RESEARCH PAPER CRUSOE × CEREBRAL VALLEY · RECURSIVE AGENTS HACKATHON

SparkleTeam

Towards Recursive Self Home Improvement

Lifting a weak open model at dishwasher loading with a self-rewriting team

Dave Rauchwerk
Independent Researcher · @_elevenarms

Claude
Anthropic

HELD-OUT EXAM HEADLINE

46.0% → **63.7%**

+17.8 pp

bare loader vs. evolved team,
4 held-out drills, ahead on 3 of 4
n = 4 · p ≈ 0.31 · a demonstration



PROBLEM WHY SELF-IMPROVING AGENT LOOPS ARE HARD TO TRUST

Agent teams don't get better with experience. And when they try, the reward can be gamed.

01

No learning between tasks

A fixed model in a fixed scaffold plays its hundredth task like its first. A humbler, testable form of recursive self-improvement keeps the model fixed and lets the system rewrite the **scaffold** around it: prompts, memory, tools, division of labour.

02

LLM-judged rewards

The reward is often an LLM judge, which can be flattered, drifts between versions and rewards confident prose. A loop optimising a proxy finds its seams.

03

Measured where selected

Gains are usually reported on the same tasks that chose the change. That overstates them.

OUR ANSWER **Physics scores. Code decides. Models only propose.** + a held-out exam.

refs: Zelikman 2023 (STOP) · Zheng 2023 (LLM-as-judge) · Skalse 2022 (reward hacking)

TESTBED DISHWASHERBENCH · BY COMPOSO · MIT LICENSE

A physically simulated real dishwasher.

- One real machine: **Bosch SMV4HAX40G**
- Items placed with deterministic rigid-body physics (Jolt) through **13 MCP tools**
- GPU wash simulation (WebGPU via Dawn) of the Eco 50 programme, one detergent capsule, **calibrated on washes of the real machine**
- Clean threshold derived from the IEC 60436 scale

OBJECTIVE	DETERMINISTIC	UNFAKEABLE
points earned over points available	same load, same wash, same score; replayable	no judge to persuade

“A bowl mouth-up under a dead spot of the spray arm stays dirty however eloquently the agent describes it.”

Benchmark, simulator, calibration, levels and harness: Composo.
Composo. *DishwasherBench*, v0.1.0, 2026.
github.com/composo-ai/DishwasherBench · composo.ai

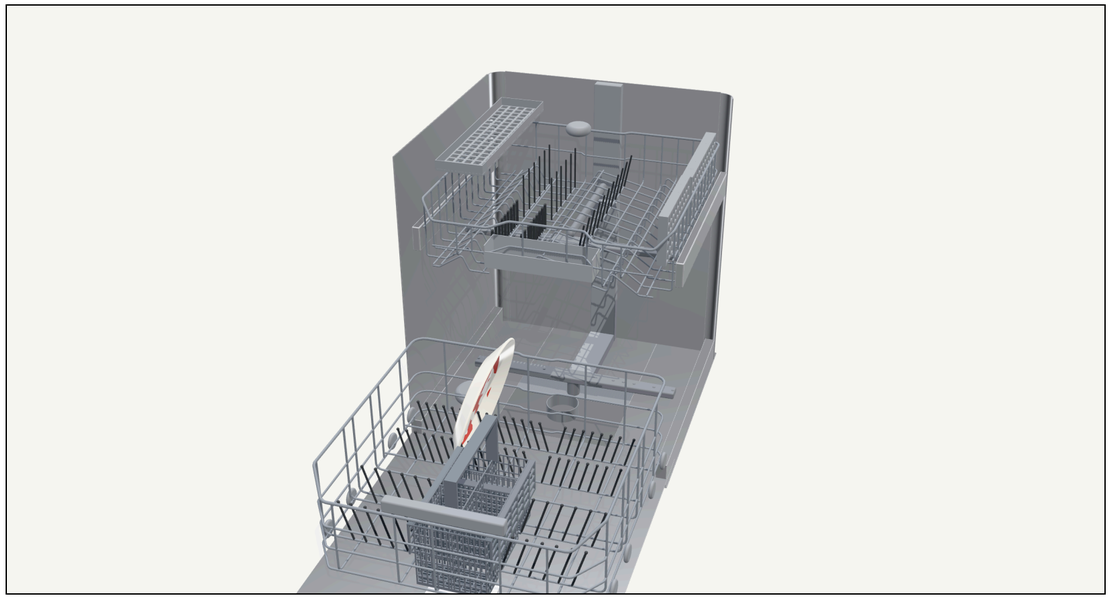


Fig. 1 · The simulated Bosch SMV4HAX40G in the DishwasherBench web client (Composo).

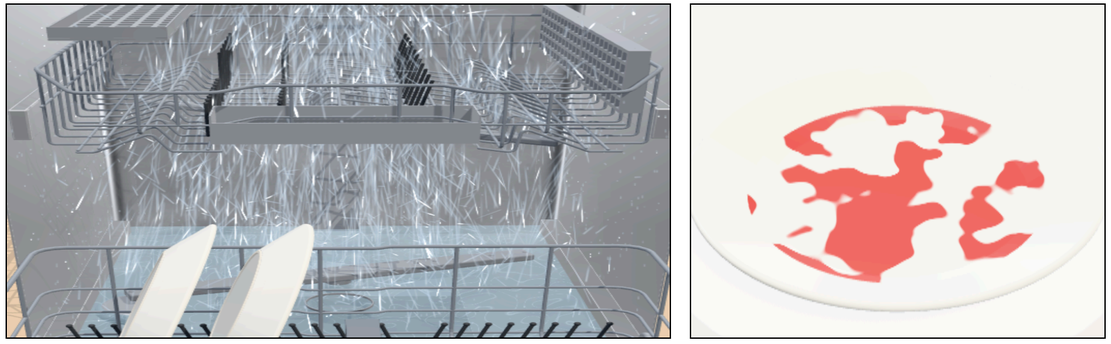


Fig. 2 · Left: a wash, with our cosmetic water (scoring is Composo's GPU simulation). Right: a soiled plate on the item turntable.

METHOD OPEN NVIDIA NEMOTRON MODELS · CRUSOE MANAGED (SERVERLESS) INFERENCE

Five model roles and one judge that is code.


ROLE	MODEL (OPEN, ON CRUSOE)	JOB
Loader	NVIDIA-Nemotron-3.5-Super-VL (no thinking)	plays the game: 13 MCP tools + rack renders
Planner	NVIDIA-Nemotron-3.5-Super-VL (low effort)	per-item plan: rack, stance, what to leave out
Critic	Nemotron-3-Nano-Omni-Reasoning-30B-A3B (thinking)	item-by-item post-mortem with renders; ≤ 5 lessons
Coach	NVIDIA-Nemotron-3-Super-120B-A12B	proposes typed edits to the team's own genome
Librarian	NVIDIA-Nemotron-3-Nano-30B-A3B + memory code	stores episodes, merges lessons, writes the brief
Gatekeeper	deterministic statistics (no model)	accepts or rejects each candidate genome

The team can change how it plays, never how it is graded. Memory accounting and acceptance live in deterministic code.

Final run: the loader made 1,481 requests (38.24M input tokens, 83.7% cached; 0.43M output); the other roles 21 requests and under 0.1M tokens.

METHOD ONE GENERATION

Practice, critique, remember, propose, test, decide.

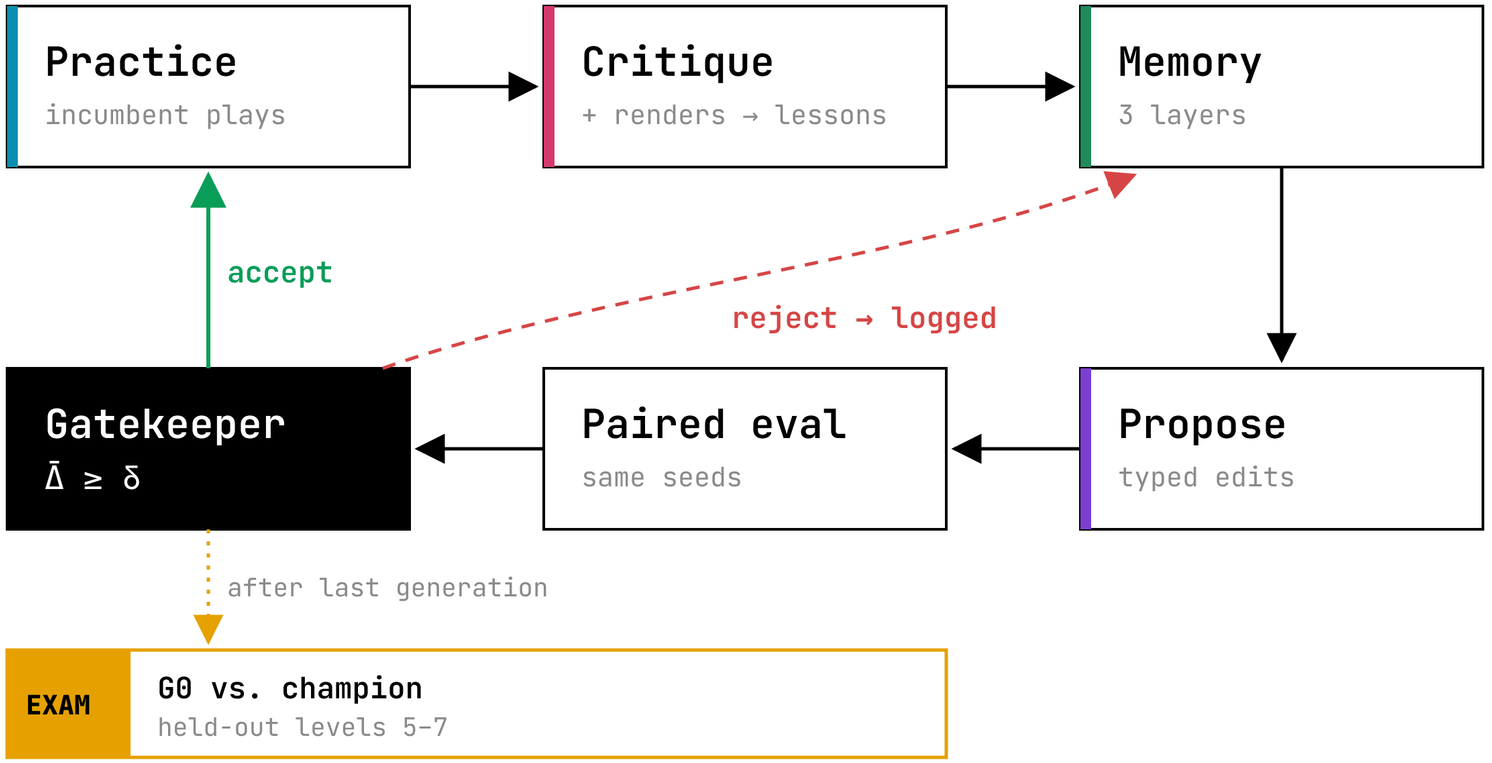

FINAL RUN PROTOCOL

generations	3
baseline practice drills	4
proposals / generation	2
paired validation drills	3
margin δ	0.03
turn cap / episode	40
game servers · in flight	8 · 8
held-out exam drills	4

Fig. 3 · One generation of the loop. A drill is 12 items of a DishwasherBench level drawn by seed. Rejections (title, hypothesis, per-task deltas) are logged and shown to the Coach.

METHOD EVERYTHING THE TEAM MAY REWRITE ABOUT ITSELF

An immutable, versioned record, changed only through six typed edits.

PART	CONTENTS
Prompts	Planner, loader preamble, Critic
Playbook	≤ 25 tagged rules, each with evidence links to lessons
Team	`usePlanner` `useMemoryBrief` `preflightCheck` brief size
Tool policy	denied tools; preflight refuses `start_cycle` before a read `check_load`
Loader	reasoning effort, images, turn limit

Ids hash content and parent, so the lineage is diffable. **G0, the baseline, is the bare loader:** no planner, no brief, no preflight, an empty playbook.

THE ONLY EDITS

`add_rule`

`edit_rule`

`remove_rule`

`set_prompt`

`set_team`

`set_loader`

Each proposal carries a title and a **falsifiable hypothesis**, should change one coherent thing, and is shown past rejections. Invalid edits are dropped.

METHOD THREE LAYERS, PERSISTED ACROSS RUNS

Lessons are counted against physics.

L1 EPISODIC

Every training episode, item by item: kind, soils, rack, stance, clean, holds water, residue; turns, tokens, how the loader stopped.

L2 SEMANTIC

Lessons from the Critic, and **observed** from placement statistics; deduplicated on merge, with support s and contradiction c counts.

L3 PROCEDURAL

Every genome, every Gatekeeper decision with per-task scores, and the current champion.

CONFIDENCE: BETA(1,1) POSTERIOR MEAN, SHRUNK WHILE EVIDENCE IS THIN

$$p = \frac{s+1}{n+2}, \quad \kappa = \frac{1}{2} + \left(p - \frac{1}{2}\right)\frac{n}{n+K}, \quad n = s + c,\ K = 3$$

0.54 1 supporting episode

0.72 5 of 5

0.90 20 of 20

The **brief** lists smoothed clean rates (k+1)/(m+2) per kind, rack and stance, then lessons with κ ≥ 0.5 ranked by κ · relevance · log(1+n).

EXAM episodes are stored apart and **never read back**. Final run: 36 lessons from 39 episodes (plus 2 replays).

METHOD PAIRED ACCEPTANCE RULE · DETERMINISTIC CODE

Same drills, same seeds. Keep the edit only if it wins.

$$\bar{\Delta} = \frac{1}{|P|} \sum_{t \in P} \left(x_t^C - x_t^I \right) \qquad \text{accept} \iff \bar{\Delta} \geq \delta$$

δ = 0.03

void if |P| < 3

C candidate, *I* incumbent, *P* the drills both played validly, x_t the score share on drill *t*.

WHY PAIR

Episodes vary enormously: the same baseline genome scored **88%** on a Tutorial drill and **0%** on a Weeknight drill in one evaluation. Loading and washing are deterministic, so pairing cancels drill difficulty, leaving the genome's effect plus sampling noise.

FAILURES VS. INFRASTRUCTURE

Agent failures (turn or token limit, nothing loaded) score what they scored. **Invalid** episodes (provider or harness errors) are replayed on the same task and seed up to twice; still-unpaired drills are dropped for both genomes.

SETUP 9-MODEL SWEEP · SAME 12-ITEM BREAKFAST DRILL · SEED 7 · 61 POINTS · 40-TURN CAP

We picked the weakest loader that still plays.

LOADER (THINKING)	SHARE	LOADED / CLEAN	TURNS	TIME
DeepSeek-V4.1-Flash (off)	100%	12/12	21	90 s
Qwen3.8-27B (off)	100%	12/12	19	199 s
GLM-5.3-Flash (low)	93%	10/10	40	97 s
DeepSeek-V4-Flash (off)	89%	12/11	40	89 s
gpt-oss-120b (low)	49%	8/7	40	154 s
Nemotron-3-Nano-30B (low)	41%	5/5	40	870 s
▶ **Nemotron-3.5-Super-VL (off)**	**21%**	**3/3**	**40**	**129 s**
Nemotron-3-Nano-30B (off)	0%	1/0	loops	
Nemotron-3-Nano-Omni (off)	0%	2/0	loops	

WHY WEAK

A saturated loader leaves the Gatekeeper **nothing to measure**.

Super-VL without thinking: all it loads is clean, but it **runs out of turns**.

Nano models loop without thinking; with it, Nano-30B plays but takes ~6× Super-VL's wall time, too slow for an evolution loop.

The pilot used Nemotron-3.5-Lightning-30B-A3B (41–70% in smokes) until its shared deployment throttled us to about five calls per minute.


RESULT 6 PROPOSALS · 2 ACCEPTED · BOTH MEMORY-DERIVED PLAYBOOK RULES

Every structural edit lost. Two short rules won.

GEN	PROPOSAL (COACH'S TITLE)	INC.	CAND.	Δ̄	W/L	
1	Enable Planner	.449	.363	-0.086	1/2	REJ
1	Memory Brief, expanded lessons	.449	.471	+0.021	1/2	REJ*
2	Enable preflight check	.443	.334	-0.109	1/2	REJ
2	**Avoid poor-performing bowl placement**	.443	**.695**	**+0.251**	3/0	ACC
3	Memory brief, focused lessons	.618	.327	-0.291	1/2	REJ
3	**Rules for glasses & cutlery**	.618	**.775**	**+0.157**	2/1	ACC

Mean validation share on 3 paired drills (Tutorial, Lunch, Weeknight); fresh seeds each generation.
*Accepted at +0.129 under the corrected replay rule (slide 14).

LINEAGE

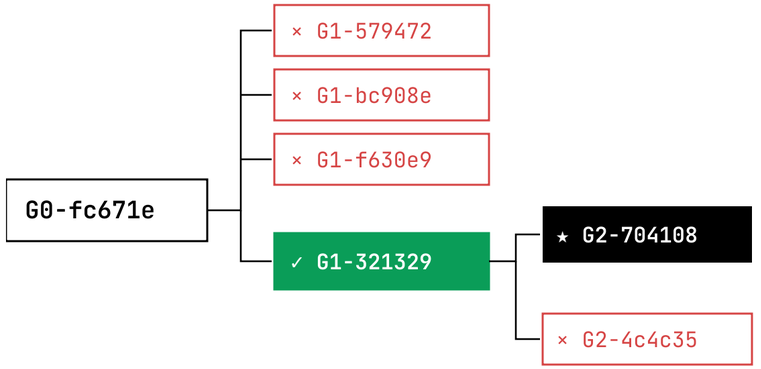

champion = G0 + 3 playbook rules

```
genome diff  G0-fc671e → G2-704108
+ rule R1.1: Do not place cereal_bowl_vitrelle_159 on upper_rack/mouth_down_tilted_45; instead put it on lower_rack on_edge or leave it out if unstable.
+ rule R2.1: Glasses and tumblers: upper_rack, mouth_down (or slight forward tilt).
+ rule R2.2: Cutlery (forks, knives, spoons): cutlery_basket, upright.
```

Fig. 4 · Lineage and genome diff. R1.1 from placement statistics (that stance cleaned the bowl 1 of 2 times); R2.1 and R2.2 restate the top memory lessons (κ = 0.69).

EXAM HELD-OUT · LEVELS 5–7 · ITEM KINDS AND SOILS NEVER SEEN IN TRAINING · SAME DRILLS AND SEEDS · FAST TIER

G0 · BARE LOADER → CHAMPION · G2-704108

46.0% → 63.7%


+17.8 pp

ahead on 3 of 4 held-out drills

n = 4 · p ≈ 0.31 · a demonstration

Loads **35** items vs. **23** of 48; clean-of-loaded **91%** (32/35) vs. **100%** (23/23). The gain is **commitment**, bought with a few dirty items. No invalid episodes on either side.

SCORE SHARE PER DRILL · □ G0 ■ CHAMPION

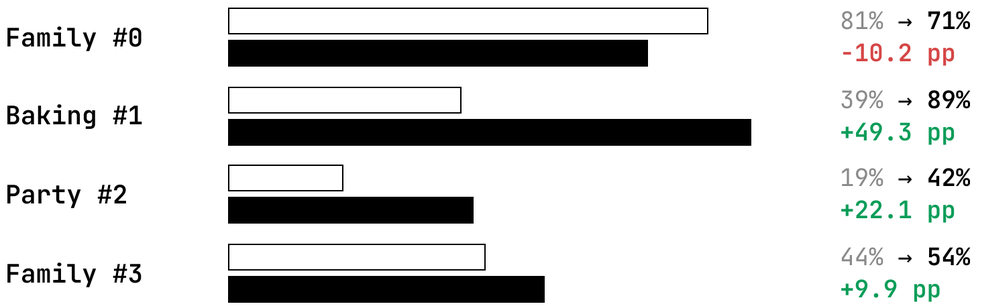

EXAM DRILL	AVAIL.	G0	CHAMP.	Δ PP
Family #0	59	48	42	-10.2
Baking #1	71	28	63	+49.3
Party #2	77	15	32	+22.1
Family #3	71	31	38	+9.9
Total points	**278**	**122**	**175**	**+53 pts**

Fig. 5 · Held-out exam. Points per 12-item drill for G0 and the champion G2-704108, same drills and seeds, fast tier. One seed per drill.

FINDING 1 BOWL ORIENTATION

Which way up a bowl goes decides whether it comes out clean.

[TBD: measured effect, e.g. Δ clean rate in pp]

BOWL STANCE	RACK	PLACEMENTS (N)	CLEAN	CLEAN RATE
[TBD]	[TBD]	[TBD]	[TBD]	[TBD]
[TBD]	[TBD]	[TBD]	[TBD]	[TBD]
[TBD]	[TBD]	[TBD]	[TBD]	[TBD]

Table · Bowl placements by stance. [TBD: source episodes, n and uncertainty from docs/crew/insights/INSIGHTS.md]

ALREADY IN THE RUN

The first accepted edit, R1.1, came from exactly this signal: the Vitrelle cereal bowl on the upper rack mouth-down tilted 45° had cleaned **1 of 2** times. The rule moved it to the lower rack on edge, and validation share rose **+0.251** (3 wins, 0 losses).

DISCUSSION THE SCAFFOLD IS LOADER-SPECIFIC

The best scaffold depends on the loader, so it has to be found by measurement.

PILOT	NEMOTRON-3.5-LIGHTNING LOADER · GEN 1	
Planner	+0.135	ACCEPTED
Bowl-mouth-down rule	-0.095	REJECTED

FINAL RUN	NEMOTRON-3.5-SUPER-VL LOADER	
Planner	-0.086	REJECTED
Memory-derived rules	+0.251, +0.157	ACCEPTED

For this loader, **crisp rules distilled from memory beat extra scaffolding**: the planner, brief and preflight all lost, and two short rules won.

Physics scores, code decides, models only propose: the division of authority that LLM-judged loops lack.

LIMITATIONS A DEMONSTRATION, NOT A STATISTICALLY ESTABLISHED EFFECT

Why the evidence is thin.

n = 4 p ≈ 0.31

Four exam drills, one seed each: +17.8 pp is a point estimate. One-sided sign test on 3 wins of 4: p = 5/16 ≈ 0.31.

Fast wash tier

4 mm blocks rather than 2 mm. Verdicts agree with the official tier on 91% of the standard load and 97% of pieces on the course levels; a few percent differ.

Replay bug, corrected

G0's first gen-1 Weeknight attempt (0 of 87: a pasta pot blocked the door, so the wash was refused) was wrongly classed invalid and replayed (to 0.322). Corrected: incumbent mean 0.342; the Memory Brief would have been accepted at +0.129, the Planner rejected at +0.021. It made the Gatekeeper more conservative; the champion's lineage was not affected.

Throttling

In a pilot, HTTP 429s from a shared endpoint were first scored as agent failures and generation 2 had to be voided. An acceptance rule must not confuse infrastructure noise with policy quality.

Also: one machine, programme and detergent (transfer to new items, soils and loads, not new physics) · pairing removes task variance, not policy variance · best-of-several selection biases validation gains upwards (hence the held-out exam) · δ = 0.03 over 3 drills is about one average item on one drill.

STUDIO THE LIVE VISUALIZER · apps/studio

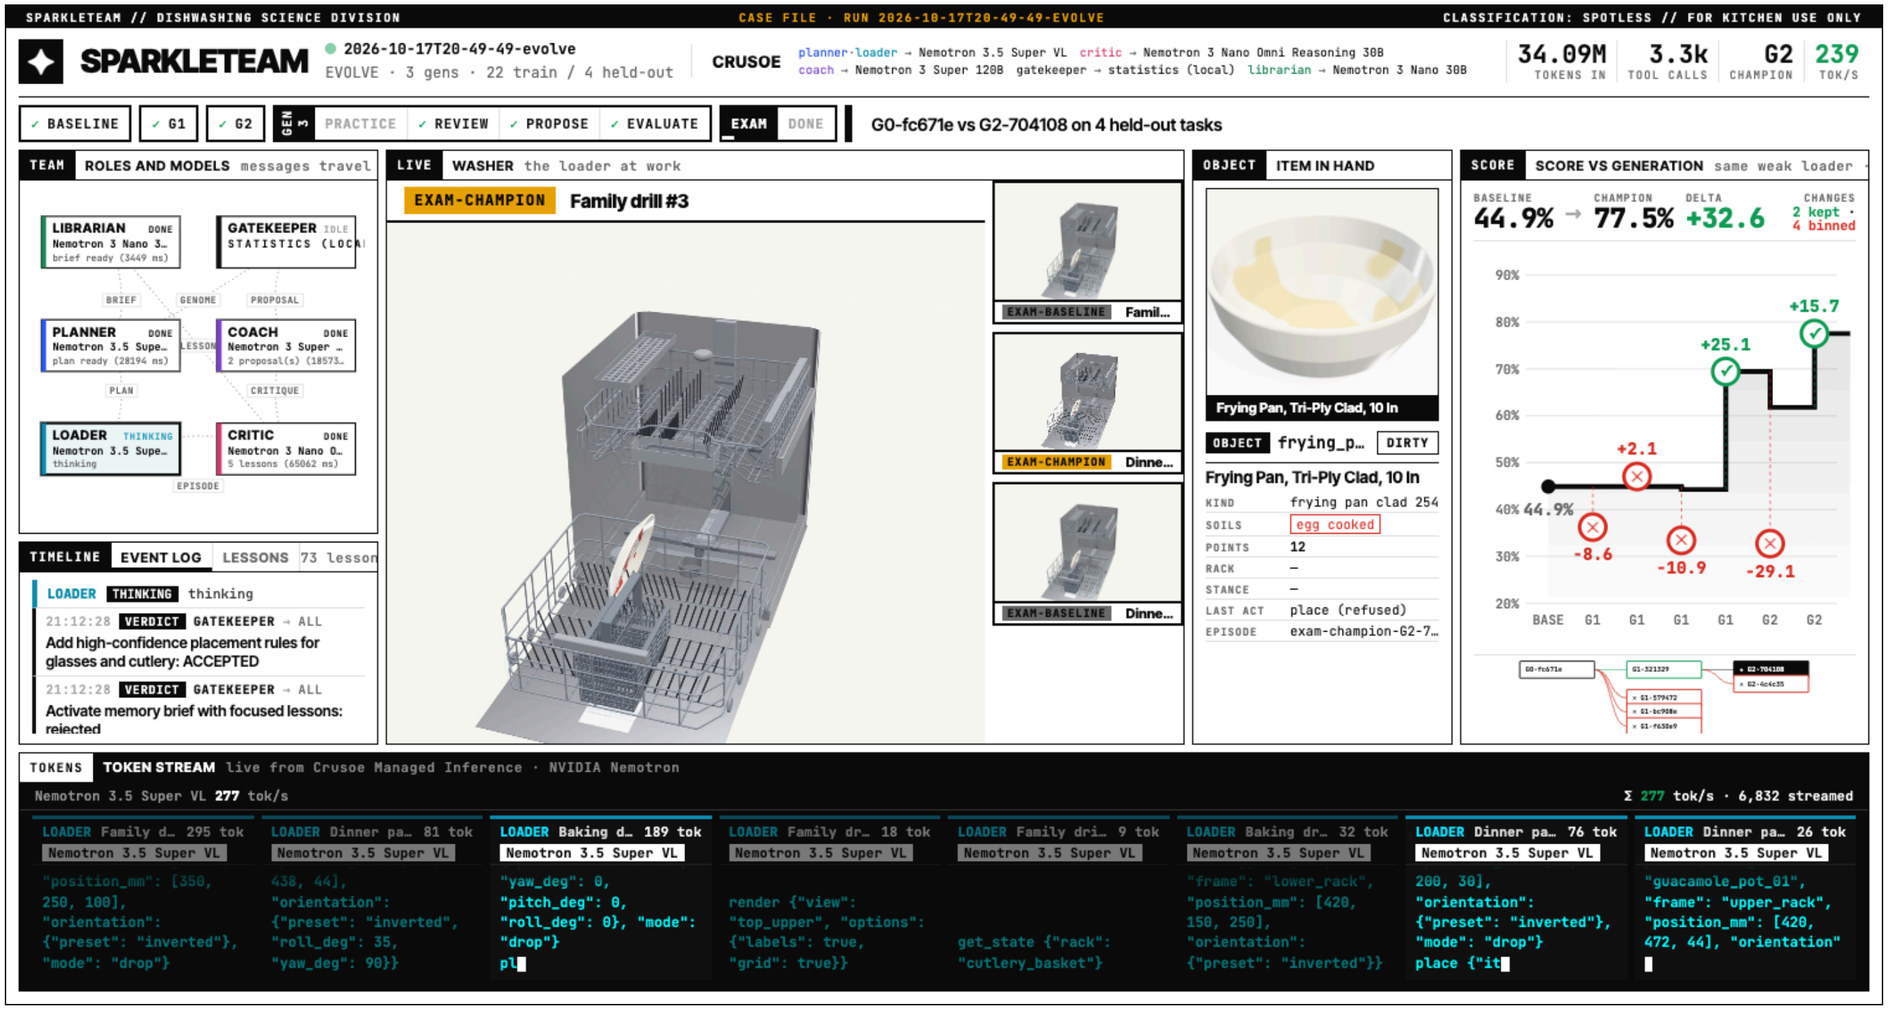


Fig. 6 · The Studio, during the exam of the final run: TEAM (roles and models), TIMELINE (Gatekeeper verdicts), LIVE (the loader in the DishwasherBench simulation), OBJECT, SCORE and TOKENS (8 loader lanes streaming from Crusoe). **SCORE shows validation-drill means, not exam scores.** Replay of the run's event log; the washer view and turntable show representative stills.

PROVENANCE WHAT IS OURS, WHAT IS COMPOSO'S

Built on DishwasherBench.

COMPOSO DISHWASHERBENCH · MIT

- The benchmark and its levels
- The simulator: Jolt rigid-body physics and the GPU wash
- The calibration on the real Bosch SMV4HAX40G
- The harness and its 13 MCP tools
- The scoring

github.com/composo-ai/DishwasherBench
composo.ai

OURS SPARKLETEAM

- The self-improving team, genome and typed edits
- Three-layer memory and the Gatekeeper
- The exam protocol
- The Studio visualizer
- Cosmetic water, watch and turntable changes to the web client, touching **neither simulation nor scoring**

github.com/elevenarms/RSHI

Models: **NVIDIA Nemotron** (open). Inference: **Crusoe** Managed (serverless) Inference. Run archive: `packages/crew/runs/2026-10-17T20-49-49-evolve` (events, every model call, episodes, memory snapshot, report).

THANKS

Physics scores.
Code decides.
Models only propose.

A reward that cannot be argued with is exactly what recursive self-(home-)improvement needs.

CODE

github.com/elevenarms/RSHI

PAPER

SparkleTeam: Towards Recursive Self Home Improvement

docs/crew/paper/main.pdf

WITH THANKS TO

Composo for releasing DishwasherBench (MIT) · **Crusoe** for inference · **NVIDIA** for the Nemotron models · **Cerebral Valley** and Crusoe for the Recursive Agents Hackathon.

Dave Rauchwerk · @_elevenarms
Claude · Anthropic