

Contents

Contents	i
List of Figures	iii
List of Tables	iv
General Introduction	1
1 Organization Multi-Agent System	3
1.1 Organization Multi-Agent System Engineering	3
1.1.1 Overview of O-MaSE	3
1.1.2 The Goal of O-MaSE	4
1.2 Organization Model for Adaptive Computational System	5
1.2.1 Overview of OMACS	5
1.2.2 Main Element of OMACS	7
1.2.2.1 Goals	7
1.2.2.2 Roles	8
1.2.2.3 Agents	8
1.2.2.4 Capabilities	9
1.2.2.5 The Tuple φ	9
1.2.2.6 OAF	10
1.2.2.7 Domain Model	10
1.2.3 Function of OMACS	10
1.2.3.1 The Achieves	10
1.2.3.2 Requires	11
1.2.3.3 Possesses	11
1.2.3.4 Capable	12
1.2.3.5 Potential	13
1.3 Organization & Reorganization Dynamic System	13
1.3.1 Organization and Reorganization	13
1.3.1.1 Goal Set Changes	14
1.3.1.2 Agent Changes	15
1.3.2 Reorganization	16

1.3.2.1	General Purpose Reorganization Examples	16
1.4	Conclusion	17

List of Figures

1.1	O-MaSE Process Framework	4
1.2	OMACS meta-models	6
1.3	Goal Node	7
1.4	Role Node	8
1.5	Agent Node	9
1.6	Cap Node	9
1.7	The Achivement Relation	11
1.8	The Requirment Relation	11
1.9	Possesses Relation	12
1.10	Agent Capable of Playing Analysis Role	12

List of Tables

General Introduction

Systems are becoming more complex, in part due to increased customer requirements and the expectation that applications should be seamlessly integrated with other existing, often distributed applications and systems. In addition, there is an increasing demand for these complex systems to exhibit some type of intelligence as well.

No longer is it „good enough ”to be able to access systems across the internet, but customers require that their systems know how to access data and systems, even in the face of unexpected events or failures.

The goal of our research is to develop a framework for constructing complex, distributed systems that can autonomously adapt to their environment. Multiagent systems have become popular over the last few years for providing the basic notions that are applicable to this problem. A multiagent

system uses groups of self-directed agents working together to achieve a common goal. Such multiagent systems are widely proposed as replacements for sophisticated, complex, and expensive stand-alone systems for similar applications. Multiagent systems tend to be more robust and, in many cases, more efficient (due to their ability to perform parallel actions) than single monolithic applications. In addition, the individual agents tend to be simpler to build, as they are built from a single agent?s perspective.

However, unpredictable application environments make multiagent systems susceptible to individual failures that can significantly reduce the ability of the system to accomplish its goal.

The problem is that multiagent systems are typically designed to work within a limited set of configurations. Even when the system possesses the resources and computational ability to accomplish its goal, it may be constrained by its own structure and knowledge of its member?s capabilities, which may change over time.

In most multiagent design methodologies ,the system designer analyzes the possible organizational structure - which determines which roles are required to accomplish which goals and sub-goals and then designs one organization that will suffice for most anticipated scenarios.

Unfortunately, in dynamic applications where the environment as well as the agents may undergo changes, a designer can rarely account for, or even consider, all possible situations. Attempts to overcome these problems include large-scale redundancy using

homogenous capabilities and centralized/distributed planning.

However, homogenous approaches negate many of the benefits of using a multiagent approach and are not applicable in complex applications where specific capabilities are often needed by only one or two agents. Centralized and distributed planning approaches tend to be brittle and computationally expensive due to their required level of detail (individual actions in most cases).

To overcome these problems, we are developing a framework that allows a system to design its own organization at runtime. In essence, we propose to provide the system with organizational knowledge and let the system design its own organization based on the current goals and its current capabilities.

While the designer can provide guidance, supplying the system with key organizational information will allow it to redesign, or reorganize, itself to match its scenario. This paper presents a key component of our framework, a metamodel for multiagent organizations named the Organization Model for Adaptive Computational Systems (OMACS).

OMACS defines the requisite knowledge of a system's organizational structure and capabilities that will allow the system to reorganize at runtime and enable it to achieve its goals in the face of a changing environment and its agent's capabilities.

Chapter 1

Organization Multi-Agent System

Designing and implementing large, complex, and distributed systems by resorting to autonomous or semi-autonomous agents that can reorganize themselves by cooperating with one another represent the future of software systems. A set of methodologies, a selection of design processes, and a collection of frameworks are available in the literature to provide the basis for constructing sophisticated autonomous multi-agent organizations. [0-omacs]

Moreover, a set of metrics and methods have been suggested with the intention of providing useful information about key properties (e.g., complexity, flexibility, self-organized, performance, scalability, and cost) of these multi-agent organizations. [0-omacs]

This chapter introduces a suite of technologies for building complex, adaptive systems. It is based in the multi-agent systems paradigm and uses the Organization Model for Adaptive Computational Systems (OMACS). And presents a suite of technologies including the Organization-based Multiagent Systems Engineering (O-MaSE) methodology [4-omacs]

Framework of Modilization MaS

1.1 Organization Multi-Agent System Engineering

1.1.1 Overview of O-MaSE

the Organization-based Multiagent System Engineering (O-MaSE) is a framework that allows designers to create custom agent-oriented development processes.

This custom agent-oriented process is generated following a process metamodel and then instantiated from a set of method fragments and guidelines by using a method engineering approach.

O-MaSE defines a metamodel, a repository of method fragments and a set of guidelines. The O-MaSE metamodel defines general concepts used in multiagent systems along with their relationships and is based on an organizational approach. [6-omacs]

The O-MaSE Process Framework is based on the OPEN Process Framework (OPF) and uses the OPF metamodel , as shown in Figure 1.1 .[4-omacs]

1. level M2 : which defines processes in terms of Work Units (Activities, Tasks, and Techniques), Producers, and Work Products.
2. Level M1 : contains the definition of O-MaSE in the form of the O-MaSE metamodel, method fragments , and guidelines.
3. Level M0 : level for specific projects (a process instance).

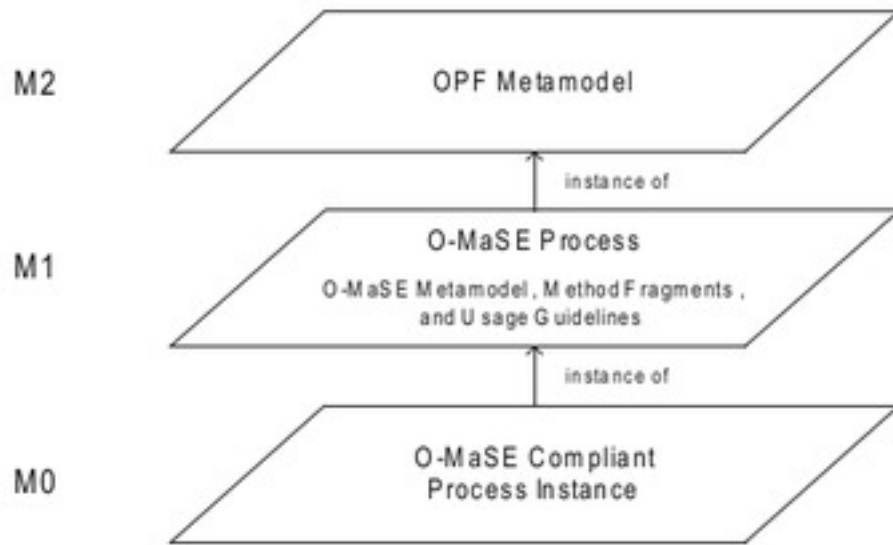


Figure 1.1: O-MaSE Process Framework

1.1.2 The Goal of O-MaSE

The goal of the O-MaSE methodology framework is to allow method engineers to build custom agent-oriented methods using a set of method fragments, all of which are based on a common meta-model. [7-omacs]

To achieve this, O-MaSE is defined in terms of a meta-model, a set of method fragments, and a set of method construction guidelines.

The O-MaSE meta-model defines a set of analysis, design, and implementation concepts and a set of constraints between them.

The method fragments define a set of work products, a set of activities that produce work products, and the performers of those activities.

And the method construction guidelines define how the method fragments may be combined to create O-MaSE compliant methods

The O-MaSE methodology is supported by the agentTool III ¹ development environment 2 , which is designed as a set of Eclipse plug-ins. agentTool includes a plug-in for

¹<http://agenttool.cs.ksu.edu/>

each O-MaSE model and the agentTool Process Editor (APE), which was developed to support the design and definition of O-MaSE compliant processes. [7-omacs]

The APE plug-in is based on the Eclipse Process Framework and provides a process designer the ability to :

1. extend O-MaSE with new tasks, models, or usage guidelines
2. create new process instances by composing tasks , models, and producers from the O-MaSE method fragment library
3. verifying that they meet process guidelines

1.2 Organization Model for Adaptive Computational System

1.2.1 Overview of OMACS

The OMACS is Framework , this model grew from the MaSE metamodel , which was based on the original AGR² model . [4-omacs]

We realized that while we could define multiagent systems in terms of agent playing roles in order to achieve system goals, we did not have to limit the flexibility of agents by predefining the roles they could and could not play. [4-omacs]

Noting that agents could be assigned to roles based on the capabilities Required to play various roles and the capabilities possessed by the agents, we figured the agents could adapt their assignments based on the current set of goals required to be achieved by the system. This basic idea led to the OMACS model as defined in DeLoach, Oyenon, and Matson (2007) and shown in Figure 1.2 . [4-omacs]

OMACS defines an organization as a tuple $O = \langle G, R, A, C, \Phi, P, \sum, \text{oaf}, \text{achieves}, \text{requires}, \text{possesses} \rangle$ where

G : goals of the organization

R : set of roles defines a set of roles (i.e., positions within an organization whose behavior is expected to achieve a particular goal or set of goals)

A : is a set of agents, which can be either human or artificial (hardware or software) entities that perceive their environment

C : set of capabilities which define the percepts/actions at their disposal. Capabilities can be soft (i.e., algorithms or plans) or hard (i.e., hardware related actions)

Φ : relation over $G - R - A$ defining the current set of agent/role/goal assignments

²Agent Group Roles

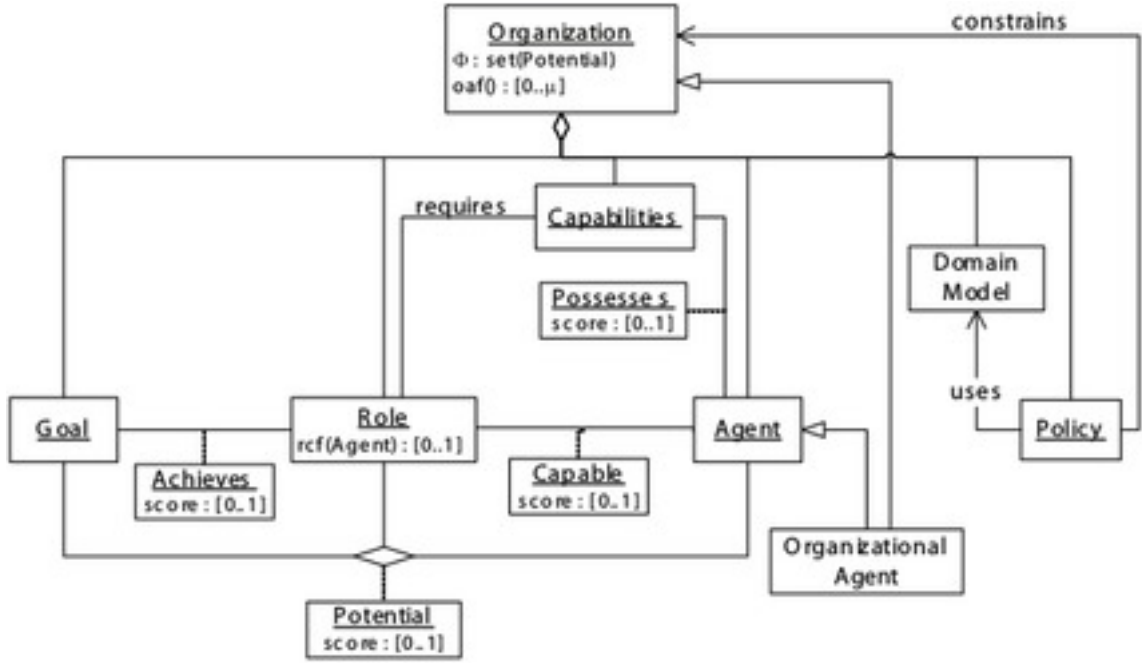


Figure 1.2: OMACS meta-models

P : set of constraints on Φ formally specifies rules that describe how O OMACS may or may not behave in particular situations

Σ : domain model used to specify objects in the environment, their inter- relationships

achieves : function $G \times R \rightarrow [0..1]$ a function whose arguments are a goal in G as well as a role in R that generates an output which is a positive real number greater than or equal to 0 and less than or equal to 1 , defining how effective the behavior defined by the role could be in the pursuit of the specified goal (the extent of achievement of a goal by a role)

requires : function $R \rightarrow P(C)$ a function that assumes a role in R , thereby yielding a set of capabilities required to play that role defining the set of capabilities required to play a role 1

possesses : function $A \times C \rightarrow [0..1]$ a function with an agent in A and a capability in C as inputs yields a positive real number in the range of $[0,1]$ defining the quality of an agent?s capability

OMACS also includes two additional derived functions to help compute potential assignment values: capable and potential.

capable : function $A \times R \rightarrow [0..1]$ function whose inputs are an agent in A OMACS and a role in R OMACS and generates an output, which is a positive real number greater than or equal to 0 and less than or equal to 1 defining how well an agent can play

a role (computed based on requires and possesses)

$$\begin{cases} 0 & \text{if } \prod_{c \in \text{require}(r)} \text{possesses}(a, c) = 0 \\ \frac{\sum_{c \in \text{require}(r)} \text{possesses}(a, c)}{|\text{require}(r)|} & \text{else} \end{cases} \quad (1.1)$$

potential : function $A \times R \times G \rightarrow [0..1]$ a function with an agent in A OMACS , a role in R , and a goal in G as inputs yields a positive real number in the range of $[0..1]$, thus yielding

$$\text{potential}(a, r, g) = \text{achieves}(r, g) \times \text{capable}(a, r) \quad (1.2)$$

defining how well an agent can play a role to achieve a goal (computed based on capable and achieves)

OAF : function $(G \times R \times A) \rightarrow [0.. \infty]$ the selection of φ from the set of potential assignments is defined by the organization's reorganization function , oaf, that assumes a set of assignments in φ , thereby yielding a positive real number in the range of $[0.. \infty]$ defining quality of a proposed assignment set

$$OAF = \sum_{(a, r, g) \in \Phi} \text{potential}(a, r, g) \quad (1.3)$$

1.2.2 Main Element of OMACS

The first eight elements in the organization tuple defined above G, R, A, C, Φ , P, \sum and oaf constitute the main elements of the OMACS model as depicted in Figure 1.2.

1.2.2.1 Goals

Artificial organizations are designed with a specific purpose, which defines the overall function of the organization. [2-omacs]

Goals are defined as a desirable situation [37] or the objective of a computational process .

Within OMACS, each organization has a set of goals, G, that it seeks to achieve.

OMACS makes no assumptions about these goals except that they can be assigned to individual agents and individual agents have the ability to achieve them independently . [2-omacs]



Figure 1.3: Goal Node

1.2.2.2 Roles

Within OMACS, each organization contains a set of roles (R) that it can use to achieve its goals. A role defines a position within an organization whose behavior is expected to achieve a particular goal or set of goals.[2-OMACS]

Thus, each role defines a set of responsibilities. Roles are analogous to roles played by actors in a play or by members of a typical corporate structure. A typical corporation has roles such as president , vice-president , and mail clerk .

Each role has specific responsibilities, rights and relationships defined in order to help the corporation perform various functions towards achieving its overall goal.

Specific people (agents) are assigned to fill those roles and carry out the roles responsibilities using the rights and relationships defined for that role.[2-OMACS]

OMACS roles consist of a name and a role capability function, rcf. Each role, $r \in R$, is a tuple $\langle \text{name}, \text{rcf}^3 \rangle$ where $A \times R \rightarrow [0..1]$.

The rcf is defined at design time for each role and computed in terms of the capabilities required to play that role. A default rcf (as shown in 1.1) would assume that all the capabilities required to play a role r are equally important, essentially taking the average of all the required possesses values ($\text{possesses}(a,c)$) (with the stipulation that none of those possesses scores are 0). [4-OMACS]



Figure 1.4: Role Node

1.2.2.3 Agents

OMACS also includes a set of heterogeneous agents (A) in each organization. As described by Russell and Norvig, an agent is an entity that perceives and can perform actions upon its environment , which includes humans as well as artificial (hardware or software) entities. [2-OAMCS]

For our purposes, we define agents as computational systems that inhabit some complex dynamic environment, sense and act autonomously in this environment, and by doing so realize a set of goals. Thus, we assume that agents exhibit the attributes of autonomy, reactivity, pro-activity, and social ability. Autonomy is the ability of agents to control their actions and internal state.

Reactivity is an agents ability to perceive its environment and respond to changes in it, whereas pro-activeness ensures agents do not simply react to their environment, but that they are able to take the initiative in achieving their goals.

Finally, social ability allows agents to interact with other agents, and possibly humans, either directly via communication or indirectly through the environment.

³the same capable function

Within the organization, agents must have the ability to communicate with each other, accept assignments to play roles that match their capabilities, and work to achieve their assigned goals. [2-OAMCS]



Figure 1.5: Agent Node

1.2.2.4 Capabilities

Capabilities are the key to determining exactly which agents can be assigned to which roles within the organization. Capabilities are atomic entities used to define a skill or capacity of agents. [2-OAMCS]

Capabilities can be used to capture soft abilities such as the access to/control over specific resources, the ability to communicate with other agents, the ability to migrate to a new platform, or the ability to carry out plans to achieve specific goals.

Capabilities also capture the notion of hard capabilities that are often associated with hardware agents such as robots.

These hard capabilities are generally described as sensors, which allow the agent to perceive a real world environment, and effectors, which allow the agent to act upon a real world environment [2-OAMCS]



Figure 1.6: Cap Node

$$\forall c : C (a : A c \in \text{possese}(a,c) \geq 1 \vee r : R c \in \text{requires}(r)) \quad (1.4)$$

1.2.2.5 The Tuple φ

An assignment set φ is the set of agent-role-goal tuples $\langle a,r,g \rangle$, that indicate that agent a has been as-signed to play role r in order to achieve goal g . [4-OAMCS]

φ is a subset of all the potential assignments of agents to play roles to achieve goals. This set of potential assignments is captured by the potential function (see Equation 1.2), which maps each agent-role-goal tuple to a real value ranging from 0 to 1 representing the ability of an agent to play a role in order to achieve a specific goal.

If $\langle a,r,g \rangle \in \varphi$, then agent a has been assigned by the organization to play role r in order to achieve goal g . [4-OAMCS]

The only inherent constraints on φ is that it must contain only assignments whose potential value is greater than zero (Equation 1.5) and that only one agent may be assigned to achieve a goal at a time (Equation 1.6)

$$\Phi \subseteq \{(a,r,g) \mid a \in A \wedge r \in R \wedge g \in G \wedge \text{potential}(a,r,g) \geq 0\} \quad (1.5)$$

$$\forall a1,a2:A \ r1,r2:R \ g1,g2:G \ (a1,r1,g1) \in \Phi \wedge (a2 \ r2 \ g2) \in \Phi \wedge a1=a2 \quad (1.6)$$

1.2.2.6 OAF

In order to select the best set of assignments to maximize an organizations ability to achieve its goals, OMACS defines an organizational assignment function, or oaf , which is a function over the current assignment set, oaf: $\varphi \rightarrow 0..\infty$. As with the rcf , the selection of assignments may be application specific. [4-OMACS]

Thus, each organization has its own application specific organization assignment function, oaf , which computes the goodness of the organization based on φ .

As with the rcf , we can define a default oaf , which is simply the sum of the potential scores in the current assignment set φ .

1.2.2.7 Domain Model

The domain model, \sum , is used to define object types in the environment and the relations between those types. [2-OMACS]

The domain model is based on traditional object oriented class diagrams. They include object classes that each have a set of attribute types.

Relations between object classes include general purpose associations as well as generalization-specialization and aggregation.

Relations may also include multiplicities to constrain the number of object classes participating in any given relation.[2-OMACS]

1.2.3 Function of OMACS

There are three major relations/functions and two derived functions between the eight main elements that provide the power of the OAMCS model: achieves, requires, possesses, capable, and potential.

1.2.3.1 The Achieves

function (although somewhat confusingly named) actually defines how effective an agent could be while playing that role in the pursuit of a specific goal. For instance, if one role requires more resources or better capabilities, it can use a different approach and thus yield better results than a second role that requires fewer resources or capabilities. [4-OMACS]

Providing two different roles to achieve the same goal may provide the organization flexibility in deciding how to actually achieve a given goal.

The value of achieves can be predefined by the organization designer or learned before or during system operation (Odell, Nodine & Levy, 2005). Thus, the OMACS achieves function formally captures the effectiveness of a role in achieving a specific goal by defining a total function from the $R \times G$ to a real value in the range of 0 to 1, achieves: $G \times R \rightarrow [0..1]$.

Thus, by definition, a role that cannot be used to achieve a particular goal must have an achieves value of 0, while a role that can achieve a goal would have an achieves value greater than zero.[4-OMACS]

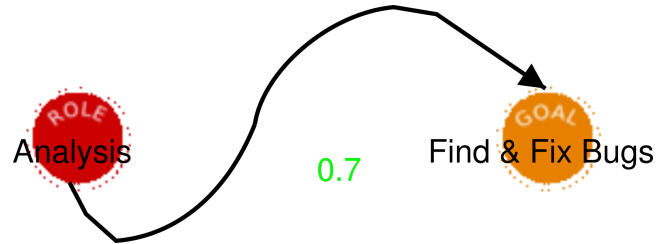


Figure 1.7: The Achievement Relation

1.2.3.2 Requires

In order to perform a particular role, agents must possess a sufficient set of capabilities that allow the agent to carry out the role and achieve its assigned goals. [2-OMACS]

For instance, to play the president role, a person would be expected to have knowledge of the corporations domain, experience in lower-level jobs in similar types of companies, and experience in managing people and resources; an artificial organization is no different.

Roles require a certain set of capabilities while agents possess a set of capabilities [2-OMACS]

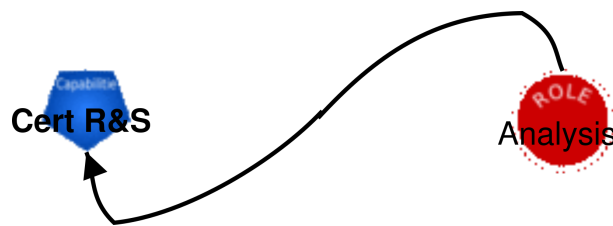


Figure 1.8: The Requirement Relation

1.2.3.3 Possesses

In order to determine if some agent has the appropriate set of capabilities to play a given role, OMACS defines a similar relation, the possesses relation, that captures the capabilities a specific agents actually possesses. [4-OMACS]

The possesses relation is formally captured as a function over agents and capabilities that returns a value in the range of 0 to 1,

possesses: $A \times C \rightarrow [0..1]$. The real value returned by the possesses function indicates the quality of each capability possessed by the agent; 0 indicates no capability while a 1 indicates a high quality capability. [4-OMACS]

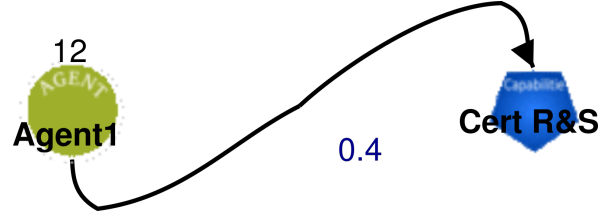


Figure 1.9: Possesses Relation

1.2.3.4 Capable

Using the capabilities required by a particular role and capabilities possessed by a given agent, we can compute the ability of an agent to play a given role, which we capture in the capable function. The capable function returns a value from 0 to 1 based on how well a given agent may play a specific role, capable: $A \times R \rightarrow [0..1]$. [2-OMACS]

Since the capability of an agent, a , to play a specific role r , application and role specific, OMACS provides the rcf defined in the previous section that controls how this value is computed. Thus, the capable score of an agent playing a particular role is defined via the designer defined rcf of each role.

$$\forall a : A \ r:R \ capable(a, r) = r.rcf(a) \quad (1.7)$$

While the rcf is user defined, it must conform to one OMACS constraint. To be capable of playing a given role in the current organization, an agent must possess all the capabilities that are required by that role. [2-OMACS]

$$\forall a : A, r : R \ capable(a, r) > 0 \Leftrightarrow requires(r) \subseteq c | possesses(a, c) > 0 \quad (1.8)$$

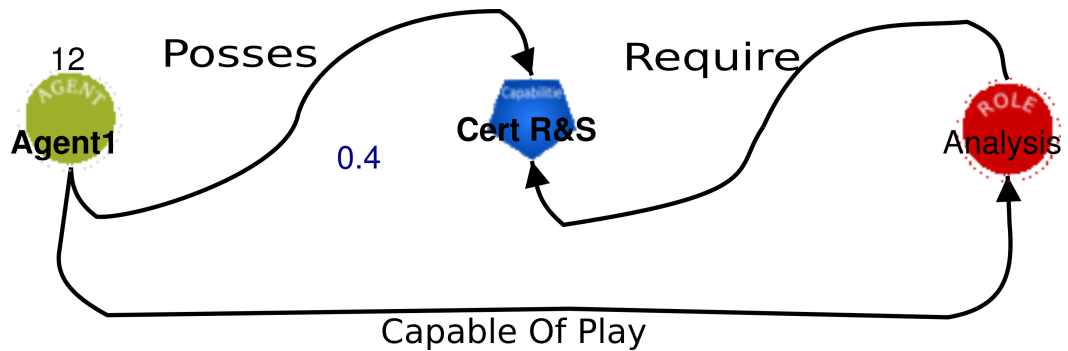


Figure 1.10: Agent Capable of Playing Analysis Role

The main goal of OMACS is to provide a mechanism to assign goals to agents [2-OMACS]

in such a way that agents cooperate toward achieving some top-level goal. Intuitively, this mechanism should provide a way to assign the best agents to play the best roles in order to achieve these goals.

Thus, OMACS has defined a potential function that captures the ability of an agent to play a role in order to achieve a specific goal. [2-OMACS]

1.2.3.5 Potential

The potential function maps each agent-role-goal tuple to a real value ranging from 0 to 1, potential: $A \times R \times G \rightarrow [0..1]$. [4-OMACS]

Here, a 0 indicates that the agent-role-goal tuple cannot be used to achieve the goal while a non-zero value indicates how well an agent can play a specific role in order to achieve a goal.

The potential of agent a to play role r to achieve goal g is defined by combining the capable and achieves functions. [4-OMACS]

$$\forall a : A \ r:R \ g:G \ potential(a, r, g) = achieves(r, g) * capable(a, r) \quad (1.9)$$

1.3 Organization & Reorganization Dynamic System

The constraints above define the legality of the organization structure and its instances. However, we are also interested in whether or not an assignment of agents to roles satisfying all the organizational policies exists that can allow the system to achieve its goals, which we refer to as organizational viability. [2-OMACS]

Although an organization may be structurally valid, there is no guarantee that an instance of that organization exists that can achieve its goals.

In actuality, we can never guarantee that the system will ever achieve all its goals due to the dynamic nature of the environment in which the organization operates. To achieve the organizational goals, the system must have the right mix of agents to play the right roles to achieve those goals.

Essentially, a viable organization is a valid organization that has been populated with the right types and numbers of agents so that it might potentially achieve its goals. [2-OMACS]

1.3.1 Organization and Reorganization

Each organization has an implicitly defined organization transition function that describes how the organization may transition from one organizational state to another over the lifetime of the organization. [2-OMACS]

Since agents in an organization as well as their individual capabilities may change over time, this function cannot be predefined, but must be computed based on the current state, the goal set, G , and the current policies. In our present research with purely autonomous systems, we have only considered reorganization that involves the state of the organization.

However, we have defined two distinct types of reorganization: state reorganization, which only allows the modification of the organization state, and structure reorganization, which allows modification of the organization structure (and may require state reorganization to keep the organization consistent).

We define the state of the organization as the set of agents, A , the possesses, capable, and potential functions, and the assignment set, φ . However, not all these components may actually be under the control of the organization. For our purposes, we assume that agents may enter or leave organizations or relationships, but that these actions are triggers that cause reorganizations and are not the result of reorganizations.

Likewise, possesses (and thus capable and potential as well) is an automatic calculation that determines the possible assignments of agents to roles and goals in the organization. The calculation of possesses is the only calculation totally controlled by the agent; the organization can only use this information in deciding how to make assignments. This leaves one element that can be modified via state reorganization: φ . [2-OMACS]

1.3.1.1 Goal Set Changes

Any change in G may cause reorganization. There are three basic types of events that can cause a change in G :

1. insertion of a new goal
2. goal achievement
3. goal failure

is discussed below.

The first situation deals with new goals being added to G . However, [2-OMACS] we cannot say with certainty that reorganization will occur based on a new goal in G .

It is possible that the organization will choose to forego reorganization for a number of reasons, the most likely being that it has simply chosen not to pursue any new goals added to G at the present time.

The second case deals with goal achievement. When a goal g is achieved, G is changed to reflect that event by

- removing g from G
- possibly adding new goals

which are enabled by the achievement of g , into G . Obviously, the agent assigned to achieve goal g is now free to pursue other goals.

The third instance involves goal failure, which really has two forms: agent-goal failure and goal failure.

When a specific agent cannot achieve goal g but g might still be achievable by some other agent, agent-goal failure occurs.

When agent-goal failure occurs, reorganization must occur to allow the organization to

- choose another agent to achieve g
- not pursue g at the current time
- choose another goal to pursue instead of g

In any of these situations, g is not removed from G since it has not been achieved. In the case where the organization or the environment has changed such that a goal g can never be achieved, then goal failure occurs.

In this case, g is removed from G and the organization must attempt to assess whether it can still achieve the overall system goals. Reorganization may occur to see if the agent assigned to achieve g can be used elsewhere.

In all cases, the selection of the appropriate strategy is left to the organization. [2-OMACS]

1.3.1.2 Agent Changes

The second type of change that triggers reorganizations are changes to the set of agents, A , or their individual capabilities.[2-OMACS]

When an agent that is part of φ is removed from the organization, a reorganization must occur, even if only to remove the agent and its assignment(s) in φ . Likewise, when an agent that is part of φ loses a capability that negates its ability to play a role that it is assigned, reorganization must occur as well.

In general, when changes occur in an agent's capability, reorganization may or may not be necessary, based on the agents capable relation.

We have identified four specific types of changes in an agents capabilities that may indicate a need for reorganization:

1. when an agent gains the ability to play a new role
2. when an agent loses the ability to play a role
3. when an agent increases its ability to play a specific role
4. when an agent decreases its ability to play a specific role.

While case 2 requires reorganization if the agent is currently assigned to play the role for which it no longer has the capability to play, whether or not to reorganize is left up to the organization when the other three cases (along with 2 when the agent is not currently assigned that role) occur. [2-OMACS]

1.3.2 Reorganization

Reorganization is the process of changing the assignments of agents to roles to goals as specified in φ . [2-OMACS]

The organization's oaf function is used to determine the best new φ ; however, total reorganization may not be necessary or efficient. (In the absence of any information or policies, an optimal total reorganization would take on the order of $2^{A \times G \times R}$.)

One approach is to take a local view, in which the organization looks at the OMACS state and reorganizes in a locally optimal fashion (i.e. hill climbing). However, when dealing with dynamic environments, it is often desirable to reorganize so that the team can operate more efficiently or effectively in its present situation as well as being adaptable to its changing environment.

Thus, we would like to take a long-range or global view. Unfortunately, it has been shown that in the general case globally optimal reorganizations are NEXP-complete and, thus impractical for most applications with any time constraints.

Therefore, OMACS provides a mechanism for augmenting the locally optimal algorithm with application specific rules in an attempt to make reasoning more efficient and to enable globally better solutions. [2-OMACS]

1.3.2.1 General Purpose Reorganization Examples

For general-purpose reorganization, the Developers have developed several reorganization algorithms that give us a default reorganization capability. When a reorganization trigger occurs, general-purpose reorganization algorithms can be used to find appropriate assignments to achieve the organizations goals, if possible. [2-OMACS]

To compute the best reorganization, an algorithm that simply optimizes the organizations oaf might seem appropriate; however, this approach is short sighted. First, it does not deal with the cost associated with reorganizing and, second, it does not consider the reason reorganizing was initially undertaken. Exploiting reorganizing costs requires a distributed solution since the cost for robots to change roles is not globally known.

For instance, if an agent is required to perform a complex computation, any effort toward that computation would be lost if the agent was reassigned to another role/goal. Considering the reason for reorganization may enable less extensive (and less costly) reorganization. If the reason for reorganizing is to fill a single role, then a total reorganization may be a waste of time and resources. [2-OMACS]

1.4 Conclusion

This chapter describes how to design adaptive multiagent systems using an organizational model, which defines the entities and relationships of a typical organization.

The major elements of the model consist of goals, roles, agents, capabilities, and the relationships between them. By designing a system using the model, and we focus on OMACS framework because it handling reorganization system more then other framework

In the following chapter will discuss other model we can use it to modeling the multi-Agent System