



Hochschule für Technik
und Wirtschaft Berlin

University of Applied Sciences

Named Entity Recognition in German-language Telegram channels

Bachelor Thesis

B.Sc. Computer Science and Business Administration

Faculty 4

by

Elisabeth Steffen

Berlin, August 19, 2022

1st Supervisor: Prof. Dr. Helena Mihaljević

2nd Supervisor: Prof. Dr. Theresa Busjahn

Abstract

This thesis implements Named Entity Recognition in German-language text data from the messenger service Telegram, focussing on a Telegram channel mobilizing for protests against COVID-19 containment measures in Germany.

The primary goal is to explore the potentials and limitations of two existing German-language models for Named Entity Recognition, namely *spacy* and *flair*, for the detection of entities of the common entity types PERSON, LOCATION, and ORGANIZATION.

Furthermore, the recognition of an additional custom entity type ACTION will be explored with the help of manually labeled data used for training custom models. Text parts containing DATE and TIME information are extracted via the *ctparse* module, and

This thesis contributes to the task of German-language NER in general by applying it to a specific domain and data type, namely text data from messenger services. Furthermore, its aim is to provide a low-resource tool for both researchers and civil society for monitoring and analyzing large amount of text data from social media/messengers.

Dedication

Statutory Declaration

I herewith formally declare that I have written the submitted thesis independently. I did not use any outside support except for the quoted literature and other sources mentioned in the paper.

I clearly marked and separately listed all of the literature and all of the other sources which I employed when producing this academic work, either literally or in content.

I am aware that the violation of this regulation will lead to the failure of the thesis.

.....	
Name	Signature

.....	
Matriculation Number	Place and Date

Contents

1	Introduction	1
1.1	Background	1
1.2	Objective	6
1.3	Thesis Structure	7
2	Theory	8
2.1	Natural Language Processing	8
2.1.1	Challenges for NLP	9
2.2	Information Extraction	10
2.2.1	Definition	10
2.2.2	Historical evolvment	11
2.2.3	Classification and application of IE	12
2.3	Named Entity Recognition	12
2.3.1	Definition	12
2.3.2	Historical evolvment	14
2.3.3	Challenges for NER	15
2.3.4	Existing German-language datasets for NER	16
2.3.5	Tagging scheme and entity types	17
2.3.6	Evaluation of NER systems	18
2.4	Different NER approaches	18
2.4.1	Rule-based approaches	19
2.4.2	Knowledge-based approaches	20
2.4.3	Machine-learning based approaches	20
2.4.4	Deep-learning based approaches / Neural Networks	23
2.4.5	Summarization	25

3	Implementation	26
3.1	Exploration of existing solutions	26
3.2	Data	26
3.2.1	Domain-specific data	26
3.2.2	data cleaning	29
3.2.3	text cleaning	29
3.2.4	sample selection	30
3.3	Annotation scheme	31
3.4	Annotated dataset	32
3.5	Additional resources	32
3.5.1	GermEval 2014 NER task dataset	32
3.5.2	DFKI Smartdata corpus	32
3.5.3	XTREME dataset	32
3.6	Models	32
3.7	Pipeline	33
3.8	Translation approach	33
3.9	Evaluation	33
3.9.1	Evaluation metrics	33
3.9.2	Performance evaluation	33
3.10	Summarization	33
4	Results	34
4.1	Spacy	34
4.2	Hugging Face	34
4.3	Translation approach	34
4.4	Summarization	34
5	Conclusion	35
5.1	Summarization	35
5.1.1	subsection	35
5.2	Discussion	35
	Bibliography	38

Chapter 1

Introduction

1.1 Background

The outbreak of the COVID-19 pandemic was followed by an increasing spread of misinformation and conspiracy theories. Those narratives evolved not only around the virus itself, but also about the intentions of those responsible for putting into effect measures for its containment.

Those measures included the mandatory use of face masks, rapid testing, and vaccinations, at times functioning as admission requirements in the workplace or publicly accessible spaces such as restaurants and theatres. Furthermore, unprecedented restrictions were imposed on public life through several general or partial lock-downs of social and economic life, as well as temporary bans of gathering in public. These restrictions also heavily affected the possibilities to hold political demonstrations.

From the beginning on, these measures were accompanied by critique and protests from various political spectres. In Germany, the first noticeable protests against COVID-19 measures took place at the so-called ‘Hygienedemonstrationen’ (hygiene demonstrations) in front of the ‘Volksbühne’ theatre in Berlin. Over time, the so-called ‘Querdenken’ (lateral thinking) movement became the most prominent movement evolving around protests

against the COVID-19 containment measures. The movement reached its preliminary climax with several large demonstrations taking place in Berlin, directed against legislative changes regarding the containment of the pandemic passed by the German parliament. In the context of these demonstrations, violent clashes occurred between police and protesters, which often refused to act according to the official restrictions for the demonstration such as wearing a face mask. Furthermore, there were several incidents in which journalists were violently attacked by protesters, accusing them to be part of the ‘Lügenpresse’ (lying press), and two incidents in which the seat of the German parliament, the Reichstag, was targeted by protesters: On August 29th 2020, around 500 protesters, among them several prominent actors from the German far-right movement, broke the barriers in front of the Reichstag in Berlin, seat of the German parliament, and occupied the stairs of the building, waving several ‘Reichskriegsflaggen’. On November 18th 2020, another large demonstration organized by the ‘Querdenken’ movement took place; once again accompanied by heavy clashes between protesters and police officers. On the same day, a small group of right-wing social media activists was invited as visitors to the Reichstag by the German far-right party ‘Alternative für Deutschland’ (AfD). The group approached and harassed politicians from other parties, filming and live-streaming the events, an incident which was perceived as a caesura and heavily criticized by the other parties.

On April 21st 2021, the last large authorized demonstration of the ‘Querdenken’ movement took place in Berlin, comparing a new law for the containment of the pandemic with the ‘Ermächtigungsgesetz’ put into effect in 1933 which ultimately paved the way for the Nazi dictatorship in Germany. In response to several violations of official restrictions by demonstration participants, police decided to disperse the demonstration. Several protesters subsequently moved to other areas nearby. Clashes between protesters and police continued to occur throughout the rest of the day.

The subsequent demonstrations announced by the ‘Querdenken’ move-

ment to take place in Berlin were prohibited by authorities, arguing with the experience at prior demonstrations that participants would act against the official restrictions. The ban was confirmed by Berlin's administrative court after the organizers of the protest had filed a suit against the initial prohibition. In spite of the ban, several hundred protesters gathered in different spots in Berlin e.g. on the 21st, 28th and 29th of August 2021.

The mentioned bans of large demonstrations of the 'Querdenken' movement as well as the general restrictions for demonstrations and public gatherings, limiting the number of participants to a maximum of twenty persons, decreased the momentum of the large, centralized protests focussing on the German legislative located in Berlin. However, the protests did not stop as a result, but rather changed their character: They became more decentralized and a shift to more informal forms of gatherings and protests could be observed: In several German cities and towns, people gathered for 'Mahnwachen' or 'Spaziergänge' (walks) to protest against the government's COVID-19 politics. Since going for a walk individually was a legal outdoor activity even under the strictest lock-down regulations, this type of action was chosen in order to circumvent the restrictions imposed on demonstrations. In effect, these walks ('Spaziergänge') often resulted in large gatherings of people moving through the streets together, often holding signs or chanting slogans against German politicians or the COVID-19 containment measures in general.

However, the calls to gather for walks in the public became more targeted and mobilized people to gather in front of the private homes of politicians, mostly those in charge for the COVID-19 measures on federal state level.

In December 2021, around thirty members of the far-right group 'Freie Sachsen' (Free Saxonians) gathered in front of the home of Saxony's Minister of Health, Petra Köpping, carrying torchlights. The incident received a lot of public attention, and was criticized in the media as well as by German politicians as attempts to intimidate politicians under the pretext of the

protesters right to ‘freedom of speech’.

Earlier that year, the same group had gathered in front of Saxony’s prime minister, Michael Kretschmer, who is one of the most prominent targets of the radical movement against the COVID-19 containment measures. In December 2021, an investigative report by German journalists revealed that members of the Telegram chat group ‘Dresden Offlinevernetzung’ had talked about concrete preparations to assassinate Kretschmer. A few months later, by mid-April 2022, police foiled a plot to kidnap Germany’s Minister of Health Karl Lauterbach and to sabotage power facilities in order to create chaos which would ultimately allow to overthrow the government.

The messenger service Telegram played a key role in the mobilization of the movement. The service allows the creation of large groups and channels to disseminate information quickly to a large number of users. Unlike Facebook or Google, which hand over data to authorities at their request, Telegram does not cooperate with authorities.

This ensures a high degree of anonymity for its users which has proven beneficial for protest movements in authoritarian countries, This anonymity poses a barrier to political repression and criminal prosecution. This makes the service attractive not only for social movements, but also for criminal and terrorist activities, and also facilitates the spread of hate-speech and calls for violence like those mentioned above.

The rise of conspiracy theories in the context of the COVID-19 pandemic has thus not only intensified hate-speech against and the discrimination of certain communities in the form of antisemitism and racism - this process was accompanied by an increasingly toxic and potentially violent climate for politicians in Germany. This makes it once more clear that the digital sphere of social networks and messengers cannot be grasped without also considering its entanglement with and effects for the physical sphere of society. Both online and offline contexts influence and often reinforce each other, as is the case with the mobilization against the COVID-19 containment measures.

The processes illustrated above also point out another important aspect: Even though political activists from Germany's extremist far-right had been involved in the protests from the start, and non-governmental organizations had warned about the antidemocratic and violent potential of parts of the movement, the dangerous potential of this movement seems to have been underestimated by German authorities for a rather long time. Only after journalists had revealed the plans to murder Michael Kretschmer, and after several gatherings in front of private homes of politicians had already taken place, the issue seems to become more of a serious concern.

Thus the process points out the relevance of investigative work by critical journalists and non-governmental organizations to monitor the mobilization and networking strategies of the far-right spectre in Germany. However, while these actors often have to deal with large amount of data, their investigation often relies on manually conducted research and data evaluation. The potentials of Data Science methods, especially Machine Learning-based approaches for Natural Language Processing (NLP), are often not accessible for these actors, making it hard for them to process large amounts of data from the often very dynamic contexts of informal political networks.

- racism: especially Asian community made responsible for spreading the virus
- antisemitism: Jews identified as culprits behind the pandemic, using it as a means to obtain world dominance
- politicians: complicit with those who benefit from pandemic; following a secret plan; restriction of civil rights
- freedom of speech, criticizing the government are valuable and essential components of a democratic society
- but: often hateful tendencies and developments, both online and offline

- entanglement of digital and real world
- hate does not stay in the internet, also has real effects
- spread of misinformation, conspiracy theories: social media and messengers
- not only information, also mobilization

1.2 Objective

This thesis aims at exploring the potentials of a particular NLP technology, namely Named Entity Recognition (NER) for the investigation of the mobilization for protests against COVID-19 measures in a German-language Telegram channel. The overarching goal is to explore if a component for Named Entity Recognition could be a beneficial contribution to the Open Source project ‘Teledash’, to make NER available as a tool for journalists, NGOs, and researchers investigating the COVID-19 related protest movements and networks in Germany.

- low-resource approach of NER in German-language Telegram messages
- extraction of entities particularly relevant for mobilization / monitoring of potential targeting: PERSON, ORGANIZATION; DATE; TIME; LOCATION; ACTION as custom type
- explore potentials and limitations of existing models
- explore potentials of translation approach
- provide a low-resource tool for NGOs and researchers make available as API; Project teledash

1.3 Thesis Structure

- Theory
- Implementation
- Conclusion and Discussion

Chapter 2

Theory

The first part of this chapter places Named Entity Recognition in its larger context of Natural Language Processing (NLP) in general, and of Information Extraction (IE) as a specific NLP task in particular. It provides a basic definition of of NER, lines out its historical evolvement, and discusses the challenges related to this task, both in general and with regard to the peculiarities of German language and to text data from social media.

The second part elaborates different approaches for NER, from heuristics-/rule-based methods over machine learning-based to deep learning-based approaches, discussing the respective limitations and potentials.

2.1 Natural Language Processing

The field of Natural Language Processing combines approaches from computer science, linguistics, and artificial intelligence. Its main focus is to build systems and computational techniques for the automated processing and analysis of human language (cf. Vajjala et al. 2020, p. xvii). Since its evolvement in the 1950s, NLP has been primarily an area of interest for academic research, but lately, it is being used more and more for real-world tasks and business applications. (cf. Vajjala et al. 2020, p. xvii)

Core NLP applications comprise the use for email platforms (e.g. for spam filters), voice-based assistants, modern search engines, and machine translation services. (cf. Vajjala et al. 2020, p. 5). Furthermore, NLP is used for analyzing web and social media data (e.g. customer reviews), for spelling and grammar correction tools, and for different domains such as health care or finance. (cf. Vajjala et al. 2020, pp. 5–6).

Typical NLP tasks are for example language modeling, text classification, text summarization, information extraction, information retrieval, machine translation, or topic modeling (cf. Vajjala et al. 2020, pp. 6–7).

2.1.1 Challenges for NLP

Since NLP processes data representing human language, it is confronted with several challenges which stem from the characteristics of human language:

Ambiguity, understood as uncertainty or inexactness of meaning, is inherent to most human languages: Words or phrases can have multiple meanings, and usually it requires knowledge of the context in which they appear to resolve this ambiguity. (cf. Vajjala et al. 2020, pp. 12–13)

Common knowledge is often an essential part in a conversation between humans: Facts are assumed to be known and thus not expressed explicitly in statements. Humans constantly use common knowledge to understand language. One of the challenges for NLP is how to encode this common knowledge for computational approaches (cf. Vajjala et al. 2020, pp. 13–14).

Creativity is another feature inherent to human language: Even though language is constituted via and essentially shaped by rules, it is far from being exclusively rule-driven. Rather, language is creative; characterized by various styles, genres, and dialects. One important challenge for NLP is thus to enable machines to adequately handle this creativity. (cf. Vajjala et al.

2020, p. 14) Moreover, language changes and evolves over time, in interaction with social and cultural processes, as well as with the development of communication technology. NLP applications developed using data from the past might thus not fit well for data consisting of newly evolving manifestations of human language.

Diversity across languages According to the database *Ethnologue*, there are currently over 7.000 languages actively spoken worldwide (cf. Ethnologue 2022). Even though some of these languages share the same family and thus have some similarities, a direct mapping between two languages is not possible which makes it hard to apply an NLP solution from one language to another. Building language-agnostic solutions is a very complex matter, while building separate solutions for each language is labor- and time-intensive (cf. Vajjala et al. 2020, p. 14).

Imbalanced resources for different languages is yet another challenge for NLP, both in terms of research efforts and data. In fact, most NLP technologies are still designed for English or European languages (cf. Singh 2008). For these so-called high-resource languages, a large number of datasets and libraries exists while low-resource languages are usually significantly "less studied, resource scarce, less computerized" (Magueresse, Carles, and Heetderks 2020). This imbalance is also reflected in the existing NER datasets (see section 3.2).

2.2 Information Extraction

2.2.1 Definition

Information Extraction (IE) is one of the several NLP tasks mentioned above. The aim of IE is to extract information from unstructured or semistructured natural language texts (cf. Zong, Xia, and Zhang 2021, p. 227).

‘Information’ can refer to different things, depending on the domain and purpose of the task: The extracted instances can be (named) entities such as people, locations, places, or organizations, but also important events occurring in texts (cf. Vajjala et al. 2020, p. 161). Sometimes the focus is on temporal information such as time and date, or on domain-specific entities, e.g. biomedical instances such as genes, proteins, or viruses, etc. in biomedical data.

The extracted parts can also be attributes related to those entities, or relationships between entities. The kinds of texts information is extracted from may be news texts from the web, social media posts, customer reviews, academic literature, and others. The aim of IE is to generate structured output from this unstructured or semistructured text data. Typical tasks of IE are named entity recognition, entity disambiguation, relation extraction, and event extraction (cf. (Zong, Xia, and Zhang 2021, p. 227)

2.2.2 Historical evolvement

The origins of IE dates back to the late 1970s, and its development was further accelerated in the late 1980s, when the US government financed activities to evaluate IE technology. Organized by the *Defense Advanced Research Projects Agency* (DARPA), the first *Message Understanding Conference* (MUC-1) took place in 1987. The conference provided standard datasets for international researchers to compete on. The MUC evaluation was held seven times between 1987 and 1997. The tasks included NER, coreference resolution, relation extraction, and slot filling, and mainly focused on text data from limited domains such as naval military intelligence, terrorist attacks, or aircraft crashes (cf. Zong, Xia, and Zhang 2021, p. 228).

By the end of the 1990s, the MUC was replaced by the *Automatic Content Extraction* (ACE) meeting which put its focus on extracting more fine-grained entities, as well as entity relations, and events. There was also a shift in the data to broader news data covering political and international events.

In 2009, ACE became a subtask of the *Text Analysis Conference Knowledge Base Population* (TAC KBP). This shifted the focus in data to open domain data (mainly from webpages), and the focus of tasks to entity attribute extraction and entity linking. Both MUC and ACE contributed to the development of several standard test datasets for the evaluation and development of IE approaches. (cf. Zong, Xia, and Zhang 2021, p. 229).

Regarding NER, another important event series was the *Conference on Computational Natural Language Learning* (CoNLL), which launched language-independent NER tasks in 2002 and 2003 (cf. Zong, Xia, and Zhang 2021, p. 229).

2.2.3 Classification and application of IE

IE technology can be classified via the domain aspect (limited vs. open domain), the type of extracted information (entity recognition, relation extraction, event extraction), and implementation methods (rule-based, machine learning-based, and deep learning-based approaches) (cf. Zong, Xia, and Zhang 2021, p. 229).

Common examples of IE applications are news tracking, counter-terrorism, business and financial intelligence, the processing of biomedical data or scientific libraries. IE can also be utilized for applications building on entity-oriented search, for question-answering systems, or the task of text segmentation (cf. Aggarwal 2018).

2.3 Named Entity Recognition

2.3.1 Definition

Named entity recognition is a subtask of IE. NER addresses the task of identifying named entities like person, location, organization, drug, time, clinical procedure, biological protein, etc. in text. It is often used as the first step in

question answering, information retrieval, co-reference resolution, topic modeling, etc. (cf. Yadav and Bethard 2019). NER is thus a fundamental task in NLP. The entities which are to be identified can mainly be represented by the following categories:

- PERSON
- LOCATION
- ORGANIZATION
- MISC/OTH
- TIME
- DATE
- CURRENCY/QUANTITY, PERCENTAGE

TIME; DATE, CURRENCY/QUANTITY, PERCENTAGE: ‘Although these types of entities are not really named entities, they can still be useful in some applications.’ (Aggarwal 2018, p. 386)

While TIME, DATE, CURRENCY/QUANTITY, and PERCENTAGE can commonly be identified via regular expressions, instances of PERSON, LOCATION, ORGANIZATION, and MISC/OTH (miscellaneous/other entities) usually do not follow a consistent pattern and thus pose larger challenges for NER, which is why most of NER research focusses mainly on these entity types (cf. Zong, Xia, and Zhang 2021, p. 229).

NER can be divided into the following two subtasks: **1. Entity detection** to detect whether a given string in a text document is an entity, including the detection of the entity’s boundaries; and **2. entity classification** to assign a specific category to the detected entity (cf. Zong, Xia, and Zhang 2021, p. 229)

2.3.2 Historical evolvement

MUC first NER task: by Grishman and Sundheim (1996) in the Sixth Message Understanding Conference

‘The first goal was to identify, from the component technologies being developed for information extraction , functions which would be of practical use, would be largely domain independent, and could in the near ter m be performed automatically with high accuracy . To meet this goal the committee developed the ”name d entity” task, which basically involves identifying the names of all the people, organizations, and geographi c locations in a text. The final task specification, which also involved time, currency, and percentage expressions, used SGM L markup to identify the names in a text . Figure 4 shows a sample sentence with named entity annotations . The tag ENAMEX (”entity name expression”) is used for both people and organiza- tion names ; the tag NUMEX (”numeric expression”) is used for currency and percentages.’

CoNLL 2002 and 2003 language-independent NER task, Spanish and Dutch (2002), English and German (2003)

language independent: language is not known in advance

(cf. Tjong Kim Sang 2002) (cf. Tjong Kim Sang and De Meulder 2003

language-independent NER tasks, datasets were created from newswire articles in four different languages (Spanish, Dutch, English, and German) and focused on 4 entities - PER (person), LOC (location), ORG (organiza- tion) and MISC (miscellaneous including all other types of entities).

German (Benikova et al., 2014) Benikova et al. (2014)’s data, which is based on German wikipedia and online news, has named entity types similar to that of CoNLL 2002 and 2003: PERson, ORGanization, LOCation and OTHer.

NER tasks have also been organized on social media data, e.g., Twitter, where the performance of classic NER systems degrades due to issues like

variability in orthography and presence of grammatically incomplete sentences (Baldwin et al., 2015). Entity types on Twitter are also more variable (person, company, facility, band, sportsteam, movie, TV show, etc.) as they are based on user behavior on Twitter. Yadav and Bethard 2019

2.3.3 Challenges for NER

In general, and specifically for German language, and for social media text data

- ambiguity ‘there is significant ambiguity in defining a named entity by using a sequence of words.’ Aggarwal 2018, p. 386

- ‘Clearly, the context in which a particular term is used is crucial in making a clear judgement about the type of entity at hand.’ Aggarwal 2018, p. 387

- social media: often shorter texts, not enough context

- abbreviations ‘of abbreviations in a contextual setting often leads to the same entity name referring to multiple instances.’ Aggarwal 2018, p. 387

- e.g. U.S., USA, United States of America

- new entities evolving ‘the set of known entities is not constant, but it evolves over time. For some types of entities like locations, the names of entities evolve slowly, whereas for others like people and organizations, the incompleteness problem is very significant.’ Aggarwal 2018, p. 386

- capitalization: used differently across languages; English: indicates proper names and is thus a helpful feature to recognized named entities - German: not only proper names, but all nouns are capitalized - adjevtices derived from NEs are not capitalized (e.g. *englisch*)

Challenges for NER in social media texts

- domain adaptation existing general NER datasets mostly from newspaper articles; special domains, such as biomedicine require the provision of domain-specific datasets; to the best of my knowledge no specific datasets

from social media for NER;

Existing approaches for named entity recognition suffer from data sparsity problems when conducted on short and informal texts, especially user-generated social media content.

performance of standard NLP tools trained on news corpora is severely degraded for e.g. tweets Ritter et al. 2011

user-generated social media content: noisy and informal nature Ritter et al. 2011

texts are often shorter and thus lack sufficient context to determine an entity's type Ritter et al. 2011

- social media: noisy data (e.g. typos)
- contain more OOV words (out of vocabulary) than e.g. news articles, mostly due to misspellings but also platform specific codes such as hashtags, lexical variations eg hashtags Ritter et al. 2011
- unreliable capitalization, wide variety of capitalization styles, eg. sometimes only lowercase also in German texts , or sometimes all caps Ritter et al. 2011
- news-trained NER seem to rely heavily on capitalization Ritter et al. 2011
- social media: often mixed language texts
- social media: shorter, more informal, more use of abbreviations, platform / subculture specific codes

2.3.4 Existing German-language datasets for NER

NER datasets first shared task on NER (Grishman and Sundheim, 1996) CoNLL 2002 (Tjong Kim Sang, 2002) and CoNLL 2003 (Tjong Kim Sang and De Meulder, 2003) were created from newswire articles in four different languages (Spanish, Dutch, English, and German) and focused on 4 entities - PER (person), LOC (location), ORG (organization) and MISC (miscellaneous including all other types of entities).

CoNLL 2003: licensing not clear, website not available; also: annotated by non-native speakers, said to be somewhat inconsistent (cf. benikova 2014)

NER shared tasks have also been organized for a variety of other languages; German (Benikova et al., 2014) named entity types vary widely by source of dataset and language Benikova et al. (2014)’s data, which is based on German wikipedia and online news, has named entity types similar to that of CoNLL 2002 and 2003: PERson, ORGanization, LOCation and OTHer NER tasks have also been organized on social media data, e.g., Twitter, where the performance of classic NER systems degrades due to issues like variability in orthography and presence of grammatically incomplete sentences (Baldwin et al., 2015) Entity types on Twitter are also more variable (person, company, facility, band, sportsteam, movie, TV show, etc.) as they are based on user behavior on Twitter Though most named entity annotations are flat, some datasets include more complex structures; e.g. nested entities (Yadav and Bethard 2019)

2.3.5 Tagging scheme and entity types

B-I-O tagging scheme

- Researchers usually regard this task of supervised NER as a sequence labeling problem. The sequence labeling model first needs to determine the label set and the language granularity for labeling. BIO is a widely used label set in which “B” denotes the beginning of an entity, “I” indicates the middle or end of an entity, and “O” denotes the outside of any entity. Zong, Xia, and Zhang 2021, p. 231

For person, location, and organization names seven tags can be employed: PER-B, PER-I, LOC-B, LOC-I, ORG-B, ORG-I, and O. Among them, PER, LOC, and ORG denote person, location, and organization names, respectively. PER-B indicates the starting point of a person name, and PER-I represents the middle or end part of a person name. LOC-B, LOC-I, ORG-B, and ORG-I have similar meanings. Zong, Xia, and Zhang 2021, pp. 231–

232

Words and characters are usually the basic language units for label annotation. Zong, Xia, and Zhang 2021, p. 232

2.3.6 Evaluation of NER systems

Extrinsic evaluation

Intrinsic evaluation

‘A named entity is correct only if it is an exact match of the corresponding entity in the data file.’ Tjong Kim Sang 2002

Precision ‘Precision is the percentage of named entities found by the learning system that are correct.’ Tjong Kim Sang 2002

Recall ‘Recall is the percentage of named entities present in the corpus that are found by the system.’ Tjong Kim Sang 2002

F1 ‘The performance in this task is measured with $F_{\beta=1}$ rate which is equal to:

$$\frac{(\beta^2 + 1) * precision * recall}{(\beta^2 * precision + recall)}$$

with $\beta = 1$.

2.4 Different NER approaches

Early NER systems were based on handcrafted rules, lexicons, orthographic features and ontologies. followed by NER systems based on feature-engineering and machine learning (Nadeau and Sekine, 2007) Starting with Collobert et al. (2011), neural network NER systems with minimal feature engineering have become popular are appealing because they typically do not require

domain specific resources like lexicons or ontologies, and are thus poised to be more domain independent. Various neural architectures have been proposed, mostly based on some form of recurrent neural networks (RNN) over characters, sub-words and/or word embeddings. Yadav and Bethard 2019

2.4.1 Rule-based approaches

Since both the internal structure and external context of person, location, and organization names have certain rules to follow, early research on NER mostly focused on rule-based methods, among which regular expression is commonly used. Compared to location and organization names, person names are much easier to identify for many languages (e.g., English, Chinese, and Japanese). For example, in English, person names usually begin with capital letters and follow some kind of titles such as Mr. , Dr., or Prof.. Therefore, a regular expression `title [capitalized token +]` can be designed to recognize such person names efficiently. Zong, Xia, and Zhang 2021, p. 230

- Nevertheless, even with a large-scale database of person, location, and organization names, rule-based NER methods still face many challenges. On the one hand, a phrase in different contexts may lead to different types of entities. Zong, Xia, and Zhang 2021, p. 231

- common words may also be a type of entity Zong, Xia, and Zhang 2021, p. 231 e.g. Bill

- Furthermore, many entities are frequently abbreviated in the text. For example, United States of America is usually written as USA. This abbreviation can cause ambiguity in many cases. Zong, Xia, and Zhang 2021, p. 231
- More importantly, new named entities, especially for person and organization names, are constantly emerging, and the consistency becomes less reliable. These problems mean that rule-based methods enhanced with entity databases are difficult to handle and cannot obtain high recognition accuracy. Furthermore, the rule-based approach also faces the problem of system maintenance, as it requires the constant modification or addition of

new rules that may conflict with existing ones. Therefore, the development of a NER model using an automatic learning framework is desirable. Zong, Xia, and Zhang 2021, p. 231

Each token in the text is converted into a set of features. These features are typically helpful properties of the token or their context for entity extraction. e.g. starts with capital letter help in defining various patterns on the left-hand side of the rule contextual pattern on the left-hand side of the rule is a combination of conditions corresponding to the features associated with a sequence of tokens a rule is fired if a sequence of tokens in the text matches this pattern action on the right-hand side could correspond to labeling that sequence as a named entity Aggarwal 2018

2.4.2 Knowledge-based approaches

Knowledge-based NER systems do not require annotated training data as they rely on lexicon resources and domain specific knowledge. These work well when the lexicon is exhaustive, but fail for entity classes not represented in the lexicon Precision is generally high for knowledge-based NER systems because of the lexicons, but recall is often low due to domain and language-specific rules and incomplete dictionaries Another drawback of knowledge based NER systems is the need of domain experts for constructing and maintaining the knowledge resources. Yadav and Bethard 2019

2.4.3 Machine-learning based approaches

Machine learning: "deals with the development of algorithms that can learn to perform tasks automatically based on a large number of examples, without requiring handcrafted rules." (cf. Vajjala et al. 2020, p. 14)

goal of ML: 'learn' to perform tasks based on examples (training data) without explicit instruction typically done by creating a numeric representation (features) of the training data and using this representation to learn the

patterns in those examples (cf. Vajjala et al. 2020, p. 15)

ML algorithms can be grouped in three paradigms: supervised learning, unsupervised learning, reinforcement learning

supervised: learn the mapping function from input to output given a large number of examples in the form of input-output pairs input-output pairs = training data output = labels, or ground truth example: spam classification

supervised learning requires large number of labeled data (cf. Vajjala et al. 2020, p. 15)

Feature-engineered supervised systems

Given a collection of text data, suppose all person, location, and organization entities are manually labeled, as shown in the examples below. Supervised NER systems attempt to design machine learning methods that learn automatic prediction models based on these correctly labeled training data. Zong, Xia, and Zhang 2021, p. 231

- Researchers usually regard this task of supervised NER as a sequence labeling problem.

Supervised machine learning models learn to make predictions by training on example inputs and their expected outputs, and can be used to replace human curated rules. Common ML systems for NER: Hidden Markov Models (HMM) Maximum Entropy Support Vector Machines (SVM) Conditional Random Fields (CRF) decision trees Yadav and Bethard 2019

Support Vector Machines - goal of any classification task: learn a decision boundary that acts as a separation between different categories of text - decision boundary can be linear or nonlinear (e.g. a circle) - SVM: can learn linear and nonlinear - SVM learns an optimal decision boundary so that the distance between points across classes is at its maximum Vajjala et al. 2020, p. 20

Hidden Markov Model HMM is a statistical model that assumes there is an underlying, observable process with hidden states that generates the data, ie we can only observe the data once it is generated - an HMM then tries to model the hidden states from this data - e.g. POS tagging: we assume that text is generated according to an underlying grammar, which is hidden underneath the text - hidden states are parts of speech that inherently define the structure of the sentence following the language grammar, but we only observe the words that are governed by these latent states - HMM also make the Markow assumption: each hidden state is dependent on the previous state(s) - human language is sequential which means that the current word depends on what occurred before - this makes HMM a powerful tool for modeling textual data Vajjala et al. 2020, pp. 21–22

Conditional Random Field - another algorithm used for sequential data - performs a classification task on each element in the sequence - takes the sequential input and the context of tags into consideration Vajjala et al. 2020, p. 22

Unsupervised / bootstrapped approaches

Unsupervised learning: aim to find hidden patterns in given input data without any reference to output works with large collection of unlabeled data example: topic modeling, identity latent topics in large collection of texts (cf. Vajjala et al. 2020, p. 15)

common in real-world NLP: semi-supervised; small labeled dataset, large unlabeled dataset; learn from both sets (cf. Vajjala et al. 2020, p. 16)

reinforcement learning: absence of larger data collections, trial and error principle, improvement via feedback (punishment or reward) (cf. Vajjala et al. 2020, p. 16)

Some of the earliest systems required very minimal training data. - labeled seeds, and 7 features including orthography (e.g., capitalization), con-

text of the entity, words contained within named entities, etc. - shallow syntactic knowledge and inverse document frequency (IDF) - uses seeds to discover text having potential named entities, detects noun phrases and filters any with low IDF values, and feeds the filtered list to a classifier Yadav and Bethard 2019

2.4.4 Deep-learning based approaches / Neural Networks

Deep learning: "branch of machine learning that is based on artificial neural network architectures." (cf. Vajjala et al. 2020, p. 14)

NER systems have been studied and developed widely for decades but accurate systems using deep neural networks (NN) have only been introduced in the last few years (Yadav and Bethard 2019)

Feature-inferring neural network systems Collobert and Weston (2008) proposed one of the first neural network architectures for NER, with feature vectors constructed from orthographic features (e.g., capitalization of the first character), dictionaries and lexicons. Yadav and Bethard 2019

Later work replaced these manually constructed feature vectors with word embeddings (Collobert et al., 2011), which are representations of words in n-dimensional space, typically learned over large collections of unlabeled data through an unsupervised process such as the skip-gram model (Mikolov et al., 2013). Studies have shown the importance of such pre-trained word embeddings for neural network based NER systems (Habibi et al., 2017), and similarly for pre-trained character embeddings in character-based languages like Chinese Modern neural architectures for NER can be broadly classified into categories depending upon their representation of the words in a sentence. For example, representations may be based on words, characters, other sub-word units or any combination of these Yadav and Bethard 2019

Recurrent neural networks - language is inherently sequential - thus, a model which can progressively read an input text from one end to another can be very useful for language understanding - RNNs are designed to keep such a sequential processing and learning in mind - have neural units that are capable of remembering what they have processed so far - memory is temporal, information is stored and updated with every step as the RNN reads the next word as input Vajjala et al. 2020, p. 23

Long short-term memory - RNNs cannot remember longer contexts - do not perform well when input text is long - LSTM = solve this issue - concept: forget irrelevant context, only remember relevant context for task at hand - relieves the load of having to remember a lot of context for long inputs Vajjala et al. 2020, p. 23

Convolutional neural networks - used heavily in computer vision tasks (e.g. image classification) - also used for NLP - each word in a sentence is represented as a word vector, all word vectors of sentence have the same size - resulting matrix representing the sentence can now be treated similar to an image by the CNN - advantage: CNN can look at a group of words together using a context window - CNN uses a collection of convolution and pooling layers to achieve a condensed representation of the text which is then fed as input to a fully connected layer to learn some NLP tasks like text classification Vajjala et al. 2020, p. 24

Transformers - latest entry in the league of deep learning models for NLP - have achieved state of the art in almost all major NLP tasks in recent years - model the textual context but not in a sequential manner - given a word in the input, it prefers to look at all the words around it (known as self-attention) and represent each word with respect to its context - e.g. bank different meaning depending on context (financial institute, furniture) - transformers can model such context and hence have been used heavily in NLP tasks due

to this higher representation capacity as compared to other deep networks Vajjala et al. 2020, pp. 25–26

Transfer learning for downstream tasks with transformers - large transformers used for smaller downstream tasks via transfer learning - transfer learning = technique where the knowledge gained while solving one problem is applied to a different but related problem - transformers: pre-training (training of very large transformer models, unsupervised) to predict a part of a sentence given the rest of the content so it can encode the high-level nuances of the language in it - models are trained on more than 40GB of textual data, scraped from the whole internet - this model is then fine-tuned on NLP downstream tasks, e.g. NER Vajjala et al. 2020, p. 26

2.4.5 Summarization

Chapter 3

Implementation

3.1 Exploration of existing solutions

- spacy - Flair
 - German - translated to English
- explorative evaluation

3.2 Data

3.2.1 Domain-specific data


Telegram channel ‘Demotermine’: 52.900 subscribers by the beginning of June 2022,

long channel name: ‘Demo-Termine & Kontakte, Gleichgesinnte treffen - Demokalender, Spaziergänge, Mahnwachen, Meditation *Rücktritt Bundesregierung!’


channel-info: “Wir Demokraten wollen miteinander in Kontakt bleiben @DemotermineChat und uns im Bedarfsfall möglichst schnell austauschen, Beweise in Wort, Bild und Ton sichern, damit sie nicht unterschlagen werden können @LivestreamsFuerDich! @Terminverteiler_Bot’

after removal of duplicates and NaN text:

date range: 2018-11-03 bis 2021-12-19

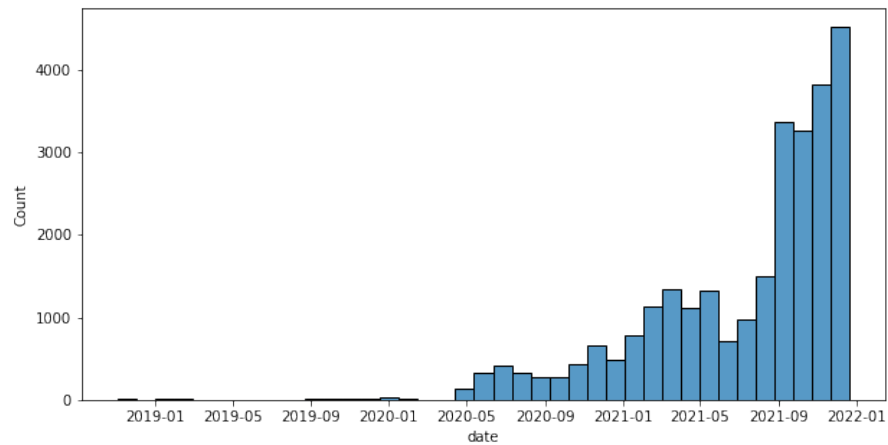

language: predominantly German (22803, ca. 83.064986%), followed by English (3.823, 13.926126%), French, Italian, Dutch (less than 1%)

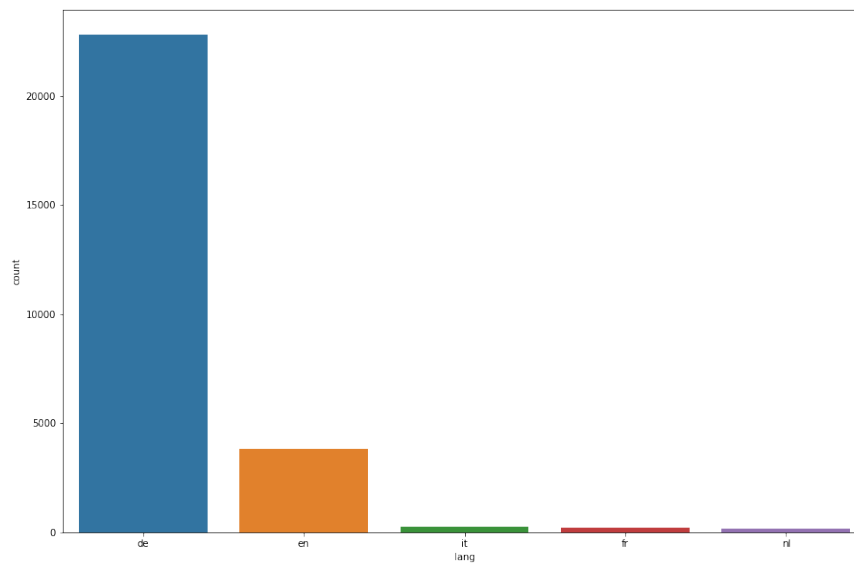

qualitative exploration of data:

- origin of channel?

early messages (before pandemic):

- AfD, anti-immigration, Kandel, Gelbwesten - racist and antisemitic - against 'mass immigration' - focus on violence by immigrants - lying press - remembrance of German victims in WWII ('Bombenopfer'), self-victimization - pegida - landwirte gegen die politik der grünen - Julian Assange - against compulsory vaccinations (not COVID), Robert F. Kennedy jr. - GEGEN REPRESSION UND GROSSEN AUSTAUSCH - gegen USA (zB Ramstein airbase, drohnen, militärtransporte durch DE) - Dresden Gedenken, Rheinwiesenlager

"2019-09-01 11:01:38 Wir sehen uns auf der Straße ! Demos sind die ideale Gelegenheit , seinen Unmut gegen die herrschende Politik , die kein Interesse mehr am Volk hat (zum Ausdruck zu bringen . Hier lernt man vor allem Gleichgesinnte kennen , kann sich untereinander austauschen . Das Ziel bleibt , die Rechtsstaatlichkeit in der Bananenrepublik wiederherzustellen . Dazu gehört , dass in diesem Kanal keine Propaganda von Klima-Nazis (Buntfaschisten und steuerfinanzierten Gefährdern der freiheitlich-demokratischen Grundordnung (z.B. geteilt wird . Natürlich lehnen unsere Demoteilnehmer Nazi-Methoden der Terror-SA-Nachfolgeorganisation Antifa entschieden ab wie die durch Zwangsgebühren erpresste faschistische Propaganda von ARD und ZDF des Beitragsservice . Geteilt werden hier auch Demoankündigungen gegen die von Faschisten installierten Atomwaffen und durchgeführten Drohnenkriege von deutschem Boden aus . Grundsätzlich ist jede Form der Zionisierung , die die durch Migration massiv verstärkte Islamisierung zur Folge hat , abzulehnen . Hilfe an Hungernde hat grundsätzlich Vorrang gegenüber der faschistischen Deportation von wohlgenährten , jungen Männern nach und später vielleicht wieder Auschwitz . Menschen , die in Küstennähe ins Wasser gefallen sind , sind grundsätzlich zu retten und dort wieder an das nächste sichere Ufer an Land zu bringen , um ihr Leben und das von Nachahmern faschistischer Ideologien zu retten . Unsere Teilnehmer

stehen zum Menschen- nach Artikel 5 im Grundgesetz . für das 5G-Netz und die des Regenwaldes zugunsten faschistischer , weltherrschaftlicher Ziele sind ebenso abzulehnen wie der faschistische Lobbyismus zum Impfzwang . Überall da , wo die feige , vermummte Antifa sein müsste , statt Faschisten die Rosetten zu lecken , sind wir da ! Soziale Ausgrenzung , Verbreitung von Hass und Hetze gegen Andersdenkende durch Stasi-Nazi-Faschisten nach Gleichmacher-Gleichschaltungs-Gleichschritt-Hitler-Vorbild liegt uns ebenso fern wie die Anwendung von Gewalt zugunsten der Diener des Faschismus in Parteien , Kirchen , Gewerkschaften , Stiftungen und EU-Reichs-Propagandamedien ARD und ZDF , die vor allem die stark wachsende Verarmung der Bevölkerung im reichen Fascho-Deutschland zur Folge hat , wogegen sich die auch Aktivisten wenden . Bei den Demos wollen wir überall und flächendeckend vor allem den Druck gegenüber der herrschenden Kaste aufbauen , den Menschen , die sich noch in der Wohlfühlblase und im Arschkriechermodus befinden zeigen , dass wir dennoch da sind ! Zu uns passende Demos bitte mitteilen . Bildet Fahrgemeinschaften , denn zusammen sind wir stark . Vernetzt euch , trifft einander . Das geht nirgendwo besser als auf der Straße . Dort erfährt man auch von weiteren (geschlossenen) und außerhalb der Demos .”

3.2.2 data cleaning

- total number of rows: 31430 - removal of duplicate texts - removal of rows not containing text

total number of messages (wo NaN / duplicates): 27.627 messages

3.2.3 text cleaning

some general and some Telegram- / channel-specific cleaning and preprocessing steps - removal of user mentions might refer to named entities, e.g. telegram channels run by / named after persons - but: explorations of models showed that this confuses models; also: mentions can easily be extracted

from text via regex via the `re` at the beginning, and are unambiguous, 100% accuracy can be achieved using regular expressions

- removal of urls: might contain strings containing named entities, confuse models
- removal of sensitive information (bank account details in the form of IBANs), be able to make labeled data publicly available
- normalization of unicode strings
- removal of emojis
- keep umlauts (German language)
- removal of footer texts ('Raus auf die Straßen')
- keep capitalization (relevant to identify common and proper nouns in German)
- split up compound hashtags
- tokenization, spacy tokenizer (german md model)
- all tokens, not only text were kept (date, time consisting of numbers and punctuation, needed for the purpose of this NER application)
- removal of duplicate whitespaces after joining tokens back together
- removal of rows not containing values for cleaned text - 22.803 messages remaining

3.2.4 sample selection

- language detection with python package `langdetect`
 - selected only German-language messages, German-language: 22.803 - selected only messages ≥ 100 characters including whitespaces (lower quartile: 83 chars) - 14.605 remaining

25%75

50%135

75%317

- identify similar messages via Levenshtein Distance - threshold: ≥ 0.8 similarity

- select random sample of 20% of remaining 11.978 messages - 2.395 messages for annotation remaining

Table 3.1: Annotation scheme: Entity types

Entity type	Description	Examples
PERSON	Named person or family, including artist names, names of fictional characters, etc.	
LOCATION	Countries, cities, states, continents, districts, regions, streets and squares; shopping centers, parking lots, restaurants, 'Non-GPE locations, mountain ranges, bodies of water'; landmarks	
ORGANIZATION	Companies, agencies, institutions, newspapers, tv/radio channels, other media platforms; political parties; non-governmental organizations; political groups such as Querdenken or Antifa etc.	
DATE	Absolute or relative dates	23.09.2022
TIME	Specific times of day, time codes, periods of time, etc.	13:10
ACTION	Specific action or event mentioned in a text, e.g. demonstrations, pickets, motorcade; (protest) walks; etc. - must not be unique entity, plural allowed	
OTHER	Other entities, e.g. religions, nationalities, products, works of art, political spectres	

3.3 Annotation scheme

Based on Benikova, Biemann, and Reznicek 2014 and spacy

and on:

for the sake of simplicity: no nested entities, no derived entities

Only full noun phrases are considered as named entities. Pronouns and all other phrases can be ignored.

Names are denominators for a single unique object in the real world.

A named entity is a “real-world object” that’s assigned a name – for example, a person, a country, a product or a book title. (spacy)

- NEs can consist of more than one token - Phrases only partly containing names (deutschlandweit), or adjectives referring to entities (euklidisch) can be ignored

combined NEs, e.g. Wien-Demo -> tagged separately if possible, otherwise tagged as the dominant entity type (here Demo), to avoid nested entities

hier wird klar wie der shift von protest forms is: Achtung Demonstration wird Abgesagt ! Wir haben als Orga Team beschlossen , das wir keine Demos mehr anmelden werden ! Wir sagen klar Nein zu den Auflagen die uns vorgegeben werden . Deshalb , neuer Termin , wir fahren nach Plauen ! Lasst uns die Freie Sachsen und den Bürgermeisterkandidaten Thomas Kaden unterstützen ! 11062021 Raus auf die Straße

labelstudio

IOB encoding: each word either begins, is inside, or is outside of a named entity

hashtags encoding events via location and date, e.g. #b20200809 or #le1311 are not to be annotated, should be extracted via regex and treated

separately; unsure if they are NEs?

3.4 Annotated dataset

descriptive statistics access / licensing?

3.5 Additional resources

3.5.1 GermEval 2014 NER task dataset

3.5.2 DFKI Smartdata corpus

the DFKI SmartData Corpus is released as CC-BY 4.0.

3.5.3 XTREME dataset

3.6 Models

- spacy - hugging face

3.7 Pipeline

3.8 Translation approach

3.9 Evaluation

3.9.1 Evaluation metrics

3.9.2 Performance evaluation

3.10 Summarization

Chapter 4

Results

4.1 Spacy

4.2 Hugging Face

4.3 Translation approach

4.4 Summarization

Chapter 5

Conclusion

5.1 Summarization

5.1.1 subsection

5.2 Discussion

Bibliography

- Aggarwal, Charu C. (2018). *Machine Learning for Text*. en. Cham: Springer International Publishing. ISBN: 978-3-319-73530-6 978-3-319-73531-3. DOI: 10.1007/978-3-319-73531-3. URL: <http://link.springer.com/10.1007/978-3-319-73531-3> (visited on 05/14/2022).
- Benikova, Darina, Biemann, Chris, and Reznicek, Marc (May 2014). “NoStad Named Entity Annotation for German: Guidelines and Dataset”. In: *Proceedings of the Ninth International Conference on Language Resources and Evaluation (LREC’14)*. Reykjavik, Iceland: European Language Resources Association (ELRA), pp. 2524–2531. URL: http://www.lrec-conf.org/proceedings/lrec2014/pdf/276_Paper.pdf.
- Ethnologue (May 2022). *How many languages are there in the world?* en. URL: <https://www.ethnologue.com/guides/how-many-languages> (visited on 06/19/2022).
- Magueresse, Alexandre, Carles, Vincent, and Heetderks, Evan (June 2020). *Low-resource Languages: A Review of Past Work and Future Challenges*. Number: arXiv:2006.07264 arXiv:2006.07264 [cs]. URL: <http://arxiv.org/abs/2006.07264> (visited on 06/19/2022).
- Mikolov, Tomas et al. (2013). *Efficient Estimation of Word Representations in Vector Space*. DOI: 10.48550/ARXIV.1301.3781. URL: <https://arxiv.org/abs/1301.3781>.
- Ritter, Alan et al. (2011). “Named Entity Recognition in Tweets: An Experimental Study”. In: *Proceedings of the Conference on Empirical Meth-*

- ods in Natural Language Processing*. EMNLP '11. Edinburgh, United Kingdom: Association for Computational Linguistics, 1524–1534. ISBN: 9781937284114.
- Schiersch, Martin et al. (2018). “A German Corpus for Fine-Grained Named Entity Recognition and Relation Extraction of Traffic and Industry Events”. In: *Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC 2018)*. Ed. by Nicoletta Calzolari (Conference chair) et al. Miyazaki, Japan: European Language Resources Association (ELRA). ISBN: 979-10-95546-00-9.
- Singh, Anil Kumar (2008). “Natural Language Processing for Less Privileged Languages: Where do we come from? Where are we going?” In: *Proceedings of the IJCNLP-08 Workshop on NLP for Less Privileged Languages*. URL: <https://aclanthology.org/I08-3004> (visited on 06/19/2022).
- Tjong Kim Sang, Erik F. (2002). “Introduction to the CoNLL-2002 Shared Task: Language-Independent Named Entity Recognition”. In: *COLING-02: The 6th Conference on Natural Language Learning 2002 (CoNLL-2002)*. URL: <https://aclanthology.org/W02-2024>.
- Tjong Kim Sang, Erik F. and De Meulder, Fien (2003). “Introduction to the CoNLL-2003 Shared Task: Language-Independent Named Entity Recognition”. In: *Proceedings of the Seventh Conference on Natural Language Learning at HLT-NAACL 2003*, pp. 142–147. URL: <https://aclanthology.org/W03-0419> (visited on 06/19/2022).
- Vajjala, Sowmya et al. (2020). *Practical natural language processing: a comprehensive guide to building real-world NLP systems*. First edition. OCLC: on1125266646. Sebastopol, CA: O'Reilly Media. ISBN: 978-1-4920-5405-4.
- Yadav, Vikas and Bethard, Steven (Oct. 2019). *A Survey on Recent Advances in Named Entity Recognition from Deep Learning models*. Tech. rep. arXiv:1910.11470. arXiv:1910.11470 [cs] type: article. arXiv. URL: <http://arxiv.org/abs/1910.11470> (visited on 05/14/2022).

Zong, Chengqing, Xia, Rui, and Zhang, Jiajun (2021). “Information Extraction”. en. In: *Text Data Mining*. Singapore: Springer Singapore, pp. 227–283. ISBN: 9789811600999 9789811601002. DOI: 10.1007/978-981-16-0100-2_10. URL: https://link.springer.com/10.1007/978-981-16-0100-2_10 (visited on 05/14/2022).

Appendix

List of Figures

List of Tables

3.1	Annotation scheme: Entity types	31
-----	---	----

List of Acronyms