
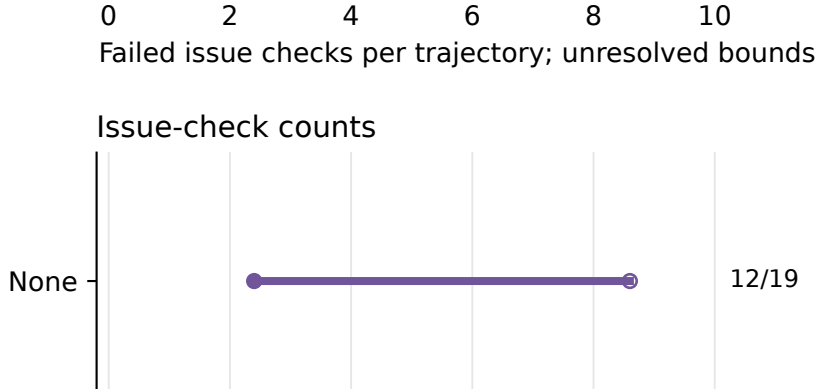
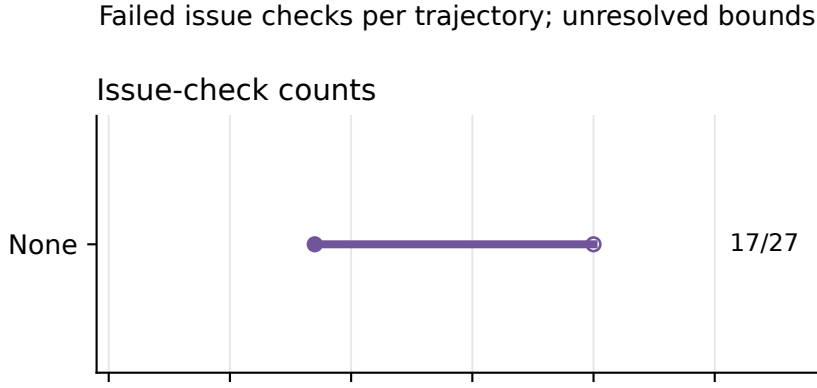
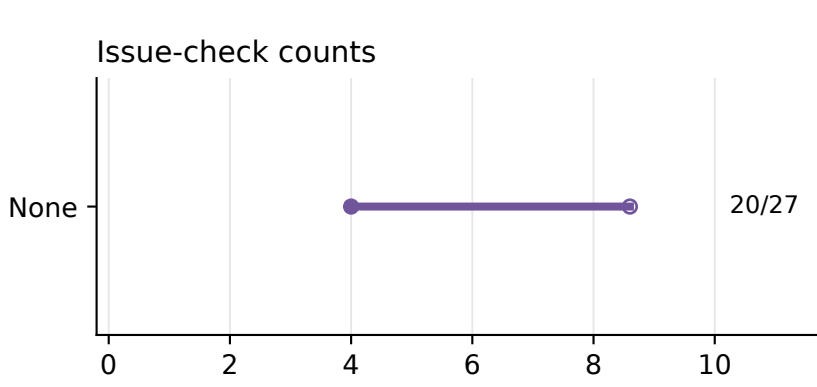
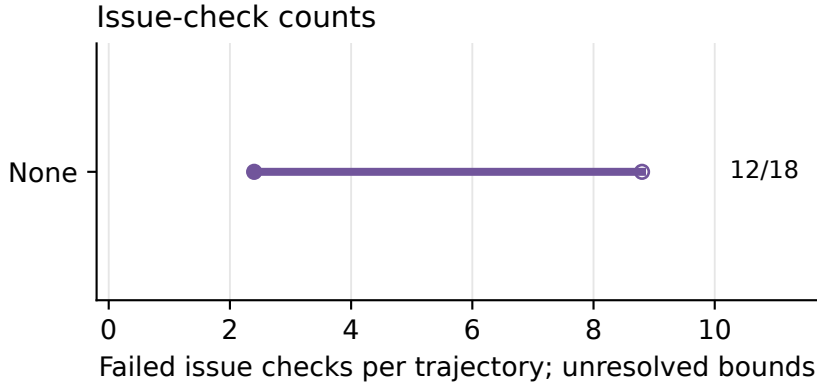
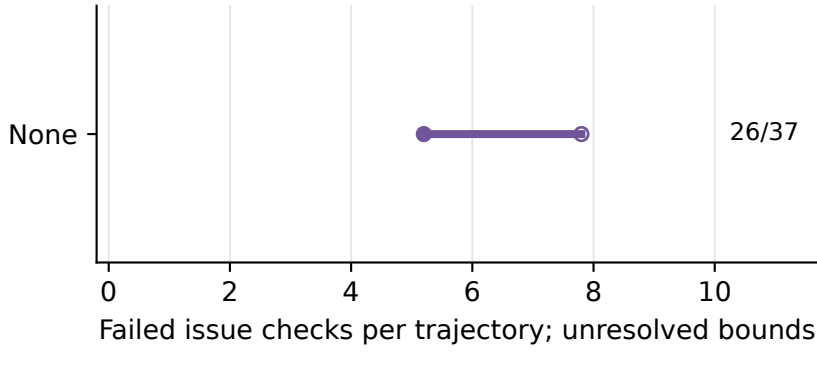
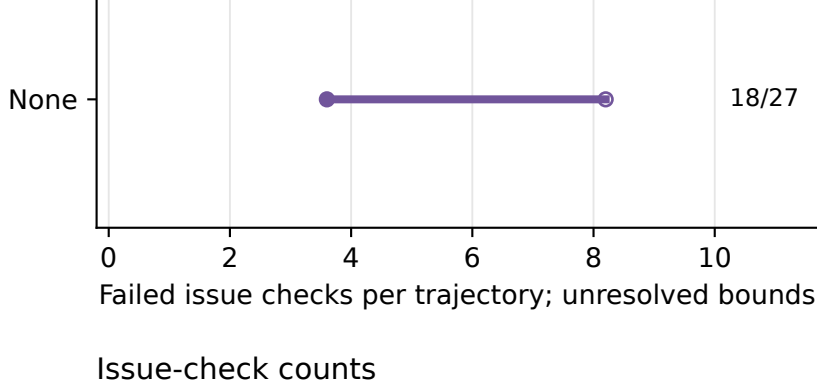
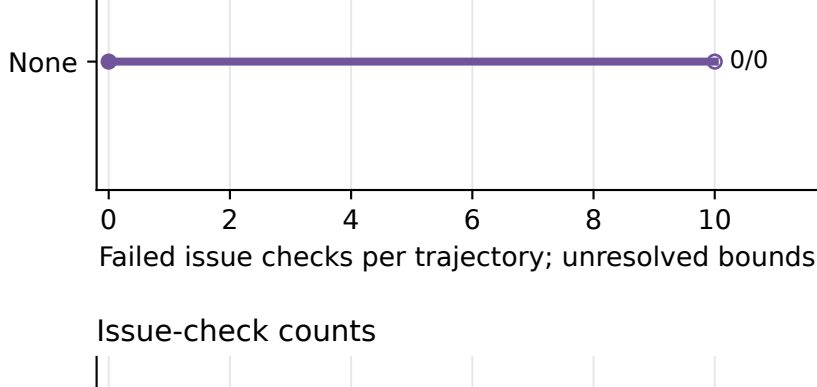
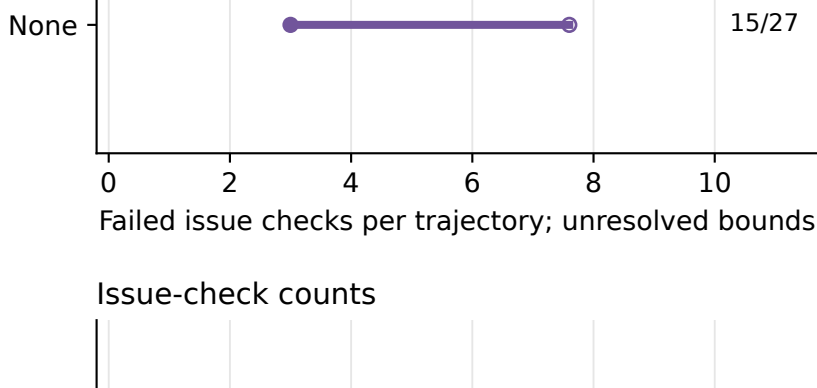
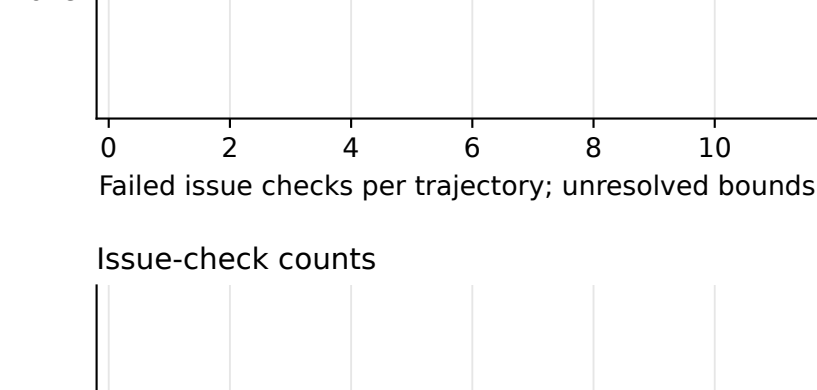
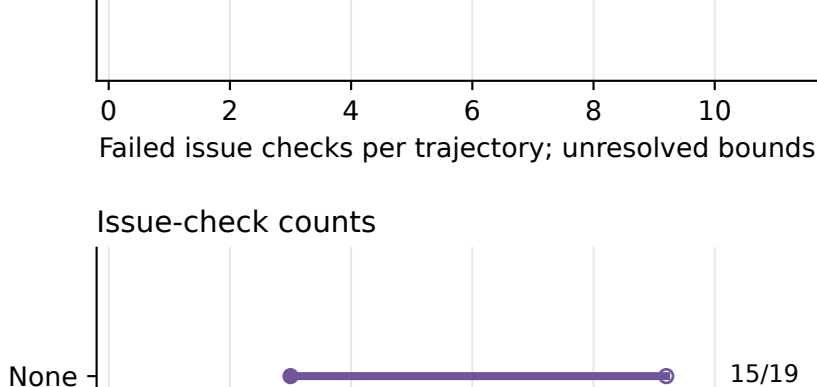
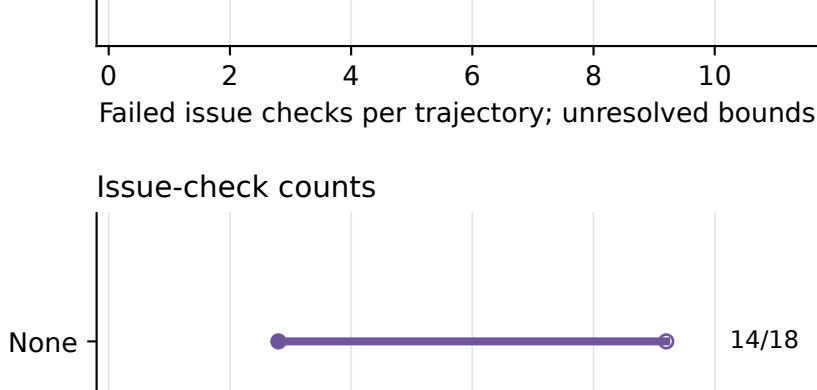
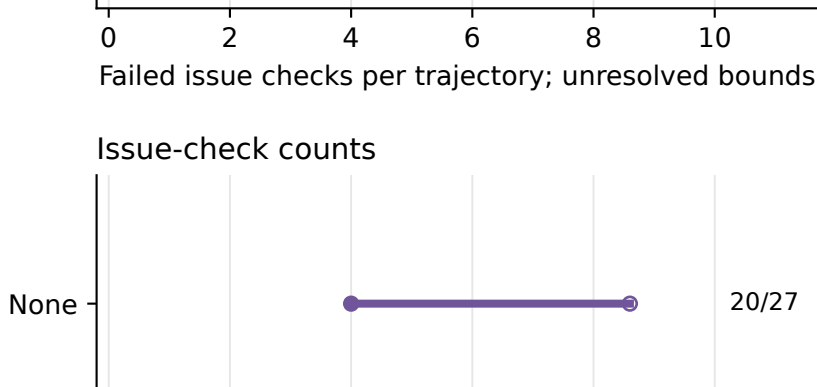
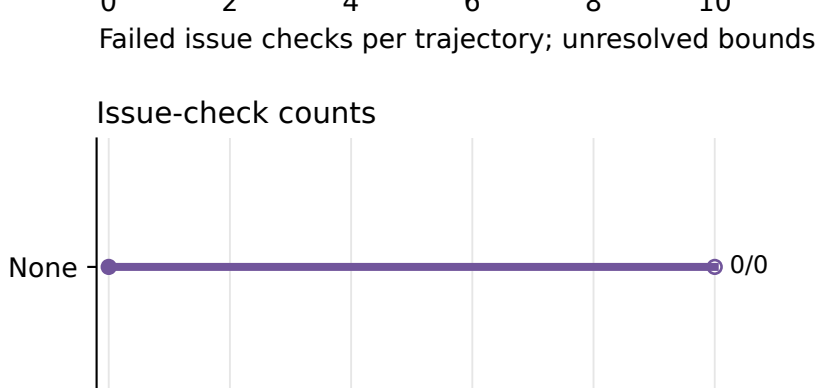
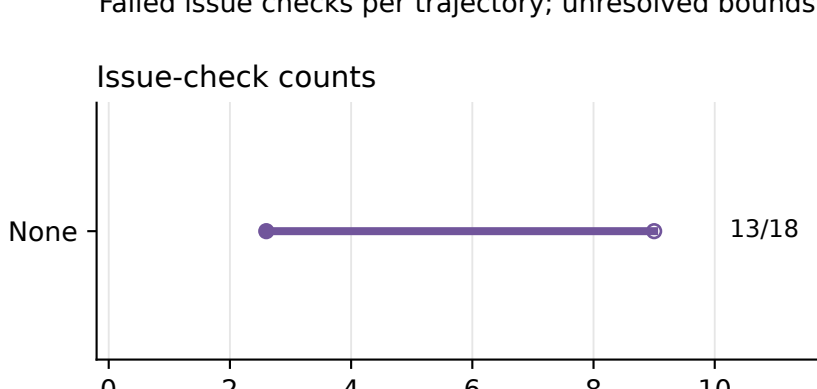
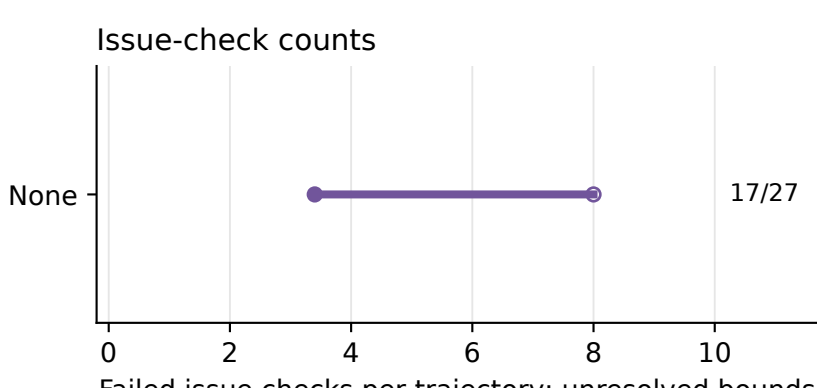
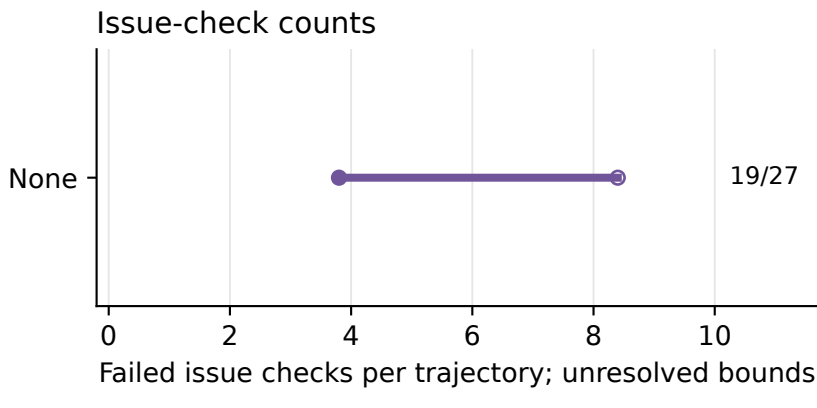
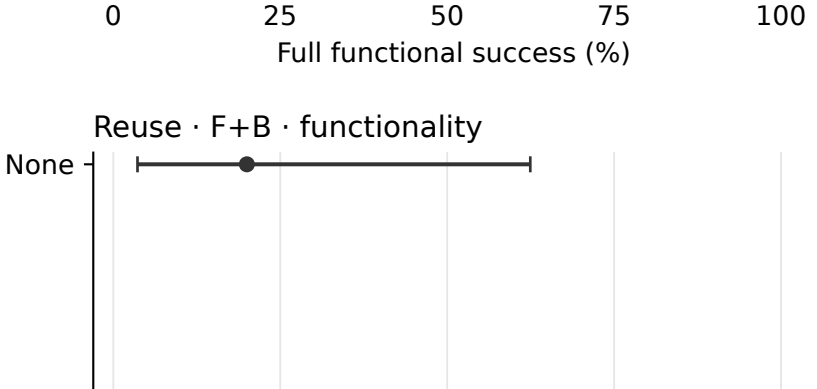
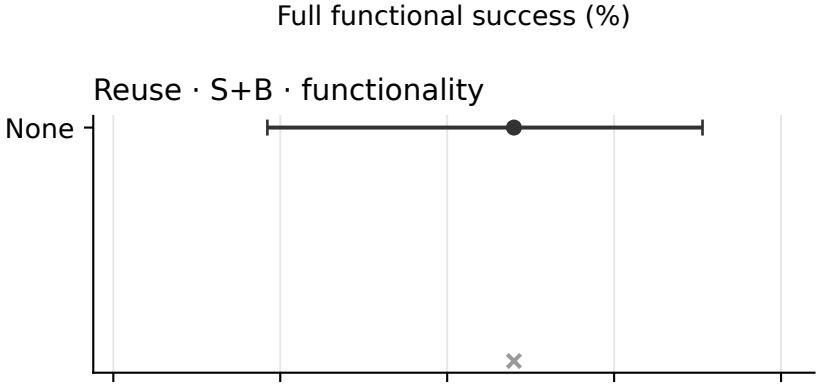
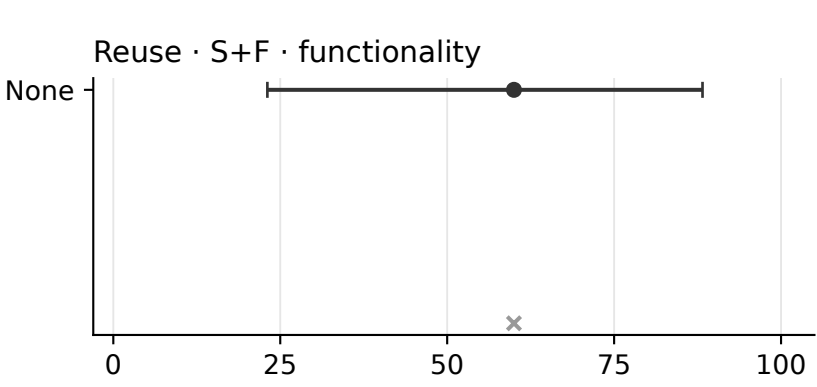
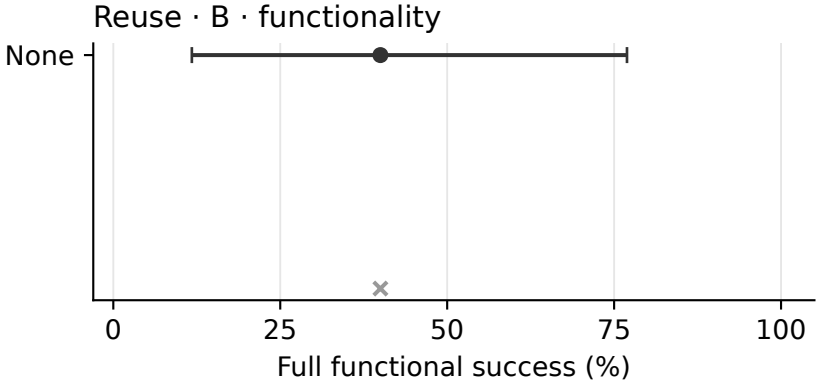
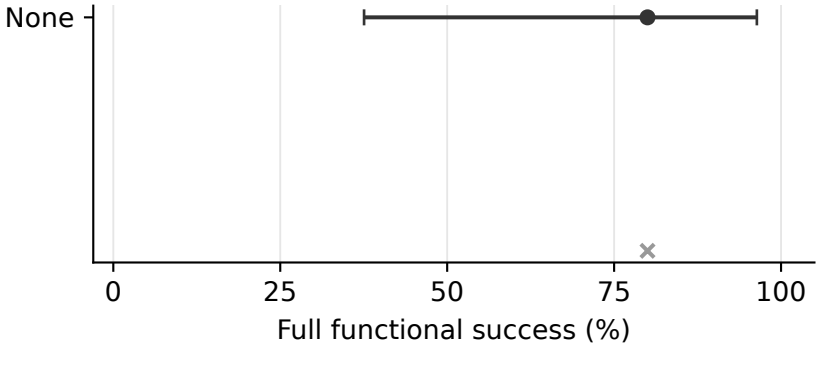
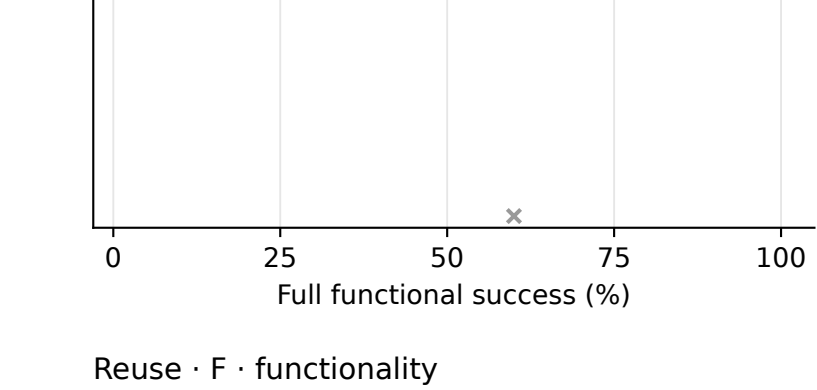
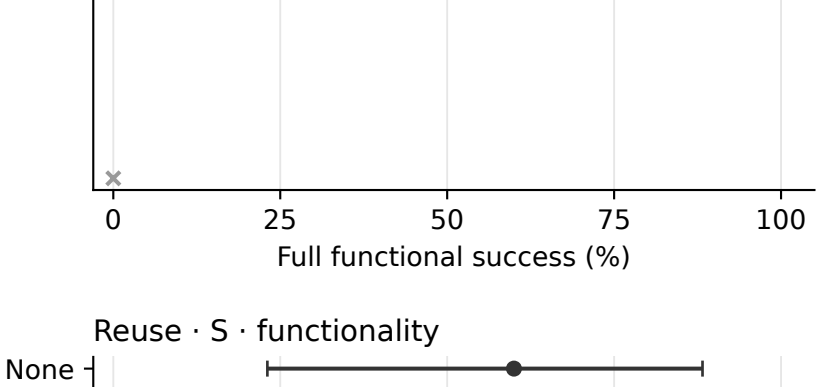
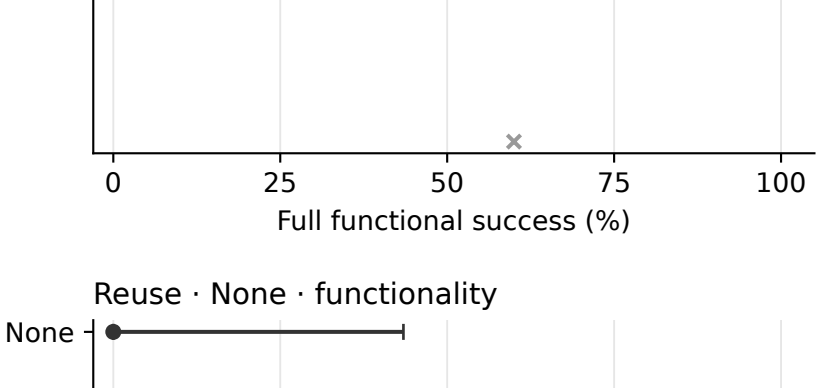
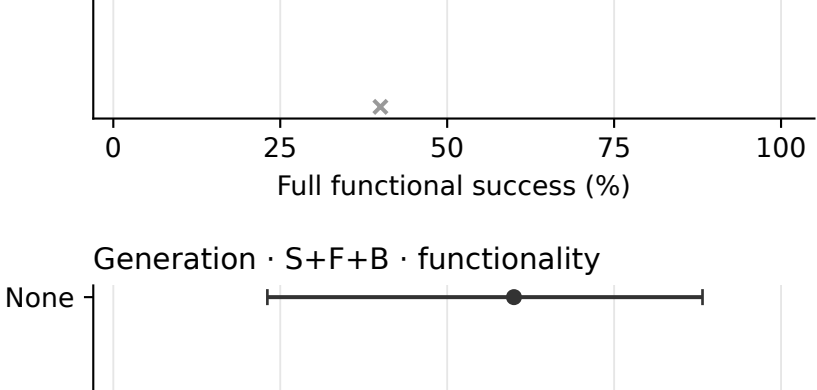
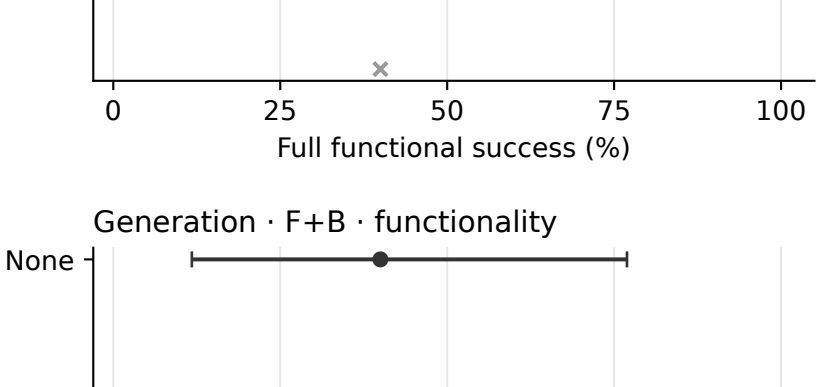
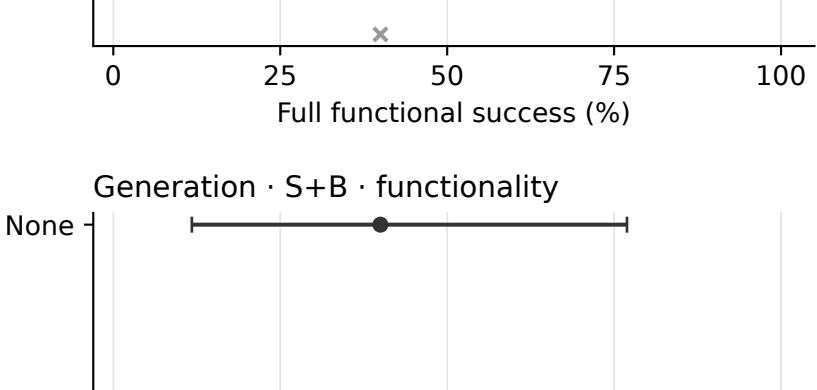
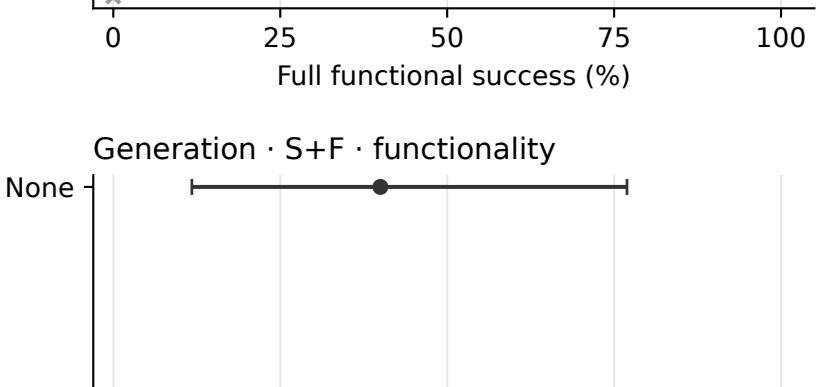
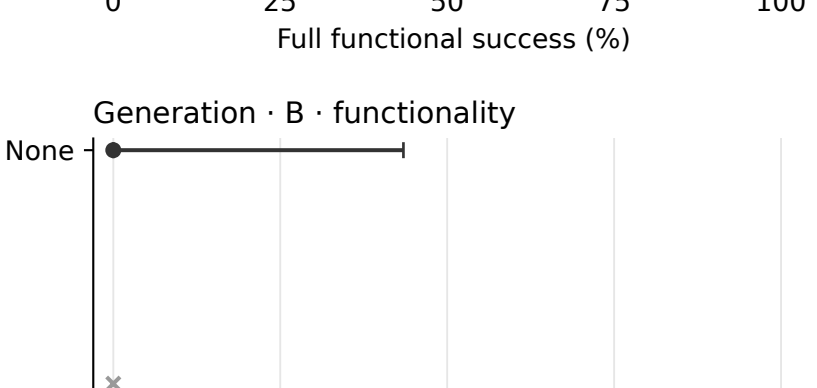
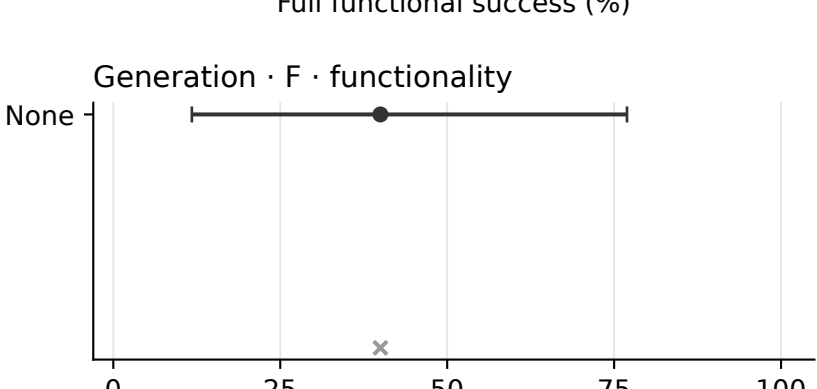
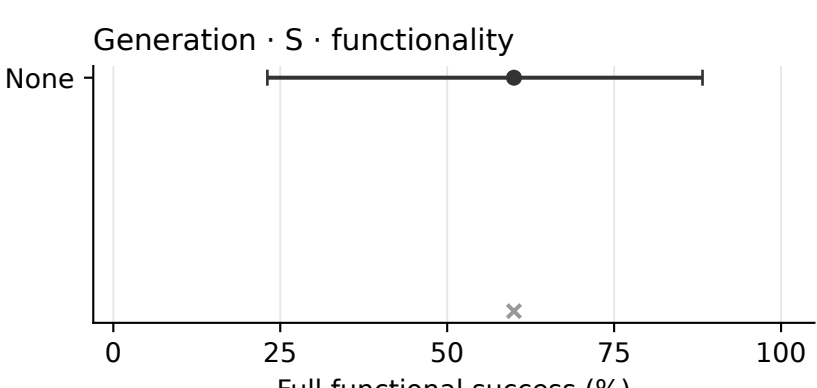


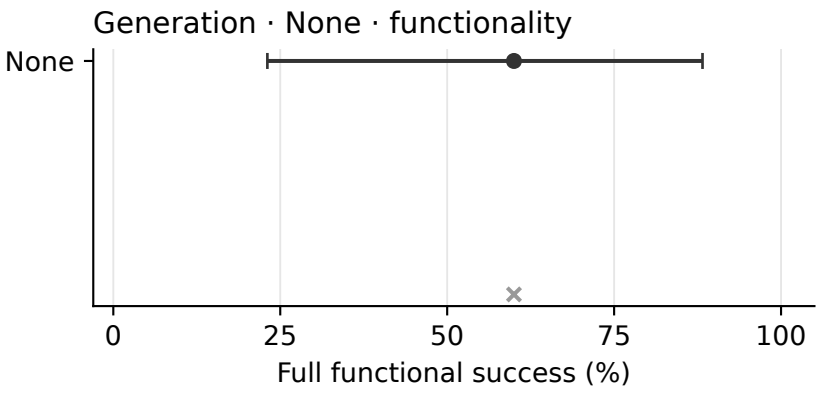

Functionality: filled dot = within budget; cross = first submission; bars = marginal Wilson 95% intervals.
Security: filled dot = observed failures; open dot = all unresolved checks failing. This range is not a confidence interval.
i23-matrix (qualified); N=5 trajectories per combination; at most 1 submissions each. Fixed task and acquired contexts.