

# Basic Programming Practicum

## Jobsheet 3



**Name**

Dicha Zelianivan Arkana

**NIM**

2241720002

**Class**

1i

**Department**

Information Technology

**Study Program**

D-IV Informatics Engineering

---

# 1 Practice

## 1.1 Experiment 1

1. Open a text editor
2. Create a new file, give it a name `ExampleVariable.java`
3. Write the basic structure of the Java programming language which contains the `main()` function.
4. Write the code below inside the `public static void main(String[] args)`

```
String oneOfMyHobbies = "Playing futsal";
boolean isSmart = true;
char gender = 'M';
byte _currentAge = 20;
double $gpa = 3.24, height = 1.78;
System.out.println(oneOfMyHobbies);
System.out.println("Is smart? " + isSmart);
System.out.println("Gender: " + gender);
System.out.println("My current age: " + _currentAge);
System.out.println(String.format("My GPA is %s and my height is %s meters", $gpa, height));
```

## Questions

1. Change the variable name so that it look better and more correct!

```
String oneOfMyHobbies = "Playing hide and seek";
boolean isSmart = true;
char gender = 'M';
byte currentAge = 20;
double gpa = 3.24, height = 1.78;
System.out.println(oneOfMyHobbies);
System.out.println("Is smart? " + isSmart);
System.out.println("Gender: " + gender);
System.out.println("My current age: " + currentAge);
System.out.println(String.format("My GPA is %s and my height is %s meters", gpa, height));
```

## 1.2 Experiment 2

1. Open a text editor
2. Create a new file, give it a name `ExampleDataType.java`
3. Write the basic structure of the Java programming language which contains the `main()` function.
4. Write the code below inside the `public static void main(String[] args)`

---


```
char bloodGroup = 'A';
byte distance = (byte) 130;
short theNumberOfResidents = 1025;
float temperature = 60.50F;
double weight = 0.5467812345;
long balance = 150000000;
int number = 0x10;

System.out.println("Blood Group\t\t\t: " + (byte) bloodGroup);
System.out.println("Distance\t\t\t: " + distance);
System.out.println("The number of residents\t\t: " + theNumberOfResidents);
System.out.println("Temperature\t\t\t: " + temperature);
System.out.println("Weight\t\t\t\t: " + (float) weight);
System.out.println("Balance\t\t\t\t: " + balance);
System.out.println("Number\t\t\t\t: " + number);
```

```
1 public class ExampleDataType {
2     public static void main(String[] args) {
3         char bloodGroup = 'A';
4         byte distance = (byte) 130;
5         short theNumberOfResidents = 1025;
6         float temperature = 60.50F;
7         double weight = 0.5467812345;
8         long balance = 150000000;
9         int number = 0x10;
10
11         System.out.println("Blood Group\t\t\t: " + (byte) bloodGroup);
12         System.out.println("Distance\t\t\t: " + distance);
13         System.out.println("The number of residents\t\t: " + theNumberOfResidents);
14         System.out.println("Temperature\t\t\t: " + temperature);
15         System.out.println("Weight\t\t\t\t: " + (float) weight);
16         System.out.println("Balance\t\t\t\t: " + balance);
17         System.out.println("Number\t\t\t\t: " + number);
18     }
19 }
```

Figure 1: The code for Experiment 2

- 
5. Execute the program and observe the result

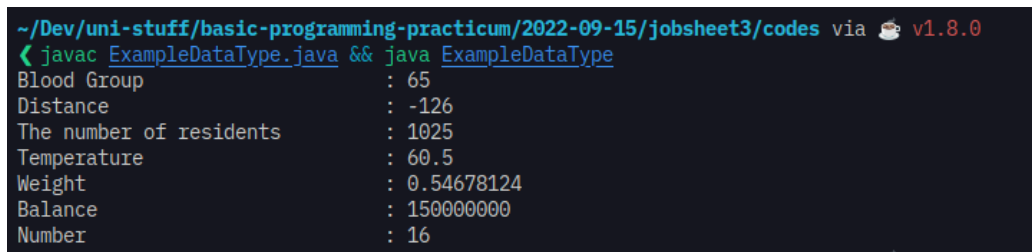

```
~/Dev/uni-stuff/basic-programming-practicum/2022-09-15/jobsheet3/codes via v1.8.0
< javac ExampleDataType.java && java ExampleDataType
Blood Group      : 65
Distance         : -126
The number of residents : 1025
Temperature      : 60.5
Weight          : 0.54678124
Balance         : 150000000
Number          : 16
```

Figure 2: The result of executing the program on Experiment 2

## Questions

1. Explain why the `bloodGroup` does not display an "A"!  
Because we downcast the data type of `bloodGroup` from `char` (16bit) to a narrower type, which is `byte` (8bit).
2. Explain the syntax of `byte distance = (byte) 130`! Then, explain why the results change when displayed!  
It's a syntax for casting to another data type. In this case, we're trying to downcast the number 130 to a `byte`. A byte can only contain -127 to 128, because of that there is integer overflow happening. Which explains why the number became -126 when it is displayed. We have 130, after it reaches 128 we still have 2 left, so it goes back to -127 and then continues to -126.
3. In the syntax `float temperature = 60.50F`, remove the letter F, then run again. What happened?  
There will be a warning saying that there could possibly be a lossy conversion from `double` to `float`.
4. Why does the result change when displaying `weight` values?  
Because we downcast it to `float`, we lost some precisions. `float` only stores 32bit of number while double can store up to 64bit, which explains why we lost some numbers after the comma.
5. Explain the meaning of initializing `0x10` on `number` variables! What does it do?  
It is used to initialise a hexadecimal number, but because we initialise it as `int`, it is automatically converted. `0x10` in hexadecimal system is equal to 16 in decimal system.

---

## 1.3 Experiment 3

1. Open a text editor
2. Create a new file, give it a name `ExampleOperator.java`
3. Write the basic structure of the Java programming language which contains the `main()` function.
4. Write the code below inside the `public static void main(String[] args)`

```
int x = 10;
System.out.println("x++ = " + x++);
System.out.println("Setelah evaluasi, x = " + x);
x = 10;
System.out.println("++x = " + ++x);
System.out.println("Setelah evaluasi, x = " + x);
int y = 12;
System.out.println(x > y || y == x && y <= x);
int z = x ^ y;
System.out.println("Hasil x ^ y adalah " + z);
z /= 2;
System.out.println("Hasil akhir " + z);
```

5. Execute the program and observe the result

```
~/Dev/uni-stuff/basic-programming-practicum/2022-09-15/jobsheet3/codes via 🍵 v1.8.0
> javac ExampleOperator.java && java ExampleOperator
x++ = 10
Setelah evaluasi, x = 11
++x = 11
Setelah evaluasi, x = 11
false
Hasil x ^ y adalah 7
Hasil akhir 1
```

Figure 3: The result of executing the program on Experiment 3

## Questions

1. Explain according to your opinion what is the difference between `x++` and `++x`!  
What happens in `x++`, called post-increment, it assigns or use the current value and then increment it after it being used. While in `++x`, called pre-increment, it increments the value and then assign or use the current value. The difference between those two is the order of the incrementing process.

- 
2. What is the result of `int z = x ^ y`; do the calculations manually (you can use a calculator)!

It is a bitwise XOR operator. To calculate it manually, we first need to convert the decimal number into its binary equivalent. Let  $x = 11$  and  $y = 12$ .

$$\begin{aligned}x &= 11/2 \text{ (remainder is 1)} \\&= 5/2 \text{ (remainder is 1)} \\&= 2/2 \text{ (remainder is 0)} \\&= 1/2 \text{ (remainder is 1)} \\x &= 1010b\end{aligned}$$

$$\begin{aligned}y &= 12/2 \text{ (remainder is 0)} \\&= 6/2 \text{ (remainder is 0)} \\&= 3/2 \text{ (remainder is 1)} \\&= 1/2 \text{ (remainder is 1)} \\y &= 1100b\end{aligned}$$

We can then apply the XOR as shown on this table. XOR returns **true** if one of the value is different, otherwise it will return **false**

Table 1: XOR Operation


x	y	Output
1	1	0
0	1	1
1	0	1
1	0	1

The final result is `0111b`, in decimal system it is 7.

---

## 1.4 Experiment 4

1. Create a new file named `Triangle.java`
2. Observe the flowchart to calculate the area of the following triangle

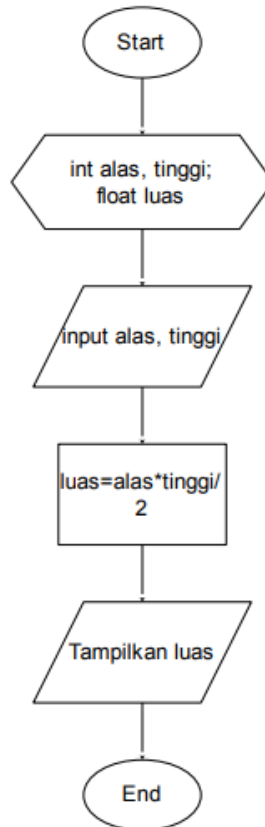

3. Create a basic Java program structure that consists of the `main()` function.
4. Add the `Scanner` library. Write the following code at the top outside the class

```
import java.util.Scanner;
```

5. Make a `Scanner` declaration. Write the following code in the `main()` function

```
Scanner sc = new Scanner(System.in);
```

- 
6. Create an `int` variable for base and height, then a float variable for area.

```
int base, height;  
float area;
```

7. Write down the syntax for inputting the `base` and `height` values

```
System.out.print("Insert the base: ");  
base = sc.nextInt();  
System.out.print("Insert the height: ");  
height = sc.nextInt();
```

8. Write down the syntax for calculating the `area` of a triangle

```
area = base * height / 2
```

9. Print the calculation of the `area` of the triangle

```
System.out.println("Triangle area: " + area);
```

10. Compile and run the program. Observe the results!

```
1  import java.util.Scanner;  
2  
3  public class Triangle {  
4      ....public static void main(String[] args) {  
5          ....Scanner sc = new Scanner(System.in);  
6          ....int base, height;  
7          ....float area;  
8  
9          ....System.out.print("Insert the base: ");  
10         ....base = sc.nextInt();  
11         ....System.out.print("Insert the height: ");  
12         ....height = sc.nextInt();  
13         ....area = base * height / 2;  
14         ....System.out.println("Triangle area: " + area);  
15     ....}  
16 }
```

Figure 4: The code for Experiment 4



```
~/Dev/uni-stuff/basic-programming-practicum/2022-09-15/jobsheet3/codes via v1.8.0
> javac Triangle.java && java Triangle
Insert the base: 19
Insert the height: 20
Triangle area: 190.0
```

Figure 5: The result of executing the program on Experiment 4

## Questions

1. Explain why the float data type is used for the variable area!

Because we need its precision after doing arithmetic operation involving multiplication or division. If we use integer, the number will get rounded and we will lose some precision.

## 2 Assignment

**Assignment Duration: 130 minutes**

1. Pay attention to the following table.

Variable Name	Data Type	Initial Value	Detail
campus	Sentence	Polinema	initial value = your class
grade	Round Number	1	
class	Character	i	
integer	Integers	10	
number	Floating point	3.33333	
character	Character	C	

From the information provided on the table, create a program to display like this:

```
I am Polinema student, class 1i
I'm learning to display values:
Integer 10
Floating point 3.33
Character C
```

---

```
1 public class Assignment1 {
2     public static void main(String[] args) {
3         String campus = "Polinema";
4         int grade = 1;
5         char _class = 'i'; // can't use 'class' since it's a Java keyword so I added an _ prefix
6         int integer = 10;
7         float number = 3.33333F;
8         char character = 'C';
9
10        System.out.printf("I am %s student, class %d%c\n", campus, grade, _class);
11        System.out.printf("I'm learning to display values:\n");
12        System.out.printf("Integer %d\n", integer);
13        System.out.printf("Floating point %f\n", number);
14        System.out.printf("Character %c\n", character);
15    }
16 }
```


Figure 6: The code for Assignment No. 1

```
~/Dev/uni-stuff/basic-programming-practicum/2022-09-15/jobsheet3/codes via 🐙 v1.8.0 took 5s
< javac Assignment1.java && java Assignment1
I am Polinema student, class 1i
I'm learning to display values:
Integer 10
Floating point 3.333330
Character C
```

Figure 7: The result of executing the program on Assignment No. 1

---

2. Observe the following flowchart to convert the temperature

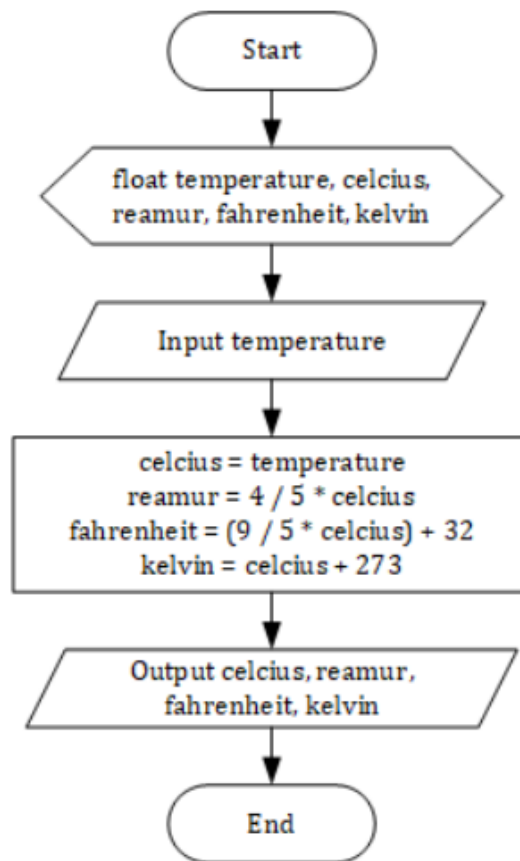

Implement the flowchart into the program using the Java programming language!

---

```
1  import java.util.Scanner;
2
3  public class Assignment2 {
4      public static void main(String[] args) {
5          Scanner sc = new Scanner(System.in);
6          float temperature, celcius, reamur, fahrenheit, kelvin;
7
8          System.out.print("Insert the temperature in celcius: ");
9          temperature = sc.nextInt();
10
11         celcius = temperature;
12         reamur = (4F / 5F) * celcius;
13         fahrenheit = (9F / 5F * celcius) + 32F;
14         kelvin = celcius + 273F;
15
16         System.out.printf("Celcius: %.1f C\n", celcius);
17         System.out.printf("Reamur: %.1f R\n", reamur);
18         System.out.printf("Fahrenheit: %.1f F\n", fahrenheit);
19         System.out.printf("Kelvin: %.1f K\n", kelvin);
20     }
21 }
```

Figure 8: The code for Assignment No. 3

```
~/Dev/uni-stuff/basic-programming-practicum/2022-09-15/jobsheet3/codes via ☕ v1.8.0
< javac Assignment2.java && java Assignment2
Insert the temperature in celcius: 98
Celcius: 98.0 C
Reamur: 78.4 R
Fahrenheit: 208.4 F
Kelvin: 371.0 K
```

Figure 9: The result of executing the program on Assignment No. 3