

Virtual Brain Inference (VBI): A flexible and integrative toolkit for efficient probabilistic inference on virtual brain models

Reviewed Preprint

v1 • May 21, 2025

Not revised

Abolfazl Ziaemehr , Marmaduke Woodman, Lia Domide, Spase Petkoski, Viktor Jirsa , Meysam Hashemi 

Aix Marseille Univ, INSERM, INS, Inst Neurosci Syst, Marseille, France • Codemart, Cluj-Napoca, Romania

 https://en.wikipedia.org/wiki/Open_access

 Copyright information

eLife Assessment

This paper presents a **valuable** software package, named "Virtual Brain Inference" (VBI), that enables faster and more efficient inference of parameters in dynamical system models of whole-brain activity, grounded in artificial network networks for Bayesian statistical inference. The authors have provided **solid** evidence, across several case studies, for the utility and validity of the methods using simulated data from several commonly used models, but more thorough benchmarking could be used to demonstrate the reliability, generalizability, and practical utility of the toolkit. This work will be of interest to computational neuroscientists interested in modelling large-scale brain dynamics.

<https://doi.org/10.7554/eLife.106194.1.sa3>

Abstract

Network neuroscience has proven essential for understanding the principles and mechanisms underlying complex brain (dys)function and cognition. In this context, whole-brain network modeling—also known as virtual brain modeling—combines computational models of brain dynamics (placed at each network node) with individual brain imaging data (to coordinate and connect the nodes), advancing our understanding of the complex dynamics of the brain and its neurobiological underpinnings. However, there remains a critical need for automated model inversion tools to estimate control (bifurcation) parameters at large scales and across neuroimaging modalities, given their varying spatio-temporal resolutions. This study aims to address this gap by introducing a flexible and integrative toolkit for efficient Bayesian inference on virtual brain models, called Virtual Brain Inference (VBI). This open-source toolkit provides fast simulations, taxonomy of feature extraction, efficient data storage and loading, and probabilistic machine learning algorithms, enabling biophysically interpretable inference from non-invasive and invasive recordings. Through in-silico testing, we demonstrate the accuracy and reliability of inference for commonly used whole-brain network models and their associated neuroimaging data. VBI shows potential to improve hypothesis evaluation in network neuroscience through

uncertainty quantification, and contribute to advances in precision medicine by enhancing the predictive power of virtual brain models.

1. Introduction

Understanding the complex dynamics of the brain and their neurobiological underpinnings, with the potential to advance precision medicine [1, 2, 3, 4], is a central goal in neuroscience. Modeling these dynamics provides crucial insights into causality and mechanisms underlying both normal brain function and various neurological disorders [5, 6, 7]. By integrating the average activity of large populations of neurons (e.g., neural mass models; [8, 9, 10, 11, 12, 13]) with information provided by structural imaging modalities (i.e., connectome; [14, 15, 16, 17]), whole-brain network modeling has proven to be a powerful tractable approach for simulating brain activities and emergent dynamics as recorded by functional imaging modalities (such as (s)EEG/MEG/fMRI; [18, 19, 20, 21, 22, 23]).

The whole-brain models have been well-established in network neuroscience [24, 25] for understanding the brain structure and function [26, 27, 28, 29, 30, 31, 32] and investigating the mechanisms underlying brain dynamics at rest [33, 34, 35, 36], normal aging [37, 38], and also altered states such as anaesthesia and loss of consciousness [39, 40, 41, 42]. This class of computational models, also known as virtual brain models [43, 44, 18, 19, 45, 46], have shown remarkable capability in delineating the pathophysiological causes of a wide range of brain diseases, such as epilepsy [47, 48, 6], multiple sclerosis [49, 50], Alzheimer's disease [51, 52], Parkinson's disease [53, 54], neuropsychiatric disorders [55, 56], stroke [57, 58] and focal lesions [59]. In particular, they enable the personalized simulation of both normal and abnormal brain activities, along with their associated imaging recordings, thereby stratifying between healthy and diseased states [60, 61, 52] and potentially informing targeted interventions and treatment strategies [47, 62, 6, 45, 23]. Although there are only a few tools available for forward simulations at the whole-brain level, e.g., the brain network simulator The Virtual Brain (TVB; [44]), there is a lack of tools for addressing the inverse problem, i.e., finding the set of control (generative) parameters that best explains the observed data. This study aims to bridge this gap by addressing the inverse problem in large-scale brain networks, a crucial step toward making these models operable for clinical applications.

Accurately and reliably estimating the parameters of whole-brain models remains a formidable challenge, mainly due to the high-dimensionality and non-linearity inherent in brain activity data, as well as the non-trivial effects of noise and network inputs. A large number of previous studies in whole-brain modeling have relied on optimization techniques to identify a single optimal value from an objective function, scoring the model's performance against observed data [34, 36, 63, 64]. This approach often involves minimizing metrics such as the Kolmogorov-Smirnov distance or maximizing the Pearson correlation between observed and generated data features such as functional connectivity (FC), functional connectivity dynamics (FCD), and/or power spectral density (PSD). Although fast, such a parametric approach results in only point estimates and fails to capture the relationship between parameters and their associated uncertainty. This limits the generalizability of findings, and hinders identifiability analysis, which explores the uniqueness of solutions. Furthermore, optimization algorithms can easily get stuck in local extrema, requiring multi-start strategies to address potential parameter degeneracies. These additional steps, while necessary, ultimately increase the computational cost. Critically, the estimation heavily depends on the form of the objective function defined for optimization [65, 66]. These limitations can be overcome by employing Bayesian inference, which naturally quantifies the uncertainty in the estimation and statistical dependencies between parameters, leading to more robust and generalizable models. Bayesian inference is a principal method for updating prior beliefs with information provided by data through the likelihood function,

resulting in a posterior probability distribution that encodes all the information necessary for inferences and predictions. This approach has proven essential for understanding the intricate relationships between brain structure and function [67, 59, 37], as well as for revealing the pathophysiological causes underlying brain disorders [68, 51, 49, 46, 69].

In this context, simulation-based inference (SBI; [70, 71, 68, 69]) has gained prominence as an efficient methodology for conducting Bayesian inference in complex models where traditional inference techniques become inapplicable. SBI leverages computational simulations to generate synthetic data and employs advanced probabilistic machine learning methods to infer the joint distribution over parameters that best explain the observed data, along with associated uncertainty. This approach is particularly well-suited for Bayesian inference on whole-brain models, which often exhibit complex dynamics that are difficult to retrieve from neuroimaging data with conventional estimation techniques. Crucially, SBI circumvents the need for explicit likelihood evaluation and the Markovian (sequential) property in sampling. Markov chain Monte Carlo (MCMC) is a standard non-parametric technique and asymptotically exact for sampling from a probability distribution [72]. However, for Bayesian inference on whole-brain models given high-dimensional data, the likelihood function becomes intractable, rendering MCMC sampling computationally prohibitive. SBI offers significant advantages, such as parallel simulation while leveraging amortized learning, making it effective for personalized inference from large datasets [69]. Amortization strategies based on artificial neural networks allow for immediate application to arbitrary inference on new recordings without the need for repeated training [73]. Following an initial computational cost during simulation and training to learn all posterior distributions, subsequent evaluation of new hypotheses can be conducted efficiently, without additional computational overhead for further simulations [68]. Importantly, SBI sidesteps the convergence issues caused by complex geometries that are often encountered when using gradient-based MCMC methods [74, 75, 76]. It also substantially outperforms ABC methods, which rely on a threshold to accept or reject samples [77, 78, 71]. Such a likelihood-free approach provides us with generic inference on complex systems as long as we can provide three modules:

1. A prior distribution, describing the possible range of parameters from which random samples can be easily drawn, i.e., $\vec{\theta} \sim p(\vec{\theta})$.
2. A simulator in computer code, that takes parameters as input and generates data as output, i.e., $\vec{x} \sim p(\vec{x} | \vec{\theta})$.
3. A set of low-dimensional data features, which are informative of the parameters that we aim to infer.

These elements prepare us with a training data set $\{(\vec{\theta}_i, \vec{x}_i)\}_{i=1}^{N_{sim}}$ with a budget of N_{sim} simulations. Then, using a class of deep neural density estimators (such as masked autoregressive flows [79] or neural spline flows [80]), we can approximate the posterior distribution of parameters given a set of observed data, i.e., $p(\vec{\theta} | \vec{x}_{obs})$. Therefore, a versatile toolkit should be flexible and integrative, adeptly incorporating these modules to enable efficient Bayesian inference over complex models.

To address the need for widely applicable, reliable, and efficient parameter estimation from different neuroimaging modalities, we introduce Virtual Brain Inference (VBI), a flexible and integrative toolkit for probabilistic inference at whole-brain level. This open-source toolkit offers fast simulation through just-in-time (JIT) compilation of various brain models in different programming languages (Python/C++) and devices (CPUs/GPUs). It supports space-efficient storage of simulated data (HDF5/NPZ/PT), provides a memory-efficient loader for batched data, and facilitates the extraction of low-dimensional data features (FC/FCD/PSD). Additionally, it enables the training of deep neural density estimators (MAFs/NSFs), making it a versatile tool for inference on various neuroimaging data types ((s)EEG/MEG/fMRI). VBI leverages high-performance

computing, significantly enhancing computational efficiency through parallel processing of large-scale datasets, which would be impractical with current alternative methods. Although SBI has been used for low-dimensional parameter spaces [71, 49, 81], we demonstrate that it can scale to whole-brain models with high-dimensional known parameters across neuroimaging modalities, as long as informative data features are provided. VBI is now accessible on the cloud platform EBRAINS (<https://ebrains.eu>), enabling users to explore more realistic brain dynamics underlying brain (dys)functioning using Bayesian inference. In the following sections, we will provide an overview of the theoretical foundations of whole-brain models and simulation-based inference, describe the architecture and features of the VBI toolkit, and demonstrate the validation through a series of case studies using in-silico data. We explore various whole-brain models corresponding to different types of brain recordings: a whole-brain network model of Wilson-Cowan [8], Jansen-Rit [82, 83], and Stuart-Landau [84] for simulating neural activity associated with EEG/MEG signals, the Epileptor [11] related to stereoelectro-EEG (sEEG) recordings, and Montbrió [12], and Wong-Wang [85, 86] mapped to fMRI BOLD signals. Although these models represent source signals and could be applied to other modalities (e.g., Stuart-Landau representing generic oscillatory dynamics), we focused on their capabilities to perform optimally in specific contexts. For instance, some are better suited for encephalographic signals (e.g., EEG/MEG) due to their ability to preserve spectral properties, while others have been used for fMRI data, emphasizing their ability to capture dynamic features such as bistability and time-varying functional connectivity.

2. Materials and methods

2.1. The virtual brain models

To build a virtual brain model (see **Figure 1**), the process begins with parcellating the brain into regions using anatomical data, typically derived from T1-MRI scans. Each region, represented as nodes in the network, is then equipped with a neural mass model to simulate the collective behavior of neurons within that area. These nodes are interconnected using a structural connectivity (SC) matrix, typically obtained from diffusion-weighted magnetic resonance imaging (DW-MRI). The entire network of interconnected nodes is then simulated using neuroinformatic tools, such as The Virtual Brain (TVB; [18]), replicating the intricate dynamics of brain activity and its associated brain imaging signals ((s)EEG/MEG/fMRI). This approach offers insights into both normal brain function and neurological disorders. In the following, we describe commonly used whole-brain network models corresponding to different types of neuroimaging recordings.

2.1.1. Wilson-Cowan model

The Wilson-Cowan model [8] is a seminal neural mass model that describes the dynamics of connected excitatory and inhibitory neural populations, at cortical microcolumn level. It has been widely used to understand the collective behavior of neurons and simulate neural activities recorded by methods such as local field potentials (LFPs) and EEG. The model effectively captures phenomena such as oscillations, wave propagation, pattern formation in neural tissue, and responses to external stimuli, offering insights into various brain (dys)functions, particularly in Parkinson's disease [87, 88].

We focused on a simplified model for generation of beta oscillation within the cortex-subthalamic nucleus-globus pallidus network [89]. The model incorporates a closed-loop connection from the STN back to the cortex, represented by a single inhibitory connection with a time delay. However, it does not include feedback via the indirect pathway (cortex-striatum-GPe), as

experimental evidence suggests this pathway is not essential for generating beta oscillations [90]. Instead, the GPe receives a constant inhibitory input from the striatum, consistent with observations from Parkinson's disease models:

$$\begin{aligned}\tau_S \dot{S}(t) &= F_S(w_{CS}E(t - T_{CS}) - w_{GS}G(t - T_{GS})) - S(t) \\ \tau_G \dot{G}(t) &= F_G(w_{SG}S(t - T_{SG}) - w_{GG}G(t - T_{GG}) - Str) - G(t) \\ \tau_E \dot{E}(t) &= F_E(-w_{SC}S(t - T_{SC}) - w_{CC}I(t - T_{CC}) + C) - E(t) \\ \tau_I \dot{I}(t) &= F_I(w_{CC}E(t - T_{CC})) - I(t) \\ F_i(x) &= \frac{M_i}{1 + \left(\frac{M_i - B_i}{B_i}\right) \exp\left(\frac{-4x}{M_i}\right)}, i \in \{S, G, E, I\}\end{aligned}\quad (1)$$

where the functions S , G , E , and I represent the firing rates of the STN, GPe, and the excitatory and inhibitory populations, respectively. The parameters T_{ij} denote the synaptic connection time delays from population i to population j , while T_{ii} represents the time delay of self-connections. The synaptic weights, w_{ij} , follow the same subscript conventions as the time delays, indicating the influence of the presynaptic neuron's firing rate on the postsynaptic neuron. The membrane time constants are denoted by τ_i . A constant input, C , is provided to the excitatory population in the cortex to account for a constant component of both extrinsic and intrinsic excitatory inputs, while Str represents the constant inhibitory input from the striatum to the GPe. Lastly, F_i are the activation functions. The nominal parameter values and the prior range for the target parameters are summarized in **Table 1**.

2.1.2. Jansen-Rit model

The Jansen-Rit neural mass model [91] has been widely used to simulate physiological signals from various recording methods like intracranial LFPs, and scalp MEG/EEG recordings. For example, it has been shown to recreate responses similar to evoked-related potentials after a series of impulse stimulations [83, 92], generating high-alpha and low-beta oscillations (with added recurrent inhibitory connections and spike-rate modulation) [93], and also seizure patterns similar to those seen in temporal lobe epilepsy [94]. This biologically motivated model comprises of three main populations of neurons: excitatory pyramidal neurons, inhibitory interneurons and excitatory interneurons. These populations interact with each other through synaptic connections, forming a feedback loop that produces oscillatory activity governed by a set of nonlinear ordinary differential equations [82, 83, 95]:

$$\begin{aligned}\dot{y}_{0i}(t) &= y_{3i}(t); \quad \dot{y}_{1i}(t) = y_{4i}(t); \quad \dot{y}_{2i}(t) = y_{5i}(t) \\ \dot{y}_{3i}(t) &= A a S(y_{1i}(t) - y_{2i}(t)) - 2a y_{3i}(t) - a^2 y_{0i}(t) \\ \dot{y}_{4i}(t) &= A a \left(P(t) + C_2 S(C_1 y_{0i}(t)) + G H_i \right) - 2a y_{4i}(t) - a^2 y_{1i}(t) \\ \dot{y}_{5i}(t) &= B b \left(C_4 S(C_3 y_{0i}(t)) \right) - 2b y_{5i}(t) - b^2 y_{2i}(t) \\ S(v) &= \frac{v_{max}}{1 + \exp(r(v_0 - v))} \\ H_i &= \sum_{j=1}^N SC_{ij} S(y_{1j} - y_{2j})\end{aligned}\quad (2)$$

where $P(t)$ represents an external input current. The model's output at i_{th} region, which corresponds to the membrane potential of pyramidal cells, is given by y_{1i} – y_{2i} . The nominal parameter values and the prior range for the target parameters are summarized in **Table 2**.

2.1.3. Stuart-Landau oscillator

The Stuart-Landau oscillator [84] is a generic mathematical model used to describe oscillatory phenomena, particularly those near a Hopf bifurcation, which is often employed to study the nonlinear dynamics of neural activity [96, 97, 63, 49]. One approach uses this model to capture slow hemodynamic changes in BOLD signal [96], while others apply it to model fast

Table 1.

Parameter descriptions for capturing whole-brain dynamics using Wilson-Cowan neural mass model.

Parameters	Description	Value	Prior
T_{SG}	Delay from STN to GPe	6 ms	
T_{GS}	Delay from GPe to STN	6 ms	
T_{GG}	Self delay of GPe	4 ms	
T_{CS}	Delay from cortex to STN	5.5 ms	
T_{SC}	Delay from STN to cortex	21.5 ms	
T_{CC}	Self delay of cortex	4.65 ms	
τ_S	Time constant for STN	12.8 ms	
τ_G	Time constant for GPe	20 ms	
τ_E	Time constant for excitatory neurons	11.59 ms	
τ_I	Time constant for inhibitory neurons	13.02 ms	
M_S	Maximum firing rate of STN	300 spk/s	
M_G	Maximum firing rate of GPe	400 spk/s	
M_{EI}	Maximum firing rate of excitatory neurons	75.77 spk/s	
M_I	Maximum firing rate of inhibitory neurons	205.72 spk/s	
B_S	Baseline firing rate of STN	10 spk/s	
B_G	Baseline firing rate of GPe	20 spk/s	
B_{EI}	Baseline firing rate of excitatory neurons	17.85 spk/s	
B_I	Baseline firing rate of inhibitory neurons	9.87 spk/s	
C	Excitatory input to cortex	172.18 spk/s	
Str	Inhibitory input from striatum to GPe	8.46 spk/s	
w_{GS}	Synaptic weight from GPe to STN	1.33	$\mathcal{U}(0, 10)$
w_{SG}	Synaptic weight from STN to GPe	4.87	$\mathcal{U}(0, 10)$
w_{GG}	Self synaptic weight among GPe	0.53	$\mathcal{U}(0, 20)$
w_{CS}	Synaptic weight from cortex to STN	9.97	$\mathcal{U}(0, 20)$
w_{SC}	Synaptic weight from STN to cortex	8.93	$\mathcal{U}(0, 10)$
w_{CC}	Self synaptic weight among cortex	6.17	$\mathcal{U}(0, 10)$

Table 2.

Parameter descriptions for capturing whole-brain dynamics using Jansen-Rit neural mass model. EP: excitatory populations, IP: inhibitory populations, PSP: post synaptic potential, PSPA: post synaptic potential amplitude.

Parameters	Description	Value	Prior
A	Excitatory PSPA	3.25 mV	
B	Inhibitory PSPA	22 mV	
$1/a$	Time constant of excitatory PSP	$a = 100 \text{ s}^{-1}$	
$1/b$	Time constant of inhibitory PSP	$b = 50 \text{ s}^{-1}$	
C_1, C_2	Average numbers of synapses between EP	$1C, 0.8C$	
C_3, C_4	Average numbers of synapses between IP	$0.25C$	
v_{max}	Maximum firing rate	5 Hz	
v_0	Potential at half of maximum firing rate	6 mV	
r	Slope of sigmoid function at v_0	0.56 mV^{-1}	
C	Average numbers of synapses between neural populations	135	$\mathcal{U}(100, 500)$
G	Scaling the strength of network connections	1.5	$\mathcal{U}(0, 5)$

neuronal dynamics, which can be linked directly to EEG/MEG data [97, 63, 49]. Note that this is a phenomenological frame-work, and both applications operate on completely different time scales.

In the network, each brain region, characterized by an autonomous Stuart-Landau oscillator, can exhibit either damped or limit-cycle oscillations depending on the bifurcation parameter a . If $a < 0$, the system shows damped oscillations, similar to a pendulum under friction. In this regime, the system, when subjected to perturbation, relaxes back to its stable fixed point through damped oscillations with an angular frequency ω_0 . The rate of amplitude damping is determined by $|a|$. Conversely, if $a > 0$, the system supports limit cycle solutions, allowing for self-sustained oscillations even in the absence of external noise. At $a = 0$, the system undergoes a Hopf bifurcation, i.e., small changes in parameters can lead to large variations in the system's behavior.

Using whole-brain network modeling of EEG/MEG data [49, 63], the oscillators are interconnected via white-matter pathways, with coupling strengths specified by subject-specific DTI fiber counts, i.e., elements of SC matrix. This adjacency matrix is then scaled by a global coupling parameter G . Note that coupling between regions accounts for finite conduction times, which are often estimated by dividing the Euclidean distances between nodes by an average conduction velocity $T_{jk} = d_{jk}/v$. Knowing the personalized time-delays [98, 99], we can use the distance as a proxy, assuming a constant propagation velocity. The distance itself can be defined as either the length of the tracts or the Euclidean distance. Taking this into account, the activity of each regions is given by a set of complex differential equations:

$$\dot{Z}_j = Z_j(a + i\omega_j - |Z_j|^2) + G \sum_{k=1}^N SC_{jk}[Z_k(t - T_{jk}) - Z_j(t)] + \sigma(\eta_{j1} + i\eta_{j2}) \quad (3)$$

where Z is a complex variable, and $\text{Re}[Z(t)]$ is the corresponding time series. In this particular realization, each region has a natural frequency of 40 Hz ($\omega_j = \omega_0 = 2\pi \cdot 40 \text{ rad/s}$), motivated by empirical studies demonstrating the emergence of gamma oscillations from the balance of excitation and inhibition, playing a role in local circuit computations [100].

In this study, for the sake of simplicity, a common cortico-cortical conduction velocity is estimated, i.e., the distance-dependent average velocities $v_{jk} = v$. We also consider $a = -5$, capturing the highly variable amplitude envelope of gamma oscillations as reported in experimental recordings [101, 63]. This choice also best reflects the slowest decay time constants of GABA_B inhibitory receptors—approximately 1 second [102]. A Gaussian noise with an intensity of $\sigma = 10^{-4}$ is added to each oscillator to mimic stochastic fluctuations. The nominal parameter values and the prior range for the target parameters are summarized in **Table 3**.

2.1.4. Epileptor model

In personalized whole-brain network modeling of epilepsy spread [47], the dynamics of each brain region are governed by the Epileptor model [11]. The Epileptor model provides a comprehensive description of epileptic seizures, encompassing the complete taxonomy of system bifurcations to simultaneously reproduce the dynamics of seizure onset, progression, and termination [103]. The full Epileptor model comprises five state variables that couple two oscillatory dynamical systems operating on three different time scales [11]. Then motivated by Synergetic theory [104, 105] and under time-scale separation [106], the fast variables

Parameters	Description	Value	Prior
a	Bifurcation parameter	-5	
ω_i	Natural angular frequency	$2\pi \cdot 40$ rad/s	
σ	Noise factor	10^{-4}	
v	Average conduction velocity	6.0 m/s	$\mathcal{U}(1, 30)$
G	Global coupling parameter	1200	$\mathcal{U}(0, 400)$

Table 3.

Parameter descriptions for capturing whole-brain dynamics using Stuart-Landau oscillator.

rapidly collapse on the slow manifold [107], whose dynamics is governed by the slow variable. This adiabatic approximation yields the 2D reduction of whole-brain model of epilepsy spread, also known as the Virtual Epileptic Patient (VEP) as follows:

$$\begin{aligned}\dot{x}_i &= 1 - x_i^3 - 2x_i^2 - z_i + I_i \\ \dot{z}_i &= \frac{1}{\tau}(4(x_i - \eta_i) - z_i - G \sum_{j=1}^N SC_{ij}(x_j - x_i)),\end{aligned}\quad (4)$$

where x_i and z_i indicate the fast and slow variables corresponding to i_{th} brain region, respectively, and the set of unknown η_i is the spatial map of epileptogenicity to be estimated. In real-world epilepsy applications [67, 68, 6], we compute the envelope function from sEEG data to perform inference. The nominal parameter values and the prior range for the target parameters are summarized in **Table 4**.

2.1.5. Montbrió model

The exact macroscopic dynamics of a specific brain region (represented as a node in the network) can be analytically derived in thermodynamic limit of infinitely all-to-all coupled spiking neurons [12] or Θ neuron representation [108]. By assuming a Lorentzian distribution on excitabilities in large ensembles of quadratic integrate- and- fire neurons with synaptic weights J and a half-width Δ centered at η , the macroscopic dynamics has been derived in terms of the collective firing activity and mean membrane potential [12]. Then, by coupling the brain regions via an additive current (e.g., in the average membrane potential equations), the dynamics of the whole-brain network can be described as follow [109, 110]:

$$\begin{aligned}\tau \dot{r}_i(t) &= 2r_i(t)v_i(t) + \frac{\Delta}{\pi\tau} \\ \tau \dot{v}_i(t) &= v_i^2(t) - (\pi\tau r_i(t))^2 + J\tau r_i(t) + \eta + \\ &\quad G \sum_{j=1}^N SC_{ij}r_j(t) + I_{stim}(t) + \xi(t),\end{aligned}\quad (5)$$

where v_i and r_i are the average membrane potential and firing rate, respectively, at the i_{th} brain region, and parameter G is the network scaling parameter that modulates the overall impact of brain connectivity on the state dynamics. The SC_{ij} denotes the connection weight between i_{th} and j_{th} regions, and the dynamical noise $\xi(t) \sim N(0, \sigma^2)$ follows a Gaussian distribution with mean zero and variance σ^2 .

The model parameters are tuned so that each decoupled node is in a bistable regime, exhibiting a down-state stable fixed point (low-firing rate) and an up-state stable focus (high-firing rate) in the phase-space [12, 81]. The bistability is a fundamental property of regional brain dynamics to ensure a switching behavior in the data (e.g., to generate FCD), that has been recognized as representative of realistic dynamics observed empirically [109, 111, 112].

The solution of the coupled system yields a neuroelectric dataset that describes the evolution of the variables ($r_i(t)$, $v_i(t)$) in each brain region i , providing measures of macroscopic activity. The surrogate BOLD activity for each region is then derived by filtering this activity through the Balloon-Windkessel model [113]. The input current I_{stim} represents the stimulation to selected brain regions, which increase the basin of attraction of the up-state in comparison to the down-state, while the fixed points move farther apart [109, 111, 112].

The nominal parameter values and the prior range for the target parameters are summarized in **Table 5**.

Table 4.

Parameter descriptions for capturing whole-brain dynamics using 2D Epileptor neural mass model.

Parameter	Description	Value	Prior
I	Input electric current	3.1	
τ	System time constant	90 ms	
η_i	Spatial map of epileptogenicity	-3.65	$\mathcal{U}(-5, -1)$
G	Global scaling factor on network connections	1.0	$\mathcal{U}(0, 2)$

Table 5.

Parameter descriptions for capturing whole-brain dynamics using Montbrió model.

Parameter	Description	Nominal value	Prior
τ	Characteristic time constant	1 ms	
J	Synaptic weight	14.5 ms^{-1}	
Δ	Spread of the heterogeneous noise distribution	0.7 ms^{-1}	
$I_{\text{stim}}(t)$	Input current representing stimulation	0.0	
σ	Gaussian noise variance	0.037	
η	Excitability	-4.6	$\mathcal{U}(-6, -3.5)$
G	Scaling the strength of network connections	0.56	$\mathcal{U}(0, 1)$

2.1.6. Wong-Wang model

Another commonly used whole-brain model for simulation of neural activity is the so-called parameterized dynamics mean-field (pDMF) model [114, 36, 86]. At each region, it comprises a simplified system of two non-linear coupled differential equations, motivated by the attractor network model, which integrates sensory information over time to make perceptual decisions, known as Wong-Wang model [85]. This biophysically realistic cortical network model of decision making then has been simplified further into a single-population model [86], which has been widely used to understand the mechanisms underpinning brain resting state dynamics [36, 115, 38]. The pDMF model has been also used to study whole-brain dynamics in various brain disorders, including Alzheimer's disease [116], schizophrenia [117], and stroke [118]. The pDMF model equations are given as:

$$\begin{aligned}\frac{dS_i(t)}{dt} &= -\frac{S_i}{\tau_s} + (1 - S_i)\gamma H(x_i) + \sigma\xi_i(t) \\ H(x_i) &= \frac{ax_i - b}{1 - \exp(-d(ax_i - b))} \\ x_i &= wJS_i + GJ \sum_{j=1}^N SC_{ij}S_j + I\end{aligned}\quad (6)$$

where $H(x_i)$ and S_i and x_i denote the population firing rate, the average synaptic gating variable, and the total input current at the i_{th} brain region, respectively. $\xi_i(t)$ is uncorrelated standard Gaussian noise and the noise amplitude is controlled by σ . The nominal parameter values and the prior range for the target parameters are summarized in Table 6.

According to recent studies [36, 38], we can parameterize the set of w , I and σ as linear combinations of group-level T1w/T2w myelin maps [119] and the first principal gradient of functional connectivity:

$$\begin{aligned}w_i &= a_w \mathbf{Mye}_i + b_w \mathbf{Grad}_i + c_w \\ I_i &= a_I \mathbf{Mye}_i + b_I \mathbf{Grad}_i + c_I \\ \sigma_i &= a_\sigma \mathbf{Mye}_i + b_\sigma \mathbf{Grad}_i + c_\sigma\end{aligned}\quad (7)$$

where $\mathbf{Mye}_i$ and $\mathbf{Grad}_i$ are the average values of the T1w/T2w myelin map and the first FC principal gradient, respectively, within the i_{th} brain region. Therefore, the set of unknown parameters to estimate includes G and linear coefficients $(a_w, b_w, c_w, a_I, b_I, c_I, a_\sigma, b_\sigma, c_\sigma) \in \mathbb{R}^9$, hence 10 parameters in total.

2.1.7. The Balloon-Windkessel model

The Balloon-Windkessel model is a biophysical framework that links neural activity to the BOLD signals detected in fMRI. This is not a neuronal model but rather a representation of neurovascular coupling, describing how neural activity influences hemodynamic responses. The model is characterized by two state variables: venous blood volume (v) and deoxyhemoglobin content (q). The system's input is blood flow (f_{in}), and the output is the BOLD signal (y):

$$\begin{aligned}y(t) &= \lambda(v, q, E_0) = V_0(k_1(1 - q) + k_2(1 - \frac{q}{v}) + k_3(1 - v)) \\ k_1 &= 4.3\vartheta_0 E_0 TE \\ k_2 &= \varepsilon r_0 E_0 TE \\ k_3 &= 1 - \varepsilon\end{aligned}\quad (8)$$

Parameter	Description	Value	Prior
a	Max feeding rate of $H(x)$	270 n/C	
b	Half saturation of $H(x)$	108 Hz	
d	Control the steepness of curve of $H(x)$	0.154 s	
γ	Kinetic parameter	0.641/1000	
τ_s	Synaptic time constant	100 ms	
J	Synaptic coupling	0.2609 nA	
w	Local excitatory recurrence	0.6	$\mathcal{U}(0, 1)$
I	Overall effective external input	0.3 nA	$\mathcal{U}(0, 0.5)$
G	Scaling the strength of network connections	6.28	$\mathcal{U}(1, 10)$
σ	Noise amplitude	0.005	$\mathcal{U}(0.0005, 0.01)$

Table 6.

Parameter descriptions for capturing whole-brain dynamics using Wong-Wang model.

where V_0 represents the resting blood volume fraction, E_0 is the oxygen extraction fraction at rest, ϵ is the ratio of intra- to extravascular signals, r_0 is the slope of the relationship between the intravascular relaxation rate and oxygen saturation, ϑ_0 is the frequency offset at the surface of a fully deoxygenated vessel at 1.5T, and TE is the echo time. The dynamics of venous blood volume v and deoxyhemoglobin content q are governed by the Balloon model's hemodynamic state equations:

$$\begin{aligned}\tau_0 \frac{dv}{dt} &= f(t) - v(t)^{1/\alpha} \\ \tau_0 \frac{dq}{dt} &= f(t) \frac{1 - (1 - E_0)^{1/f}}{E_0} - v(t)^{1/\alpha} q(t)\end{aligned}\quad (9)$$

where τ_0 is the transit time of blood flow, α reflects the resistance of the venous vessel (stiffness), and $f(t)$ denotes blood inflow at time t , given by

$$\frac{df}{dt} = s,$$

where s is an exponentially decaying vasodilatory signal defined by

$$\frac{ds}{dt} = \epsilon x - \frac{s}{\tau_s} - \frac{(f - 1)}{\tau_f} \quad (10)$$

where, ϵ represents the efficacy of neuronal activity $x(t)$ (i.e., integrated synaptic activity) in generating a signal increase, τ_s is the time constant for signal decay, and τ_f is the time constant for autoregulatory blood flow feedback [113]. For parameter values, see **Table 7**, taken from [113, 120, 121]. The resulting time series is downsampled to match the TR value in seconds.

2.2. Simulation-based inference

In the Bayesian framework [122], parameter estimation involves quantifying and propagating uncertainty through probability distributions placed on the parameters (prior information before seeing data), which are updated with information provided by the data (likelihood function). The formidable challenge to conducting efficient Bayesian inference is evaluating the likelihood function $p(x | \theta)$. This typically involves intractable integrating over all possible trajectories in the latent space: $p(x | \theta) = \int p(x, z | \theta) dz$, where $p(x, z | \theta)$ is the joint probability density of the data x and latent variables z , given parameters θ . For whole-brain network models with high-dimensional and nonlinear latent spaces, the computational cost can be prohibitive, making likelihood-based inference with MCMC sampling challenging to converge [76, 67, 123].

Simulation-based inference (SBI; [70, 71, 68]), or likelihood-free inference [124, 125, 126], addresses issues with inference on complex systems by using deep networks to learn an invertible transformation between parameters and data, avoiding direct sampling and likelihood evaluation. Given a prior distribution $p(\vec{\theta})$ placed on the parameters $\vec{\theta}$, N random simulations are generated (with samples from prior), resulting in pairs $\{(\vec{\theta}_i, \vec{x}_i)\}_{i=1}^{N_{sim}}$, where $\vec{\theta}_i \sim p(\vec{\theta})$ and $\vec{x}_i \sim p(\vec{x} | \vec{\theta})$ is the simulated data given $\vec{\theta}_i$. By training a deep neural density estimator F (such as normalizing flows [79, 80]), we can approximate the posterior $p(\vec{\theta} | \vec{x})$ with $q_F(\phi, \vec{x})$ by minimizing the loss function

$$\mathcal{L}(\phi) = - \sum_{i=1}^{N_{sim}} \log q_{F(\phi, \vec{x}_i)}(\vec{\theta}_i) \quad (11)$$

Parameter	Description	Value
τ_s	Rate constant of vasodilatory signal decay in seconds	1.5
τ_f	Time of flow-dependent elimination in seconds	4.5
α	Grubb's vessel stiffness exponent	0.2
τ_0	Hemodynamic transit time in seconds	1.0
ϵ	Efficacy of synaptic activity to induce signal	0.1
r_0	Slope of intravascular relaxation rate in Hertz	25.0
ϑ_0	Frequency offset at outer surface of magnetized vessels	40.3
ε	Ratio of intra- and extravascular BOLD signal at rest	1.43
V_0	Resting blood volume fraction	0.02
E_0	Resting oxygen extraction fraction	0.8
TE	Echo time, 1.5T scanner	0.04

Table 7.

Parameter descriptions for the Balloon-Windkessel model to map neural activity to the BOLD signals detected in fMRI.

over network parameters Φ . Once the parameters of the neural network F are optimized, for observed data $\vec{x}_{obs}$ we can readily estimate the target posterior $q_{F(\phi, \vec{x}_{obs})}(\vec{\theta}) \simeq p(\vec{\theta} | \vec{x}_{obs})$. This allows for rapid approximation and sampling from the posterior distribution for any new observed data through a forward pass in the trained network [68, 69].

This approach uses a class of generative machine learning models known as normalizing flows ([127, 128]) to transform a simple based distribution into any complex target through a sequence of invertible mappings. Here, generative modeling is an unsupervised machine learning method for modeling a probability distribution given samples drawn from that distribution. The state-of-the-art normalizing flows, such as masked autoregressive flows (MAF; [79]) and neural spline flows (NSF; [80]), enable fast and exact density estimation and sampling from high-dimensional distributions. These models learn mappings between input data and probability densities, capturing complex dependencies and multi-modal distributions [128, 129].

In our work, we integrate the implementation of these models from the open-source SBI tool, leveraging both MAF and NSF architectures. The MAF model comprises 5 flow transforms, each with two blocks and 50 hidden units, tanh nonlinearity and batch normalization after each layer. The NSF model consists of 5 flow transforms, two residual blocks of 50 hidden units each, ReLU nonlinearity, and 10 spline bins. We apply these generative models to virtual brain simulations conducted with random parameters, to approximate the full posterior distribution of parameters from low-dimensional data features. Note that we employ a single round of SBI to benefit from amortization strategy rather than using a sequential approach that is designed to achieve a better fit but only for a specific dataset [68, 69].

2.3. Evaluation of posterior fit

To assess the reliability of Bayesian inference using synthetic data, we evaluate the posterior z-scores (denoted by z) against the posterior shrinkage (denoted by s), as defined by [75]:

$$z = \left| \frac{\bar{\theta} - \theta^*}{\sigma_{post}} \right|, \quad (12)$$

$$s = 1 - \frac{\sigma_{post}^2}{\sigma_{prior}^2}, \quad (13)$$

where $\bar{\theta}$ and θ^* are the posterior mean and the true values, respectively, σ_{prior} is the standard deviation of the prior, and σ_{post} is the standard deviation of the posterior. The posterior z-score measures how well the posterior distribution of a parameter captures its true value, while the posterior shrinkage quantifies the contraction of the posterior distribution relative to the prior. A concentration of estimations towards large shrinkages indicates that the posteriors are well-identified, whereas a concentration towards small z-scores signifies that the true values are accurately captured within the posteriors.

2.4. Flexible simulator and model building

A key feature of the VBI pipeline is its modularity and flexibility in integrating various simulators (see **Figure 2**). The *Simulation* module of the VBI pipeline is designed to be easily interchangeable, allowing researchers to replace it with other simulators, such as TVB [18] (see **Figure S10**), Neurolib [130], Brian [131], Brainpy [132]. This adaptability supports a wide range of simulation needs and computational environments, making the VBI a versatile tool for inference in system neuroscience. In particular, *Simulation* module offers a comprehensive implementation of commonly used whole-brain models. This is a customized version of implementation from open-source TVB simulator. While VBI does not encompass all the features of the original TVB, it is mainly designed to leverage the computational power of GPU devices and

significantly reduce RAM requirements (see **Figure S1A** [\[132\]](#)). This optimization ensures that high-performance clusters can be fully utilized, enabling parallel and scalable simulations, as often is required to perform scalable SBI.

2.5. Comprehensive feature extraction

VBI offers a comprehensive toolbox for feature extraction across various datasets. The *Features* module includes but not limited to: (1) *Statistical features*, including mean (average of elements), variance (spread of the elements around mean), kurtosis (tailedness of the distribution of elements), and skewness (the asymmetry of the distribution of elements), that can be applied to any matrix. (2) *Spectral features*, such as low-dimensional summary statistics of power spectrum density (PSD). (3) *Temporal features*, including zero crossings, area under the curve, average power, and envelope. (4) *Connectivity features*, including functional connectivity (FC), which represents the statistical dependencies or correlations between activity patterns of different brain regions, and functional connectivity dynamics (FCD), which captures the temporal variations and transitions in these connectivity patterns over time. These calculations are performed for the whole-brain and/or subnetwork (e.g., limbic system, resting state networks). However, since these matrices are still high-dimensional, we use standard dimensional reduction techniques, such as principal component analysis (PCA) on FC/FCD matrices, to extract their associated low-dimensional summary statistics. (5) *Information theory features*, such as mutual information and transfer entropy.

In this study, we use the term *spatio-temporal data features* to refer to the *statistical features* and *temporal features* derived from time series, while we refer to the *connectivity features* extracted from FC/FCD matrices as *functional data features*.

The *Features* module uses parallel multiprocessing to speed up feature calculation. Additionally, it provides flexibility for users to add their own custom feature calculations with minimal effort and expertise, or to adjust the parameters of existing features based on the type of input time series. The feature extraction module is designed to be interchangeable with existing feature extraction libraries such as tsfel [\[133\]](#), pyspi [\[134\]](#), hctsa [\[135\]](#), and scikit-learn [\[136\]](#). Note that, some lightweight libraries such as catch22 [\[137\]](#) are directly accessible from the VBI feature extraction module.

2.6. VBI workflow

Figure 1 [\[138\]](#) illustrates an overview of our approach in VBI, which combines virtual brain models and simulation-based inference to make probabilistic predictions on brain dynamics from neuroimaging recordings. The inputs to the pipeline include the structural imaging data (for building the connectome), functional imaging data such as (s)EEG/MEG, and fMRI as the target for fitting, and prior information as a plausible range over control parameters for generating random simulations. The main computational costs involve model simulations and data feature extraction. The output of the pipeline is the joint posterior distribution of control parameters (such as excitability, synaptic weights, or effective external input) that best explains the observed data. Since the approach is amortized (i.e., it learns across all combinations in the parameter space), it can be readily applied to any new data from a specific subject.

In the first step, non-invasive brain imaging data, such as T1-weighted MRI and Diffusion-weighted MRI (DW-MRI), are collected for a specific subject (**Figure 1A** [\[138\]](#)). T1-weighted MRI images are processed to obtain brain parcellation, while DW-MRI images are used for tractography. Using the estimated fiber tracts and the defined brain regions from the parcellation, the connectome (i.e., the complete set of links between brain regions) is constructed by counting the fibers connecting all regions. The SC matrix, with entries representing the connection strength between brain

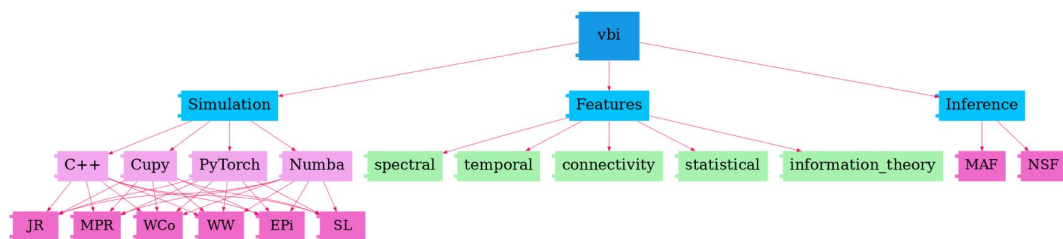


Figure 2.

Flowchart of the VBI Structure.

This toolkit consists of three main modules: (1) The *Simulation* module, implementing various whole-brain models, such as Wilson-Cowan (WCo), Jansen-Rit (JR), Stuart-Landau (SL), Epileptor (EPi), Montbrió (MPR), and Wong-Wang (WW), across different numerical computing libraries (C++, Cupy, PyTorch, Numba). (2) The *Features* module, offering an extensive toolbox for extracting low-dimensional data features, such as spectral, temporal, connectivity, statistical, and information theory features. (3) The *Inference* module, providing neural density estimators (such as MAF and NSF) to approximate the posterior of parameters.

regions, forms the structural component of the virtual brain which constrains the generation of brain dynamics and functional data at arbitrary brain locations (e.g., cortical and subcortical structures).

Subsequently, each brain network node is equipped with a computational model of average neuronal activity, known as neural mass models (see **Figure 1B** and **subsection 2.1**). They can be represented in the generic form of a dynamical model as $\vec{x} = f(\vec{x}, \vec{\theta}, I_{input})$, with the system variables $\vec{x}$ (such as membrane potential and firing rate), the control parameters $\vec{\theta}$ (such as excitability), and the input current I_{input} (such as stimulation). This integration of mathematical mean-field modeling (neural mass models) with anatomical information (connectome) allows us to efficiently analyze functional neuroimaging modalities at the whole-brain level.

To quantify the posterior distribution of control parameters given a set of observations, $p(\vec{\theta} | \vec{x})$, we first need to define a plausible range for the control parameters based on background knowledge $p(\vec{\theta})$, i.e., a simple base distribution known as a prior. We draw random samples from the prior and provide them as input to the VBI simulator (implemented by *Simulation* module) to generate simulated time series associated with neuroimaging recordings, as shown in **Figure 1C**. Subsequently, we extract low-dimensional data features (implemented by *Features* module), as shown in **Figure 1D** for FC/FCD/PSD, to prepare the training dataset $\{(\vec{\theta}_i, \vec{x}_i)\}_{i=1}^{N_{sim}}$, with a budget of N_{sim} simulations. Then, we use a class of deep neural density estimators, such as MAF or NSF models, as schematically shown in **Figure 1E**, to learn all the posterior $p(\vec{\theta} | \vec{x})$. Finally, we can readily sample from $p(\vec{\theta} | \vec{x}_{obs})$, which determines the probability distribution in parameter space that best explains the observed data. **Figure 2** depicts the structure of the VBI toolkit, which consists of three main modules. The first module, referred to as *Simulation* module, is designed for fast simulation of whole-brain models, such as Wilson-Cowan (**subsubsection 2.1.1**), Jansen-Rit (**subsubsection 2.1.2**), Stuart-Landau (**subsubsection 2.1.3**), Epileptor (**subsubsection 2.1.4**), Montbrió (**subsubsection 2.1.5**), and Wong-Wang (**subsubsection 2.1.6**). These whole-brain models are implemented across various numerical computing libraries such as Cupy (GPU-accelerated computing with Python), C++ (a high-performance systems programming language), Numba (a just-in-time compiler for accelerating Python code), and PyTorch (an open-source machine learning library for creating deep neural network).

The second module, *Features*, provides a versatile tool for extracting low-dimensional features from simulated time series (see **subsection 2.5**). The features include, but are not limited to, *spectral*, *temporal*, *connectivity*, *statistical*, and *information theory* related features, and the associated summary statistics. The third module focuses on *Inference*, i.e., training the deep neural density estimators, such as MAF and NSF (see **subsection 2.2**), to learn the joint posterior distribution of control parameters.

3. Results

In the following, we demonstrate the capability of VBI for inference on the state-of-the-art whole-brain network models using in-silico testing, where the ground truth is known. We apply this approach to simulate neural activity and associated measurements, including (s)EEG/MEG, and fMRI, while also providing diagnostics for the accuracy and reliability of the estimation. Note that for (s)EEG/MEG neuroimaging, we perform inference at the regional level rather than at the sensor level, whereas for fMRI, it is mapped using the Balloon-Windkessel model (see **subsubsection 2.1.7**).

First, we demonstrate the inference on the whole-brain network of Wilson-Cowan model which generates beta oscillations characteristic of Parkinson's disease [87, 88]. **Figure 3** demonstrates the inference on the synaptic weights in an adapted Wilson-Cowan model (see **subsubsection 2.1.1**). **Figure 3A** and **B** show the observed and predicted neural activities (e.g., LFP recordings), and the corresponding power spectrum density (PSD) up to 20 Hz, respectively. Here, to estimate the set of unknown parameters $\vec{\theta} = \{w_{SG}, w_{GS}, w_{CS}, w_{SC}, w_{GG}, w_{CC}\} \in \mathbb{R}^6$, we conducted 10k random simulations for training of MAF density estimator. The non-informative prior was placed on all parameters (see **Table 1**), and the spatio-temporal features (such as statistical moments of time series) was used for training. **Figure 3C** demonstrates an accurate posterior estimation (in red), given the true values (in green). The model training was completed within a few minutes, and sampling from the posterior was nearly instantaneous. **Figure 3D** shows the evaluation of the inference by measuring the shrinkage and z-scores of the estimated posterior distributions. This result demonstrates an ideal Bayesian inference and prediction for this class of whole-brain network model. Note that removing the spatio-temporal features of time series and considering only the PSD as the data features leads to larger uncertainty in estimation (see **Figure S2**). Nevertheless, the observed and predicted PSD show close agreement.

Then, we demonstrate the inference on heterogeneous control parameters in the whole-brain network of Jansen-Rit (see **subsubsection 2.1.2**), commonly used for modeling EEG/MEG data, e.g., in dementia and Alzheimer's disease [138, 139]. **Figure 4A** and **B** show the observed and predicted EEG signals, given by $(y_{1i} - y_{2i})$ at each region, while **Figure 4C** and **D** illustrate the observed and predicted features such as PSD, respectively. **Figure 4E** and **F** show the estimated posterior distributions of synaptic connections C_i , and the global coupling parameter G , respectively, given the set of unknown parameters $\vec{\theta} = \{G, C_i\} \in \mathbb{R}^{89}$. Here we conducted 50k random simulations with samples drawn from uniform priors $G \in \mathcal{U}(0, 5)$ and $C_i \in \mathcal{U}(100, 650)$ (shown in blue, see **Table 2**). After approximately 45 min of training (MAF density estimator), the posterior sampling took only a few seconds. With such a sufficient number of simulations and informative data features, VBI shows accurate estimation of high-dimensional heterogeneous parameters (given the ground truth, shown in green), leading to a strong correspondence between the observed and predicted PSD of EEG/MEG data. **Figure 4G** displays the shrinkage and z-score as the evaluation metrics, indicating an ideal Bayesian estimation for C_i parameters, compared to the coupling parameter G . This occurred because the network input did not induce a significant change in the intrinsic frequency of activities at regional level, resulting in greater uncertainty in its estimation.

Note that relying on only alpha-peak while excluding other summary statistics, such as total power (i.e., area under the curve), leads to poor estimation of synaptic connections across brain regions (see **Figure S3**). This results in less accurate predictions of the PSD, with more dispersion in their amplitudes. This example demonstrates that VBI provides a valuable tool for hypothesis evaluation and improved insight into data features by uncertainty quantification, and their impact on predictions.

To demonstrate efficient inference on the whole-brain time delay from EEG/MEG data, we used a whole-brain network model of coupled generic oscillators (StuartLandau model (see **subsubsection 2.1.3**). This model could establish a causal link between empirical spectral changes and the slower conduction velocities observed in multiple sclerosis patients, resulting from immune system attacks on the myelin sheath [49, 50]. The parameter set to estimate is $\vec{\theta} = \{G, V\} \in \mathbb{R}^2$, consisting of the global scaling parameter G and the averaged velocity of signal transmission V . The training was performed using a budget of only 2k simulations, which was sufficient due to the low dimensionality of the parameter space. **Figure 5A** illustrates the comparison between observed (in green) and predicted neural activities (in red). **Figure 5B** shows a close agreement between observed and predicted PSD signals, as the data feature used for

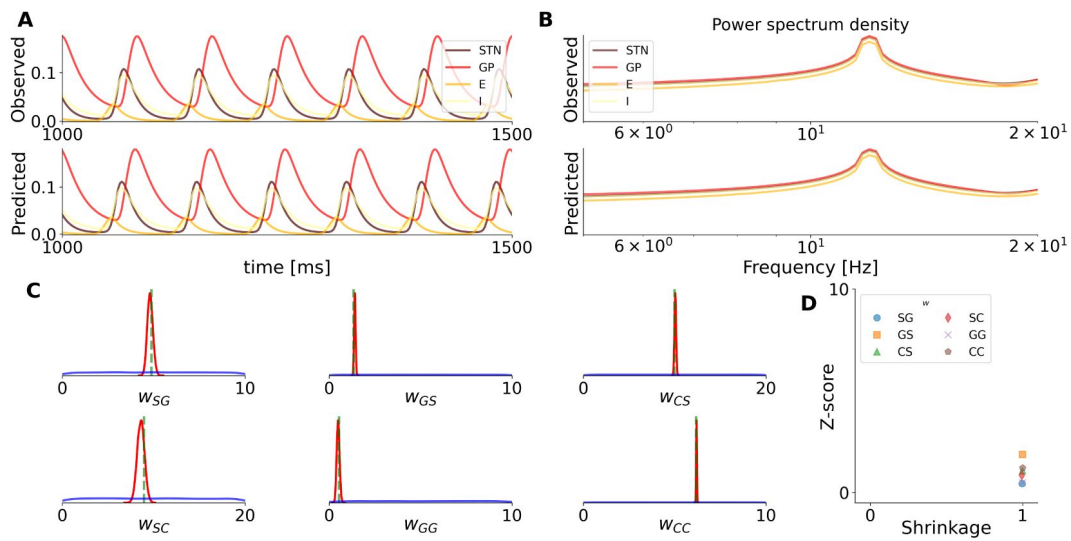


Figure 3.

Bayesian inference on the control parameters of the whole-brain network model of Wilson-Cowan, generating the beta oscillation.

The inferred parameters are $\vec{\theta} = \{w_{SG}, w_{GS}, w_{CS}, w_{SC}, w_{GG}, w_{CC}\} \in \mathcal{R}^6$, where subscripts *S*, *G*, and *C* denote the subthalamic nucleus, globus pallidus, and cortex, respectively. We conducted 10k random simulations for training of MAF density estimator. **(A)** The observed and predicted neural activities. **(B)** The observed and predicted spectral power densities up to 20 Hz. **(C)** The estimated posterior distributions (in red), along with the prior (in blue) and ground-truth values (in green). **(D)** The posterior shrinkage versus z-scores for measuring the accuracy and reliability of the estimates.

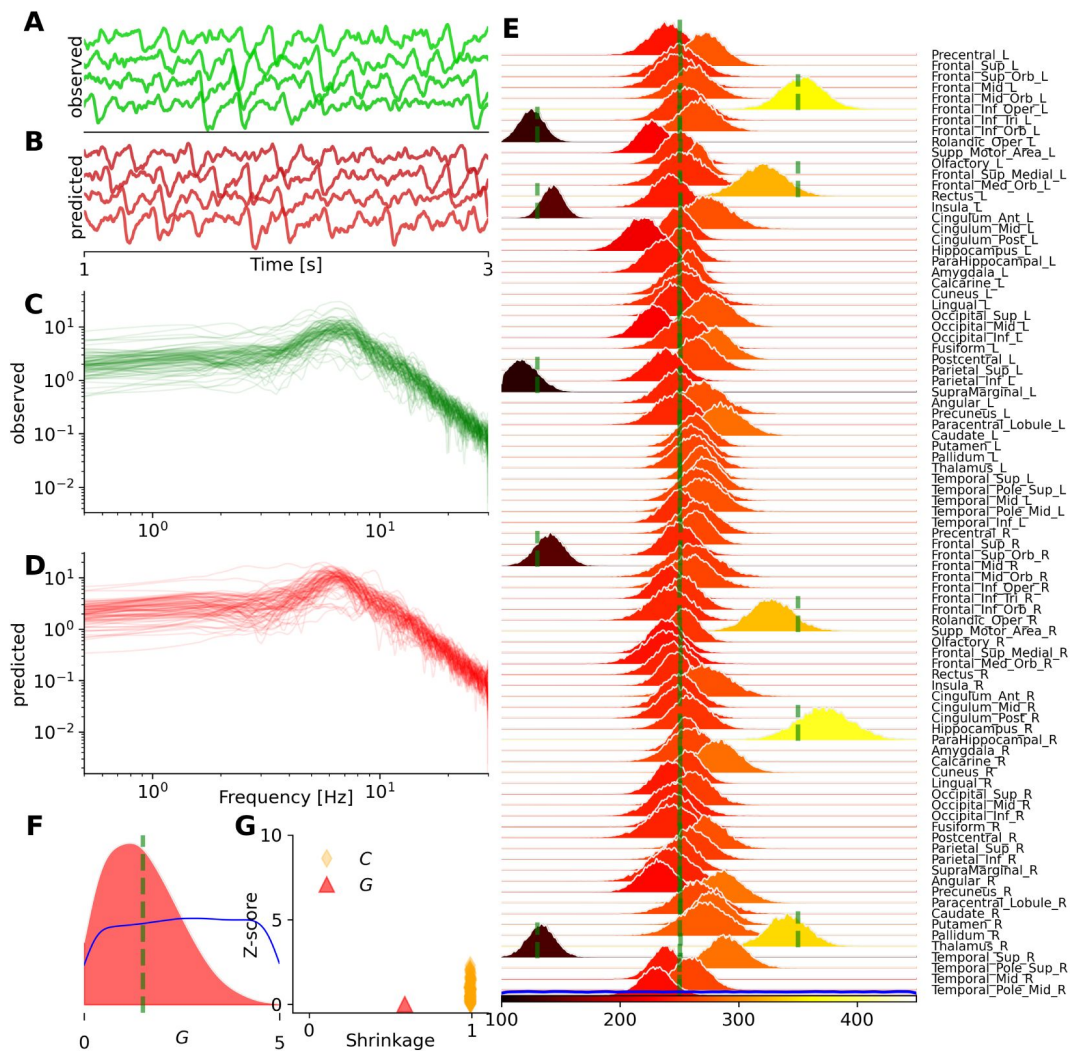


Figure 4.

Bayesian inference on heterogeneous control parameters in the whole-brain network of Jansen-Rit model.

The set of inferred parameters is $\vec{\theta} = \{G, C_i\} \in \mathbb{R}^{89}$, with the global scaling parameter G and average numbers of synapse between neural populations per C_i region, given $i \in \{1, 2, \dots, N_n = 88\}$ parcelled regions. Summary statistics of power spectrum density (PSD) were used for training, with a budget of 50k simulations. (A) and (B) illustrate the observed and predicted neural activities, respectively. (C) and (D) show the observed and predicted data features, such as PSD. (E) and (F) display the posterior distribution of C_i per region, and global coupling G , respectively. The ground truth and prior are represented by vertical green lines and a blue distribution, respectively. (G) shows the inference evaluation the shrinkage and z-score of the estimated posterior distributions.

training. **Figure 5C** and **D** provide visualizations of the posterior distributions for the averaged velocity V and the global coupling G . In these panels, we can see a large shrinkage in the posterior (in red) the uniform prior (in blue) centered around the true values (vertical green lines). Importantly, **Figure 5E** presenting the joint posterior distribution, indicates a high correlation of $\rho = 0.7$ between parameters G and V . This illustrates the advantage of Bayesian estimation in identifying statistical relationships between parameters, which helps to detect degeneracy among them. This is crucial for causal hypothesis evaluation and guiding conclusions in clinical settings. Finally, **Figure 5F** illustrates the sensitivity analysis (based on the eigenvalues of the posterior distribution), revealing that the posterior is more sensitive to changes in V compared to G . This highlights the relative impact of these parameters on the model's posterior estimates.

Next, we demonstrate the inference on a whole-brain model of epilepsy spread, known as the Virtual Epileptic Patient (VEP; [47, 76]), used to delineate the epileptogenic and propagation zone networks from the invasive sEEG recordings (subsubsection 2.1.4). Here, we used a large value for system time constant $\tau = 90$ ms (see **Table 4**) to generate slow-fast dynamics in pathological areas, corresponding to seizure envelope at each brain region. **Figure 6** demonstrates the inference the set of inferred parameters $\vec{\theta} = \{G, C_i\} \in \mathbb{R}^{89}$, with the global scaling parameter G and spatial map of epileptogenicity η_i , given $i \in \{1, 2, \dots, N_n = 88\}$ parcelled regions. **Figure 6A** and **B** show the observed and predicted envelope, respectively, at each brain region. Here, the whole brain regions are classified into two epileptogenic zones (in red, corresponding to high excitability), three propagation zones (in yellow, corresponding to excitability close to bifurcation), and the rest as healthy regions (in green, corresponding to low excitability). **Figure 6C** and **D** illustrate the observed and predicted data features as the total power energy per region, calculated as the area under the curve. Additionally the seizure onset at each region was used as a data feature for training the MAF density estimator. From these panels, we observe accurate recovery of seizure envelopes in pathological regions. **Figure 6E** and **F** show that the posterior distribution of heterogeneous η_i and global coupling parameter G , respectively, indicating 100% accurate recovery of the true values (in green). **Figure 6G** confirms the reliability and accuracy of the estimates through shrinkage and z-score diagnostics. With our efficient implementation, generating 10k whole-brain simulations took less than a minute (using 10 CPU cores). The training took approximately 13 minutes to converge, while posterior sampling required only a few seconds. See **Figure S4** for a similar analysis with a faster time separation ($\tau = 10$ ms). These results demonstrate an ideal and fast Bayesian estimation, despite the stiffness of equations in each region and the high dimensionality of the parameters.

Targeting the fMRI data, we demonstrate the inference on the whole-brain dynamics using Montbrió model (see subsubsection 2.1.5). **Figure 7** demonstrates the inference on heterogeneous control parameters of the Montbrió model, operating in a bistable regime (**Table 5**). **Figure 7A** and **B** show the observed and predicted BOLD time series, respectively, while **Figure 7C** and **D** illustrate the observed and predicted data features, such as the static and dynamical functional connectivity matrices (FC and FCD, respectively). **Figure 7E** and **F** show the estimated posterior distributions of excitability η_i per brain region, and the global coupling parameter G . **Figure 7G** displays the reliability and accuracy of estimation through the evaluation of posterior shrinkage and z-score (see **Equation 12** and **13**).

Due to the large number of simulations for training and the informativeness of the data features (both spatio-temporal and functional data features), the results indicate that we achieved accurate parameter estimation, consequently, a close agreement between the observed and predicted features of BOLD data. This required 500k simulations for training (see **Figure S6**), given the uniform priors $G \in \mathcal{U}(0, 1)$ and $\eta_i \in \mathcal{U}(-6, -3.5)$. After approximately 10 h of training (of MAF density estimator), posterior sampling took only 1 min. Our results indicate that training the MAF model was 2 to 4 times faster than the NSF model (see **Figure S1B**). Note that removing the spatio-temporal features and considering only FC/FCD as the data features (see **Figure S7**) leads to poor estimation of the excitability parameter across brain regions (see **Figure S5**).

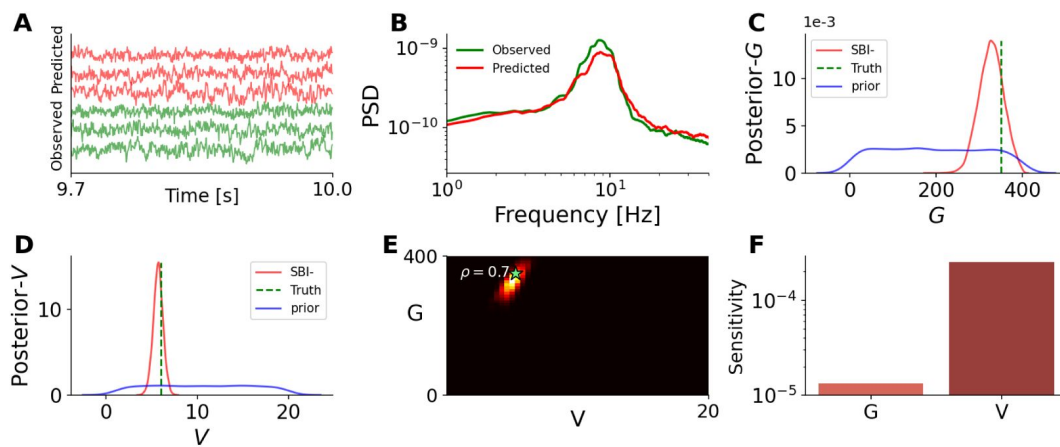


Figure 5.

Bayesian inference on global scaling parameter G and the averaged velocity V of signal transmission using the whole-brain network model of Stuart-Landau oscillators.

The set of estimated parameters is $\vec{\theta} = \{G, V\} \in \mathbb{R}^2$, and the summary statistics of PSD signals with a budget of 2k simulations were used for training. **(A)** illustrates exemplary observed and predicted neural activities (in green and red, respectively). **(B)** shows the observed and predicted PSD signals (in green and red, respectively). **(C)** and **(D)** display the posterior distribution of averaged velocity V and global coupling G , respectively. The true values and prior are shown as vertical green lines and a blue distribution, respectively. **(E)** shows the joint posterior distribution indicating a high correlation between posterior samples. **(F)** illustrates the sensitivity analysis based on the eigenvalues of the posterior distribution.

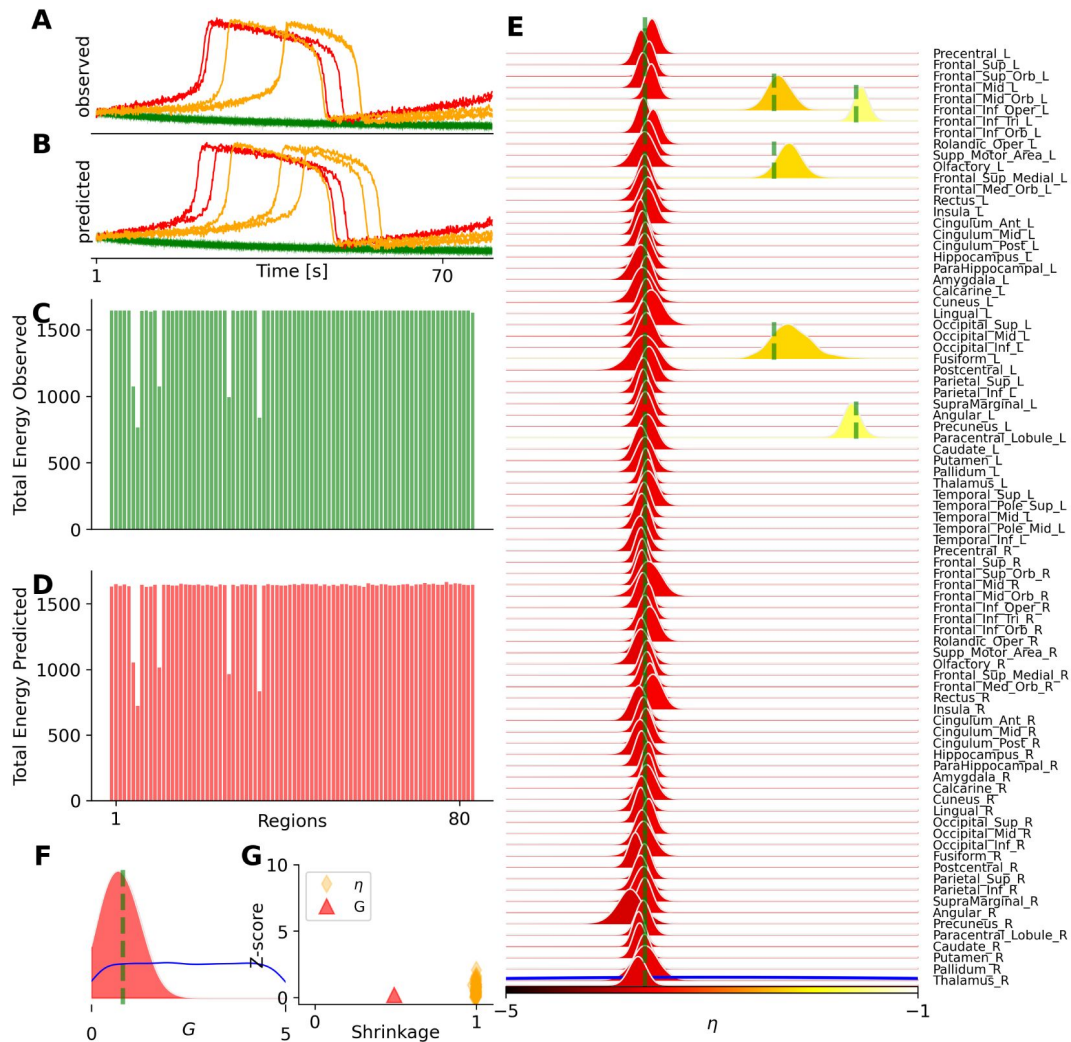


Figure 6.

Bayesian inference on the spatial map of epileptogenicity across brain regions in the VEP model.

The set of inferred parameters is $\vec{\theta} = \{G, \eta_i\} \in \mathbb{R}^{89}$, as the global scaling parameter and spatial map of epileptogenicity with $i \in \{1, 2, \dots, N_n = 88\}$ parcelled regions. **(A)** The observed seizure envelope generated by the Epileptor model, given two regions as epileptogenic zones (in red) and three regions as propagation zones (in yellow), while the rest are healthy (in green). **(B)** The predicted seizure envelope, by training MAF model on a dataset containing 10k simulations, using only the total power and seizure onset per region as the data features. **(C)** and **(D)** show the observed and predicted data features, respectively. **(E)** and **(F)** show the posterior distributions of heterogeneous control parameters η_i and global coupling parameter G , respectively. **(G)** The posterior z-scores versus posterior shrinkages for estimated parameters.

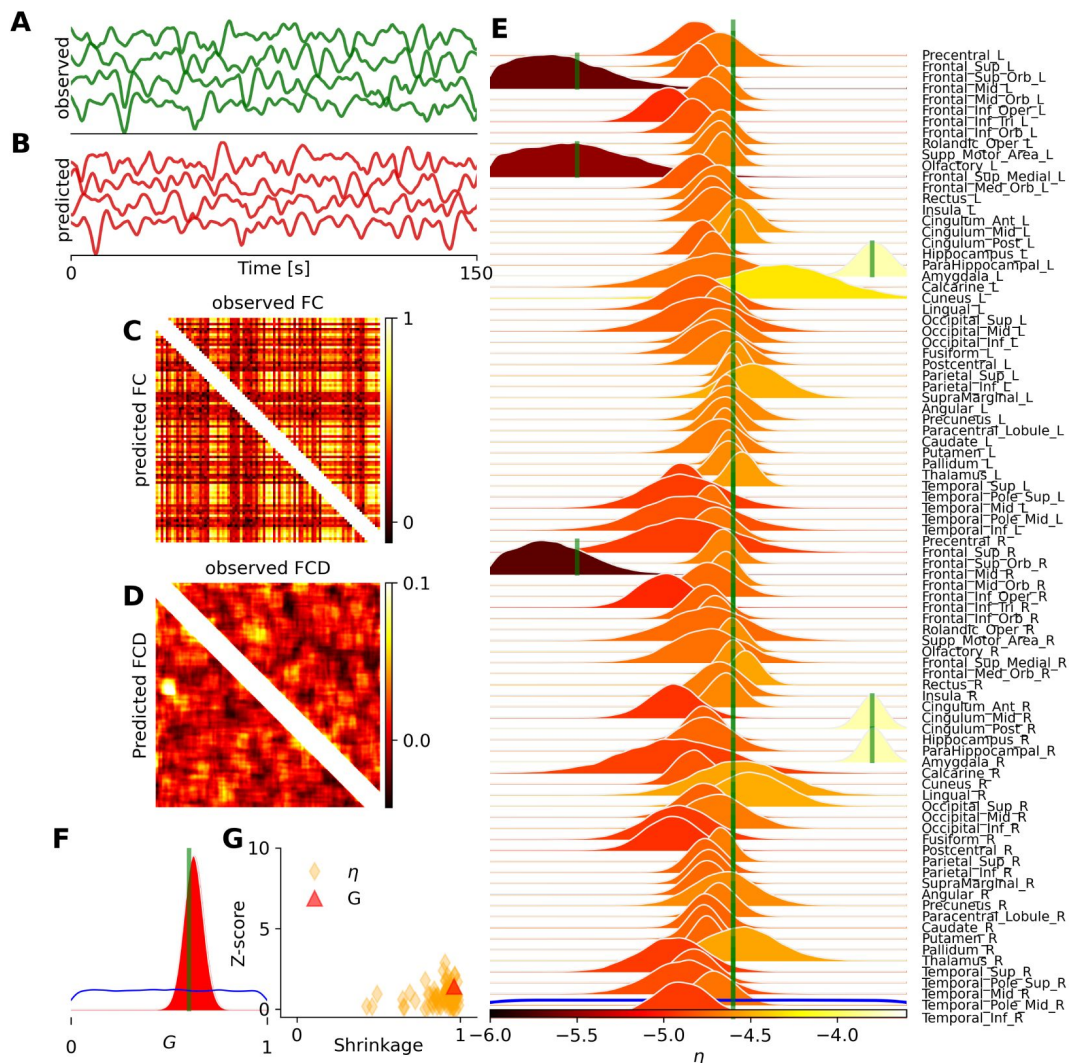


Figure 7.

Bayesian inference on heterogeneous control parameters in the whole-brain dynamics using Montbrió model.

The set of inferred parameters is $\vec{\theta} = \{G, \eta_i\} \in \mathbb{R}^{89}$, as the global scaling parameter and excitability per region, with $i \in \{1, 2, \dots, N_n = 88\}$ parcelled regions. VBI provides accurate and reliable posterior estimation using both spatio-temporal and functional data features for training, with a budget of 500k simulations. (A) and (B) illustrate the observed and predicted BOLD signals, respectively. (C) and (D) show the observed (upper triangular) and predicted (lower triangular) data features (FC and FCD), respectively. (E) and (F) display the posterior distribution of excitability parameters η_i per region, and global coupling G , respectively. The true values and prior are shown as vertical green lines and a blue distribution, respectively. (G) shows the inference evaluation by the shrinkage and z-score of the posterior distributions.

Interestingly, accurate estimation of the only global coupling parameter, $\vec{\theta} = \{G\} \in \mathbb{R}^1$, from only FC/FCD requires around 100 simulations (see [Figure S8](#)). This showcase demonstrates the capability of VBI in inferring heterogeneous excitability, given the bistable brain dynamics, for fMRI studies.

Finally, in [Figure 8](#), we show the inference on the so-called pDMF model, i.e., a whole-brain network model of the reduced Wong-Wang equation (see subsection 2.1.6), comprising 10 control parameters: the global scaling of connections G and the linear coefficients $(a_w, b_w, c_w, a_p, b_p, c_p, a_o, b_o, c_o) \in \mathbb{R}^9$. These parameters are introduced to reduce the dimension of whole-brain parameters as recurrent connection strength w_i , external input current I_i , and noise amplitude σ_i for each region (in total, 264 parameters were reduced to 9 dimensions; see [Equation 7](#)). Here, we used summary statistics of both spatio-temporal and functional data features extracted from simulated BOLD data to train the MAF density estimator, with a budget of 50k simulations. The training took around 160 min to converge, whereas posterior sampling took only a few seconds.

The diagonal panels in [Figure 8A](#) show estimated posterior distributions (in red), along with the prior (in blue) and true values (in green). The upper diagonal panels illustrate the joint posterior distributions between parameters (i.e., statistical dependency between parameters). [Figure 8B](#) illustrates the observed and predicted BOLD time series, generated by true and estimated parameters (in blue and red, respectively). From [Figure 8C](#), we can see a close agreement between the observed and predicted data features (FC/FCD matrices). Note that due to the stochastic nature of the generative process, we do not expect an exact element-wise correspondence between these features, but rather a match in their summary statistics, such as the mean, variance, and higher-order moments (see [Figure S9](#)). [Figure 8D](#) shows the posterior z-score versus shrinkage, indicating less accurate estimation for the coefficients c_w , c_p , and c_o compared to others, as they are not informed by anatomical data such as the T1w/T2w myelin map and the first FC principal gradient (see [Equation 7](#)). This showcase demonstrates the advantage of Bayesian inference over optimization in assessing the accuracy and reliability of parameter estimation, whether informed by anatomical data.

Note that in the whole-brain network of Wong-Wang model (6), the global scaling parameter G and synaptic coupling J exhibit structural non-identifiability, meaning their combined effects on the system cannot be uniquely disentangled. This is evident in the parameter estimations corresponding to selected observations, where the posterior distributions appear diffuse. The joint posterior plots reveal a nonlinear dependency (banana shape) between G and J , arising from their product in the neural mass equation (see [Equation 6](#)). Such a nonlinear relationship between parameters poses challenges for deriving causal conclusions, as often occurs in other neural mass models. This is a demonstration of how Bayesian inference facilitates causal hypothesis testing without requiring additional non-identifiability analysis.

4. Discussion

This study introduces the Virtual Brain Inference (VBI), a flexible and integrative toolkit designed to facilitate probabilistic inference on complex whole-brain dynamics using connectome-based models (forward problem) and simulation-based inference (inverse problem). The toolkit leverages high-performance programming languages (C++) and dynamic compilers (such as Python's JIT compiler), alongside the computational power of parallel processors (GPUs), to significantly enhance the speed and efficiency of simulations. Additionally, VBI integrates popular feature extraction libraries with parallel multiprocessing to efficiently convert simulated time series into low-dimensional summary statistics. Moreover, VBI incorporates state-of-the-art deep neural density estimators (such as MAF and NSF generative models) to estimate the posterior density of control parameters within whole-brain models given low-dimensional data features.

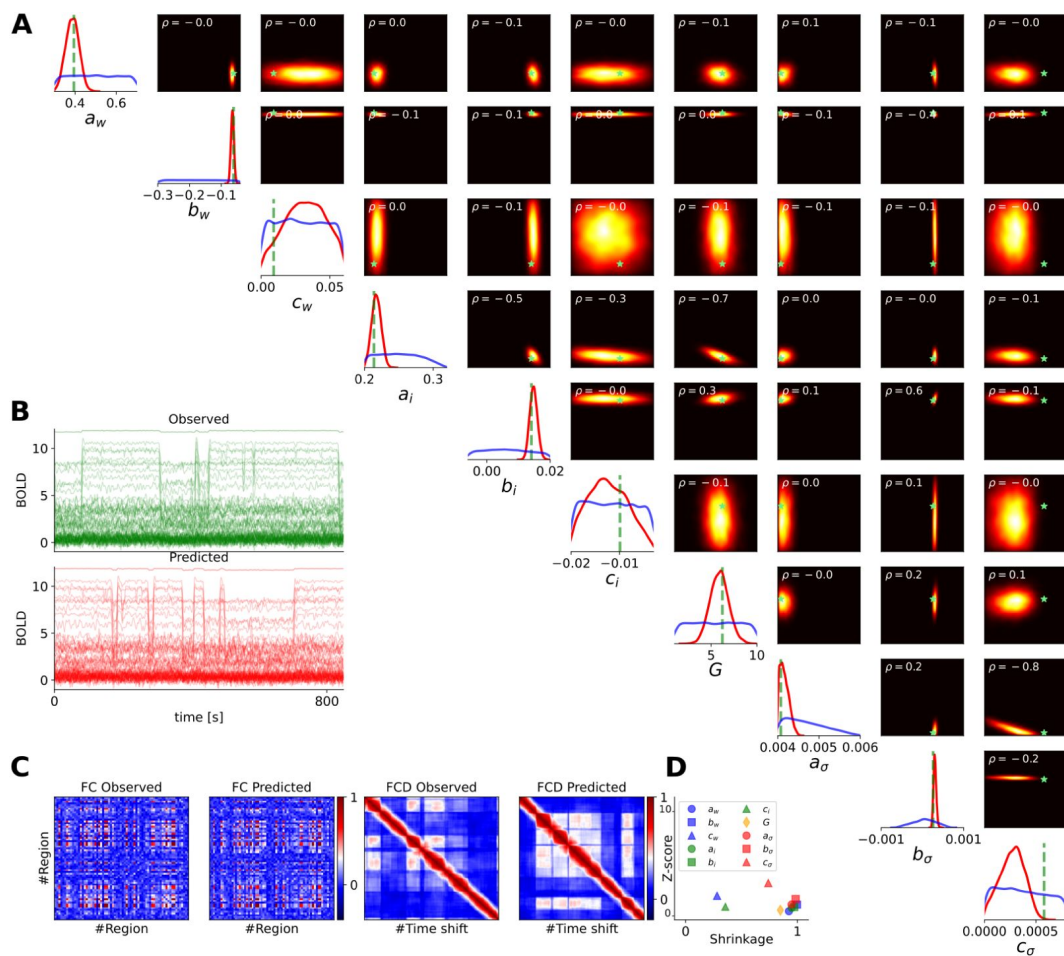


Figure 8.

Bayesian inference on the parametric mean-field model of Wong-Wang (pDMF model), with linear coefficients $(a_w, b_w, c_w, a_i, b_i, c_i, a_\sigma, b_\sigma, c_\sigma) \in \mathbb{R}^9$, reparameterizing the recurrent connection strength w_i , external input current I_i , and noise amplitude σ_i for each region.

Summary statistics of spatio-temporal and functional data features were used for training, with a budget of 50k simulations. **(A)** The diagonal panels display the ground-true values (in green), the uniform prior (in blue), and the estimated posterior distributions (in red). The upper diagonal panels illustrate the joint posterior distributions between parameters, along with their correlation (ρ , in the upper left corners), and ground-truth values (green stars). High-probability areas are color-coded in yellow, while low-probability areas are shown in black. **(B)** The observed and predicted BOLD time series (in green and red, respectively). **(C)** The observed and predicted data features, such as FC/FCD matrices. **(D)** The inference evaluation by calculating the shrinkage and z-score of the estimated posterior distributions.

Our results demonstrated the versatility and efficacy of the VBI toolkit across commonly used whole-brain network models, such as Wilson-Cowan, Jansen-Rit, Stuart-Landau, Epileptor, Montbrió, and Wong-Wang equations placed at each region. The ability to perform parallel and rapid simulations, coupled with a taxonomy of feature extraction, allows for detailed and accurate parameter estimation from associated neuroimaging modalities such as (s)EEG/MEG/fMRI. This is crucial for advancing our understanding of brain dynamics and the underlying mechanisms of various brain disorders. Overall, VBI represents a substantial improvement over alternative methods, offering a robust framework for both simulation and parameter estimation, and contributing to the advancement of network neuroscience, potentially, to precision medicine.

The alternatives for parameter estimation include optimization techniques [66, 34, 36, 63, 64], ABC method, and MCMC sampling. Optimization techniques are sensitive to the choice of the objective function (e.g., minimizing distance error or maximizing correlation) and do not provide estimates of uncertainty. Although multiple runs and thresholding can be used to address these issues, such methods often fall short in revealing relationships between parameters, such as identifying degeneracy, which is crucial for reliable causal inference. Alternatively, a technique known as ABC compares observed and simulated data using a distance measure based on summary statistics [140, 141, 142]. It is known that, ABC methods suffer from the curse of dimensionality, and their performance also depends critically on the tolerance level in the accepted/rejected setting [71, 70]. The self-tuning variants of MCMC sampling have also been used for model inversion at the whole-brain level [76, 67]. Although MCMC is unbiased and exact with infinite runs, it can be computationally prohibitive, and sophisticated reparameterization methods are often required to facilitate convergence at whole-brain level [123, 143]. This becomes more challenging for gradient-based MCMC algorithms, due to the bistability and stiffness of neural mass models. Tailored to Bayes' rule, SBI sidesteps these issues by relying on expressive deep neural density estimators (such as MAF and NSF) on low-dimensional data features to efficiently approximate the posterior distribution of model parameters. Taking spiking neurons as generative models, this approach has demonstrated superior performance compared to alternative methods, as it does not require model or data features to be differentiable [71, 81].

In previous studies, we demonstrated the effectiveness of SBI on virtual brain models of neurological [68, 49, 50, 54], and neurodegenerative diseases [69, 51, 23] as well as focal intervention [59] and healthy aging [37]. In this work, we extended this probabilistic methodology to encompass a broader range of whole-brain network models, highlighting its flexibility and scalability in leveraging diverse computational resources, from CPUs/GPUs to high-performance computing facilities. Our results indicated that the VBI toolkit effectively estimates posterior distributions of control parameters in whole-brain network modeling, offering a deeper understanding of the mechanisms underlying brain activity. For example, using the Montbrió and Wong-Wang models, we achieved a close match between observed and predicted FC/FCD matrices derived from BOLD time series (**Figure 7** and **Figure 8**). Additionally, the Jansen-Rit and Stuart-Landau models provided accurate inferences of PSD from neural activity (**Figure 4**, and **Figure 5**), while the Epileptor model precisely captured the spread of seizure envelopes (**Figure 6**). These results underscore the toolkit's capability to manage complex, high-dimensional data with precision. Uncertainty quantification using VBI can illuminate and combine the informativeness of data features (e.g., FC/FCD) and reveal the causal drivers behind interventions [69, 59]. This adaptability ensures that VBI can be applied across various neuroimaging modalities, accommodating different computational capabilities and research needs.

Since data features are key in SBI, some factors can lead to the collapse of this method. For instance, high noise levels in observations or dynamical noise can compromise the accurate calculation of data features, undermining the inference process. Identifying the set of low-dimensional data features that are relevant to the control parameters for each case study is

another challenge in effectively applying SBI. Nevertheless, the uncertainty of the posterior informs us about the predictive power of these features. Statistical moments of time series could be effective candidates for most models. However, this poses a formidable challenge for inference from empirical data, as certain moments, such as the mean and variance, may be lost during preprocessing steps. The hyperparameter and noise estimation can also be challenging for SBI. Moreover, there is no established rule for determining the number of simulations for training, aside from relying on z-score values during in-silico testing, as it depends on available computational resources.

Various sequential methods, such as SNPE [125], SNLE [144], and SNRE [145], have been proposed to reduce computational costs of SBI by iteratively refining the fit to specific targets. These approaches aim for more precise parameter estimation by progressively adjusting the model based on each new data set or subset, potentially enhancing the accuracy of the fit at the reduced computational effort. The choice of method depends on the specific characteristics and requirements of the problem being addressed [146]. Our previous study indicates that for inferring whole-brain dynamics of epilepsy spread, the SNPE method outperforms alternative approaches [68]. Nevertheless, sequential methods can become unstable, with simulators potentially diverging and causing probability mass to leak into regions that lack prior support [68]. In this study, we used single-round training to benefit from an amortization strategy. This approach brings the costs of simulation and network training upfront, enabling inference on new data to be performed rapidly (within seconds). This strategy facilitates personalized inference at the subject level, as the generative model is tailored by the SC matrix, thereby allowing for rapid hypothesis evaluation specific to each subject (e.g., in delineating the epileptogenic and propagation zones). Note that model comparison across different configurations or model structures, as well-established in dynamic causal modeling [147, 148], has yet to be explored in this context.

Deep learning algorithms are increasingly gaining traction in the context of whole-brain modeling. The VBI toolkit leverages a class of deep generative models, called Normalizing Flows (NFs; [127, 128]), to model probability distributions given samples drawn from those distributions. Using NFs, a base probability distribution (e.g., a standard normal) is transformed into any complex distribution (potentially multi-modal) through a sequence of invertible transformations. Variational autoencoders (VAEs; [149, 150]) is a class of deep generative models to encode data into a latent space and then decode it back to reconstruct the original data. Recently, Sip et al. [151] introduced a method using VAEs for nonlinear dynamical system identification, enabling the inference of neural mass models and region- and subject-specific parameters from functional data. VAEs have also been employed for dimensionality reduction of whole-brain functional connectivity [42], and to investigate various pathologies and their severity by analyzing the evolution of trajectories within a low-dimensional latent space [52]. Additionally, Generative Adversarial Networks (GANs; [152, 153]) have demonstrated remarkable success in mapping latent space to data space by learning a manifold induced from a base density [154]. This method merits further exploration within the context of whole-brain dynamics. To fully harness the potential of deep generative models in large-scale brain network modeling, integrating VAEs and GANs into the VBI framework would be beneficial. This will elucidate their strengths and limitations within this context and guide future advancements in the field.

In summary, VBI offers fast simulations, taxonomy of feature extraction, and deep generative models, making it a versatile tool for model-based inference from different neuroimaging modalities, helping researchers to explore brain (dys)functioning in greater depth. This advancement not only enhances our theoretical understanding but also holds promise for practical applications in diagnosing and treating neurological conditions.

Information Sharing Statement

All code is available on GitHub (<https://github.com/ins-amu/vbi> .

Glossary of technical terms

Bayesian Rule: A fundamental belief updating principle that calculates the probability of a hypothesis given new evidence.

Deep neural density estimators: A class of artificial neural network-based approaches that are used to learn and approximate the underlying probability distribution from a given dataset.

Control (generative) parameters: The bifurcation parameters, setting, or configuration within a generative model that controls the synthesis of data and potentially represents causal relationships.

Generative model: A statistical, machine learning, or mechanistic model that represents the underlying data distribution to generate new data resembling the original dataset.

Likelihood: The conditional probability of observing the evidence given a particular hypothesis.

Markov chain Monte Carlo: A family of stochastic algorithms used for uncertainty quantification by drawing random samples from probability distributions, in which the sampling process does not require knowledge of the entire distribution.

Prior: The initial probability assigned to a hypothesis before considering new evidence.

Probability distribution: The statistical description of potential outcomes of random events, where a numerical measure is assigned to the possibility of each specific outcome.

Probability density estimation: The process of inferring the underlying probability distribution of a random event based on observed data.

Posterior: The updated probability of a hypothesis after taking into account both prior beliefs and observed evidence.

Simulation-based inference: A machine learning approach that involves generating synthetic data through forward simulations to make inferences about complex systems, often when analytic or computational solutions are unavailable.

Whole-brain or virtual brain models: Computational models informed by personalized anatomical data, i.e., a set of equations describing regional brain dynamics placed at each node, which are then connected through structural connectivity matrix.

6. Supplementary figures

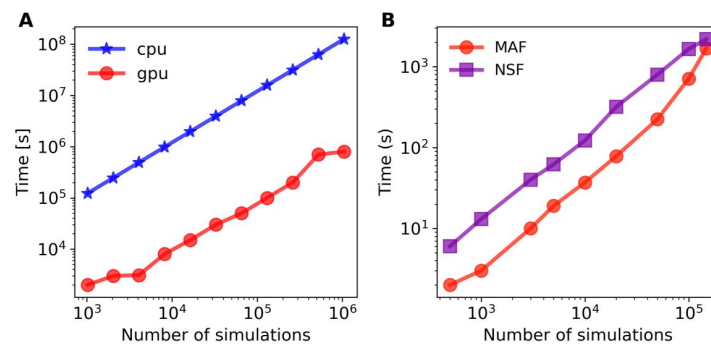


Figure S1.

(A) Benchmarking the simulation cost of the whole-brain network of Montbrió model, with 2.5M time step on Intel(R) Core(TM) i9-10900 CPU 2.80 GHz (in red) and NVIDIA RTX A5000 GPU (in blue). GPUs deliver substantial speedups up to 100x over multi-core CPUs. (B) Comparing MAF and NSF density estimators, MAF is typically 2-4 times faster than NSF during the training process.

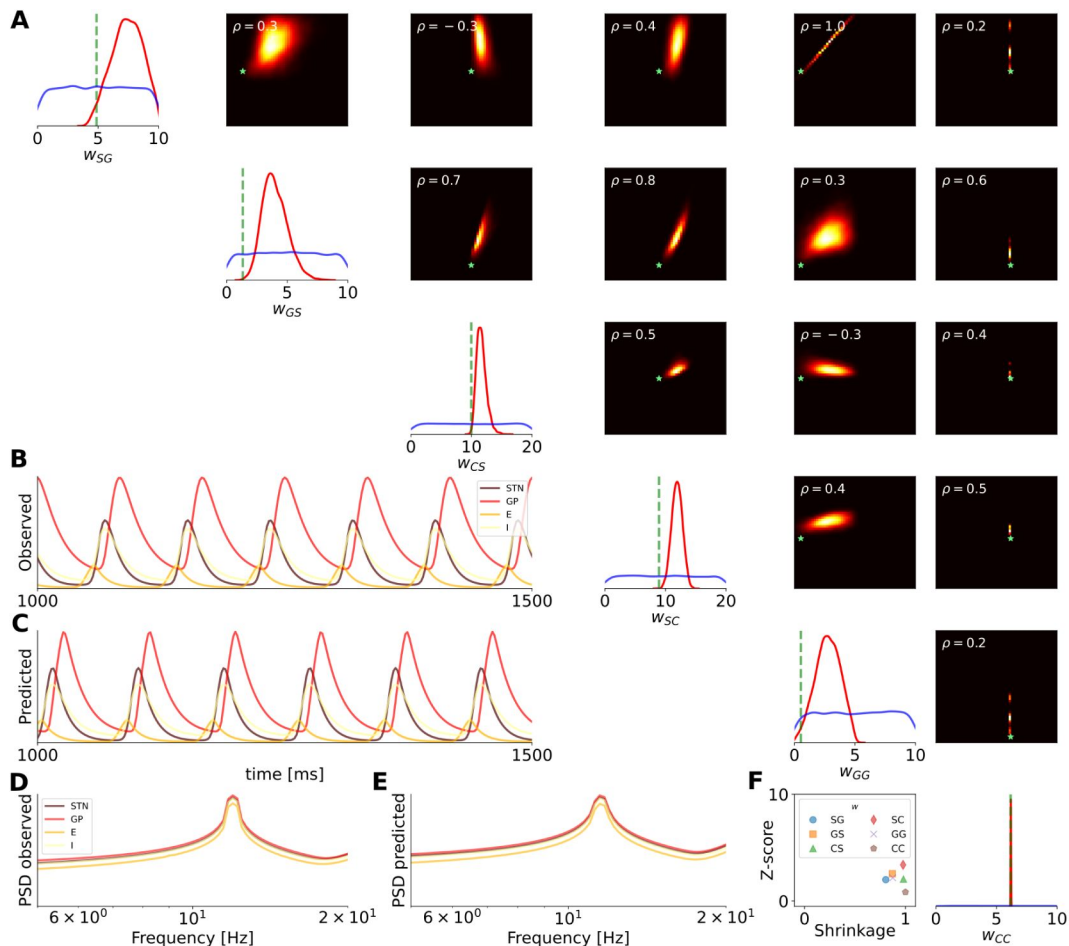


Figure S2.

Inference on generative parameters in the Wilson-Cowan model (Equation 1) of beta oscillation.

The set of inferred parameters is $\theta = w_{SG}, w_{GS}, w_{CS}, w_{SC}, w_{GG}, w_{CC} \in \mathcal{R}^6$. (A) The diagonal panels show the estimated posterior distributions (in red), true values (in green), and the uniform prior (in blue). The upper diagonal panels depict the joint posterior distributions between parameters, including their correlations (ρ , in the upper left corners), with true values marked by green stars. High-probability areas are color-coded in yellow, while low-probability areas are shown in black. Panels (B), (C) display the observed and predicted activity timeseries, respectively. Panels (D), (E) show the observed and predicted PSD, respectively, used as data features for training. (F) Evaluates the inference by presenting the shrinkage and z-scores of the estimated posterior distributions.

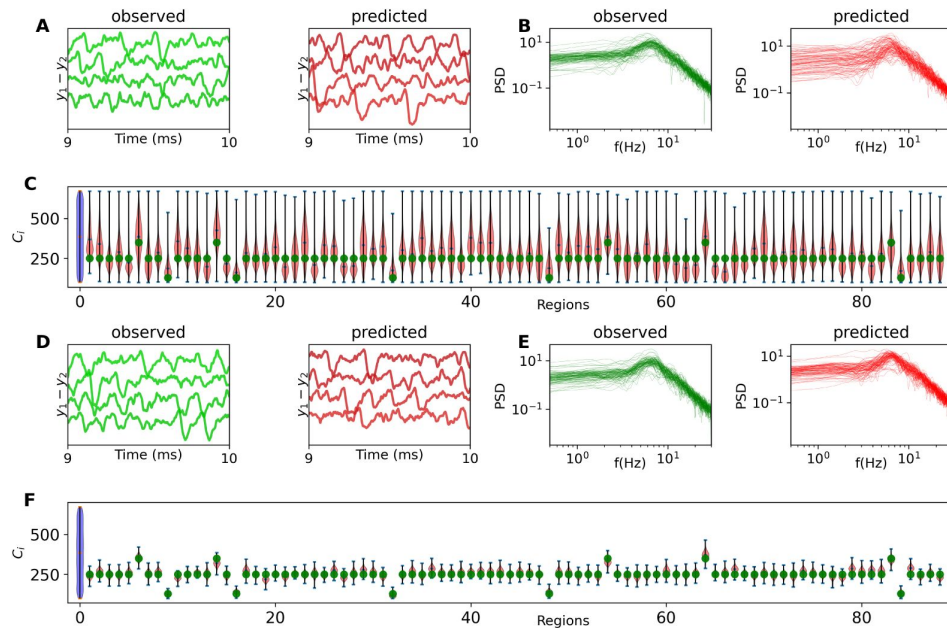


Figure S3.

Inference on heterogeneous generative parameters in the whole-brain network of Jansen-Rit model (Equation 2).

The set of inferred parameters is $\vec{\theta} = \{G, C_i\} \in \mathbb{R}^{89}$, consisting of the global scaling parameter G and the average number of synapses between neural populations C_i per region, with $i \in \{1, 2, \dots, N_n = 88\}$ parcellated regions. For panels **A** to **C**, only the area under the curve of the power spectral density (PSD) in the $[0, 30]$ Hz band was used, while for panels **D** to **F**, additional statistical features of the PSD were included in the training, with a total budget of 50k simulations. (**A**) and (**D**) illustrate the observed and predicted EEG signals. (**B**) and (**E**) show the observed and predicted PSD signals. (**C**) and (**F**) display the posterior distribution of C_i for each region. The true values are indicated by vertical green lines, and the prior distribution is shown in blue.

Figure S5.

Inference on heterogeneous generative parameters in the whole-brain network of Montbrió model (Equation 5) involves estimating a parameter set denoted as

$$\vec{\theta} = \{G, \eta_i\} \in \mathbb{R}^{89}$$

Here, G is the global scaling parameter, and η_i represents the excitability of each brain region, where $i \in \{1, 2, \dots, N_n = 88\}$ corresponds to the parcelled regions. Relying on only functional data features (FC/FCD) for training proves insufficient to accurately estimate the posterior distribution of heterogeneous excitabilities, even with a budget of 500k simulations. In (A), the posterior estimates are shown in red, the true values of η_i in green, and the prior distribution in blue. Panels (B) and (C) show the observed and predicted FC/FCD matrices, respectively. The simulation to generate training data took approximately 24 hours, utilizing 10 GPUs concurrently. The training process lasted around 8 hours, while sampling required just a few seconds.

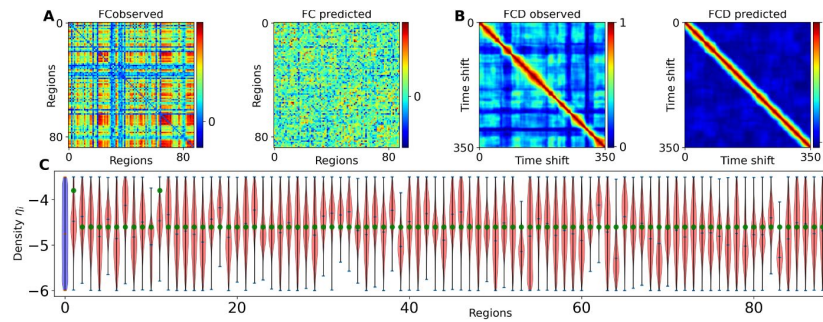


Figure S6.

Evaluating the reliability and accuracy of estimation (parameter G) with respect to the number of simulation used for training the MAF/NSF density estimator by (A) posterior shrinkage, and (B) z-score versus the number of simulations.

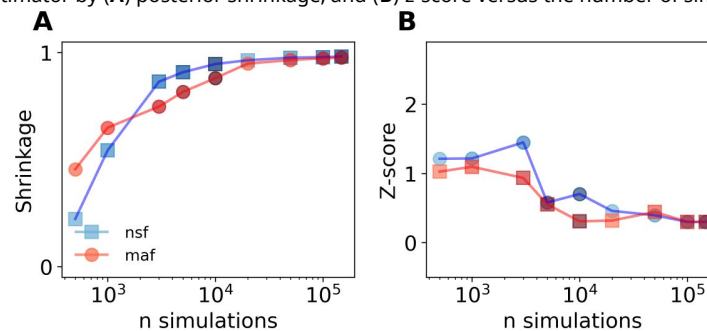


Figure S7.

Exemplary summary statistics from the FC/FCD matrices in the whole-brain network of Montbrió model (Equation 5).

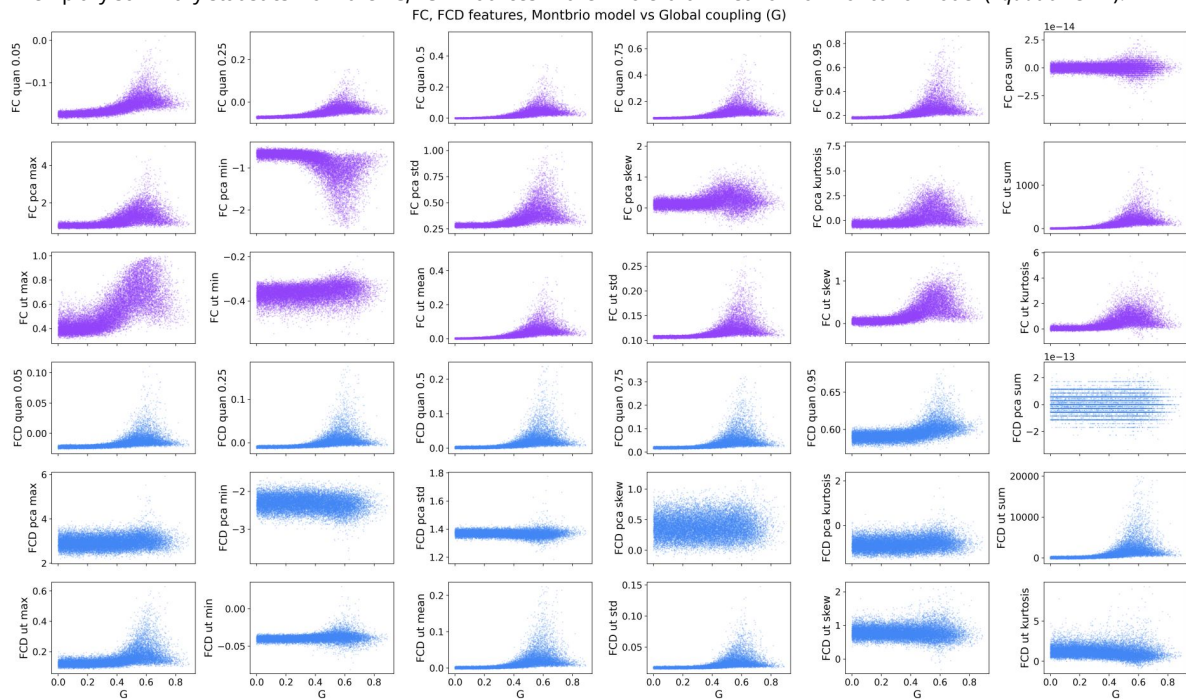


Figure S8.

Inference of the global coupling parameter

$$\vec{\theta} = \{G\} \in \mathbb{R}^1$$

in the whole-brain network of Montbrió model (Equation 5) using functional data features, using a budget of only 100 simulations.

(A) The uniform prior distribution of G in blue, the estimated posterior in red and the true value is shown in green. (B) and (C) The observed and predicted FC/FCD matrices, respectively.

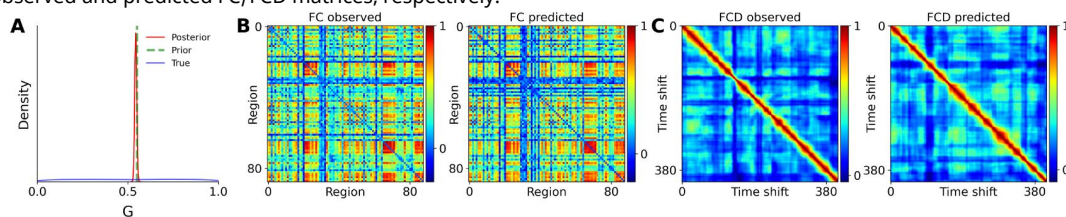


Figure S9.

The distribution of observed and predicted functional connectivity (FC) in panel (A) and the functional connectivity dynamics (FCD) in panel (B), which are demonstrated in Figure 8.

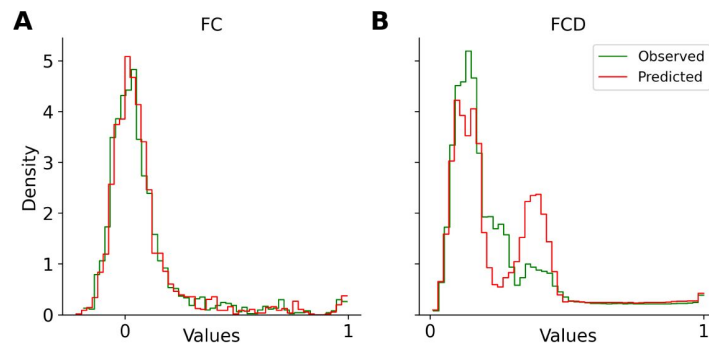



Figure S10.

Inference of the global coupling parameter

$$\vec{\theta} = \{G\} \in \mathbb{R}^1$$

in the whole-brain model of Montbrió (Equation 5) using TVB simulator, using summation of FC and FCD matrix elements as low dimensional data features, constrained by a budget of only 100 simulations.

(A) The uniform prior distribution of G in blue, the estimated posterior in red and the true value is shown in green. (B) and (C) show the observed and predicted FC/FCD matrices, respectively.

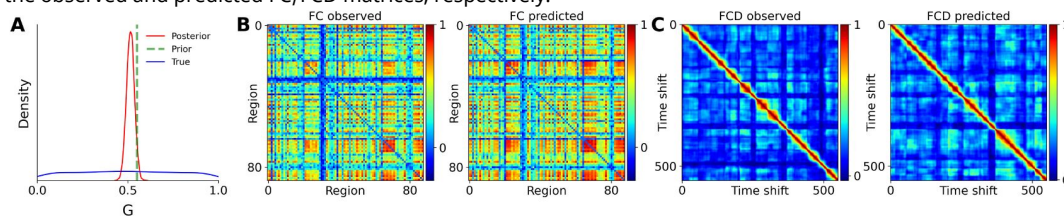

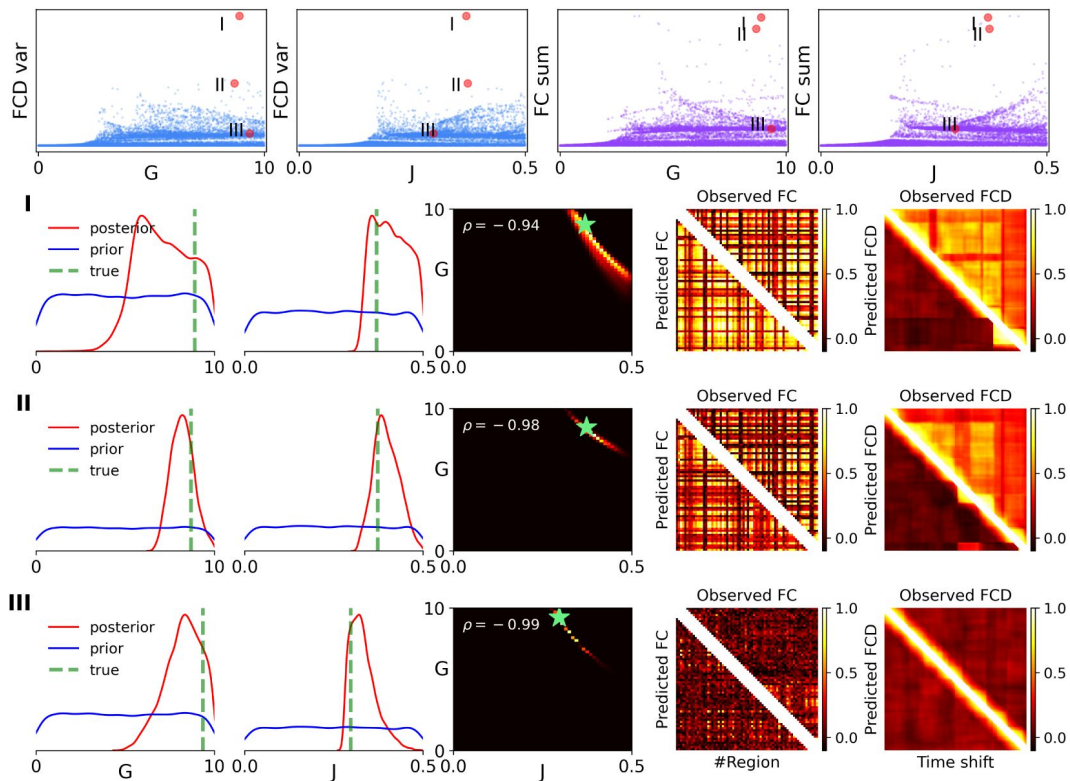


Figure S11.

The non-identifiability in estimating G and J in the Wong-Wang model (Equation 6).

A total of 16k simulations and functional data features (see [Figure S11](#)) were used for training. The upper row illustrates the FCD variance and the sum of FC matrices plotted against the parameters G and J , respectively, for three selected observations marked by red circles. The lower panels display the parameter estimations corresponding to the selected observations. Due to structural non-identifiability in the product of G and J , the posterior distributions appear diffuse, showing a nonlinear dependency (banana shape) in the joint posterior plots.

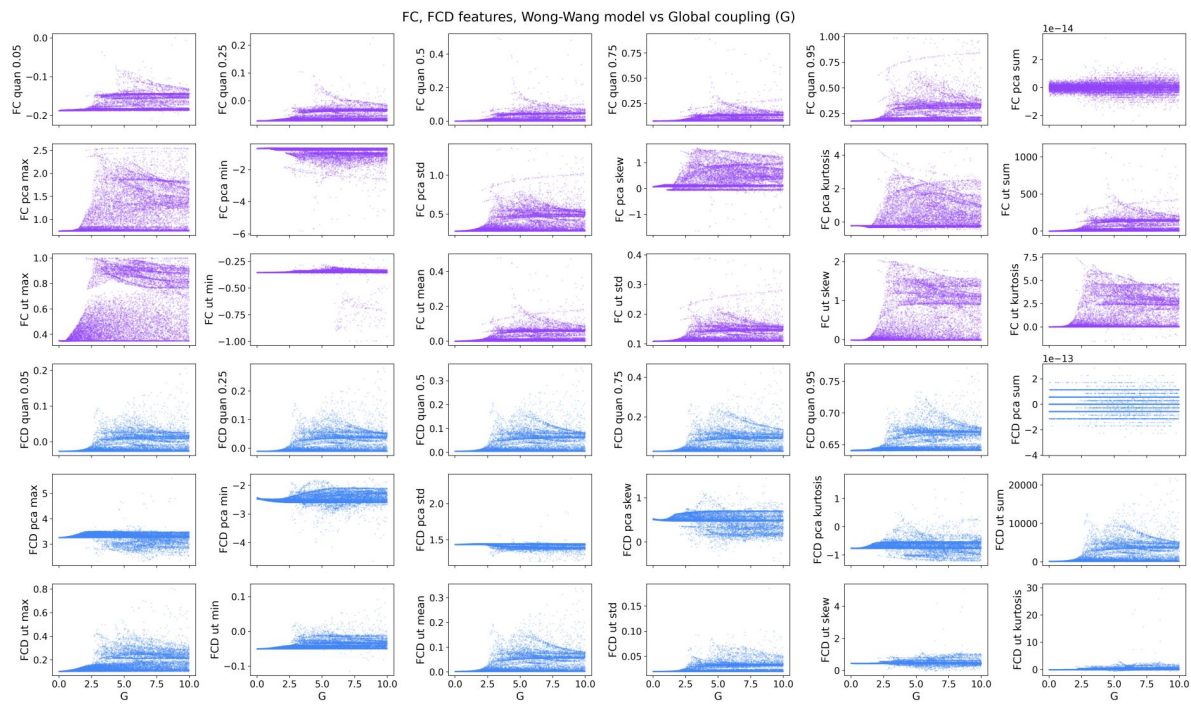


Figure S12.

Exemplary summary statistics from the FC/FCD matrices in the whole-brain network of Wong-Wang model (Equation 6 [↗](#)).

Acknowledgements

This research has received funding from EU's Horizon 2020 Framework Programme for Research and Innovation under the Specific Grant Agreements No. 101147319 (EBRAINS 2.0 Project), No. 101137289 (Virtual Brain Twin Project), No. 101057429 (project environMENTAL), and government grant managed by the Agence Nationale de la Recherche reference ANR-22-PESN-0012 (France 2030 program). We acknowledge the use of Fenix Infrastructure resources, which are partially funded from the European Union's Horizon 2020 research and innovation programme through the ICEI project under the grant agreement No. 800858. The funders had no role in study design, data collection and analysis, decision to publish, or preparation of the manuscript.

Additional information

Author contributions

Conceptualization: V.J., and M.H. Methodology: A.Z., M.W., L.D., and M.H. Software: A.Z., M.W., L.D., and M.H. Investigation: A.Z. Visualization: A.Z., Supervision: V.J., S.P., and M.H. Funding acquisition: V.J., M.H. Writing - original draft: A.Z., and M.H. Writing - review & editing: A.Z., M.W., L.D., S.P., V.J., and M.H.

Abbreviations

- VBI: virtual brain inference
- BOLD: blood-oxygen-level-dependent
- fMRI: functional magnetic resonance imaging
- EEG: Electroencephalography
- MEG: Magnetoencephalography
- sEEG: Stereoelectroencephalography
- SC: structural connectivity
- FC: functional connectivity
- FCD: functional connectivity dynamic
- PSD: power spectral density
- SBI: simulation-based inference
- MAF: masked autoregressive flow
- NSF: neural spline flow
- MCMC: Markov chain Monte Carlo

References

- [1] Falcon Maria I, Jirsa Viktor, Solodkin Ana (2016) **A new neuroinformatics approach to personalized medicine in neurology: The virtual brain** *Current opinion in neurology* **29**:429–436 [Google Scholar](#)
- [2] Tan Lin, Jiang Teng, Tan Lan, Yu Jin-Tai (2016) **Toward precision medicine in neurological diseases** *Annals of translational medicine* **4** [Google Scholar](#)
- [3] Vogel Jacob W, Corriveau-Lecavalier Nick, Franzmeier Nicolai, Pereira Joana B, Brown Jesse A, Maass Anne, Botha Hugo, Seeley William W, Bassett Dani S, Jones David T, et al. (2023) **Connectome-based modelling of neurodegenerative diseases: towards precision medicine and mechanistic insight** *Nature Reviews Neuroscience* **24**:620–639 [Google Scholar](#)
- [4] Williams Leanne M, Gabrieli Susan Whitfield (2024) **Neuroimaging for precision medicine in psychiatry** *Neuropsychopharmacology, pages* :1–12 [Google Scholar](#)
- [5] Breakspear Michael (2017) **Dynamic models of large-scale brain activity** *Nature neuroscience* **20**:340–352 [Google Scholar](#)
- [6] Wang Huifang E, Woodman Marmaduke, Triebkorn Paul, Lemarechal Jean-Didier, Jha Jayant, Dollomaja Borana, Vattikonda Anirudh Nihalani, Sip Viktor, Villalon Samuel Medina, Hashemi Meysam, et al. (2023) **Delineating epileptogenic networks using brain imaging data and personalized modeling in drug-resistant epilepsy** *Science Translational Medicine* **15**:eabp8982 [Google Scholar](#)
- [7] Ross Lauren N, Bassett Dani S (2024) **Causation in neuroscience: Keeping mechanism meaningful** *Nature Reviews Neuroscience* **25**:81–90 [Google Scholar](#)
- [8] Wilson H.R., Cowan J.D. (1972) **Excitatory and inhibitory interactions in localized populations of model neurons** *Biophys. J* **12**:1–24 [Google Scholar](#)
- [9] Jirsa V.K., Haken H. (1996) **Field theory of electromagnetic brain activity** *Phys. Rev. Lett* **77**:960–963 [Google Scholar](#)
- [10] Deco G., Jirsa V.K., Robinson P.A., Breakspear M., Friston K. (2008) **The dynamic brain: from spiking neurons to neural masses and cortical fields** *PloS Comp. Biol* **4** [Google Scholar](#)
- [11] Jirsa Viktor K., Stacey William C., Quilichini Pascale P., Ivanov Anton I., Bernard Christophe (2014) **On the nature of seizure dynamics** *Brain* **137**:2210–2230 [Google Scholar](#)
- [12] Montbrió Ernest, Pazó Diego, Roxin Alex (2015) **Macroscopic description for networks of spiking neurons** *Physical Review X* **5**:021028 [Google Scholar](#)
- [13] Cook Blake J, Peterson Andre DH, Woldman Wessel, Terry John R (2022) **Neural field models: A mathematical overview and unifying framework** *Mathematical Neuroscience and Applications* **2** [Google Scholar](#)
- [14] Honey Christopher J, Sporns Olaf, Cammoun Leila, Gigandet Xavier, Thiran JeanPhilippe, Meuli Reto, Hagmann Patric (2009) **Predicting human resting-state functional connectivity from**

structural connectivity *Proceedings of the National Academy of Sciences* **106**:2035–2040 [Google Scholar](#)

- [15] Sporns Olaf, Tononi Giulio, Kötter Rolf (2005) **The human connectome: a structural description of the human brain** *PLoS computational biology* **1**:e42 [Google Scholar](#)
- [16] Schirner Michael, Rothmeier Simon, Jirsa Viktor K. (2015) **Anthony Randal McIntosh, and Petra Ritter. An automated pipeline for constructing personalized virtual brains from multimodal neuroimaging data** *NeuroImage* **117**:343–357 [Google Scholar](#)
- [17] Bazinet Vincent, Hansen Justine Y, Misić Bratislav (2023) **Towards a biologically annotated brain connectome** *Nature reviews neuroscience* **24**:747–760 [Google Scholar](#)
- [18] Sanz-Leon Paula, Knock Stuart A., Spiegler Andreas, Jirsa Viktor K. (2015) **Mathematical framework for large-scale brain network modeling in the virtual brain** *NeuroImage* **111**:385–430 [Google Scholar](#)
- [19] Schirner Michael, Domide Lia, Perdakis Dionysios, Triebkorn Paul, Stefanovski Leon, Pai Roopa, Prodan Paula, Vălean Bogdan, Palmer Jessica, Langford Chloë, Blickensdörfer André, van der Vlag Michiel, Diaz-Pier Sandra, Peyser Alexander, Klijn Wouter, Pleiter Dirk, Nahm Anne, Schmid Oliver, Woodman Marmaduke, Zehl Lyuba, Fousek Jan, Petkoski Spase, Kusch Lionel, Hashemi Meysam, Marinazzo Daniele, Mangin Jean-François, Flöel Agnes, Akintoye Simisola, Stahl Bernd Carsten, Cepic Michael, Johnson Emily, Deco Gustavo, McIntosh Anthony R., Hilgetag Claus C., Morgan Marc, Schuller Bernd, Upton Alex, McMurtrie Colin, Dickscheid Timo, Bjaalie Jan G., Amunts Katrin, Mersmann Jochen, Jirsa Viktor, Ritter Petra (2022) **Brain simulation as a cloud service: The virtual brain on ebrains** *NeuroImage* **251** [Google Scholar](#)
- [20] Amunts Katrin, DeFelipe Javier, Pennartz Cyriel, Destexhe Alain, Migliore Michele, Ryvlin Philippe, Furber Steve, Knoll Alois, Bitsch Lise, Bjaalie Jan G, et al. (2022) **Linking brain structure, activity, and cognitive function through computation** *Eneuro* **9** [Google Scholar](#)
- [21] D'Angelo Egidio, Jirsa Viktor (2022) **The quest for multiscale brain modeling** *Trends in neurosciences* **45**:777–790 [Google Scholar](#)
- [22] Patow Gustavo, Martin Ignacio, Perl Yonatan Sanz, Kringelbach Morten L, Deco Gustavo (2024) **Whole-brain modelling: an essential tool for understanding brain dynamics** *Nature Reviews Methods Primers* **4**:53 [Google Scholar](#)
- [23] Hashemi Meysam, Depannemaecker Damien, Saggio Marisa, Triebkorn Paul, Rabuffo Giovanni, Fousek Jan, Ziaemehr Abolfazl, Sip Viktor, Athanasiadis Anastasios, Breyton Martin, et al. (2024) **Principles and operation of virtual brain twins** *bioRxiv* :2024.10.25.620245 [Google Scholar](#)
- [24] Sporns Olaf (2016) **Networks of the Brain** MIT press [Google Scholar](#)
- [25] Bassett Danielle S, Sporns Olaf (2017) **Network neuroscience** *Nature neuroscience* **20**:353–364 [Google Scholar](#)
- [26] Ghosh Anandamohan, Rho Y, McIntosh Anthony Randal, Kötter Rolf, Jirsa Viktor K (2008) **Noise during rest enables the exploration of the brain's dynamic repertoire** *PLoS computational biology* **4**:e1000196 [Google Scholar](#)
- [27] Honey Christopher J, Thivierge Jean-Philippe, Sporns Olaf (2010) **Can structure predict function in the human brain?** *Neuroimage* **52**:766–776 [Google Scholar](#)

- [28] Park Hae-Jeong, Friston Karl (2013) **Structural and functional brain networks: from connections to cognition** *Science* **342**:1238411 [Google Scholar](#)
- [29] Melozzi Francesca, Bergmann Eyal, Harris Julie A., Kahn Itamar, Jirsa Viktor, Bernard Christophe (2019) **Individual structural features constrain the mouse functional connectome** *Proceedings of the National Academy of Sciences* **116**:26961–26969 [Google Scholar](#)
- [30] Suárez Laura E, Markello Ross D, Betzel Richard F, Misic Bratislav (2020) **Linking structure and function in macroscale brain networks** *Trends in cognitive sciences* **24**:302–315 [Google Scholar](#)
- [31] Feng Guozheng, Wang Yiwen, Huang Weijie, Chen Haojie, Cheng Jian, Shu Ni (2024) **Spatial and temporal pattern of structure-function coupling of human brain connectome with development** *eLife* **13**:RP93325 <https://doi.org/10.7554/eLife.93325> | [Google Scholar](#)
- [32] Tanner Jacob, Faskowitz Joshua, Teixeira Andreia Sofia, Seguin Caio, Coletta Ludovico, Gozzi Alessandro, Mišić Bratislav, Betzel Richard F (5865) **A multi-modal, asymmetric, weighted, and signed description of anatomical connectivity** *Nature Communications* **15**:2024 [Google Scholar](#)
- [33] Deco G., Jirsa V.K., McIntosh A.R. (2011) **Emerging concepts for the dynamical organization of resting-state activity in the brain** *Nature Reviews Neuroscience* **12**:43–56 [Google Scholar](#)
- [34] Wang Peng, Kong Ru, Kong Xiaolu, Liégeois Raphaël, Orban Csaba, Deco Gustavo, Van Den Heuvel Martijn P, Yeo BT Thomas (2019) **Inversion of a large-scale circuit model reveals a cortical hierarchy in the dynamic resting human brain** *Science advances* **5**:eaat7854 [Google Scholar](#)
- [35] Ziaemehr Abolfazl, Zarei Mina, Valizadeh Alireza, Mirasso Claudio R (2020) **Frequency-dependent organization of the brain's functional network through delayed-interactions** *Neural Networks* **132**:155–165 [Google Scholar](#)
- [36] Kong Xiaolu, Kong Ru, Orban Csaba, Wang Peng, Zhang Shaoshi, Anderson Kevin, Holmes Avram, Murray John D, Deco Gustavo, van den Heuvel Martijn, et al. (2021) **Sensory-motor cortices shape functional connectivity dynamics in the human brain** *Nature communications* **12**:1–15 [Google Scholar](#)
- [37] Lavanga Mario, Stumme Johanna, Yalcinkaya Bahar Hazal, Fousek Jan, Jockwitz Christiane, Sheheitli Hiba, Bittner Nora, Hashemi Meysam, Petkoski Spase, Caspers Svenja, et al. (2023) **The virtual aging brain: Causal inference supports inter-hemispheric dedifferentiation in healthy aging** *NeuroImage* **283**:120403 [Google Scholar](#)
- [38] Zhang Shaoshi, Larsen Bart, Sydnor Valerie J, Zeng Tianchu, An Lijun, Yan Xiaoxuan, Kong Ru, Kong Xiaolu, Gur Ruben C, Gur Raquel E, et al. (2024) **In vivo whole-cortex marker of excitation-inhibition ratio indexes cortical maturation and cognitive ability in youth** *Proceedings of the National Academy of Sciences* **121**:e2318641121 [Google Scholar](#)
- [39] Barttfeld Pablo, Uhrig Lynn, Sitt Jacobo D, Sigman Mariano, Jar-raya Béchir, Dehaene Stanislas (2015) **Signature of consciousness in the dynamics of resting-state brain activity** *Proceedings of the National Academy of Sciences* **112**:887–892 [Google Scholar](#)
- [40] Hashemi M., Hutt A., Darren H., Sleight J. (2017) **Anesthetic action on the transmission delay between cortex and thalamus explains the beta-buzz observed under propofol anesthesia** *PLOS One* **12**:1–29 [Google Scholar](#)

- [41] Luppi Andrea I, Cabral Joana, Cofre Rodrigo, Mediano Pedro AM, Rosas Fernando E, Qureshi Abid Y, Kuceyeski Amy, Tagliazucchi Enzo, Raimondo Federico, Deco Gustavo, et al. (2023) **Computational modelling in disorders of consciousness: Closing the gap towards personalised models for restoring consciousness** *NeuroImage* **275** [Google Scholar](#)
- [42] Perl Yonatan Sanz, Pallavicini Carla, Piccinini Juan, Demertzi Athena, Bonhomme Vincent, Martial Charlotte, Panda Rajanikant, Alnagger Naji, Annen Jitka, Gosseries Olivia, et al. (2023) **Low-dimensional organization of global brain states of reduced consciousness** *Cell Reports* **42** [Google Scholar](#)
- [43] Jirsa Viktor, Sporns Olaf, Breakspear Michael, Deco Gustavo (2010) and Anthony Randal McIntosh **Towards the virtual brain: network modeling of the intact and the damaged brain.** *Archives italiennes de biologie* **148**:189–205 [Google Scholar](#)
- [44] Leon Paula Sanz, Knock Stuart, Woodman M., Domide Lia, Mersmann Jochen, McIntosh Anthony, Jirsa Viktor (2013) **The virtual brain: a simulator of primate brain network dynamics** *Frontiers in Neuroinformatics* **7** [Google Scholar](#)
- [45] Jirsa Viktor, Wang Huifang, Triebkorn Paul, Hashemi Meysam, Jha Jayant, Gonzalez-Martinez Jorge, Guye Maxime, Makhalova Julia, Bartolomei Fabrice (2023) **Personalised virtual brain models in epilepsy** *The Lancet Neurology* **22**:443–454 [Google Scholar](#)
- [46] Wang Huifang E, Triebkorn Paul, Breyton Martin, Dollomaja Borana, Lemarechal Jean-Didier, Petkoski Spase, Sorrentino Pierpaolo, Depannemaecker Damien, Hashemi Meysam, Jirsa Viktor K (2024) **Virtual brain twins: from basic neuroscience to clinical use** *National Science Review* **11**:nwae079 [Google Scholar](#)
- [47] Jirsa V.K., Proix T., Perdakis D., Woodman M.M., Wang H., Gonzalez-Martinez J., Bernard C., Bénar C., Guye M., Chauvel P., Bartolomei F. (2017) **The virtual epileptic patient: Individualized whole-brain models of epilepsy spread** *NeuroImage* **145**:377–388 [Google Scholar](#)
- [48] Proix Timothée, Bartolomei Fabrice, Guye Maxime, Jirsa Viktor K. (2017) **Individual brain structure and modelling predict seizure propagation** *Brain* **140**:641–654 [Google Scholar](#)
- [49] Sorrentino P, Pathak A, Ziaemehr A, Troisi Lopez E, Cipriano L, Romano A, Sparaco M, Quarantelli M, Banerjee A, Sorrentino G, et al. (2024) **The virtual multiple sclerosis patient** *iScience* **27** [Google Scholar](#)
- [50] Mazzara Camille, Ziaemehr Abolfazl, Troisi Emahnuel Lopez, Lorenzo CIPRI- ANO, Angiolelli Marianna, Sparaco Maddalena, Quarantelli Mario, Granata Carmine, Sorrentino Giuseppe, Hashemi Meysam, et al. (2024) **Mapping brain lesions to conduction delays: the next step for personalized brain models in multiple sclerosis** *medRxiv* :2024.07.10.24310150 [Google Scholar](#)
- [51] Yalcinkaya Bahar Hazal, Ziaemehr Abolfazl, Fousek Jan, Hashemi Meysam, Lavanga Mario, Solodkin Ana, McIntosh Randy, Jirsa Viktor, Petkoski Spase (2023) **Personalized virtual brains of alzheimer’s disease link dynamical biomarkers of fmri with increased local excitability** *medRxiv* [Google Scholar](#)
- [52] Perl Yonatan Sanz, Fittipaldi Sol, Campo Cecilia Gonzalez, Moguilner Sebastián, Cruzat Josephine, Fraile-Vazquez Matias E, Herzog Rubén, Kringelbach Morten L, Deco Gustavo, Prado Pavel, et al. (2023) **Model-based whole-brain perturbational landscape of**

- [53] Jung Kyesam, Florin Esther, Patil Kaustubh R, Caspers Julian, Rubbert Christian, Eickhoff Simon B, Popovych Oleksandr V (2023) **Whole-brain dynamical modelling for classification of parkinson's disease** *Brain communications* **5**:fcac331 [Google Scholar](#)
- [54] Angiolelli Marianna, Depannemaecker Damien, Agouram Hasnae, Regis Jean, Carron Romain, Woodman Marmaduke, Chiodo Letizia, Triebkorn Paul, Ziaemehr Abolfazl, Hashemi Meysam, et al. (2024) **The virtual parkinsonian patient** *medRxiv* [Google Scholar](#)
- [55] Deco Gustavo, Kringelbach Morten L (2014) **Great expectations: using whole-brain computational connectomics for understanding neuropsychiatric disorders** *Neuron* **84**:892–905 [Google Scholar](#)
- [56] Iravani Behzad, Arshamian Artin, Fransson Peter, Kaboodvand Neda (2021) **Whole-brain modelling of resting state fmri differentiates adhd subtypes and facilitates stratified neuro-stimulation therapy** *Neuroimage* **231** [Google Scholar](#)
- [57] Allegra Mascaro Anna Letizia, Falotico Egidio, Petkoski Spase, Pasquini Maria, Vannucci Lorenzo, Tort-Colet Núria, Conti Emilia, Resta Francesco, Spalletti Cristina, Ramalingasetty Shravan Tata, et al. (2020) **Experimental and computational study on motor control and recovery after stroke: toward a constructive loop between experimental and virtual embodied neuroscience** *Frontiers in systems neuroscience* **14**:31 [Google Scholar](#)
- [58] Idesis Sebastian, Favaretto Chiara, Metcalf Nicholas V, Griffis Joseph C, Shulman Gordon L, Corbetta Maurizio, Deco Gustavo (2022) **Inferring the dynamical effects of stroke lesions through whole-brain modeling** *NeuroImage: Clinical* **36**:103233 [Google Scholar](#)
- [59] Rabuffo Giovanni, Lokossou Houefa-Armelle, Li Zengmin, Mehr Abolfazl Ziaee-, Hashemi Meysam, Quilichini Pascale P, Ghestem Antoine, Arab Ouafae, Esclapez Monique, Verma Parul, et al. (2023) **On global brain reconfiguration after local manipulations** *bioRxiv* [Google Scholar](#)
- [60] Liu Jin, Li Min, Lan Wei, Wu Fang-Xiang, Pan Yi, Wang Jianxin (2016) **Classification of alzheimer's disease using whole brain hierarchical network** *IEEE/ACM transactions on computational biology and bioinformatics* **15**:624–632 [Google Scholar](#)
- [61] Patow Gustavo, Stefanovski Leon, Ritter Petra, Deco Gustavo, Kobeleva Xenia (2023) **and Alzheimer's Disease Neuroimaging Initiative Whole-brain modeling of the differential influences of amyloid-beta and tau in alzheimer's disease.** *Alzheimer's Research & Therapy* **15**:210 [Google Scholar](#)
- [62] Proix Timothée, Jirsa Viktor K, Bartolomei Fabrice, Guye Maxime, Truccolo Wilson (2018) **Predicting the spatiotemporal diversity of seizure propagation and termination in human focal epilepsy** *Nature Communications* **9**:1088 [Google Scholar](#)
- [63] Cabral Joana, Castaldo Francesca, Vohryzek Jakub, Litvak Vladimir, Bick Christian, Lambiotte Renaud, Friston Karl, Kringelbach Morten L, Deco Gustavo (2022) **Metastable oscillatory modes emerge from synchronization in the brain spacetime connectome** *Communications Physics* **5**:1–13 [Google Scholar](#)
- [64] Liu Yuanzhe, Seguin Caio, Mansour Sina, Oldham Stuart, Betzel Richard, Di Biase Maria A, Zalesky Andrew (2023) **Parameter estimation for connectome generative models:**

Accuracy, reliability, and a fast parameter fitting method *Neuroimage* **270** [Google Scholar](#)

- [65] Svensson Carl-Magnus, Coombes Stephen, Peirce Jonathan Westley (2012) **Using Evolutionary Algorithms for Fitting High-Dimensional Models to Neuronal Data** *Neuroinformatics* **10**:199–218 [Google Scholar](#)
- [66] Hashemi Meysam, Hutt Axel, Buhry Laure, Sleight Jamie (2018) **Optimal model parameter estimation from eeg power spectrum features observed during general anesthesia** *Neuroinformatics* **16**:231–251 [Google Scholar](#)
- [67] Hashemi Meysam, Vattikonda Anirudh N, Sip Viktor, Diaz-Pier Sandra, Peyser Alexander, Wang Huifang, Guye Maxime, Bartolomei Fabrice, Woodman Marmaduke M, Jirsa Viktor K (2021) **On the influence of prior information evaluated by fully bayesian criteria in a personalized whole-brain model of epilepsy spread** *PLoS computational biology* **17**:e1009129 [Google Scholar](#)
- [68] Hashemi Meysam, Vattikonda Anirudh N, Jha Jayant, Sip Viktor, Woodman Marmaduke M, Bartolomei Fabrice, Jirsa Viktor K (2023) **Amortized bayesian inference on generative dynamical network models of epilepsy using deep neural density estimators** *Neural Networks* **163**:178–194 [Google Scholar](#)
- [69] Hashemi Meysam, Ziaemehr Abolfazl, Woodman Marmaduke M, Fousek Jan, Petkoski Spase, Jirsa Viktor K (2024) **Simulation-based inference on virtual brain models of disorders** *Machine Learning: Science and Technology* **5** [Google Scholar](#)
- [70] Cranmer Kyle, Brehmer Johann, Louppe Gilles (2020) **The frontier of simulation-based inference** *Proceedings of the National Academy of Sciences* **117**:30055–30062 [Google Scholar](#)
- [71] Gonçalves Pedro J, Lueckmann Jan-Matthis, Deistler Michael, Nonnenmacher Marcel, Öcal Kaan, Bassetto Giacomo, Chintaluri Chaitanya, Podlaski William F, Haddad Sara A, Vogels Tim P, et al. (2020) **Training deep neural density estimators to identify mechanistic models of neural dynamics** *eLife* **9**:e56261 <https://doi.org/10.7554/eLife.56261> | [Google Scholar](#)
- [72] Gelman Andrew, Robert Christian, Chopin Nicolas, Rousseau Judith (1995) **Bayesian Data Analysis** CRC Press [Google Scholar](#)
- [73] Gershman Samuel, Goodman Noah (2014) **Amortized inference in probabilistic reasoning** In: *Proceedings of the annual meeting of the cognitive science society* [Google Scholar](#)
- [74] Betancourt M., Girolami M. (2013) **Hamiltonian monte carlo for hierarchical models** *arXiv* :1312.0906 [Google Scholar](#)
- [75] Betancourt M., Byrne S., Livingstone S., Girolami M. (2014) **The geometric foundations of hamiltonian monte carlo** *arXiv* :1410.5110 [Google Scholar](#)
- [76] Hashemi Meysam, Vattikonda AN, Sip Viktor, Guye Maxime, Bartolomei Fabrice, Woodman Michael Marmaduke, Jirsa Viktor K (2020) **The Bayesian virtual epileptic patient: A probabilistic framework designed to infer the spatial map of epileptogenicity in a personalized large-scale brain model of epilepsy spread** *NeuroImage* **217** [Google Scholar](#)
- [77] Sisson Scott A, Fan Yanan, Tanaka Mark M (2007) **Sequential monte carlo without likelihoods** *Proceedings of the National Academy of Sciences* **104**:1760–1765 [Google Scholar](#)

- [78] Beaumont Mark A, Cornuet Jean-Marie, Marin Jean-Michel, Robert Christian P (2009) **Adaptive approximate bayesian computation** *Biometrika* **96**:983–990 [Google Scholar](#)
- [79] Papamakarios George, Pavlakou Theo, Murray Iain (2017) **Masked autoregressive flow for density estimation** *Advances in Neural Information Processing Systems* [Google Scholar](#)
- [80] Durkan Conor, Bekasov Artur, Murray Iain, Papamakarios George (2019) **Neural spline flows** *Advances in Neural Information Processing Systems* **32**:7511–7522 [Google Scholar](#)
- [81] Baldy Nina, Breyton Martin, Woodman Marmaduke M, Jirsa Viktor K, Hashemi Meysam (2024) **Inference on the macroscopic dynamics of spiking neurons** *Neural Computation, pages :1–43* [Google Scholar](#)
- [82] Jansen B.H., Rit V.G. (1995) **Electroencephalogram and visual evoked potential generation in a mathematical model of coupled cortical columns** *Biol. Cybern* **73**:357–366 [Google Scholar](#)
- [83] David Olivier, Friston Karl J. (2003) **A neural mass model for meg/eeg:: coupling and neuronal dynamics** *NeuroImage* **20**:1743–1755 [Google Scholar](#)
- [84] Selivanov Anton A, Lehnert Judith, Dahms Thomas, Hövel Philipp, Fradkov Alexander L, Schöll Eckehard (2012) **Adaptive synchronization in delay-coupled networks of stuart-landau oscillators** *Physical Review E-Statistical, Nonlinear, and Soft Matter Physics* **85**:016201 [Google Scholar](#)
- [85] Wong Kong-Fatt, Wang Xiao-Jing (2006) **A recurrent network mechanism of time integration in perceptual decisions** *Journal of Neuroscience* **26**:1314–1328 [Google Scholar](#)
- [86] Deco Gustavo, Ponce-Alvarez Adrián, Mantini Dante, Romani Gian Luca, Hagmann Patric, Corbetta Maurizio (2013) **Resting-state functional connectivity emerges from structurally and dynamically shaped slow linear fluctuations** *Journal of Neuroscience* **33**:11239–11252 [Google Scholar](#)
- [87] Duchet Benoit, Ghezzi Filippo, Weerasinghe Gihan, Tinkhauser Gerd, Kühn Andrea A, Brown Peter, Bick Christian, Bogacz Rafal (2021) **Average beta burst duration profiles provide a signature of dynamical changes between the on and off medication states in parkinson's disease** *PLoS computational biology* **17**:e1009116 [Google Scholar](#)
- [88] Sermon James J, Olaru Maria, Anso Juan, Cernera Stephanie, Little Simon, Shcherbakova Maria, Bogacz Rafal, Starr Philip A, Denison Timothy, Duchet Benoit (2023) **Sub-harmonic entrainment of cortical gamma oscillations to deep brain stimulation in parkinson's disease: model based predictions and validation in three human subjects** *Brain Stimulation* **16**:1412–1424 [Google Scholar](#)
- [89] Pavlides Alex, John Hogan S, Bogacz Rafal (2015) **Computational models describing possible mechanisms for generation of excessive beta oscillations in parkinson's disease** *PLoS computational biology* **11**:e1004609 [Google Scholar](#)
- [90] Wei Wei, Rubin Jonathan E, Wang Xiao-Jing (2015) **Role of the indirect pathway of the basal ganglia in perceptual decision making** *Journal of Neuroscience* **35**:4052–4064 [Google Scholar](#)
- [91] Jansen Ben H, Rit Vincent G (1995) **Electroencephalogram and visual evoked potential generation in a mathematical model of coupled cortical columns** *Biological cybernetics* **73**:357–366 [Google Scholar](#)

- [92] David Olivier, Kiebel Stefan J., Harrison Lee M., Mattout Jérémie, Kilner James M., Friston Karl J. (2006) **Dynamic causal modeling of evoked responses in eeg and meg** *NeuroImage* **30**:1255–1272 [Google Scholar](#)
- [93] Moran R.J., Kiebel S.J., Stephan K.E., Reilly R.B., Daunizeau J., Friston K.J. (2007) **A neural mass model of spectral responses in electrophysiology** *NeuroImage* **37**:706–720 [Google Scholar](#)
- [94] Wendling Fabrice, Bartolomei Fabrice, Bellanger Jean-Jcques, Chauvel Patrick (2001) **Interpretation of interdependencies in epileptic signals using a macroscopic physiological model of the eeg** *Clinical neurophysiology* **112**:1201–1218 [Google Scholar](#)
- [95] Kazemi Sheida, Jamali Yousef (2022) **On the influence of input triggering on the dynamics of the jansen-rit oscillators network** *arXiv* :2202.06634 [Google Scholar](#)
- [96] Deco Gustavo, Kringelbach Morten L, Jirsa Viktor K, Ritter Petra (2017) **The dynamics of resting fluctuations in the brain: metastability and its dynamical cortical core** *Scientific reports* **7**:2017 [Google Scholar](#)
- [97] Petkoski Spase, Jirsa Viktor K (2019) **Transmission time delays organize the brain network synchronization** *Philosophical Transactions of the Royal Society A* **377**:20180132 [Google Scholar](#)
- [98] Lemaréchal Jean-Didier, Jedynak Maciej, Trebaul Lena, Boyer Anthony, Tadel François, Bhattacharjee Manik, Deman Pierre, Tuyisenge Viateur, Ayoubian Leila, Hugues Etienne, et al. (2022) **A brain atlas of axonal and synaptic delays based on modelling of cortico-cortical evoked potentials** *Brain* **145**:1653–1667 [Google Scholar](#)
- [99] Sorrentino Pierpaolo, Petkoski Spase, Sparaco Maddalena, Troisi Lopez E, Signoriello Elisabetta, Baseline Fabio, Bonavita Simona, Pirozzi Maria Agnese, Quarantelli Mario, Sorrentino Giuseppe, et al. (2022) **Whole-brain propagation delays in multiple sclerosis, a combined tractography-magnetoencephalography study** *Journal of Neuroscience* **42**:8807–8816 [Google Scholar](#)
- [100] Funk Agnes P, Epstein Charles M (2004) **Natural rhythm: evidence for occult 40 hz gamma oscillation in resting motor cortex** *Neuroscience letters* **371**:181–184 [Google Scholar](#)
- [101] Buzsáki György, Wang Xiao-Jing (2012) **Mechanisms of gamma oscillations** *Annual review of neuroscience* **35**:203–225 [Google Scholar](#)
- [102] Schnitzler Alfons, Gross Joachim (2005) **Normal and pathological oscillatory communication in the brain** *Nature reviews neuroscience* **6**:285–296 [Google Scholar](#)
- [103] Saggio Maria Luisa, Crisp Dakota, Scott Jared M, Karoly Philippa, Kuhlmann Levin, Nakatani Mitsuyoshi, Murai Tomohiko, DÄ¼mpelmann Matthias, Schulze-Bonhage Andreas, Ikeda Akio, Cook Mark, Gliske Stephen V, Lin Jack, Bernard Christophe, Jirsa Viktor, Stacey William C (2020) **A taxonomy of seizure dynamotypes** *eLife* **9**:e55632 <https://doi.org/10.7554/eLife.55632> | [Google Scholar](#)
- [104] Haken Herman (1977) **Synergetics** *Physics Bulletin* **28**:412 [Google Scholar](#)
- [105] Jirsa Viktor K, Haken Hermann (1997) **A derivation of a macroscopic field theory of the brain from the quasi-microscopic neural dynamics** *Physica D: Nonlinear Phenomena* **99**:503–526 [Google Scholar](#)

- [106] Proix Timothée, Bartolomei Fabrice, Chauvel Patrick, Bernard Christophe, Jirsa Viktor K. (2014) **Permittivity coupling across brain regions determines seizure recruitment in partial epilepsy** *Journal of Neuroscience* **34**:15009–15021 [Google Scholar](#)
- [107] McIntosh Anthony R., Jirsa Viktor K. (2019) **The hidden repertoire of brain dynamics and dysfunction** *Network Neuroscience* **3**:994–1008 [Google Scholar](#)
- [108] Byrne Áine, O’Dea Reuben D, Forrester Michael, Ross James, Coombes Stephen (2020) **Next-generation neural mass and field modeling** *Journal of neurophysiology* **123**:726–742 [Google Scholar](#)
- [109] Rabuffo Giovanni, Fousek Jan, Bernard Christophe, Jirsa Viktor (2021) **Neuronal cascades shape whole-brain functional dynamics at rest** *ENeuro* **8** [Google Scholar](#)
- [110] Fousek Jan, Rabuffo Giovanni, Gudibanda Kashyap, Sheheitli Hiba, Jirsa Viktor, Petkoski Spase (2022) **The structured flow on the brain’s resting state manifold** *bioRxiv* [Google Scholar](#)
- [111] Breyton M, Fousek J, Rabuffo G, Sorrentino P, Kusch L, Massimini M, Petkoski S, Jirsa V (2023) **Spatiotemporal brain complexity quantifies consciousness outside of perturbation paradigms** *bioRxiv* [Google Scholar](#)
- [112] Fousek Jan, Rabuffo Giovanni, Gudibanda Kashyap, Sheheitli Hiba, Petkoski Spase, Jirsa Viktor (2024) **Symmetry breaking organizes the brain’s resting state manifold** *Scientific Reports* **14**:31970 [Google Scholar](#)
- [113] Friston Karl J, Mechelli Andrea, Turner Robert, Price Cathy J (2000) **Nonlinear responses in fmri: the balloon model, volterra kernels, and other hemodynamics** *NeuroImage* **12**:466–477 [Google Scholar](#)
- [114] Hansen Enrique C.A., Battaglia Demian, Spiegler Andreas, Deco Gustavo, Jirsa Viktor K. (2015) **Functional connectivity dynamics: Modeling the switching behavior of the resting state** *NeuroImage* **105**:525–535 [Google Scholar](#)
- [115] Deco Gustavo, Kringelbach Morten L, Arnatkeviciute Aurina, Oldham Stuart, Sabaroedin Kristina, Rogasch Nigel C, Aquino Kevin M, Fornito Alex (2021) **Dynamical consequences of regional heterogeneity in the brain’s transcriptional landscape** *Science Advances* **7**:eabf4752 [Google Scholar](#)
- [116] Monteverdi Anita, Palesi Fulvia, Schirner Michael, Argentino Francesca, Merante Mariateresa, Redolfi Alberto, Conca Francesca, Mazzocchi Laura, Cappa Stefano F, Ramusino Matteo Cotta, et al. (2023) **Virtual brain simulations reveal network-specific parameters in neurodegenerative dementias** *Frontiers in Aging Neuroscience* **15**:1204134 [Google Scholar](#)
- [117] Klein Pedro Costa, Ettinger Ulrich, Schirner Michael, Ritter Petra, Rujescu Dan, Falkai Peter, Koutsouleris Nikolaos, Kambeitz-Ilankovic Lana, Kambeitz Joseph (2021) **Brain network simulations indicate effects of neuregulin-1 genotype on excitation-inhibition balance in cortical dynamics** *Cerebral Cortex* **31**:2013–2025 [Google Scholar](#)
- [118] Klein Pedro Costa, Ettinger Ulrich, Schirner Michael, Ritter Petra, Rujescu Dan, Falkai Peter, Koutsouleris Nikolaos, Kambeitz-Ilankovic Lana, Kambeitz Joseph (2021) **Brain network simulations indicate effects of neuregulin-1 genotype on excitation-inhibition balance in cortical dynamics** *Cerebral Cortex* **31**:2013–2025 [Google Scholar](#)

- [119] Glasser Matthew F, Van Essen David C (2011) **Mapping human cortical areas in vivo based on myelin content as revealed by t1-and t2-weighted mri** *Journal of neuroscience* **31**:11597–11616 [Google Scholar](#)
- [120] Stephan Klaas Enno, Weiskopf Nikolaus, Drysdale Peter M, Robinson Peter A, Friston Karl J (2007) **Comparing hemodynamic models with dcm** *Neuroimage* **38**:387–401 [Google Scholar](#)
- [121] Stephan Klaas Enno, Kasper Lars, Harrison Lee M, Daunizeau Jean, den Ouden Hanneke EM, Breakspear Michael, Friston Karl J (2008) **Nonlinear dynamic causal models for fmri** *Neuroimage* **42**:649–662 [Google Scholar](#)
- [122] van de Schoot Rens, Depaoli Sarah, King Ruth, Kramer Bianca, Mörtens Kaspar, Tadesse Mahlet G, Vannucci Marina, Gelman Andrew, Veen Duco, Willemsen Joukje, et al. (2021) **Bayesian statistics and modelling** *Nature Reviews Methods Primers* **1**:1–26 [Google Scholar](#)
- [123] Jha Jayant, Hashemi Meysam, Vattikonda Anirudh Nihalani, Wang Huifang, Jirsa Viktor (2022) **Fully bayesian estimation of virtual brain parameters with self-tuning hamiltonian monte carlo** *Machine Learning: Science and Technology* **3**:035016 [Google Scholar](#)
- [124] Papamakarios George, Sterratt David, Murray Iain (2019) **Sequential neural likelihood: Fast likelihood-free inference with autoregressive flows** In: *The 22nd International Conference on Artificial Intelligence and Statistics* PMLR pp. 837–848 [Google Scholar](#)
- [125] Greenberg David, Nonnenmacher Marcel, Macke Jakob (2019) **Automatic posterior transformation for likelihood-free inference** In: *International Conference on Machine Learning* PMLR pp. 2404–2414 [Google Scholar](#)
- [126] Brehmer Johann, Louppe Gilles, Pavez Juan, Cranmer Kyle (2020) **Mining gold from implicit models to improve likelihood-free inference** *Proceedings of the National Academy of Sciences* **117**:5242–5249 [Google Scholar](#)
- [127] Rezende Danilo, Mohamed Shakir (2015) **Variational inference with normalizing flows** In: *International conference on machine learning (ICML)* PMLR pp. 1530–1538 [Google Scholar](#)
- [128] Papamakarios George, Nalisnick Eric, Rezende Danilo Jimenez, Mohamed Shakir, Lakshminarayanan Balaji (2019) **Normalizing flows for probabilistic modeling and inference** *arXiv* [Google Scholar](#)
- [129] Kobzyev Ivan, Prince Simon, Brubaker Marcus (2020) **Normalizing flows: An introduction and review of current methods** *IEEE Transactions on Pattern Analysis and Machine Intelligence* [Google Scholar](#)
- [130] Cakan Caglar, Jajcay Nikola (2021) **and Klaus Obermayer. neurolib: A simulation framework for whole-brain neural mass modeling** *Cognitive Computation* [Google Scholar](#)
- [131] Stimberg Marcel, Brette Romain, Goodman Dan FM (2019) **Brian 2, an intuitive and efficient neural simulator** *eLife* **8**:e47314 <https://doi.org/10.7554/eLife.47314> | [Google Scholar](#)
- [132] Wang Chaoming, Zhang Tianqiu, Chen Xiaoyu, He Sichao, Li Shangyang, Wu Si (2023) **Brainpy, a flexible, integrative, efficient, and extensible framework for general-purpose brain dynamics programming** *eLife* **12**:e86365 <https://doi.org/10.7554/eLife.86365> | [Google Scholar](#)
- [133] Barandas Marília, Folgado Duarte, Fernandes Letícia, Santos Sara, Abreu Mariana, Bota Patrícia, Liu Hui, Schultz Tanja, Gamboa Hugo (2020) **Tsfel: Time series feature extraction library**

- [134] Cliff Oliver M, Bryant Annie G, Lizier Joseph T, Tsuchiya Naotsugu, Fulcher Ben D (2023) **Unifying pairwise interactions in complex dynamics** *Nature Computational Science* **3**:883–893 [Google Scholar](#)
- [135] Fulcher Ben D, Jones Nick S (2017) **hctsa: A computational framework for automated time-series phenotyping using massive feature extraction** *Cell systems* **5**:527–531 [Google Scholar](#)
- [136] Pedregosa F., Varoquaux G., Gramfort A., Michel V., Thirion B., Grisel O., Blondel M., Prettenhofer P., Weiss R., Dubourg V., Vanderplas J., Passos A., Cournapeau D., Brucher M., Perrot M., Duchesnay E. (2011) **Scikit-learn: Machine learning in Python** *Journal of Machine Learning Research* **12**:2825–2830 [Google Scholar](#)
- [137] Lubba Carl H, Sethi Sarab S, Knaute Philip, Schultz Simon R, Fulcher Ben D, Jones Nick S (2019) **catch22: Canonical time-series characteristics: Selected through highly comparative time-series analysis** *Data Mining and Knowledge Discovery* **33**:1821–1852 [Google Scholar](#)
- [138] Triebkorn Paul, Stefanovski Leon, Dhindsa Kiret, Cortes Margarita-Arimatea Diaz-, Bey Patrik, Bülau Konstantin, Pai Roopa, Spiegler Andreas, Solodkin Ana, Jirsa Viktor, et al. (2022) **Brain simulation augments machine-learning- based classification of dementia** *Alzheimer's & Dementia: Translational Research & Clinical Interventions* **8**:e12303 [Google Scholar](#)
- [139] Stefanovski Leon, Triebkorn Paul, Spiegler Andreas, Cortes Margarita-Arimatea Diaz-, Solodkin Ana, Jirsa Viktor, McIntosh Anthony Randal, Ritter Petra (2019) **and Alzheimer's Disease Neuroimaging Initiative Linking molecular pathways and large-scale computational modeling to assess candidate disease mechanisms and pharmacodynamics in alzheimer's disease.** *Frontiers in computational neuroscience* **13**:54 [Google Scholar](#)
- [140] Beaumont Mark A., Zhang Wenyang, Balding David J. (2002) **Approximate bayesian computation in population genetics** *Genetics* **162**:2025–2035 [Google Scholar](#)
- [141] Beaumont Mark A (2010) **Approximate bayesian computation in evolution and ecology** *Annual review of ecology, evolution, and systematics* **41**:379–406 [Google Scholar](#)
- [142] Sisson S.A., Fan Y., Beaumont M. (2018) **Handbook of Approximate Bayesian Computation** Chapman & Hall/CRC handbooks of modern statistical methods. CRC Press, Taylor & Francis Group [Google Scholar](#)
- [143] Baldy Nina, Simon Nicolas, Jirsa Viktor, Hashemi Meysam (2023) **Hierarchical bayesian pharmacometrics analysis of baclofen for alcohol use disorder** *Machine Learning: Science and Technology* [Google Scholar](#)
- [144] Lueckmann Jan-Matthis, Bassetto Giacomo, Karaletsos Theofanis, Macke Jakob H (2019) **Likelihood-free inference with emulator networks** In: *Symposium on Advances in Approximate Bayesian Inference*, pages PMLR pp. 32–53 [Google Scholar](#)
- [145] Durkan Conor, Murray Iain, Papamakarios George (2020) **On contrastive learning for likelihood-free inference** In: *International Conference on Machine Learning* PMLR pp. 2771–2781 [Google Scholar](#)
- [146] Lueckmann Jan-Matthis, Boelts Jan, Greenberg David, Goncalves Pedro, Macke Jakob (2021) **Benchmarking simulation-based inference** In: *International Conference on Artificial Intelligence and Statistics* PMLR pp. 343–351 [Google Scholar](#)

- [147] Penny W.D., Stephan K.E., Mechelli A., Friston K.J. (2004) **Comparing dynamic causal models** *NeuroImage* **22**:1157–1172 [Google Scholar](#)
- [148] Penny W.D. (2012) **Comparing dynamic causal models using aic, bic and free energy** *NeuroImage* **59**:319–330 [Google Scholar](#)
- [149] Kingma Durk P, Mohamed Shakir, Rezende Danilo Jimenez, Welling Max (2014) **Semi-supervised learning with deep generative models** *Advances in neural information processing systems* **27** [Google Scholar](#)
- [150] Doersch Carl (2016) **Tutorial on variational autoencoders** *arXiv* :1606.05908 [Google Scholar](#)
- [151] Sip Viktor, Hashemi Meysam, Dickscheid Timo, Amunts Katrin, Petkoski Spase, Jirsa Viktor (2023) **Characterization of regional differences in resting-state fmri with a data-driven network model of brain dynamics** *Science Advances* **9**:eabq7547 [Google Scholar](#)
- [152] Goodfellow Ian, Pouget-Abadie Jean, Mirza Mehdi, Xu Bing, Farley David Warde-, Ozair Sherjil, Courville Aaron, Bengio Yoshua (2014) **Generative adversarial nets** *Advances in neural information processing systems* **27** [Google Scholar](#)
- [153] Creswell Antonia, White Tom, Dumoulin Vincent, Arulkumaran Kai, Sengupta Biswa, Bharath Anil A (2018) **Generative adversarial networks: An overview** *IEEE signal processing magazine* **35**:53–65 [Google Scholar](#)
- [154] Liu Qiao, Xu Jiaze, Jiang Rui, Wong Wing Hung (2021) **Density estimation using deep generative neural networks** *Proceedings of the National Academy of Sciences* **118**:e2101344118 [Google Scholar](#)

Author information

Abolfazl Ziaemehr

Aix Marseille Univ, INSERM, INS, Inst Neurosci Syst, Marseille, France
ORCID iD: [0000-0002-4696-9947](#)

For correspondence: abolfazl.ziaee-mehr@univ-amu.fr

Marmaduke Woodman

Aix Marseille Univ, INSERM, INS, Inst Neurosci Syst, Marseille, France
ORCID iD: [0000-0002-8410-4581](#)

Lia Domide

Codemart, Cluj-Napoca, Romania
ORCID iD: [0000-0002-4822-2046](#)

Spase Petkoski

Aix Marseille Univ, INSERM, INS, Inst Neurosci Syst, Marseille, France
ORCID iD: [0000-0003-4540-6293](#)

Viktor Jirsa[†]

Aix Marseille Univ, INSERM, INS, Inst Neurosci Syst, Marseille, France

ORCID iD: [0000-0002-8251-8860](https://orcid.org/0000-0002-8251-8860)

For correspondence: viktor.jirsa@univ-amu.fr

[†]These authors contributed equally.

Meysam Hashemi[†]

Aix Marseille Univ, INSERM, INS, Inst Neurosci Syst, Marseille, France

ORCID iD: [0000-0001-5289-9837](https://orcid.org/0000-0001-5289-9837)

For correspondence: meysam.hashemi@univ-amu.fr

[†]These authors contributed equally.

Editors

Reviewing Editor

Alex Fornito

Monash University, Clayton, Australia

Senior Editor

Andre Marquand

Radboud University Nijmegen, Nijmegen, Netherlands

Reviewer #1 (Public review):

This work provides a new Python toolkit for combining generative modeling of neural dynamics and inversion methods to infer likely model parameters that explain empirical neuroimaging data. The authors provided tests to show the toolkit's broad applicability and accuracy; hence, it will be very useful for people interested in using computational approaches to better understand the brain.

Strengths:

The work's primary strength is the tool's integrative nature, which seamlessly combines forward modelling with backward inference. This is important as available tools in the literature can only do one and not the other, which limits their accessibility to neuroscientists with limited computational expertise. Another strength of the paper is the demonstration of how the tool can be applied to a broad range of computational models popularly used in the field to interrogate diverse neuroimaging data, ensuring that the methodology is not optimal to only one model. Moreover, through extensive in-silico testing, the work provided evidence that the tool can accurately infer ground-truth parameters, which is important to ensure results from future hypothesis testing are meaningful.

Weaknesses:

Although the tool itself is the main strength of the work, the paper lacked a thorough analysis of issues concerning robustness and benchmarking relative to existing tools.

The first issue is the robustness to the choice of features to be included in the objective function. This choice significantly affects the training and changes the results, as the authors even acknowledged themselves multiple times (e.g., Page 17 last sentence of first paragraph or Page 19 first sentence of second paragraph). This brings the question of whether the

accurate results found in the various demonstrations are due to the biased selection of features (possibly from priors on what worked in previous works). The robustness of the neural estimator and the inference method to noise was also not demonstrated. This is important as most neuroimaging measurements are inherently noisy to various degrees.

The second issue is on benchmarking. Because the tool developed is, in principle, only a combination of existing tools specific to modeling or Bayesian inference, the work failed to provide a more compelling demonstration of its added value. This could have been demonstrated through appropriate benchmarking relative to existing methodologies, specifically in terms of accuracy and computational efficiency.

<https://doi.org/10.7554/eLife.106194.1.sa2>

Reviewer #2 (Public review):

Summary:

Whole-brain network modeling is a common type of dynamical systems-based method to create individualized models of brain activity incorporating subject-specific structural connectome inferred from diffusion imaging data. This type of model has often been used to infer biophysical parameters of the individual brain that cannot be directly measured using neuroimaging but may be relevant to specific cognitive functions or diseases. Here, Ziaemehr et al introduce a new toolkit, named "Virtual Brain Inference" (VBI), offering a new computational approach for estimating these parameters using Bayesian inference powered by artificial neural networks. The basic idea is to use simulated data, given known parameters, to train artificial neural networks to solve the inverse problem, namely, to infer the posterior distribution over the parameter space given data-derived features. The authors have demonstrated the utility of the toolkit using simulated data from several commonly used whole-brain network models in case studies.

Strengths:

- (1) Model inversion is an important problem in whole-brain network modeling. The toolkit presents a significant methodological step up from common practices, with the potential to broadly impact how the community infers model parameters.
- (2) Notably, the method allows the estimation of the posterior distribution of parameters instead of a point estimation, which provides information about the uncertainty of the estimation, which is generally lacking in existing methods.
- (3) The case studies were able to demonstrate the detection of degeneracy in the parameters, which is important. Degeneracy is quite common in this type of model. If not handled mindfully, they may lead to spurious or stable parameter estimation. Thus, the toolkit can potentially be used to improve feature selection or to simply indicate the uncertainty.
- (4) In principle, the posterior distribution can be directly computed given new data without doing any additional simulation, which could improve the efficiency of parameter inference on the artificial neural network if well-trained.

Weaknesses:

- (1) While the posterior estimator was trained with a large quantity of simulated data, the testing/validation is only demonstrated with a single case study (one point in parameter space) per model. This is not sufficient to demonstrate the method's accuracy and reliability, but only its feasibility. Demonstrating the accuracy and reliability of the posterior estimation in large test sets would inspire more confidence.

(2) The authors have only demonstrated validation of the method using simulated data, but not features derived from actual EEG/MEG or fMRI data. So, it is unclear if the posterior estimator, when applied to real data, would produce results as sensible as using simulated data. Human data can often look quite different from the simulated data, which may be considered out of distribution. Thus, the authors should consider using simulated test data with out-of-distribution parameters to validate the method and using real human data to demonstrate, e.g., the reliability of the method across sessions.

(3) The z-scores used to measure prediction error are generally between 1-3, which seems quite large to me. It would give readers a better sense of the utility of the method if comparisons to simpler methods, such as k-nearest neighbor methods, are provided in terms of accuracy.

(4) A lot of simulations are required to train the posterior estimator, which seems much more than existing approaches. Inferring from Figure S1, at the required order of magnitudes of the number of simulations, the simulation time could range from days to years, depending on the hardware. Although once the estimator is well-trained, the parameter inverse given new data will be very fast, it is not clear to me how often such use cases would be encountered. Because the estimator is trained based on an individual connectome, it can only be used to do parameter inversion for the same subject. Typically, we only have one session of resting state data from each participant, while longitudinal resting state data where we can assume the structural connectome remains constant, is rare. Thus, the cost-efficiency and practical utility of training such a posterior estimator remains unclear.

<https://doi.org/10.7554/eLife.106194.1.sa1>

Author response:

Public Reviews:

Reviewer #1 (Public review):

This work provides a new Python toolkit for combining generative modeling of neural dynamics and inversion methods to infer likely model parameters that explain empirical neuroimaging data. The authors provided tests to show the toolkit's broad applicability and accuracy; hence, it will be very useful for people interested in using computational approaches to better understand the brain.

Strengths:

The work's primary strength is the tool's integrative nature, which seamlessly combines forward modelling with backward inference. This is important as available tools in the literature can only do one and not the other, which limits their accessibility to neuroscientists with limited computational expertise. Another strength of the paper is the demonstration of how the tool can be applied to a broad range of computational models popularly used in the field to interrogate diverse neuroimaging data, ensuring that the methodology is not optimal to only one model. Moreover, through extensive in-silico testing, the work provided evidence that the tool can accurately infer ground-truth parameters, which is important to ensure results from future hypothesis testing are meaningful.

We are happy to hear the positive feedback on our effort to provide an open-source and widely accessible tool for both fast forward simulations and flexible model inversion, applicable across popular models of large-scale brain dynamics.

Weaknesses:

Although the tool itself is the main strength of the work, the paper lacked a thorough analysis of issues concerning robustness and benchmarking relative to existing tools.

The first issue is the robustness to the choice of features to be included in the objective function. This choice significantly affects the training and changes the results, as the authors even acknowledged themselves multiple times (e.g., Page 17 last sentence of first paragraph or Page 19 first sentence of second paragraph). This brings the question of whether the accurate results found in the various demonstrations are due to the biased selection of features (possibly from priors on what worked in previous works). The robustness of the neural estimator and the inference method to noise was also not demonstrated. This is important as most neuroimaging measurements are inherently noisy to various degrees.

The second issue is on benchmarking. Because the tool developed is, in principle, only a combination of existing tools specific to modeling or Bayesian inference, the work failed to provide a more compelling demonstration of its added value. This could have been demonstrated through appropriate benchmarking relative to existing methodologies, specifically in terms of accuracy and computational efficiency.

We fully agree with the reviewer that the VBI estimation heavily depends on the choice of data features, and this is the core of the inference procedure, not its weakness. We have demonstrated different scenarios showing how the informativeness of features (commonly used in the literature) results in varying uncertainty quantification. For instance, using summary statistics of functional connectivity (FC) and functional connectivity dynamics (FCD) matrices to estimate global coupling parameter leads to fast convergence; however, it is not sufficient to accurately estimate the whole-brain heterogeneous excitability parameter, which requires features such as statistical moments of time series. VBI provides a taxonomy of data features that users can employ to test their hypotheses. It is important to note that one major advantage of VBI is its ability to make estimation using a battery of data features, rather than relying on a limited set (such as only FC or FCD) as is often the case in the literature. In the revised version, we will elaborate further by presenting additional scenarios to demonstrate the robustness of the estimation. We will also evaluate the robustness of the neural density estimators to (dynamical/additive) noise.

More importantly, relative to benchmarking, we would like to draw attention to a key point regarding existing tools and methods. The literature often uses optimization for fitting whole-brain network models, and its limitations for reliable causal hypothesis testing have been pointed out in the Introduction/Discussion. As also noted by the reviewer under strengths, and to the best of our knowledge, there are no existing tools other than VBI that can scale and generalize to operate across whole-brain models for *Bayesian model inversion*. Previously, we developed Hamiltonian Monte Carlo (HMC) sampling for Epileptor model in epilepsy (Hashemi et al., 2020, Jha et al., 2022). This phenomenological model is very well-behaved in terms of numerical integration, gradient calculation, and dynamical system properties (Jirsa et al., 2014). However, this does not directly generalize to other models, particularly the Montbrió model for resting-state, which exhibits bistability with noise driving transitions between states. As shown in Baldy et al., 2024, even at the level of a single neural mass model (i.e., one brain region), gradient-based HMC failed to capture such switching behaviour, particularly when only one state variable (membrane potential) was observed while the other (firing rate) was missing. Our attempts to use other methods (e.g., the second-derivative-based Laplace approximation used in Dynamic Causal Modeling) also failed, due to divergence in gradient calculation. Nevertheless, reparameterization techniques (Baldy et al.,

2024) and hybrid algorithms (Gabri  et al., 2022) could offer improvements, although this remains an open problem for these classes of computational models.

In sum, for oscillatory systems, it has been shown previously that SBI approach used in VBI substantially outperforms both gradient-based and gradient-free alternative methods (Gon alves et al., 2020, Hashemi et al., 2023, Baldy et al., 2024). Importantly, for bistable systems with switching dynamics, gradient-based methods fail to converge, while gradient-free methods do not scale to the whole-brain level (Hashemi et al., 2020). Hence, the generalizability of VBI relies on the fact that neither the model nor the data features need to be differentiable. We will clarify this point in the revised version. Moreover, we will provide better explanations for some terms mentioned by the reviewer in Recommendations.

Hashemi, M., Vattikonda, A. N., Sip, V., Guye, M., Bartolomei, F., Woodman, M. M., & Jirsa, V. K. (2020). The Bayesian Virtual Epileptic Patient: A probabilistic framework designed to infer the spatial map of epileptogenicity in a personalized large-scale brain model of epilepsy spread. *NeuroImage*, 217, 116839.

Jha, J., Hashemi, M., Vattikonda, A. N., Wang, H., & Jirsa, V. (2022). Fully Bayesian estimation of virtual brain parameters with self-tuning Hamiltonian Monte Carlo. *Machine Learning: Science and Technology*, 3(3), 035016.

Jirsa, V. K., Stacey, W. C., Quilichini, P. P., Ivanov, A. I., & Bernard, C. (2014). On the nature of seizure dynamics. *Brain*, 137(8), 2210-2230.

Baldy, N., Breyton, M., Woodman, M. M., Jirsa, V. K., & Hashemi, M. (2024). Inference on the macroscopic dynamics of spiking neurons. *Neural Computation*, 36(10), 2030-2072.

Baldy, N., Woodman, M., Jirsa, V., & Hashemi, M. (2024). Dynamic Causal Modeling in Probabilistic Programming Languages. *bioRxiv*, 2024-11.

Gabri , M., Rotskoff, G. M., & Vanden-Eijnden, E. (2022). Adaptive Monte Carlo augmented with normalizing flows. *Proceedings of the National Academy of Sciences*, 119(10), e2109420119.

Gon alves, P. J., Lueckmann, J. M., Deistler, M., Nonnenmacher, M.,  cal, K., Bassetto, G., ... & Macke, J. H. (2020). Training deep neural density estimators to identify mechanistic models of neural dynamics. *eLife*, 9, e56261.

Hashemi, M., Vattikonda, A. N., Jha, J., Sip, V., Woodman, M. M., Bartolomei, F., & Jirsa, V. K. (2023). Amortized Bayesian inference on generative dynamical network models of epilepsy using deep neural density estimators. *Neural Networks*, 163, 178-194.

Reviewer #2 (Public review):

Summary:

Whole-brain network modeling is a common type of dynamical systems-based method to create individualized models of brain activity incorporating subject-specific structural connectome inferred from diffusion imaging data. This type of model has often been used to infer biophysical parameters of the individual brain that cannot be directly measured using neuroimaging but may be relevant to specific cognitive functions or diseases. Here, Ziaemehr et al introduce a new toolkit, named "Virtual Brain Inference" (VBI), offering a new computational approach for estimating these parameters using Bayesian inference powered by artificial neural networks. The basic idea is to use simulated data, given known parameters, to train artificial neural networks to solve the inverse problem, namely, to infer the posterior distribution over the parameter space given data-derived features. The authors have demonstrated the utility of the toolkit

using simulated data from several commonly used whole-brain network models in case studies.

Strengths:

(1) Model inversion is an important problem in whole-brain network modeling. The toolkit presents a significant methodological step up from common practices, with the potential to broadly impact how the community infers model parameters.

(2) Notably, the method allows the estimation of the posterior distribution of parameters instead of a point estimation, which provides information about the uncertainty of the estimation, which is generally lacking in existing methods.

(3) The case studies were able to demonstrate the detection of degeneracy in the parameters, which is important. Degeneracy is quite common in this type of model. If not handled mindfully, they may lead to spurious or stable parameter estimation. Thus, the toolkit can potentially be used to improve feature selection or to simply indicate the uncertainty.

(4) In principle, the posterior distribution can be directly computed given new data without doing any additional simulation, which could improve the efficiency of parameter inference on the artificial neural network if well-trained.

We thank the reviewer for the careful consideration of important aspects of the VBI tool, such as uncertainty quantification, degeneracy detection, parallelization, and amortization strategy.

Weaknesses:

(1) While the posterior estimator was trained with a large quantity of simulated data, the testing/validation is only demonstrated with a single case study (one point in parameter space) per model. This is not sufficient to demonstrate the method's accuracy and reliability, but only its feasibility. Demonstrating the accuracy and reliability of the posterior estimation in large test sets would inspire more confidence.

(2) The authors have only demonstrated validation of the method using simulated data, but not features derived from actual EEG/MEG or fMRI data. So, it is unclear if the posterior estimator, when applied to real data, would produce results as sensible as using simulated data. Human data can often look quite different from the simulated data, which may be considered out of distribution. Thus, the authors should consider using simulated test data with out-of-distribution parameters to validate the method and using real human data to demonstrate, e.g., the reliability of the method across sessions.

(3) The z-scores used to measure prediction error are generally between 1-3, which seems quite large to me. It would give readers a better sense of the utility of the method if comparisons to simpler methods, such as k-nearest neighbor methods, are provided in terms of accuracy.

(4) A lot of simulations are required to train the posterior estimator, which seems much more than existing approaches. Inferring from Figure S1, at the required order of magnitudes of the number of simulations, the simulation time could range from days to years, depending on the hardware. Although once the estimator is well-trained, the parameter inverse given new data will be very fast, it is not clear to me how often such use cases would be encountered. Because the estimator is trained based on an individual connectome, it can only be used to do parameter inversion for the same subject. Typically, we only have one session of resting state data from each participant, while longitudinal resting state data where we can assume the structural connectome remains

constant, is rare. Thus, the cost-efficiency and practical utility of training such a posterior estimator remains unclear.

We agree with the reviewer that it is necessary to show results on larger synthetic test sets, and we will elaborate further by presenting additional scenarios to demonstrate the robustness of the estimation. However, there are some points raised by the reviewer that we need to clarify.

The validation on empirical data was beyond the scope of this study, as it relates to model validation rather than the inversion algorithms. This is also because we aimed to avoid repetition, given that we have previously demonstrated model validation on empirical data using these techniques, for invasive sEEG (Hashemi et al., 2023), MEG (Sorrentino et al., 2024), EEG (Angiolelli et al., 2025) and fMRI (Lavanga et al., 2024, Rabuffo et al., 2025). Note that if the features of the observed data are not included during training, VBI ignores them, as it requires an invertible mapping function between parameters and data features.

We have used z-scores and posterior shrinkage to measure prediction performance, as these are Bayesian metrics that take into account the variance of both prior and posterior rather than only the mean value or thresholding for ranking of the prediction used in k-NN or confusion matrix methods. This helps avoid biased accuracy estimation, for instance, if the mean posterior is close to the true value but there is no posterior shrinkage. Although shrinkage is bounded between 0 and 1, we agree that z-scores have no upper bound for such diagnostics.

Finally, the number of required simulations depends on the dimensionality of the parameter space and the informativeness of the data features. For instance, estimating a single global scaling parameter requires around 100 simulations, whereas estimating whole-brain heterogeneous parameters requires substantially more simulations. Nevertheless, we have provided fast simulations, and one key advantage of VBI is that simulations can be run in parallel (unlike MCMC sampling, which is more limited in this regard). Hence, with commonly accessible CPUs/GPUs, the fast simulations and parallelization capabilities of the VBI tool allow us to run on the order of 1 million simulations within 2–3 days on desktops, or in less than half a day on supercomputers at cohort level, rather than over several years! It has been previously shown that the SBI method used in VBI provides an order-of-magnitude faster inversion than HMC for whole-brain epilepsy spread (Hashemi et al., 2023). Moreover, after training, the amortized strategy is critical for enabling hypothesis testing within seconds to minutes. We agree that longitudinal resting-state data under the assumption of a constant structural connectome is rare; however, this strategy is essential in brain diseases such as epilepsy, where experimental hypothesis testing is prohibitive.

We will clarify these points and better explain some terms mentioned by the reviewer in the revised manuscript.

Hashemi, M., Vattikonda, A. N., Jha, J., Sip, V., Woodman, M. M., Bartolomei, F., & Jirsa, V. K. (2023). Amortized Bayesian inference on generative dynamical network models of epilepsy using deep neural density estimators. *Neural Networks*, 163, 178-194.

Sorrentino, P., Pathak, A., Ziaemehr, A., Lopez, E. T., Cipriano, L., Romano, A., ... & Hashemi, M. (2024). The virtual multiple sclerosis patient. *Iscience*, 27(7).

Angiolelli, M., Depannemaecker, D., Agouram, H., Regis, J., Carron, R., Woodman, M., ... & Sorrentino, P. (2025). The virtual parkinsonian patient. *npj Systems Biology and Applications*, 11(1), 40.

Lavanga, M., Stumme, J., Yalcinkaya, B. H., Fousek, J., Jockwitz, C., Sheheitli, H., ... & Jirsa, V. (2023). The virtual aging brain: Causal inference supports interhemispheric dedifferentiation in healthy aging. *NeuroImage*, 283, 120403.

Rabuffo, G., Lokossou, H. A., Li, Z., Ziaee-Mehr, A., Hashemi, M., Quilichini, P. P., ... & Bernard, C. (2025). Mapping global brain reconfigurations following local targeted manipulations. *Proceedings of the National Academy of Sciences*, 122(16), e2405706122.

<https://doi.org/10.7554/eLife.106194.1.sa0>