

A: Datasheet

Algorithm: afisbiometrics_000

Developer: AFIS and Biometrics Consulting

Submission Date: 2023_06_07

Template size: 265 bytes

Template time (2.5 percentile): 650 msec

Template time (median): 651 msec

Template time (97.5 percentile): 658 msec

Investigation:

Frontal mugshot ranking 96 (out of 428) -- FNIR(1600000, 0, 1) = 0.0016 vs. lowest 0.0008 from intema_001

Mugshot webcam ranking 60 (out of 390) -- FNIR(1600000, 0, 1) = 0.0088 vs. lowest 0.0054 from sensetime_009

Mugshot profile ranking 96 (out of 359) -- FNIR(1600000, 0, 1) = 0.1249 vs. lowest 0.0517 from sensetime_009

Immigration visa-border ranking 111 (out of 317) -- FNIR(1600000, 0, 1) = 0.0030 vs. lowest 0.0006 from cloudwalk_mt_002

Immigration visa-kiosk ranking 100 (out of 261) -- FNIR(1600000, 0, 1) = 0.0756 vs. lowest 0.0387 from cloudwalk_mt_002

Identification:

Frontal mugshot ranking 183 (out of 428) -- FNIR(1600000, T, L+1) = 0.0297, FPIR=0.001000 vs. lowest 0.0011 from idemia_010


Mugshot webcam ranking 162 (out of 388) -- FNIR(1600000, T, L+1) = 0.0810, FPIR=0.001000 vs. lowest 0.0072 from sensetime_009

Mugshot profile ranking 58 (out of 358) -- FNIR(1600000, T, L+1) = 0.5187, FPIR=0.001000 vs. lowest 0.0634 from cloudwalk_mt_002

Immigration visa-border ranking 142 (out of 315) -- FNIR(1600000, T, L+1) = 0.0340, FPIR=0.001000 vs. lowest 0.0010 from cloudwalk_mt_002

Immigration visa-kiosk ranking 88 (out of 261) -- FNIR(1600000, T, L+1) = 0.1624, FPIR=0.001000 vs. lowest 0.0517 from cloudwalk_mt_002


B: Mugshot natural images, identification mode: FNIR(N, L+1, T) vs. most accurate (verigram_000)

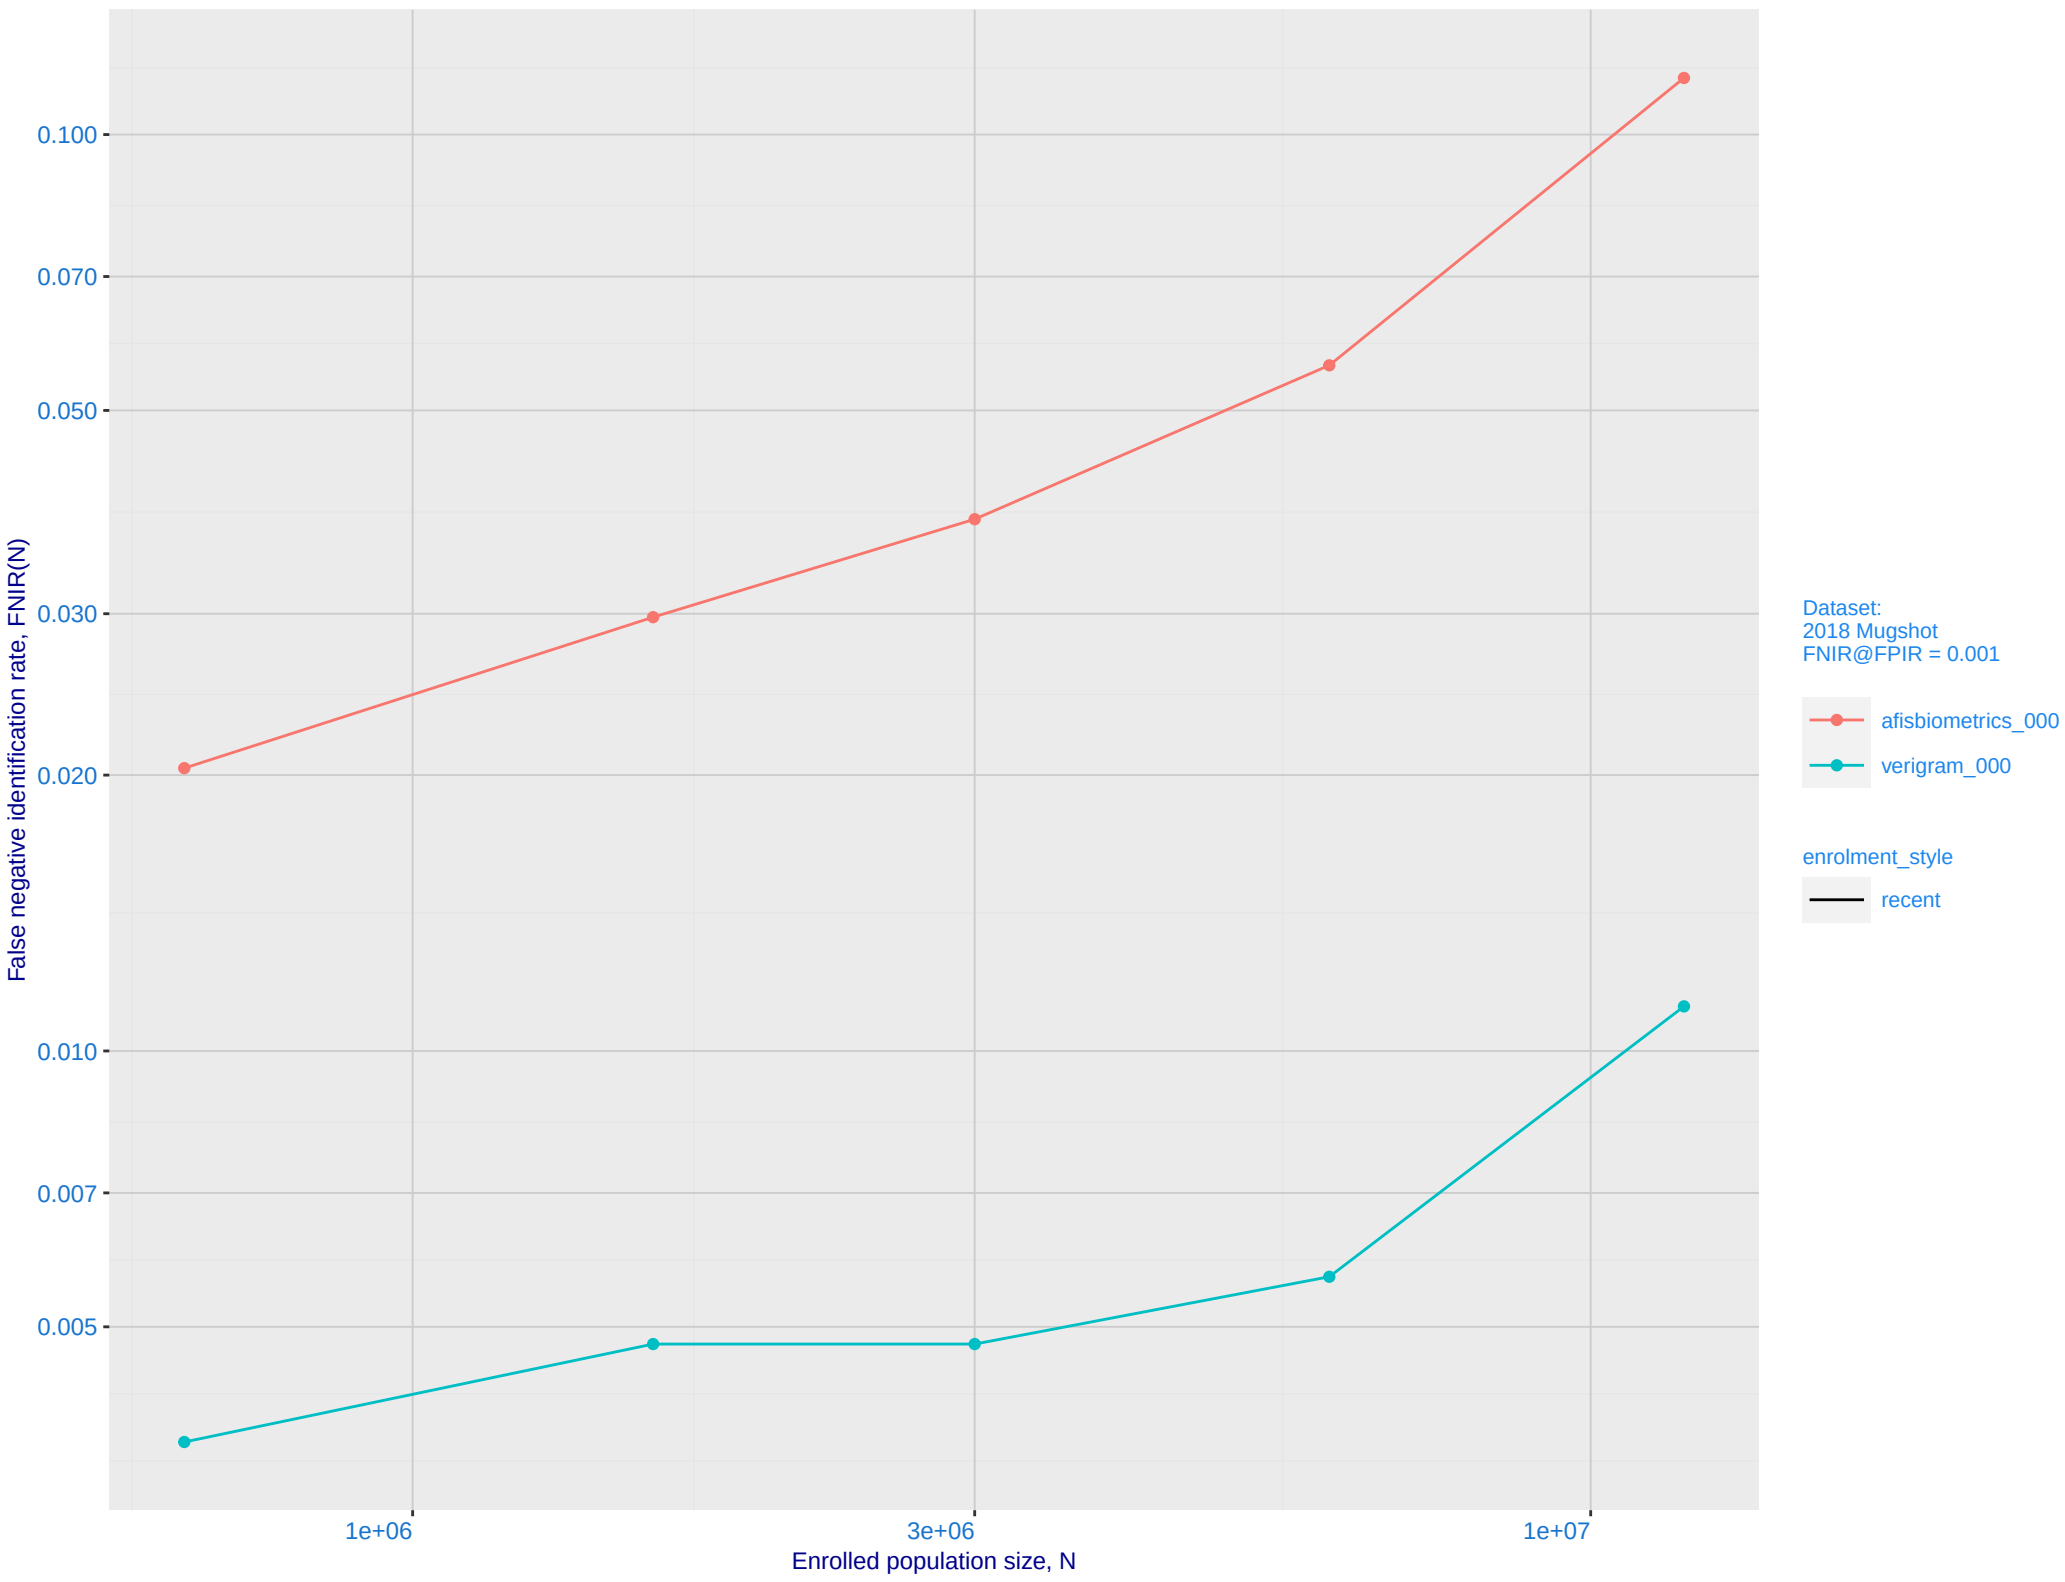


C: Evolution of accuracy for AFISBIOMETRICS algorithms on three datasets 2018 – present




D: 1:N error tradeoff by dataset and enrollment type. N = 1600000 individuals

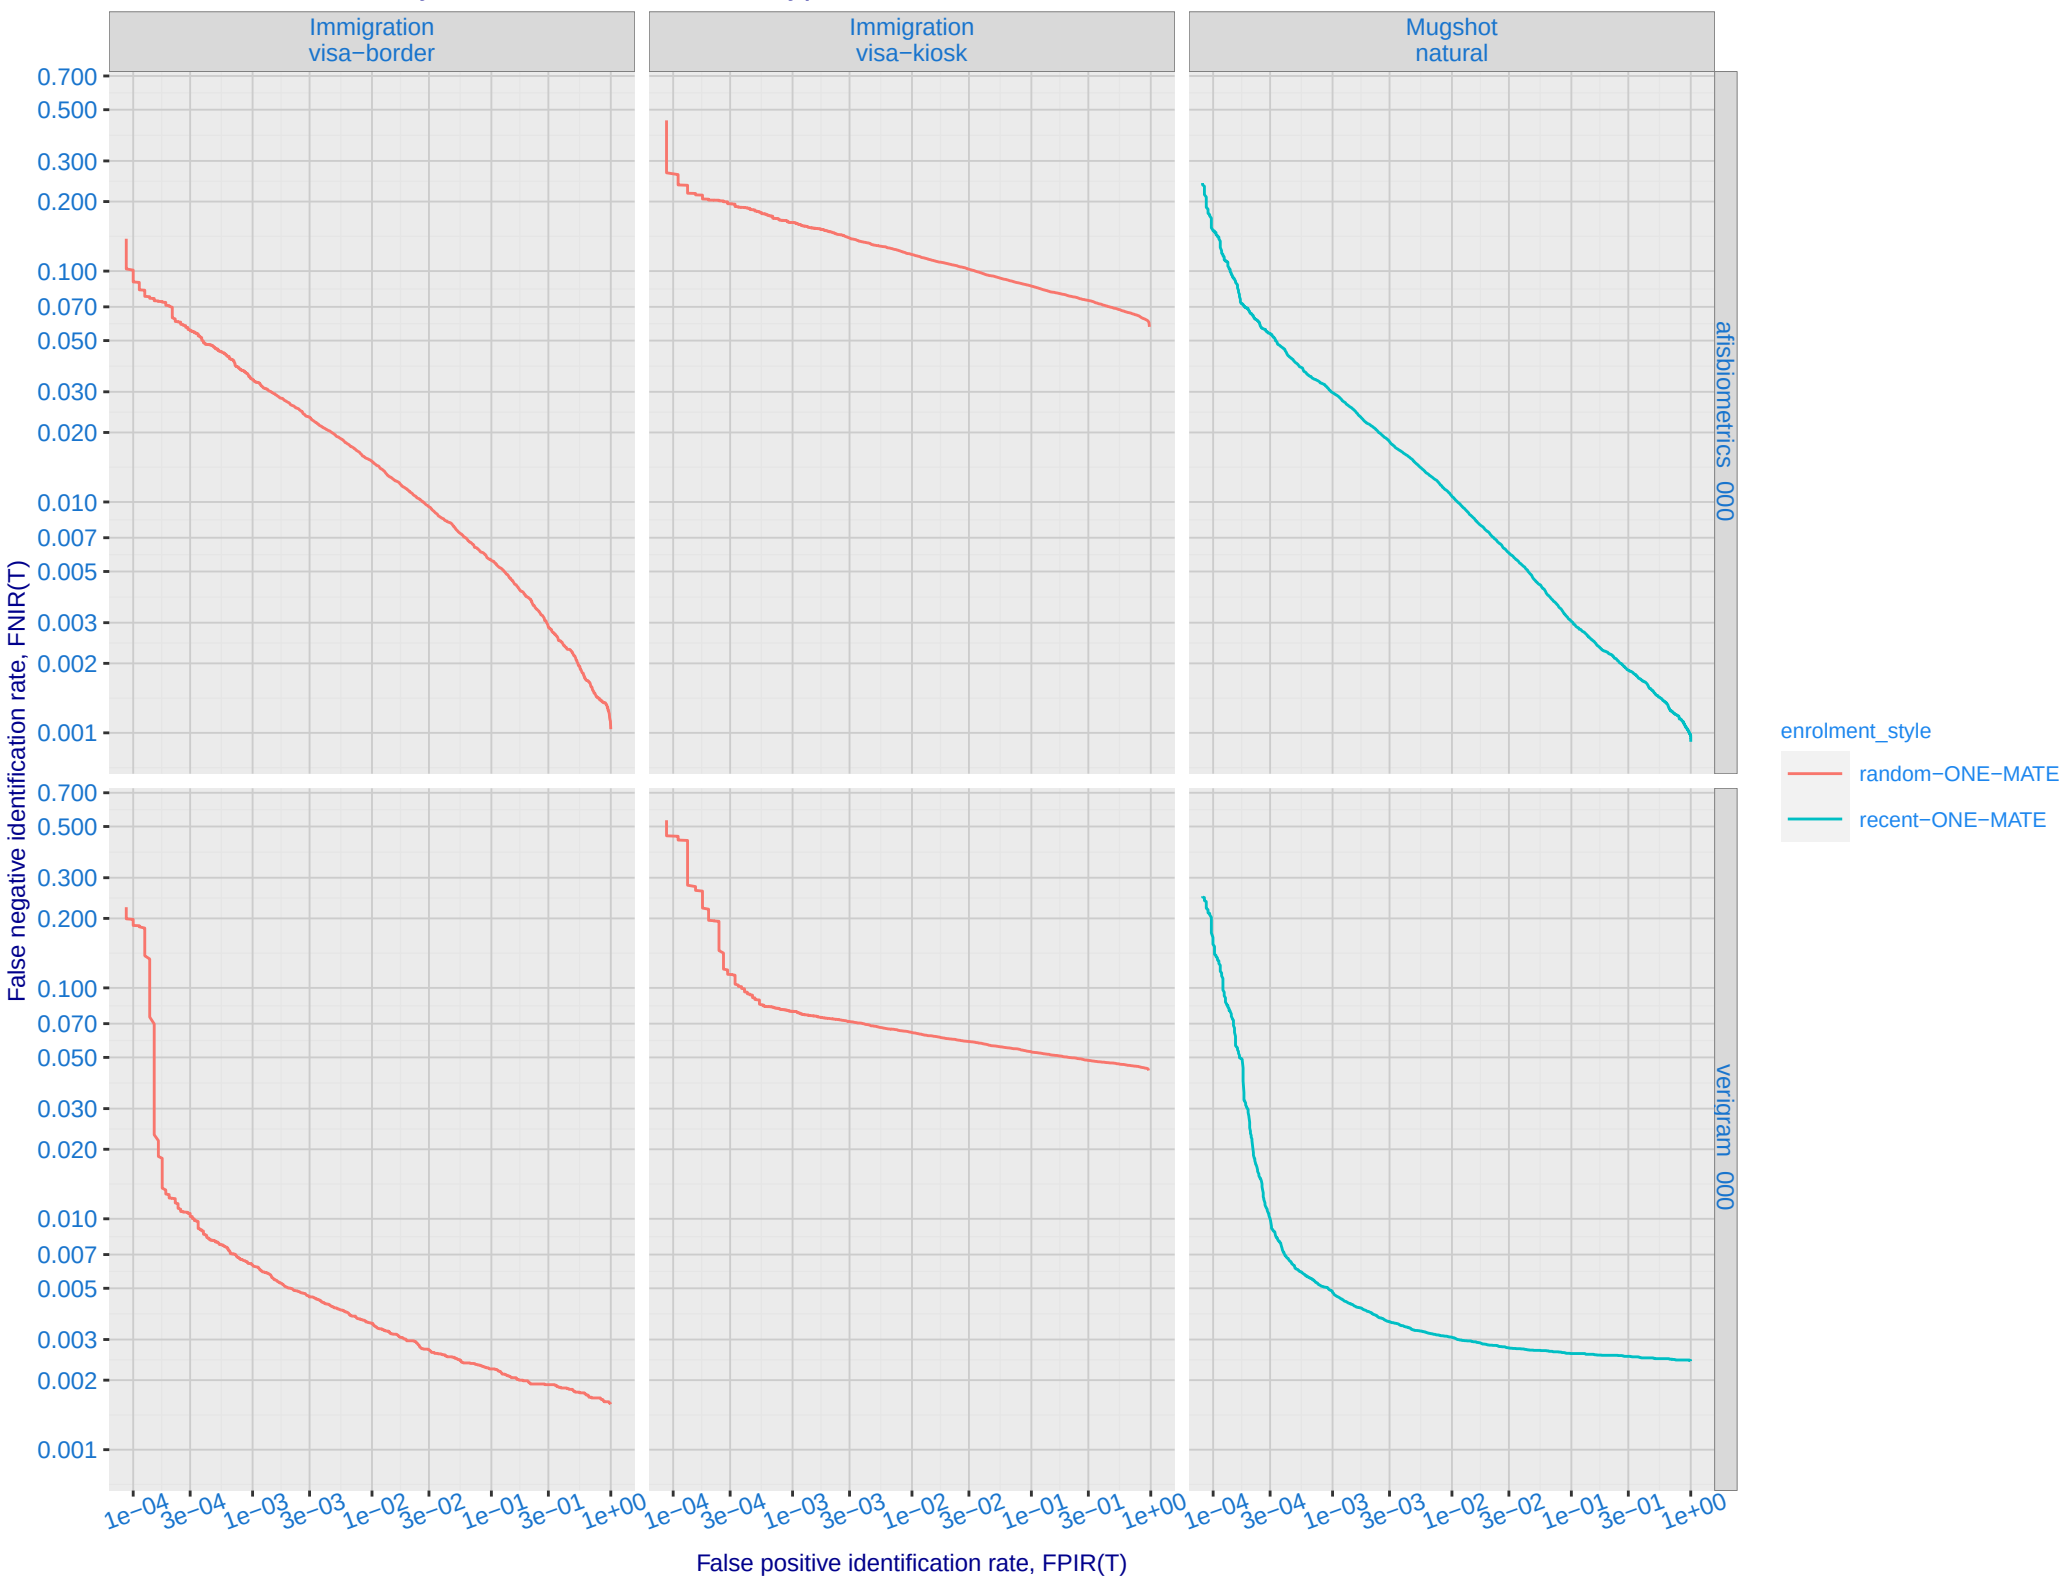

E: Dependence of error rates on T by number enrolled identities, N, for Mugshot natural images

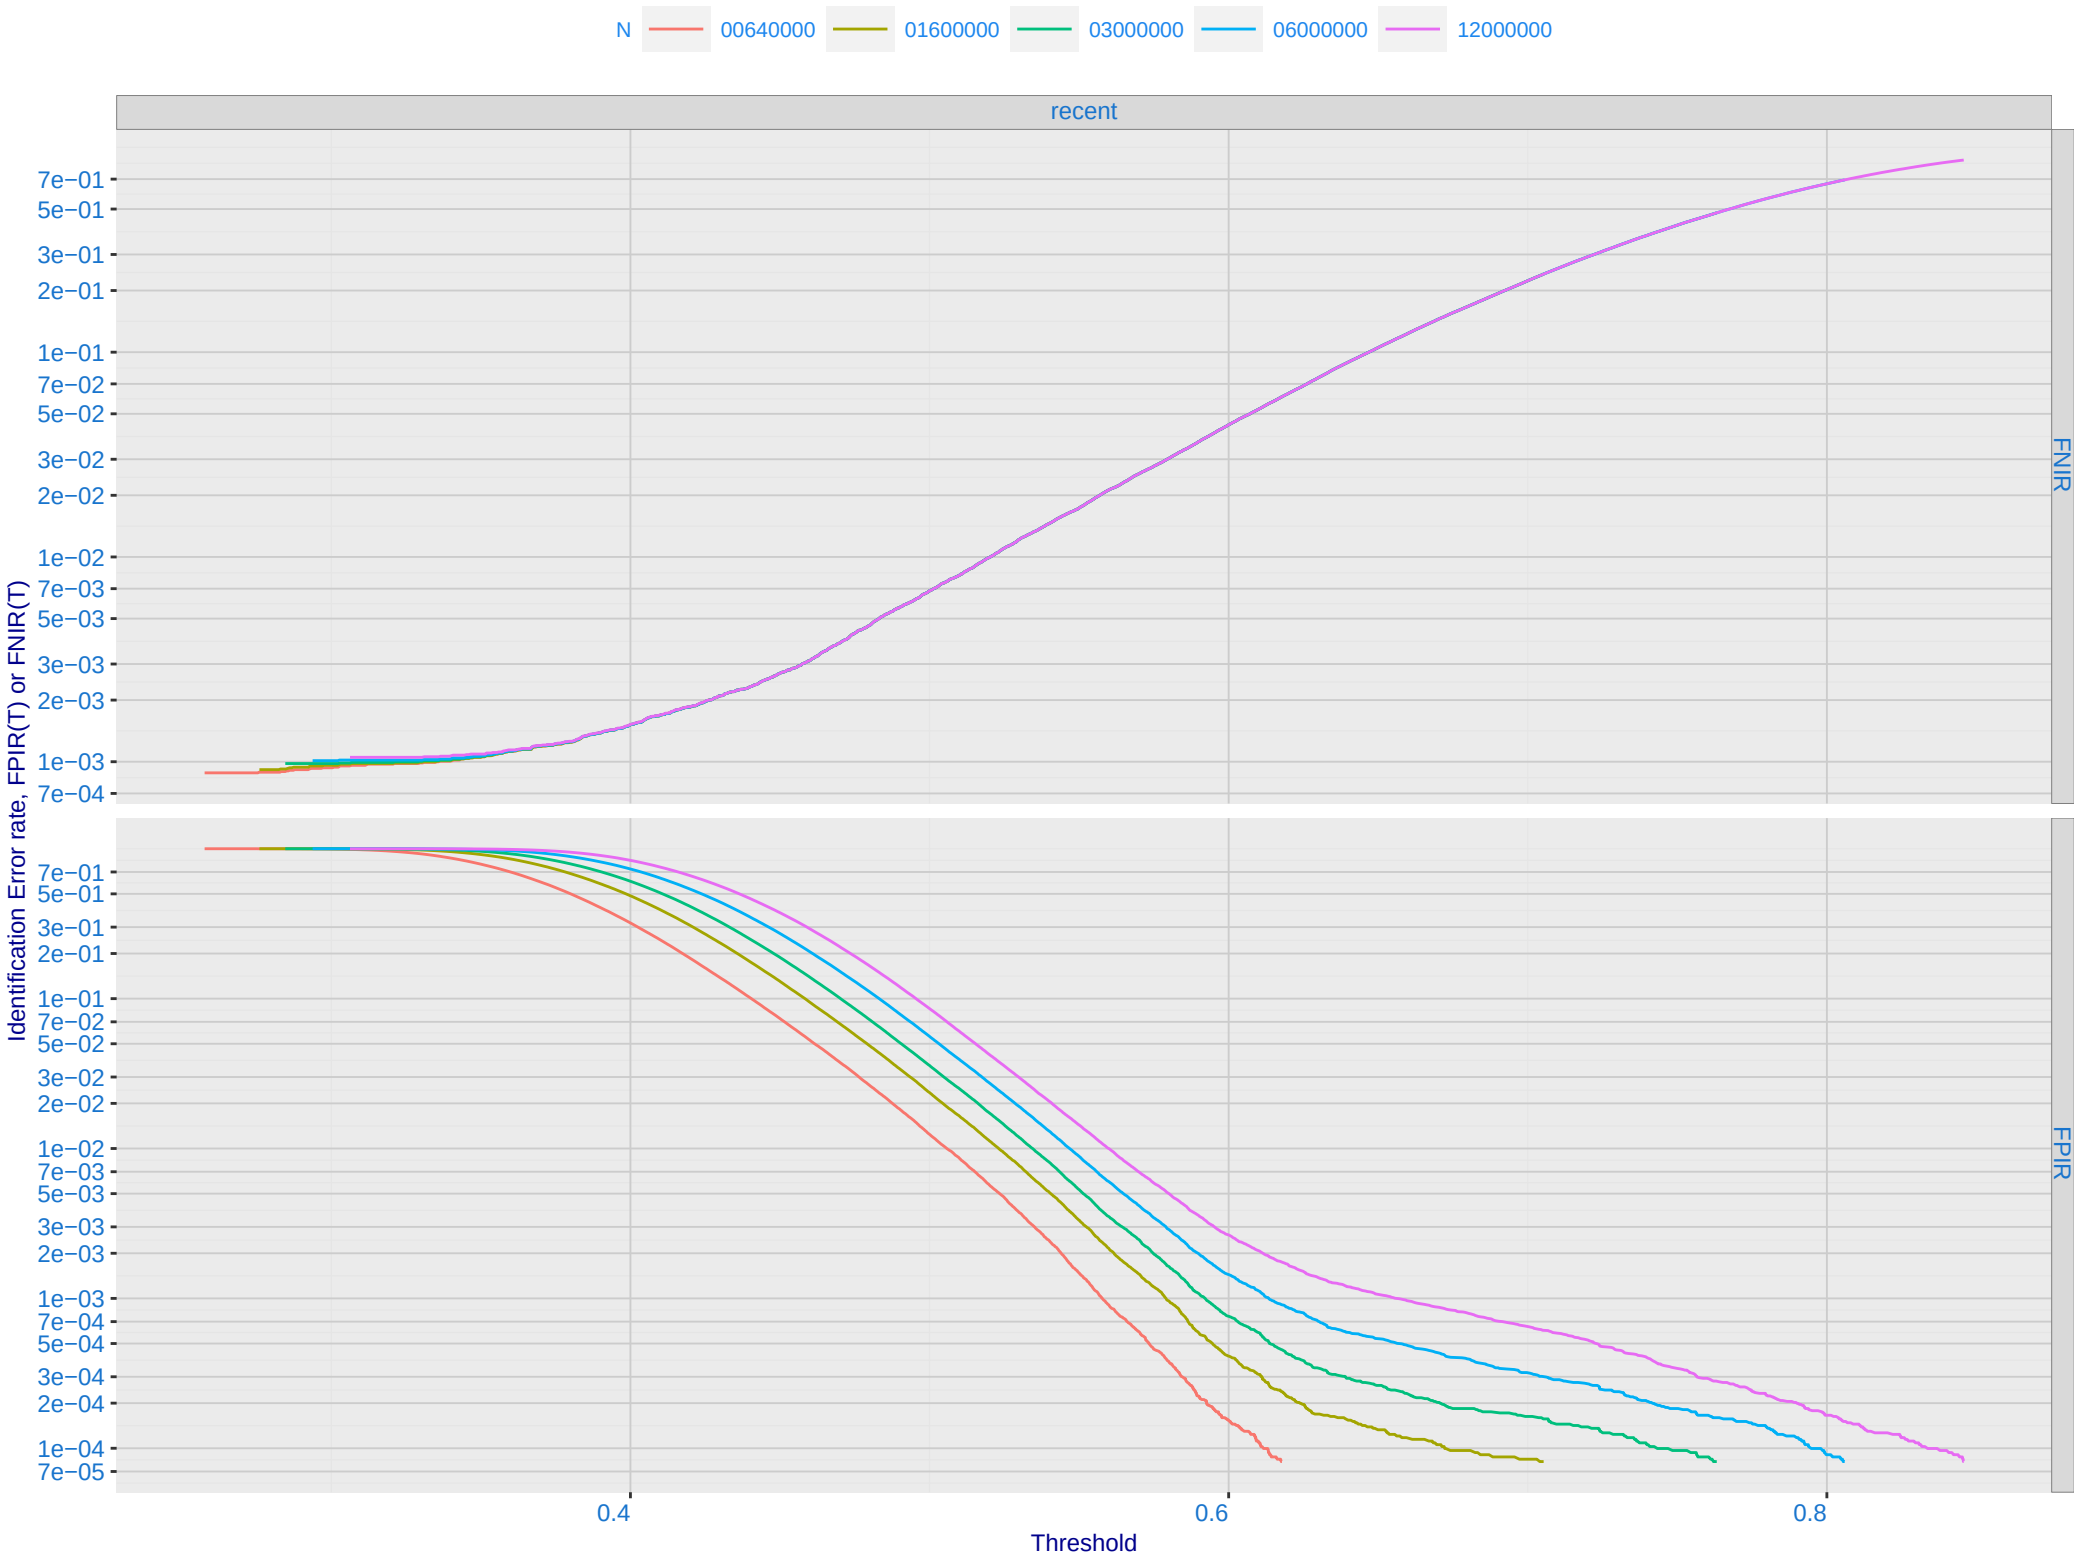

F: FPIR vs. Selectivity for mugshot images, N = 1600000 subjects enrolled with one recent mate

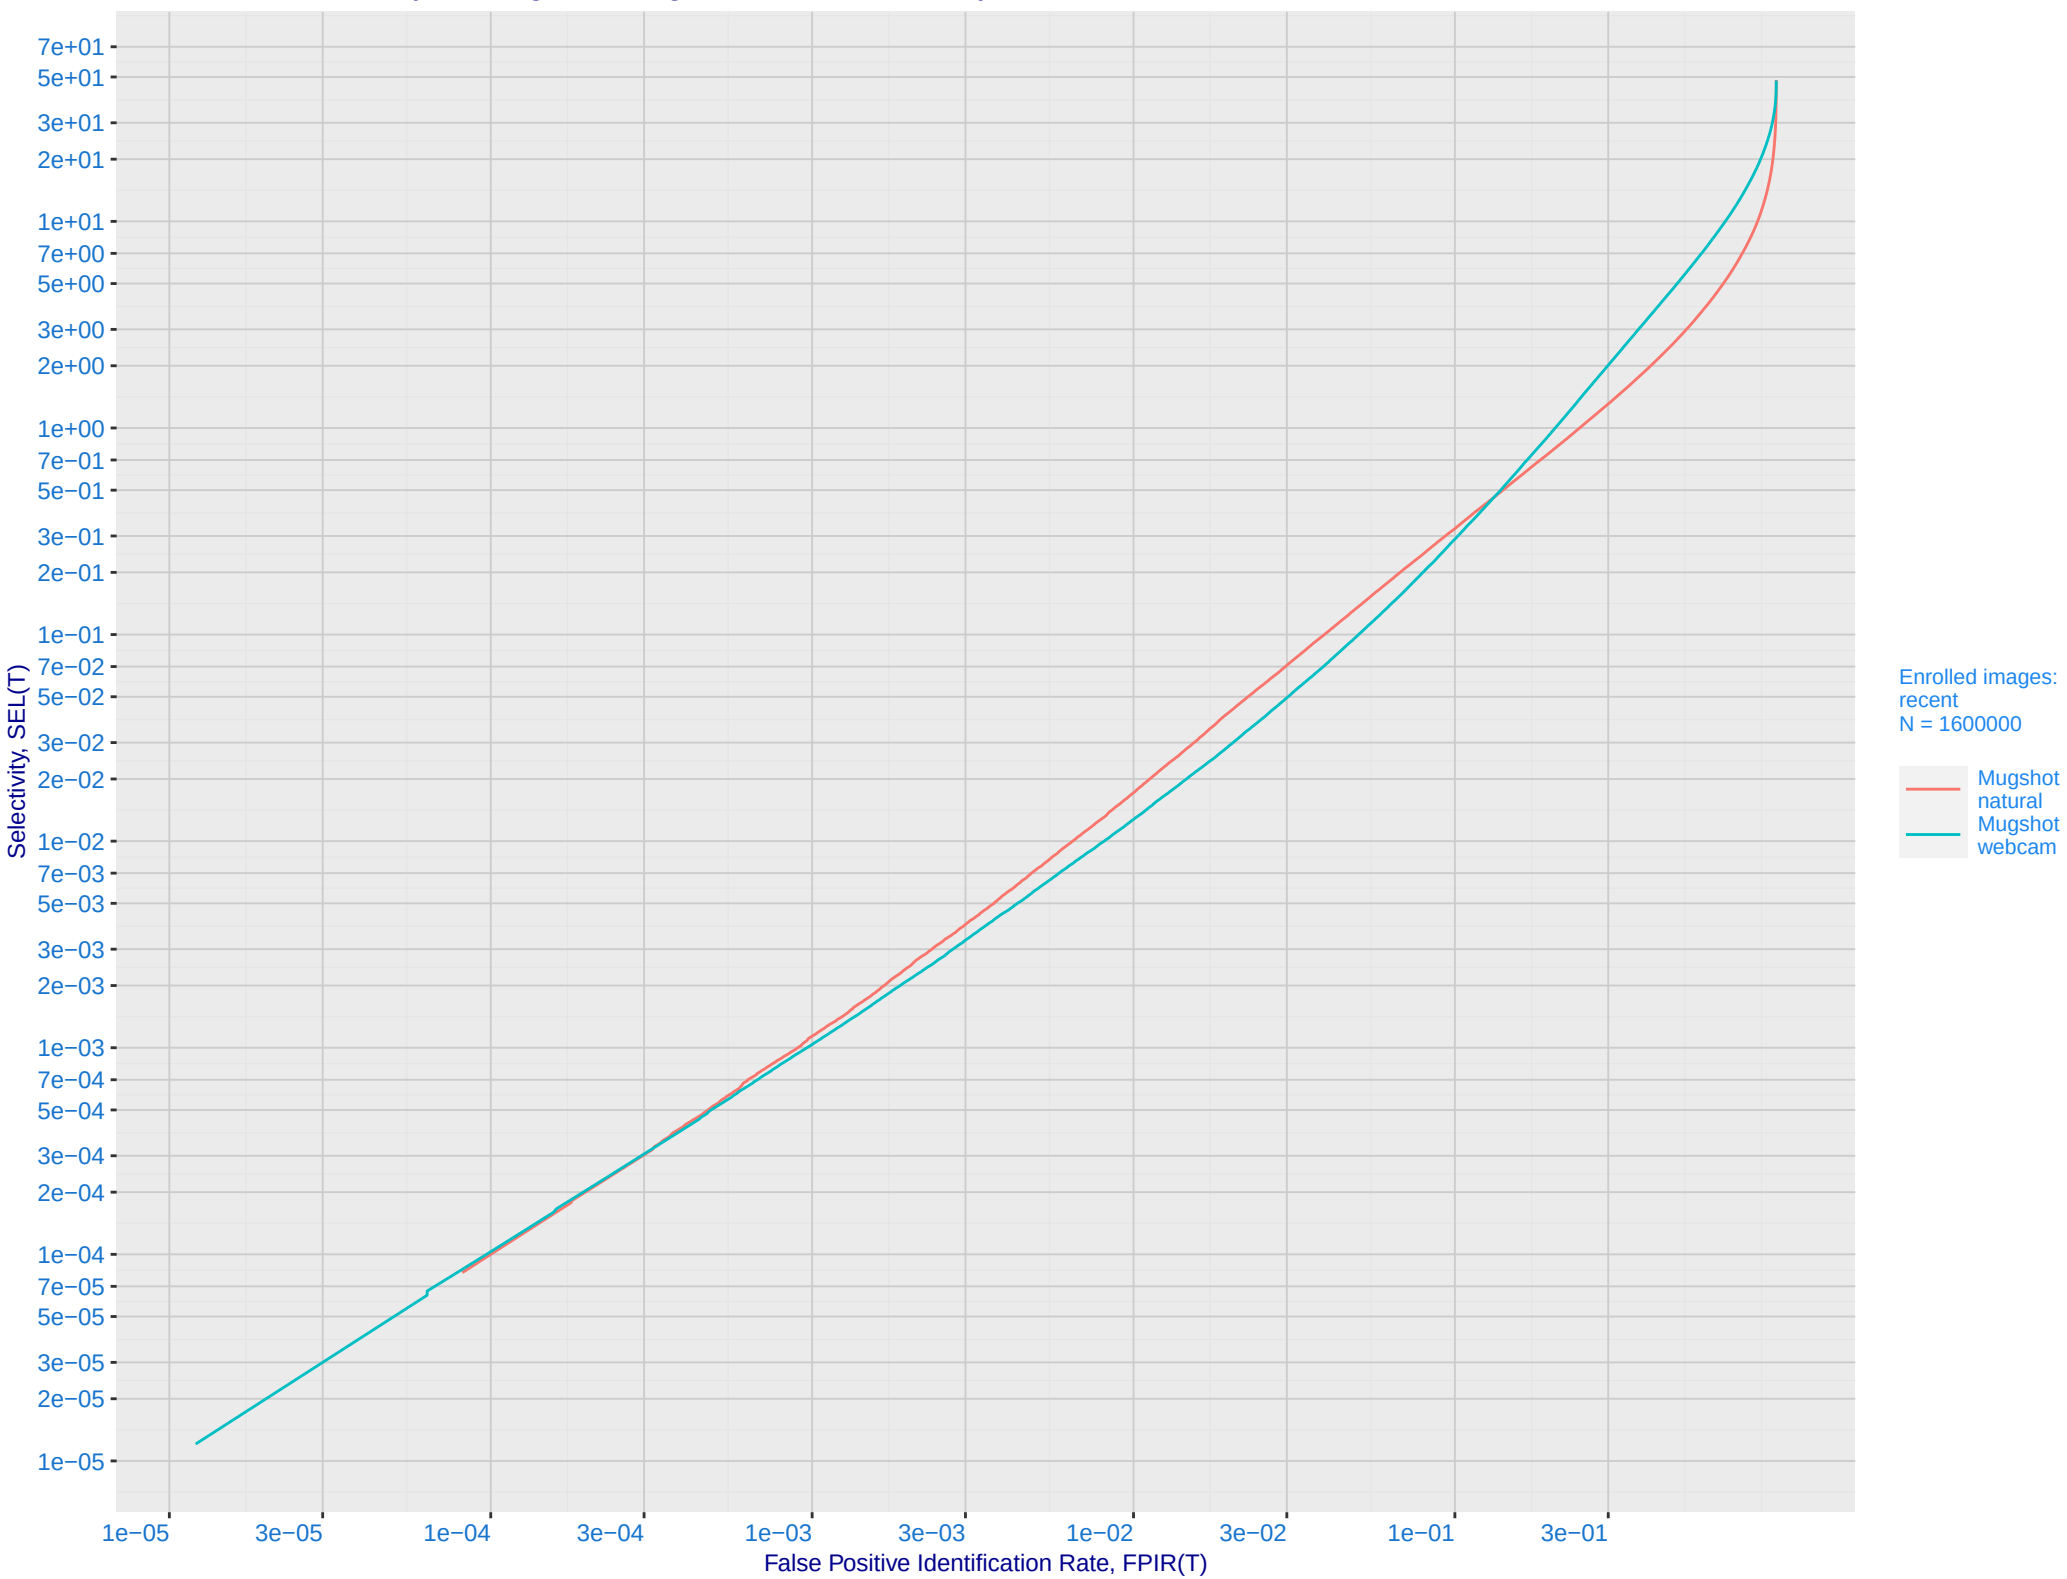


- Immigration visa-border
- Immigration visa-kiosk
- Mugshot natural
- Mugshot profile
- Mugshot webcam

enrolment_style

—	random
- - - -	recent


H: Reduced length candidate lists for human review

Dataset is border-border with time-lapse [10,15] YRS with N = 1600000. Probes are 10–15 years later than enrollment image

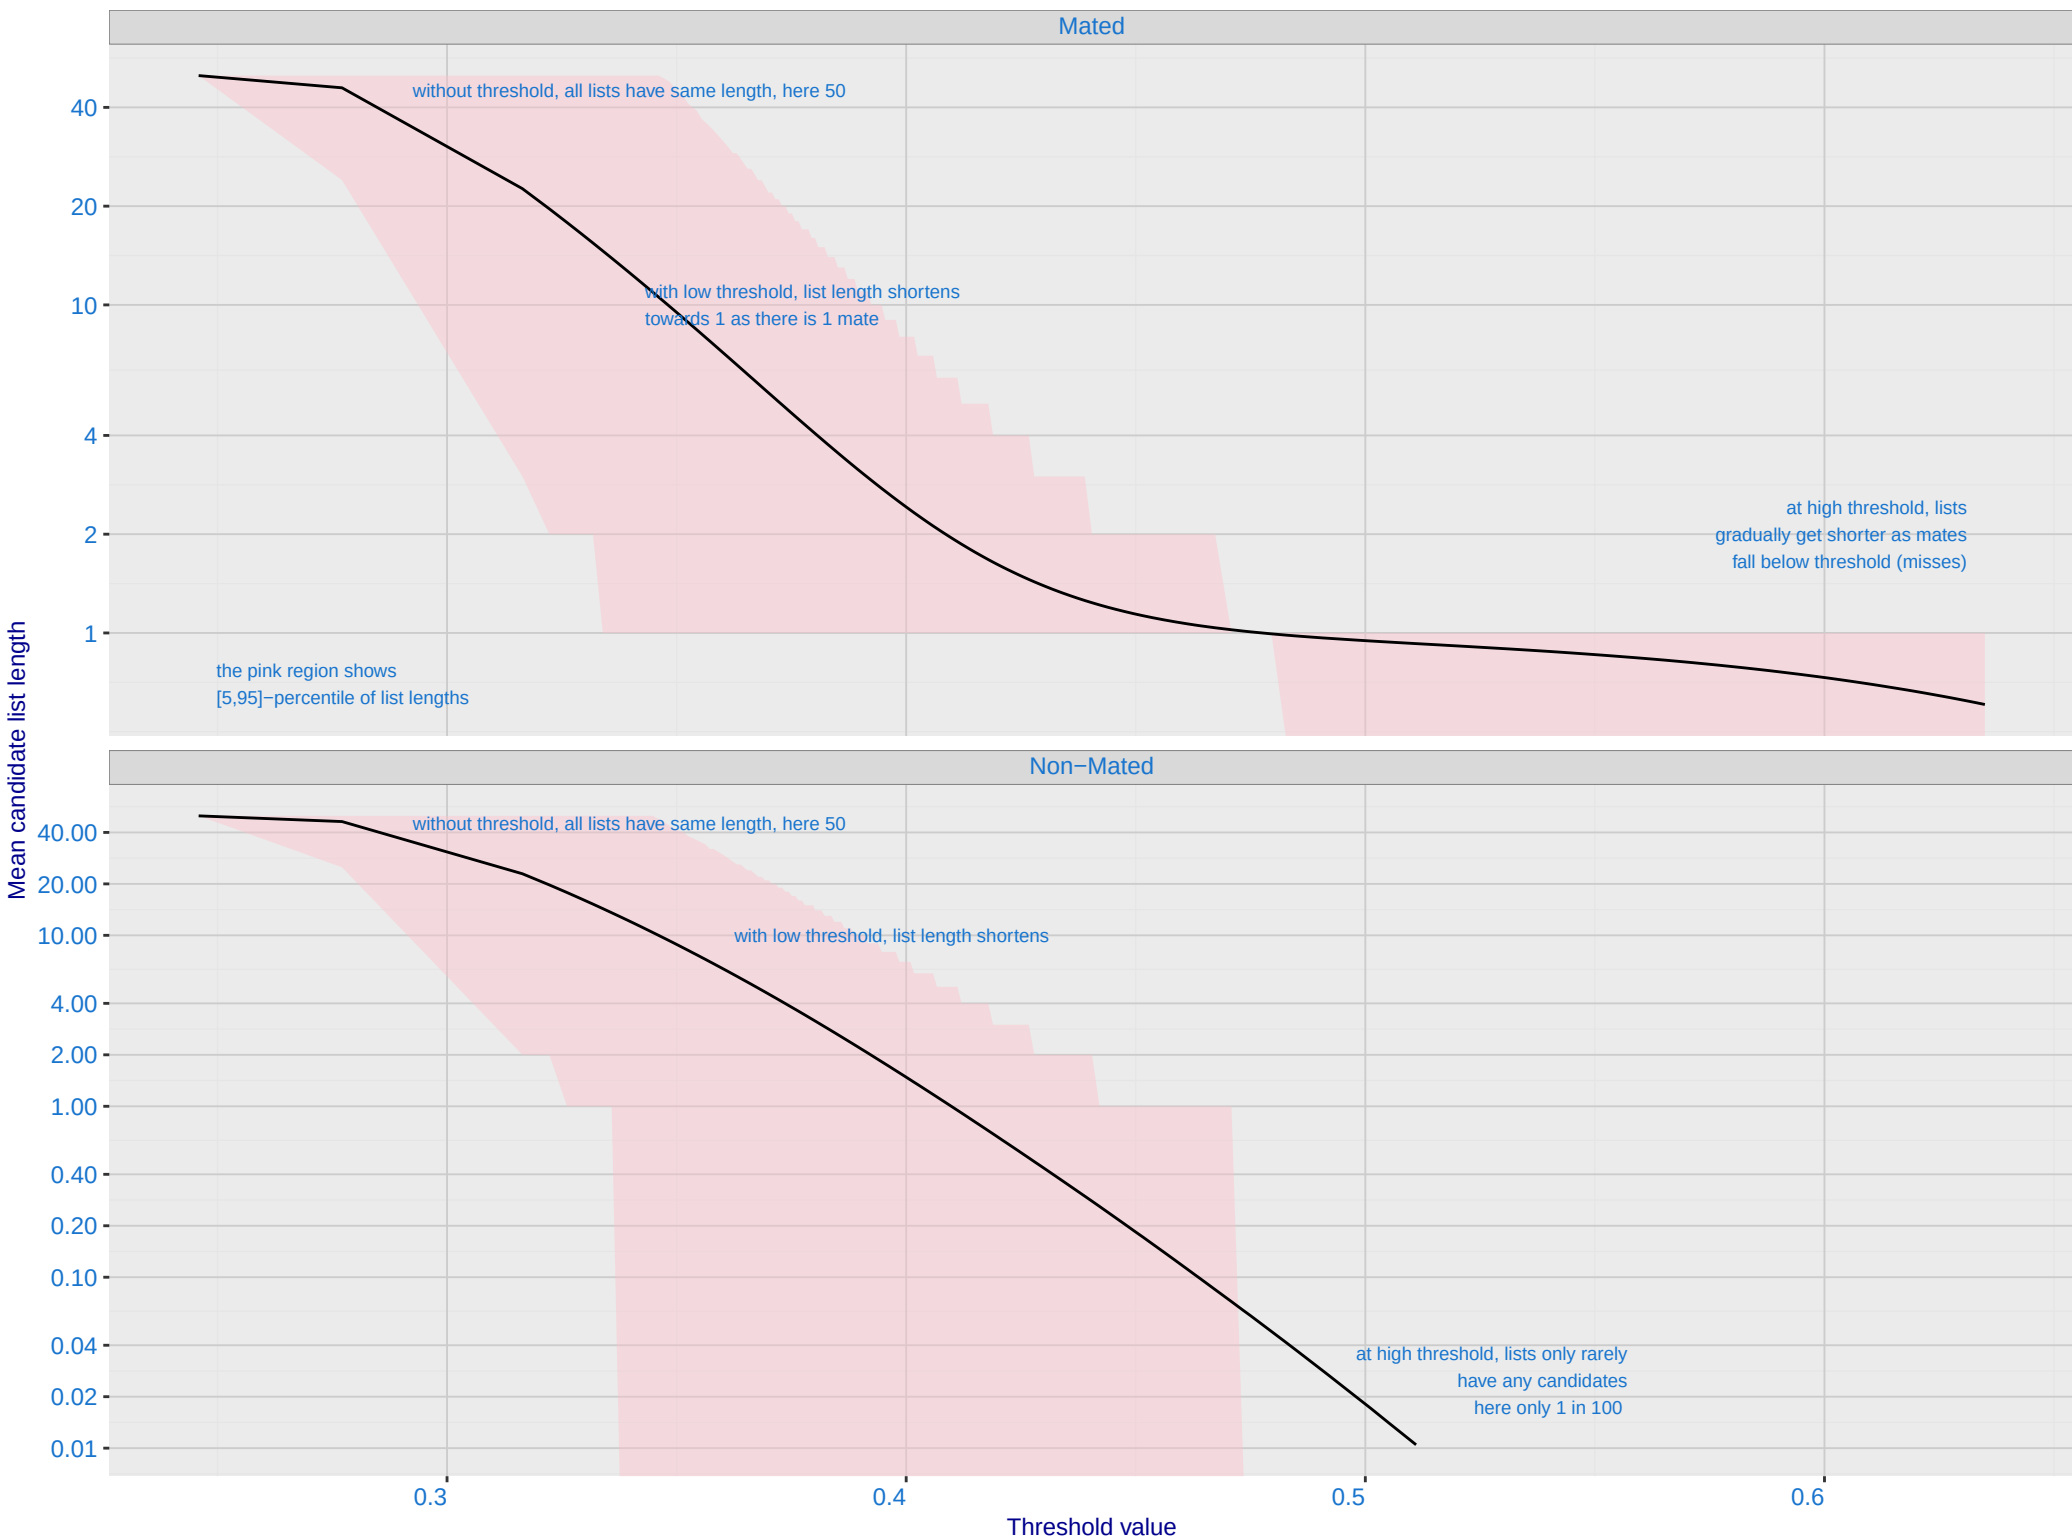


I: FNIR and FPIR dependence on threshold


Dataset is border-border with time-lapse [10,15] YRS with N = 1600000. Probes are 10-15 years later than enrollment image

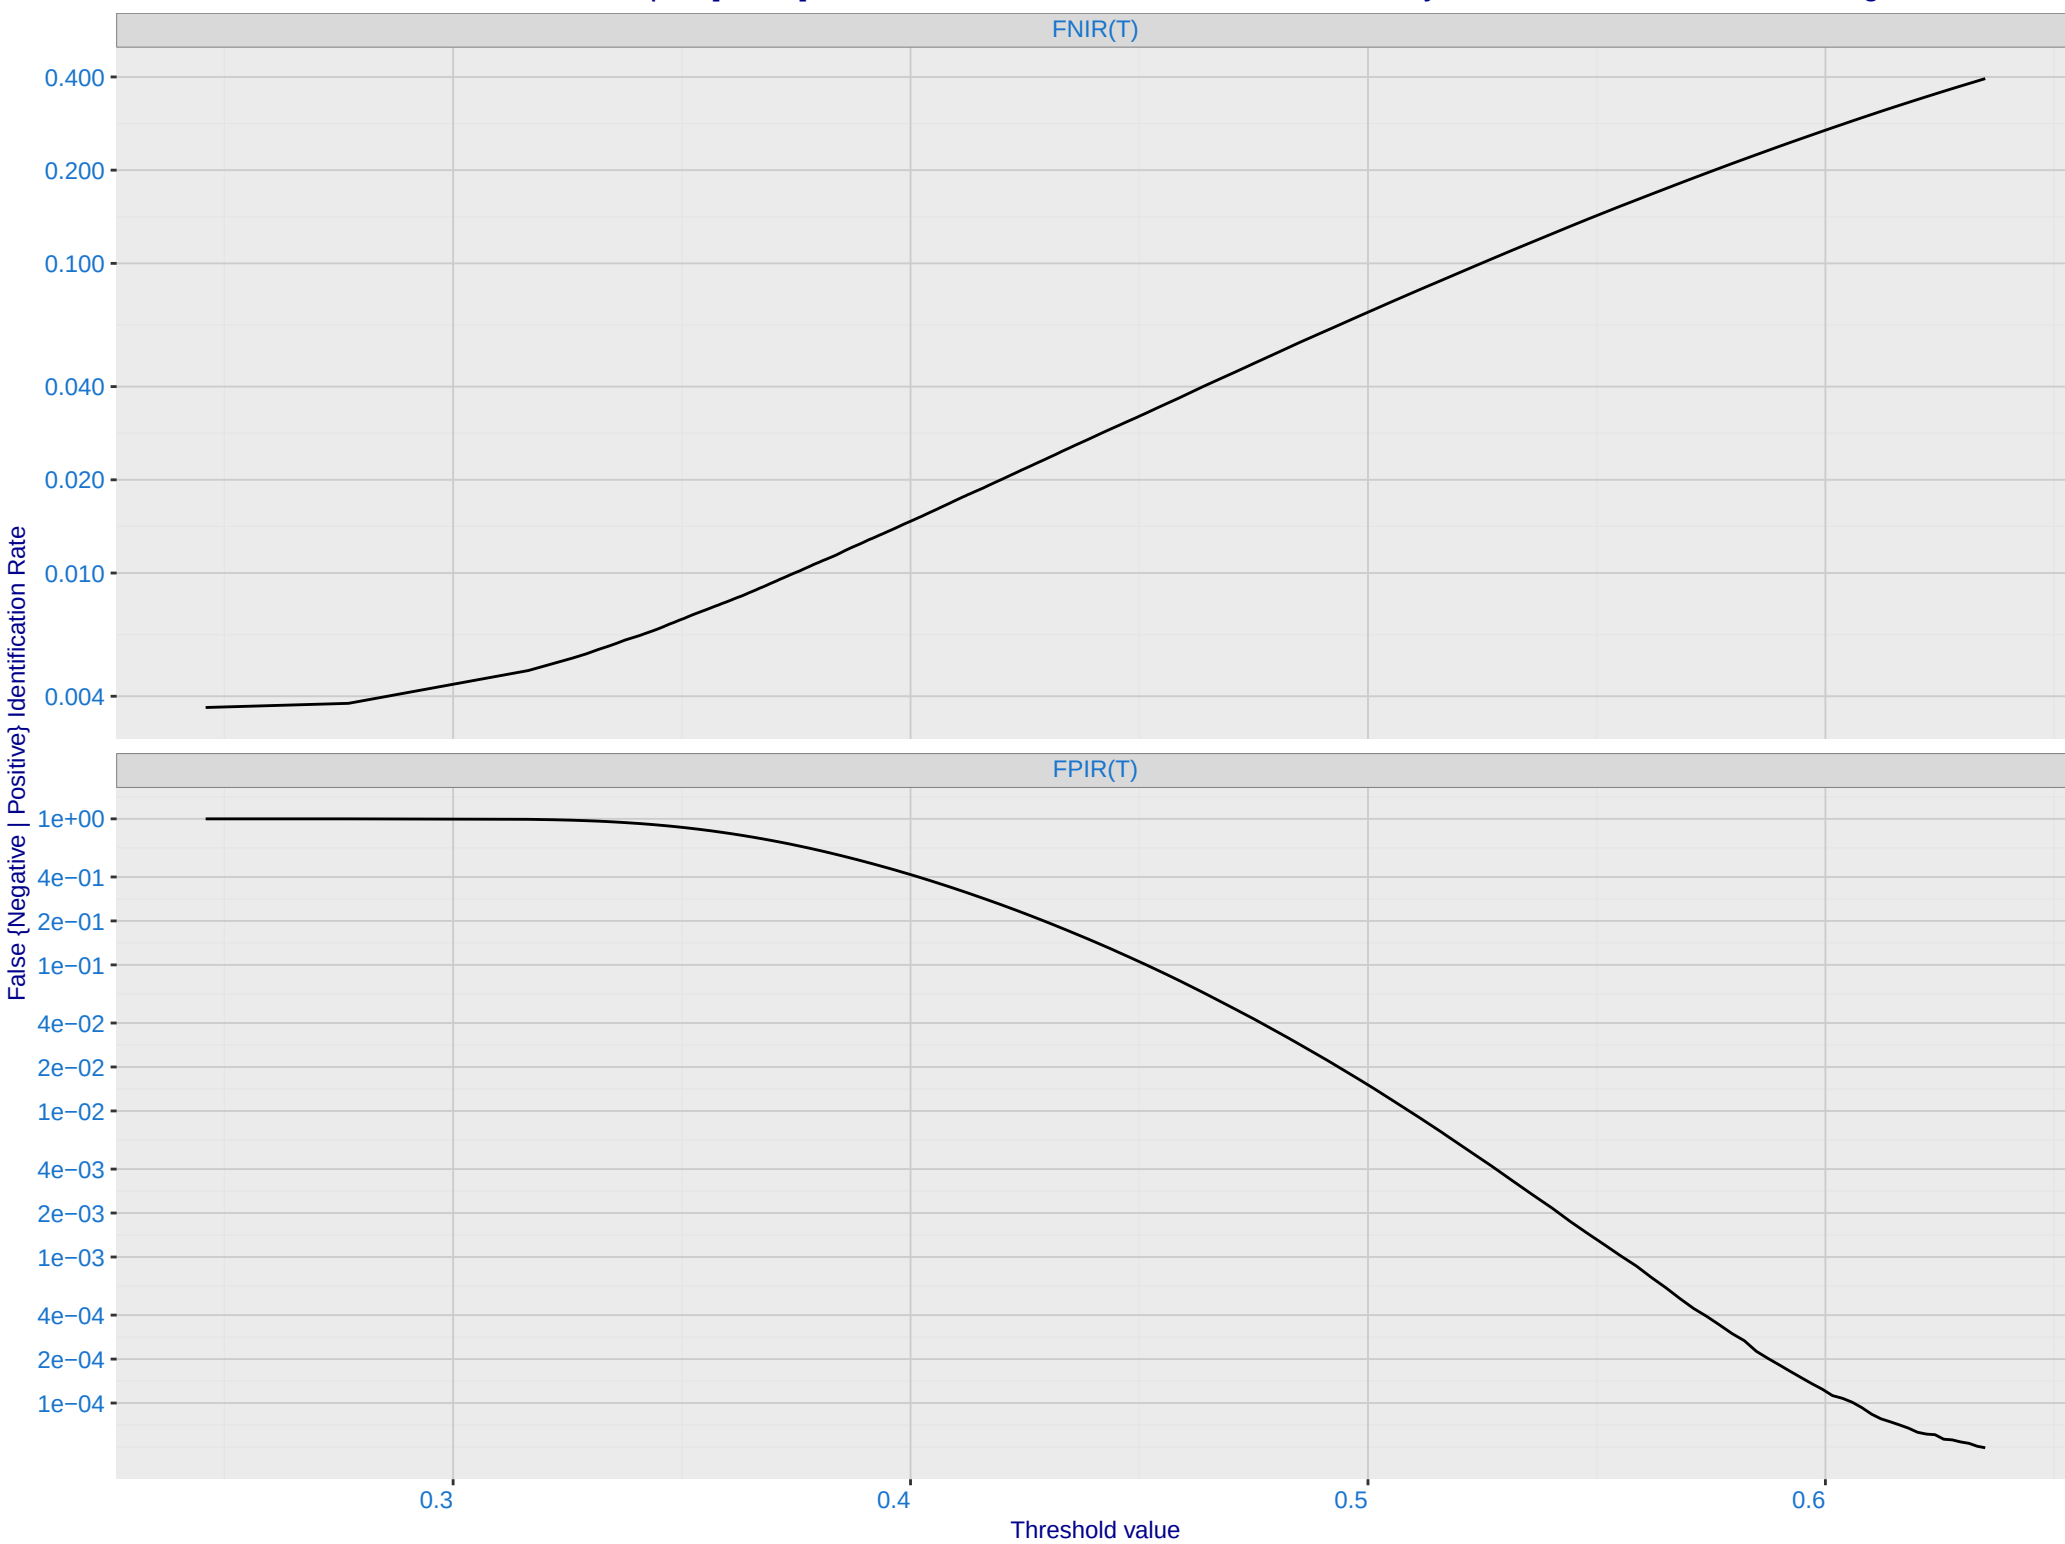


J: DET for Mugshot natural images and various N. Links connect points of equal threshold.

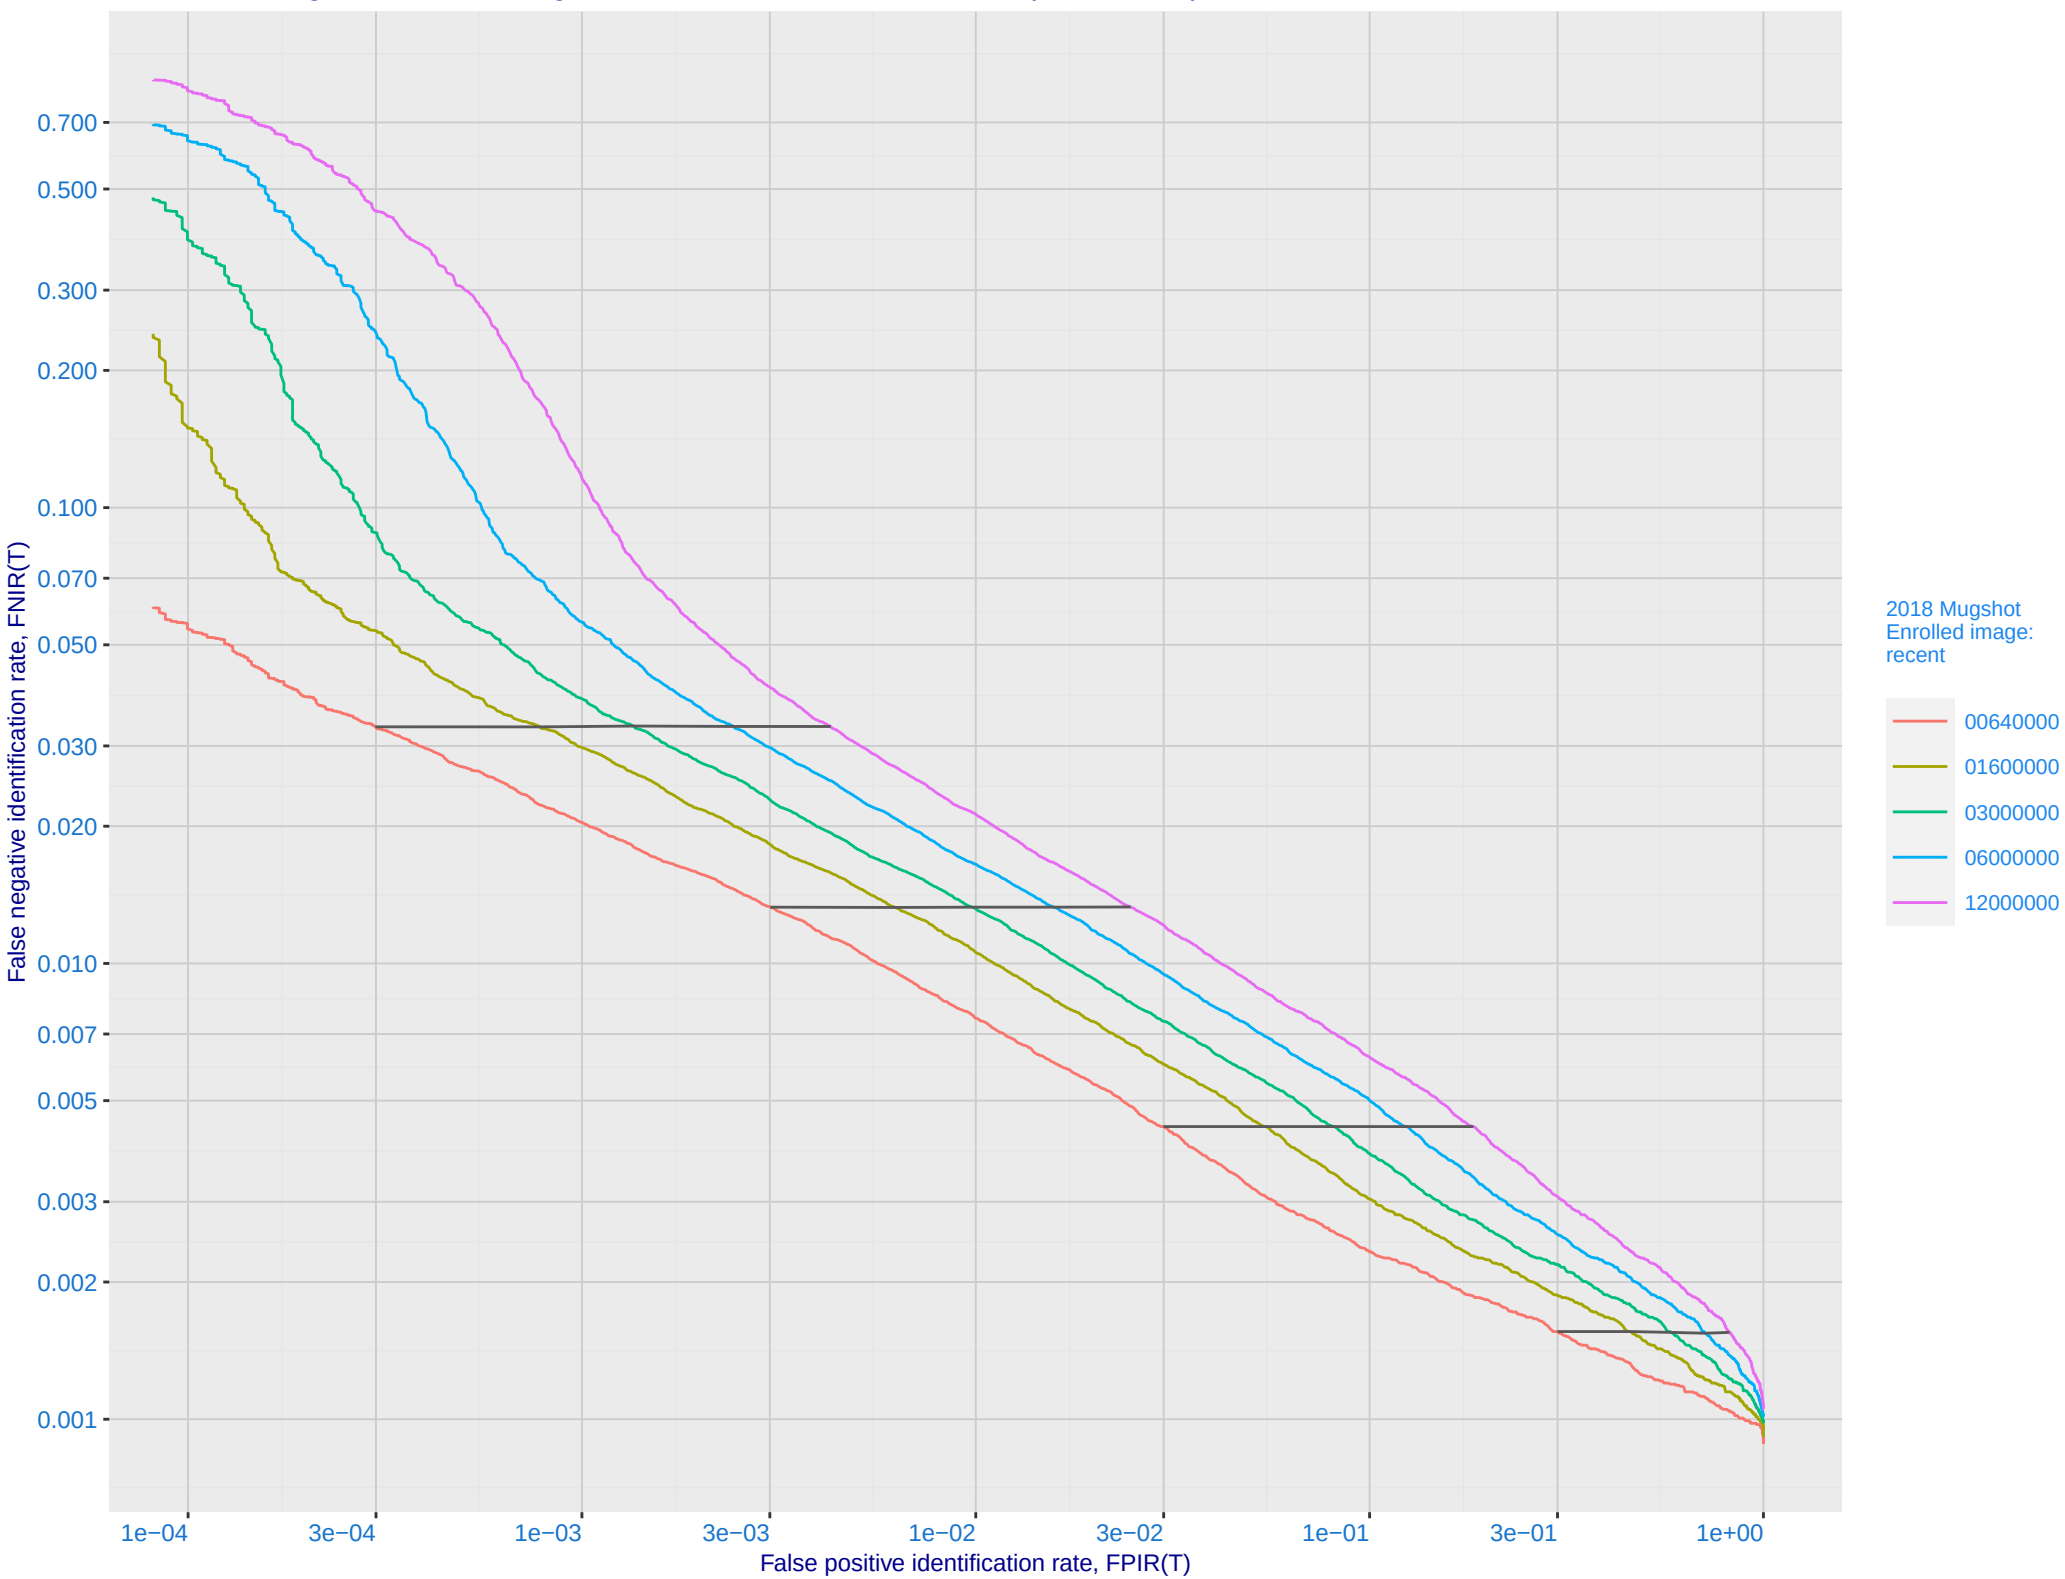


K: Investigational mode: FNIR(N, 1, 0) vs. most accurate (sensetime_009)

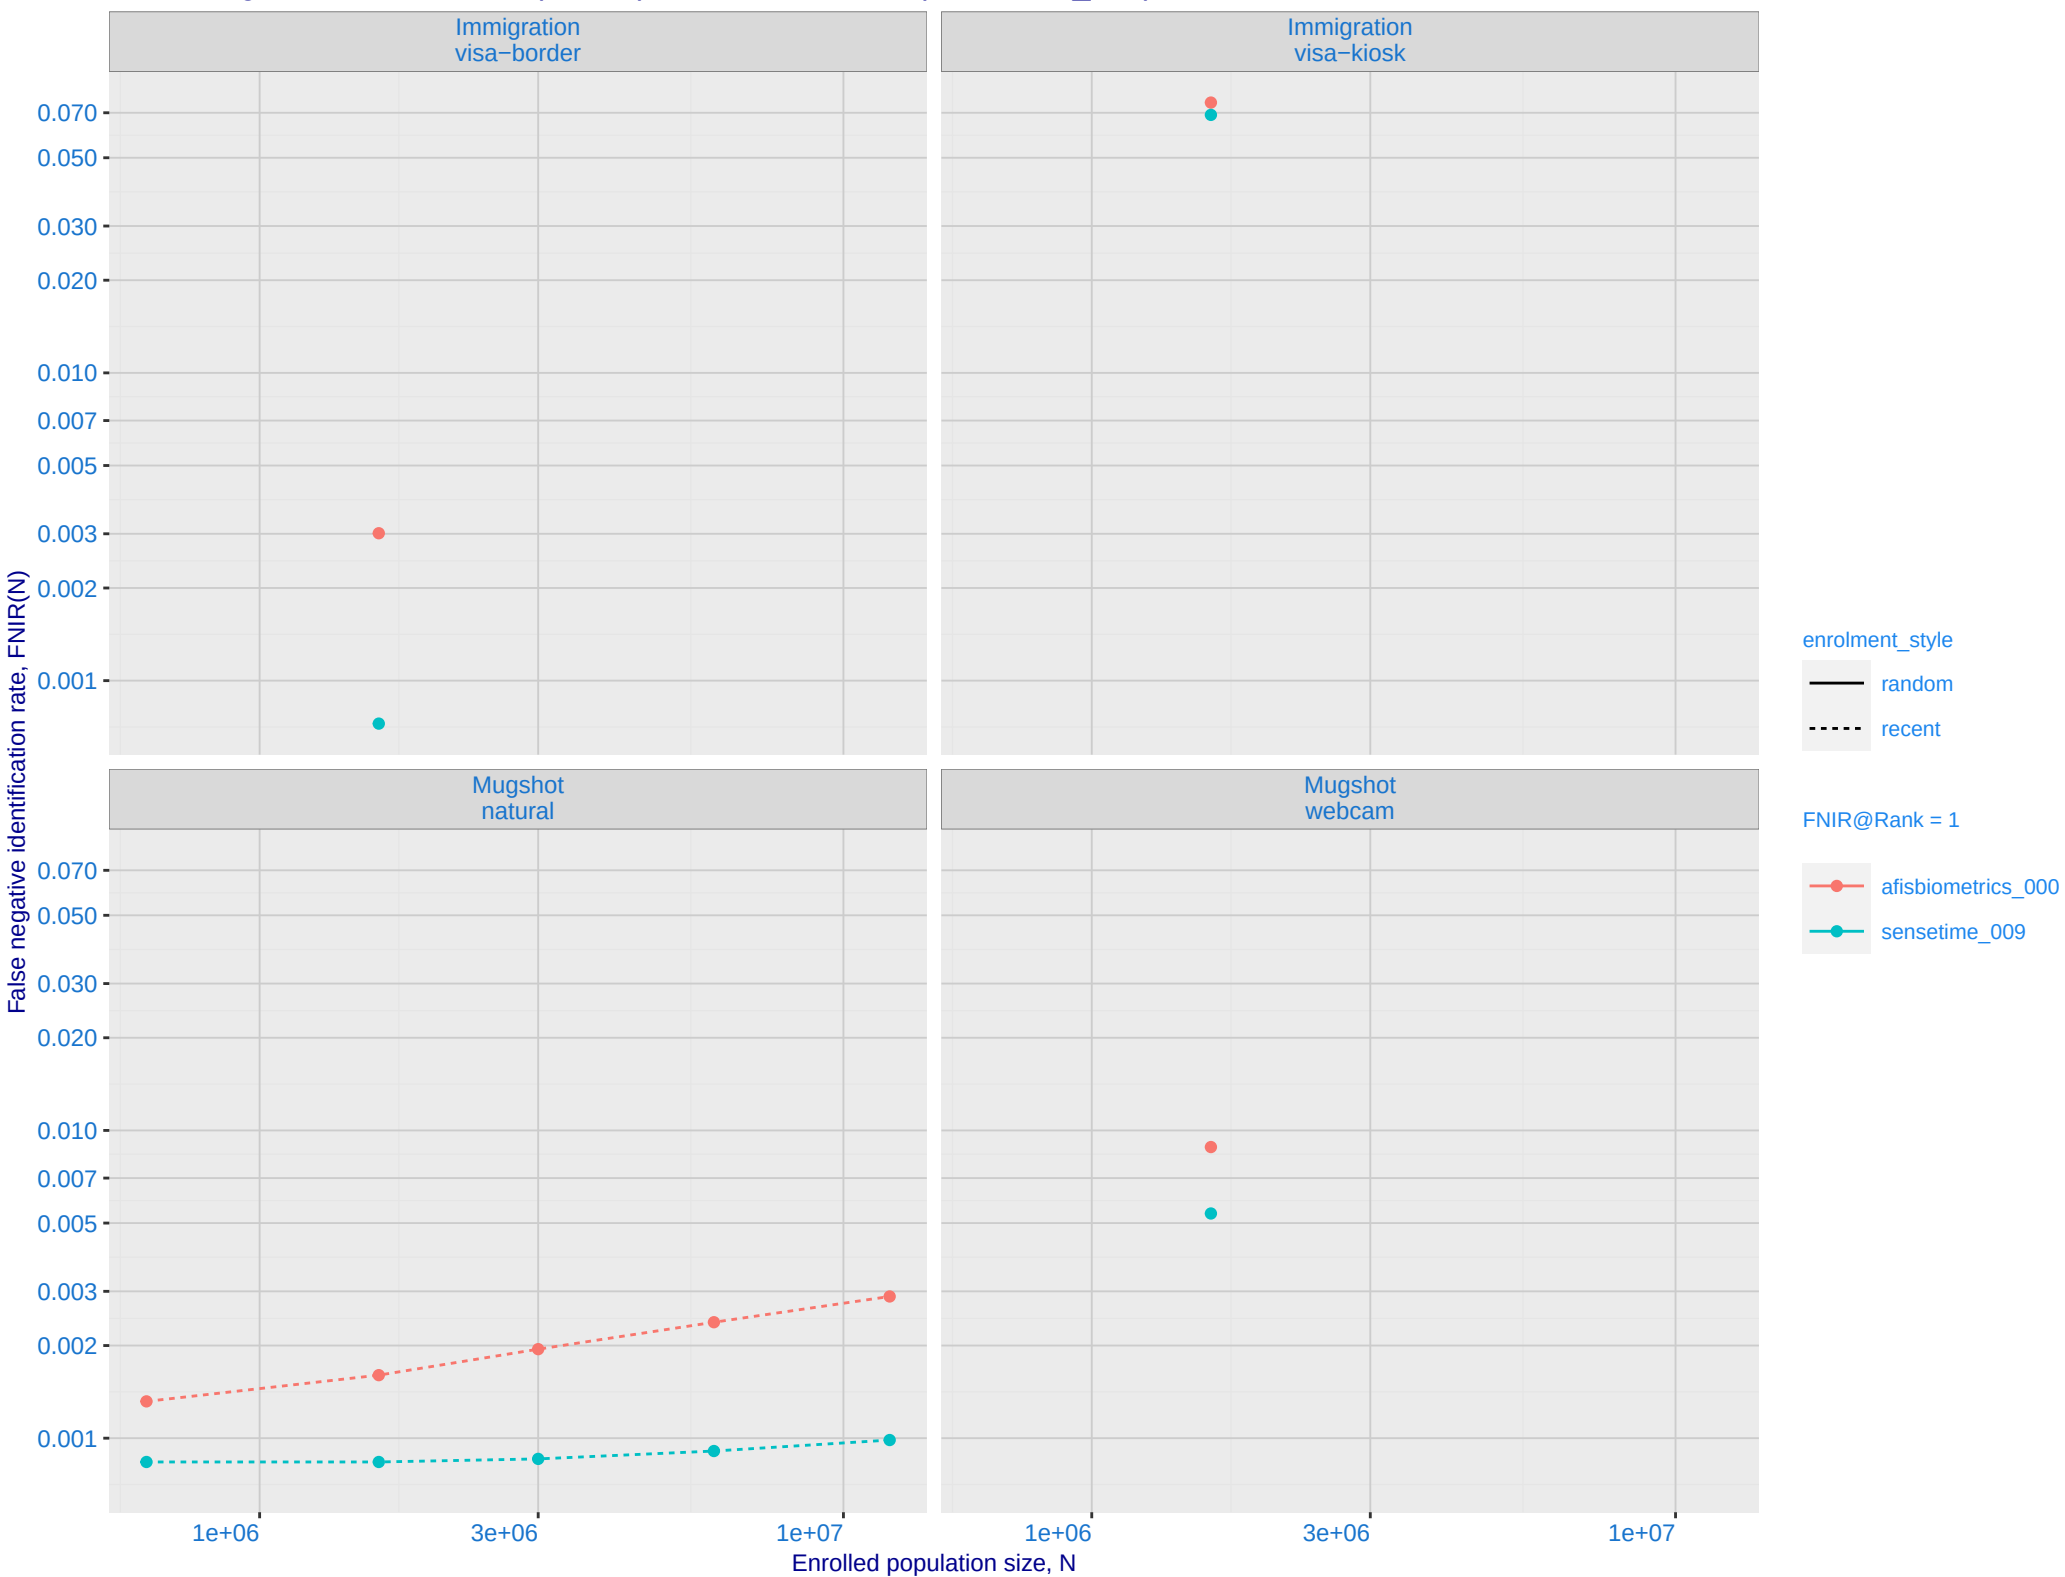



L: Investigational mode: FNIR(1600000, R, 0) by probe type

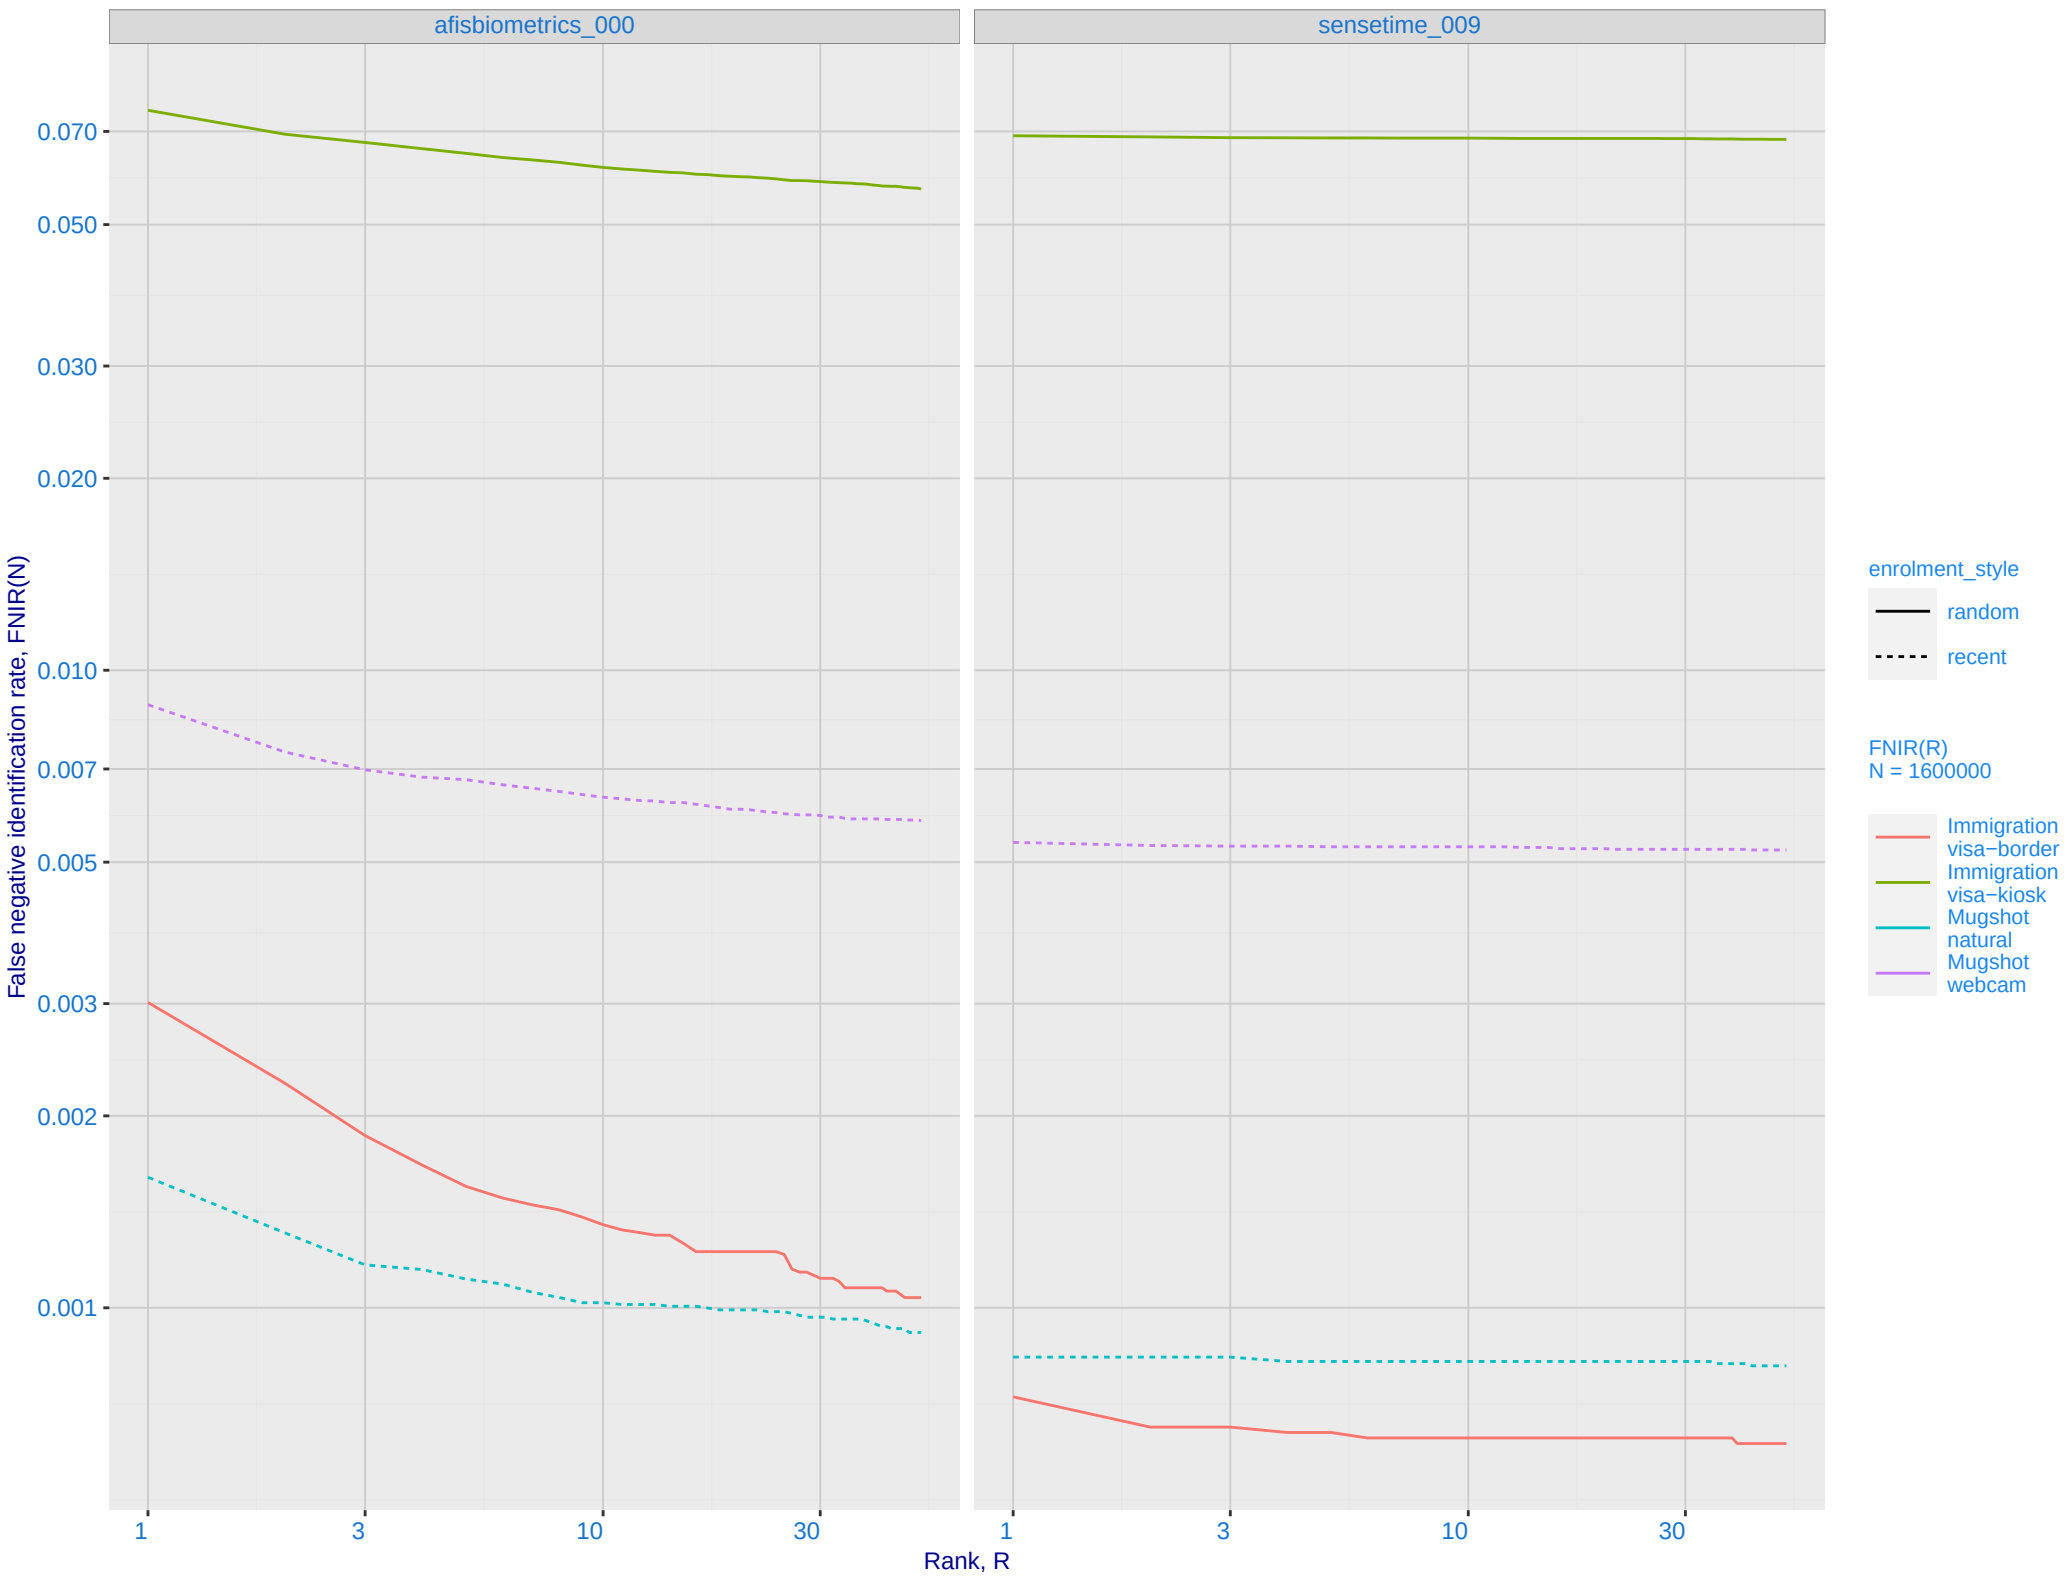

M: Template duration; search duration vs. N. The blue and pink ribbon covers 95 percent of observed measurements. The template generation time is independent of N. The log and power-law models are fit to the first two (N,T) observations

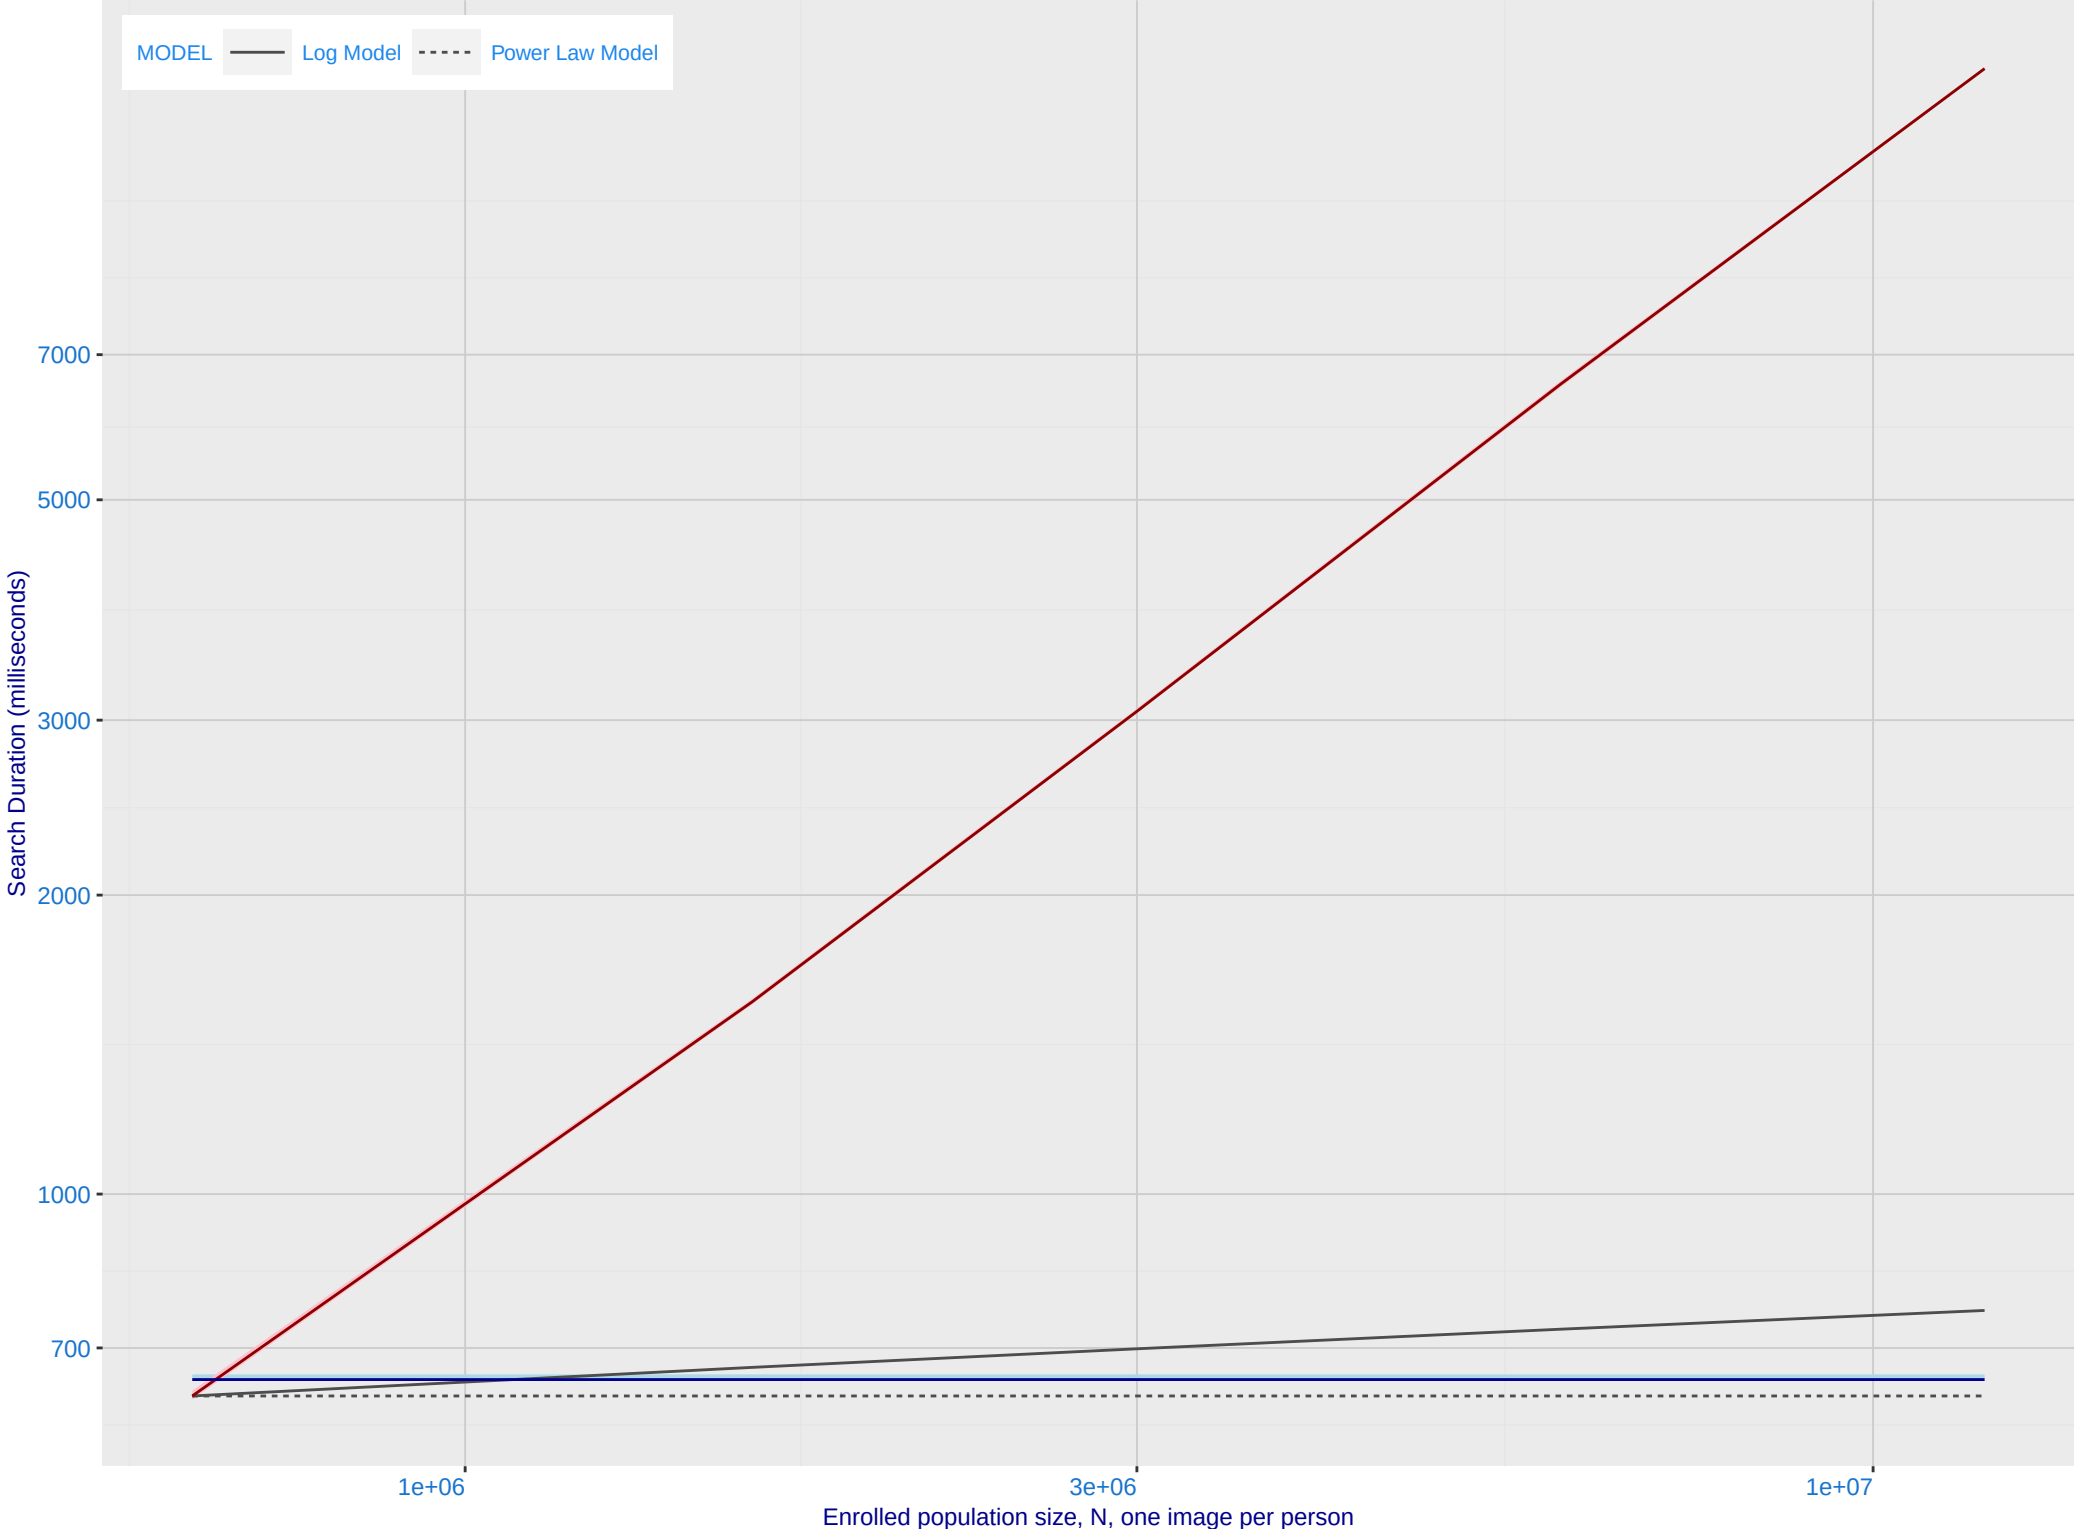


O: FNIR(T, N = 1.6 million) by sex, age and time-lapse. The top row gives investigational rank-1 miss rates. The bottom panels give high threshold for more lights-out identification with low FPIR.

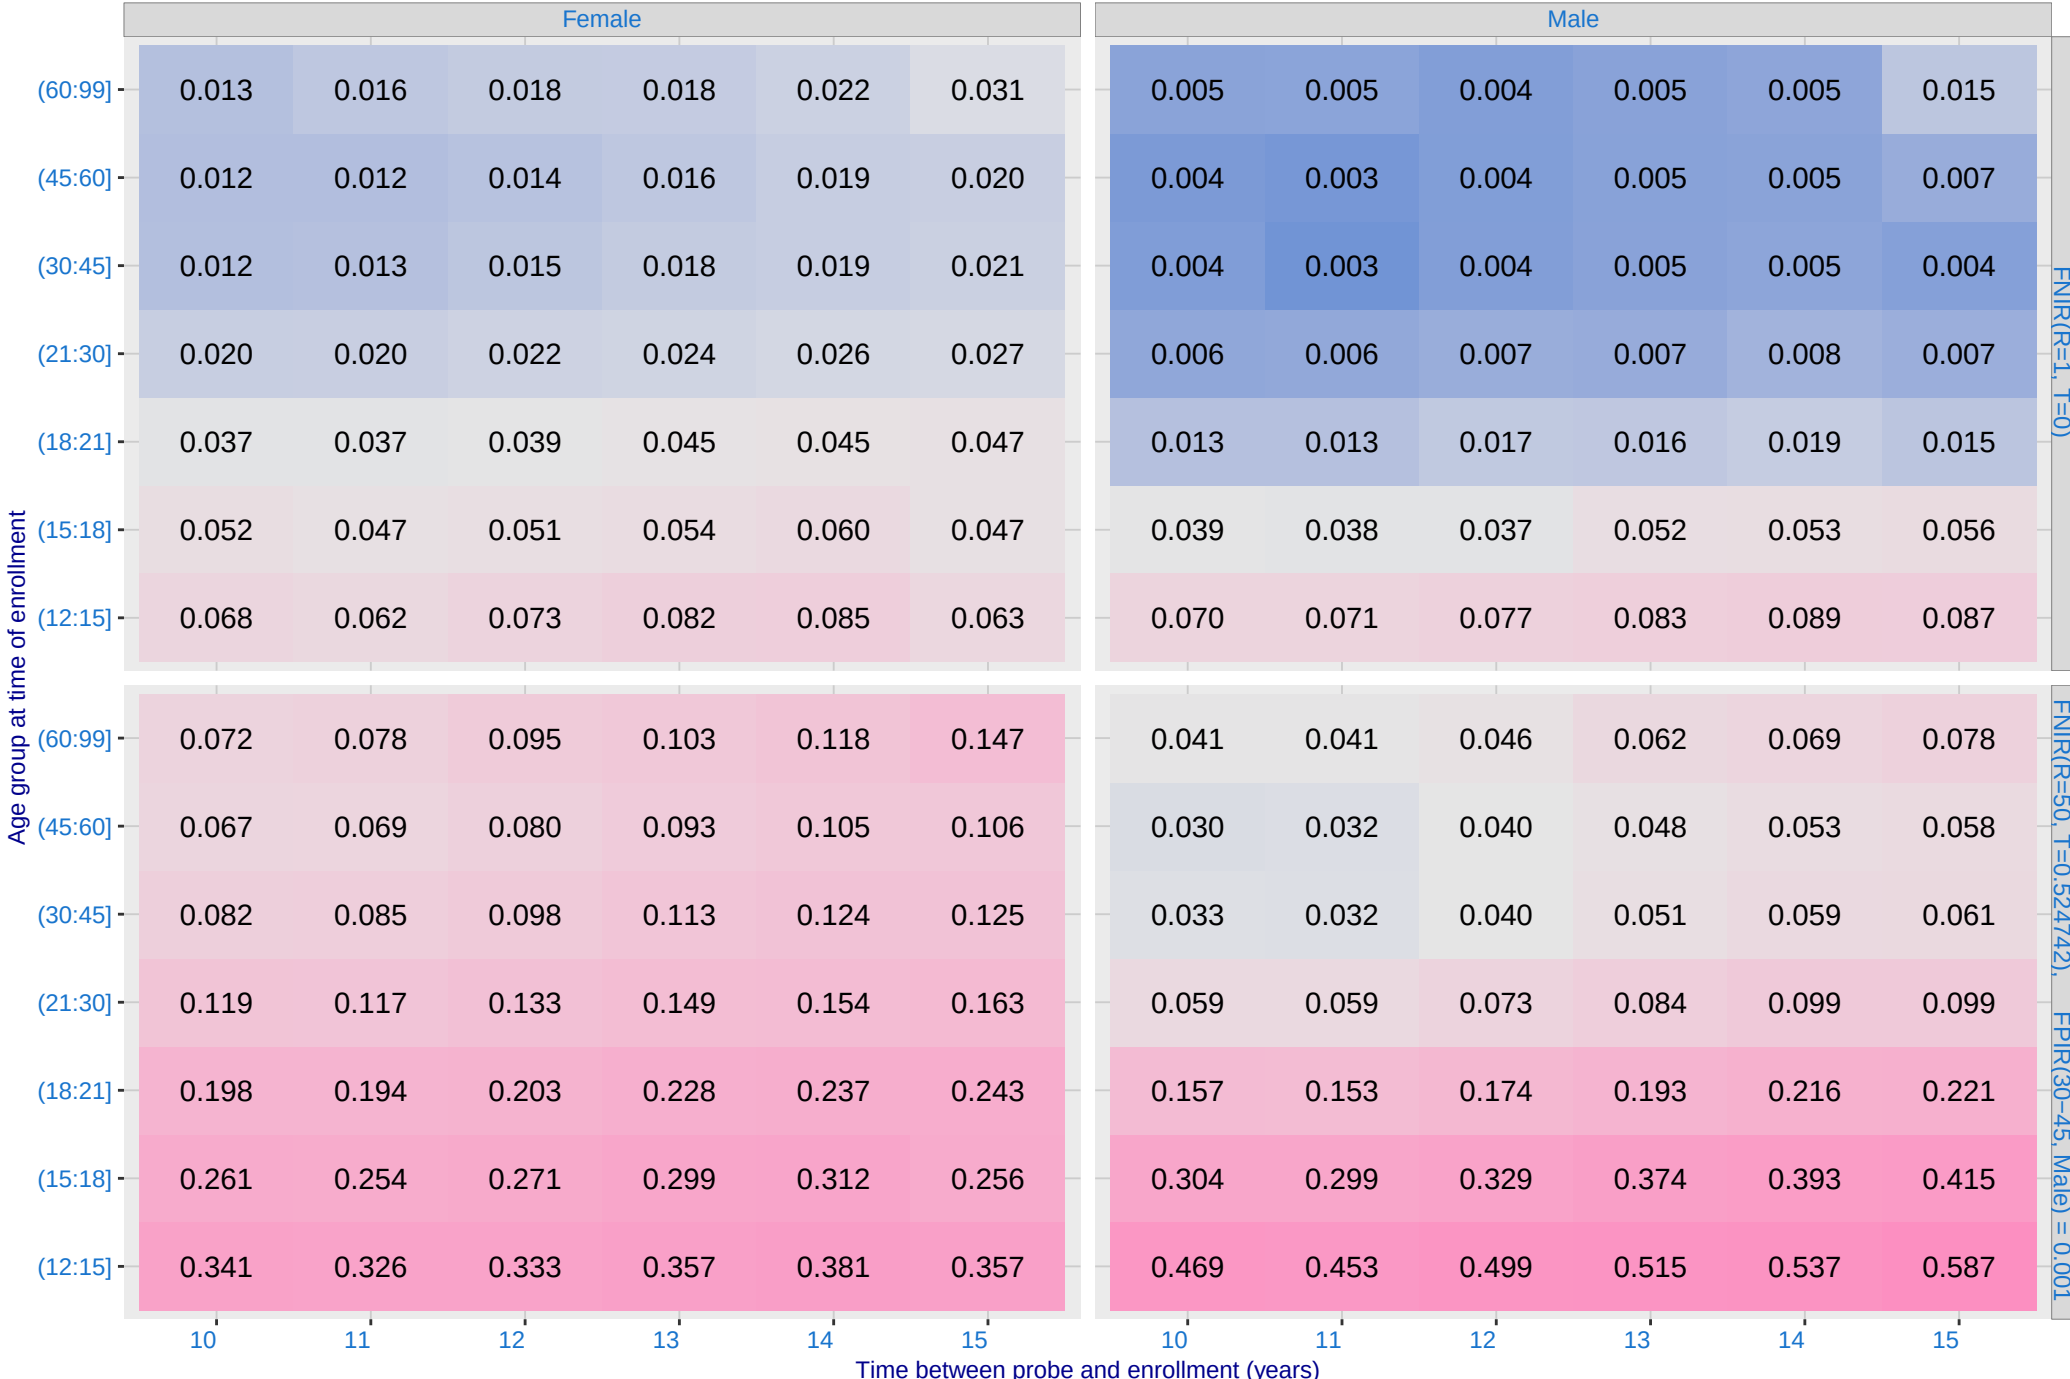

P: FPIR(N = 1.6 million) by sex and age. It is typical for false positive identification rates to be higher in women except in their teens.


Algorithm: afisbiometrics_000, Dataset: Border-Crossing Ageing
Threshold: 0.524742 set to achive FPIR(30-45, Male) = 0.001

Color encodes log(FPIR)

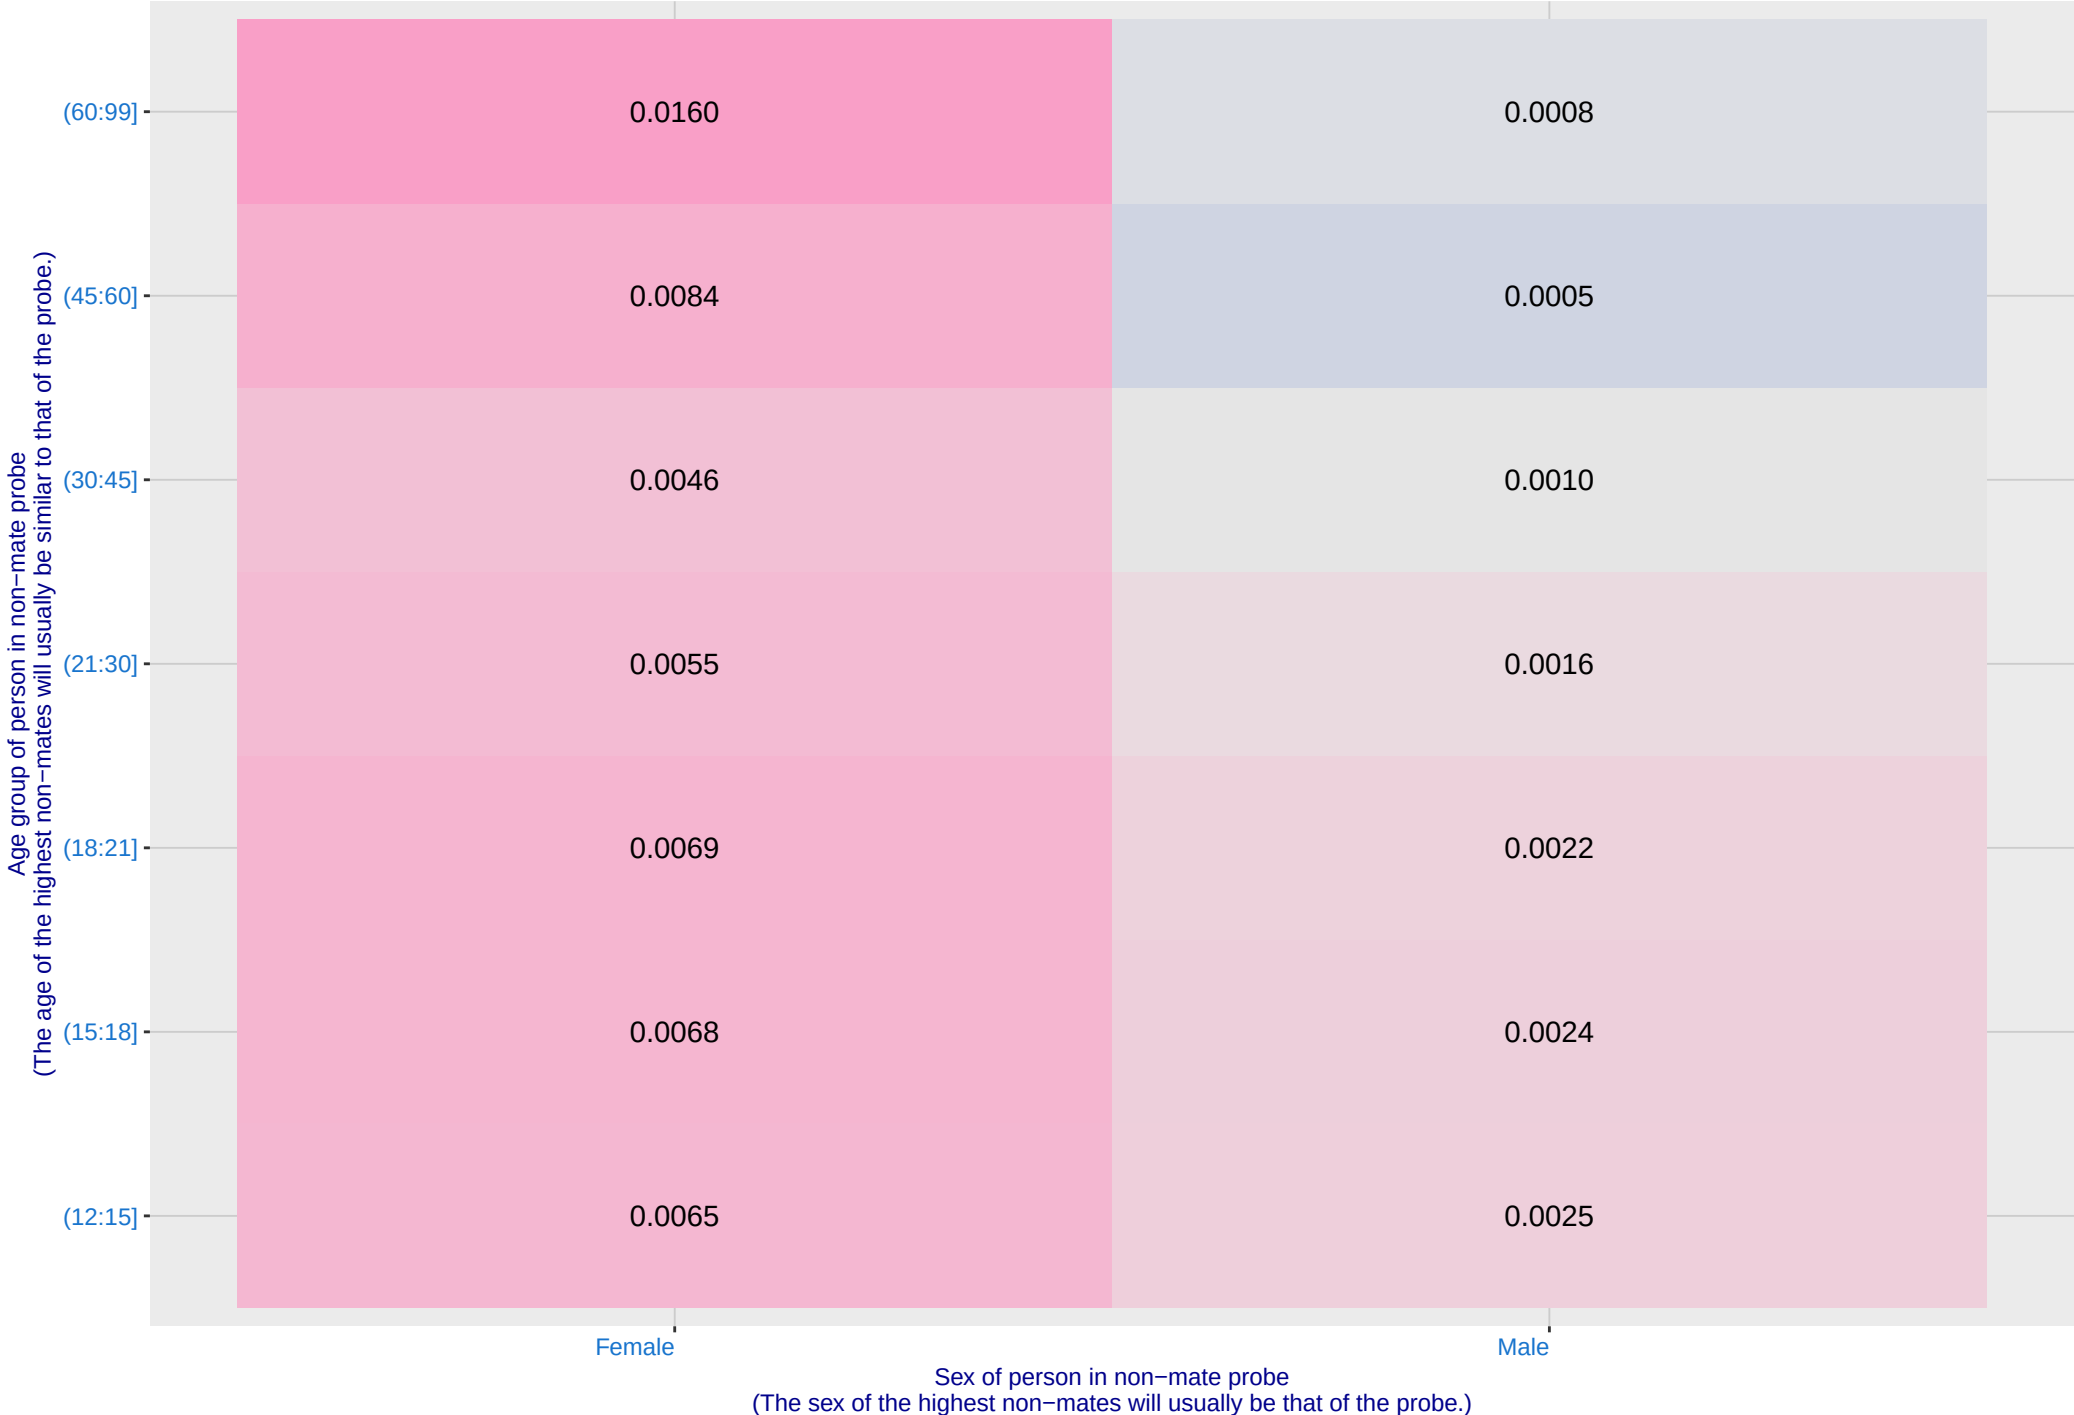

Q: Identification FNIR(N, T, L+1) and Investigational FNIR(N, 0, R) under ageing

Dataset: 2018 Mugshot N = 3068801

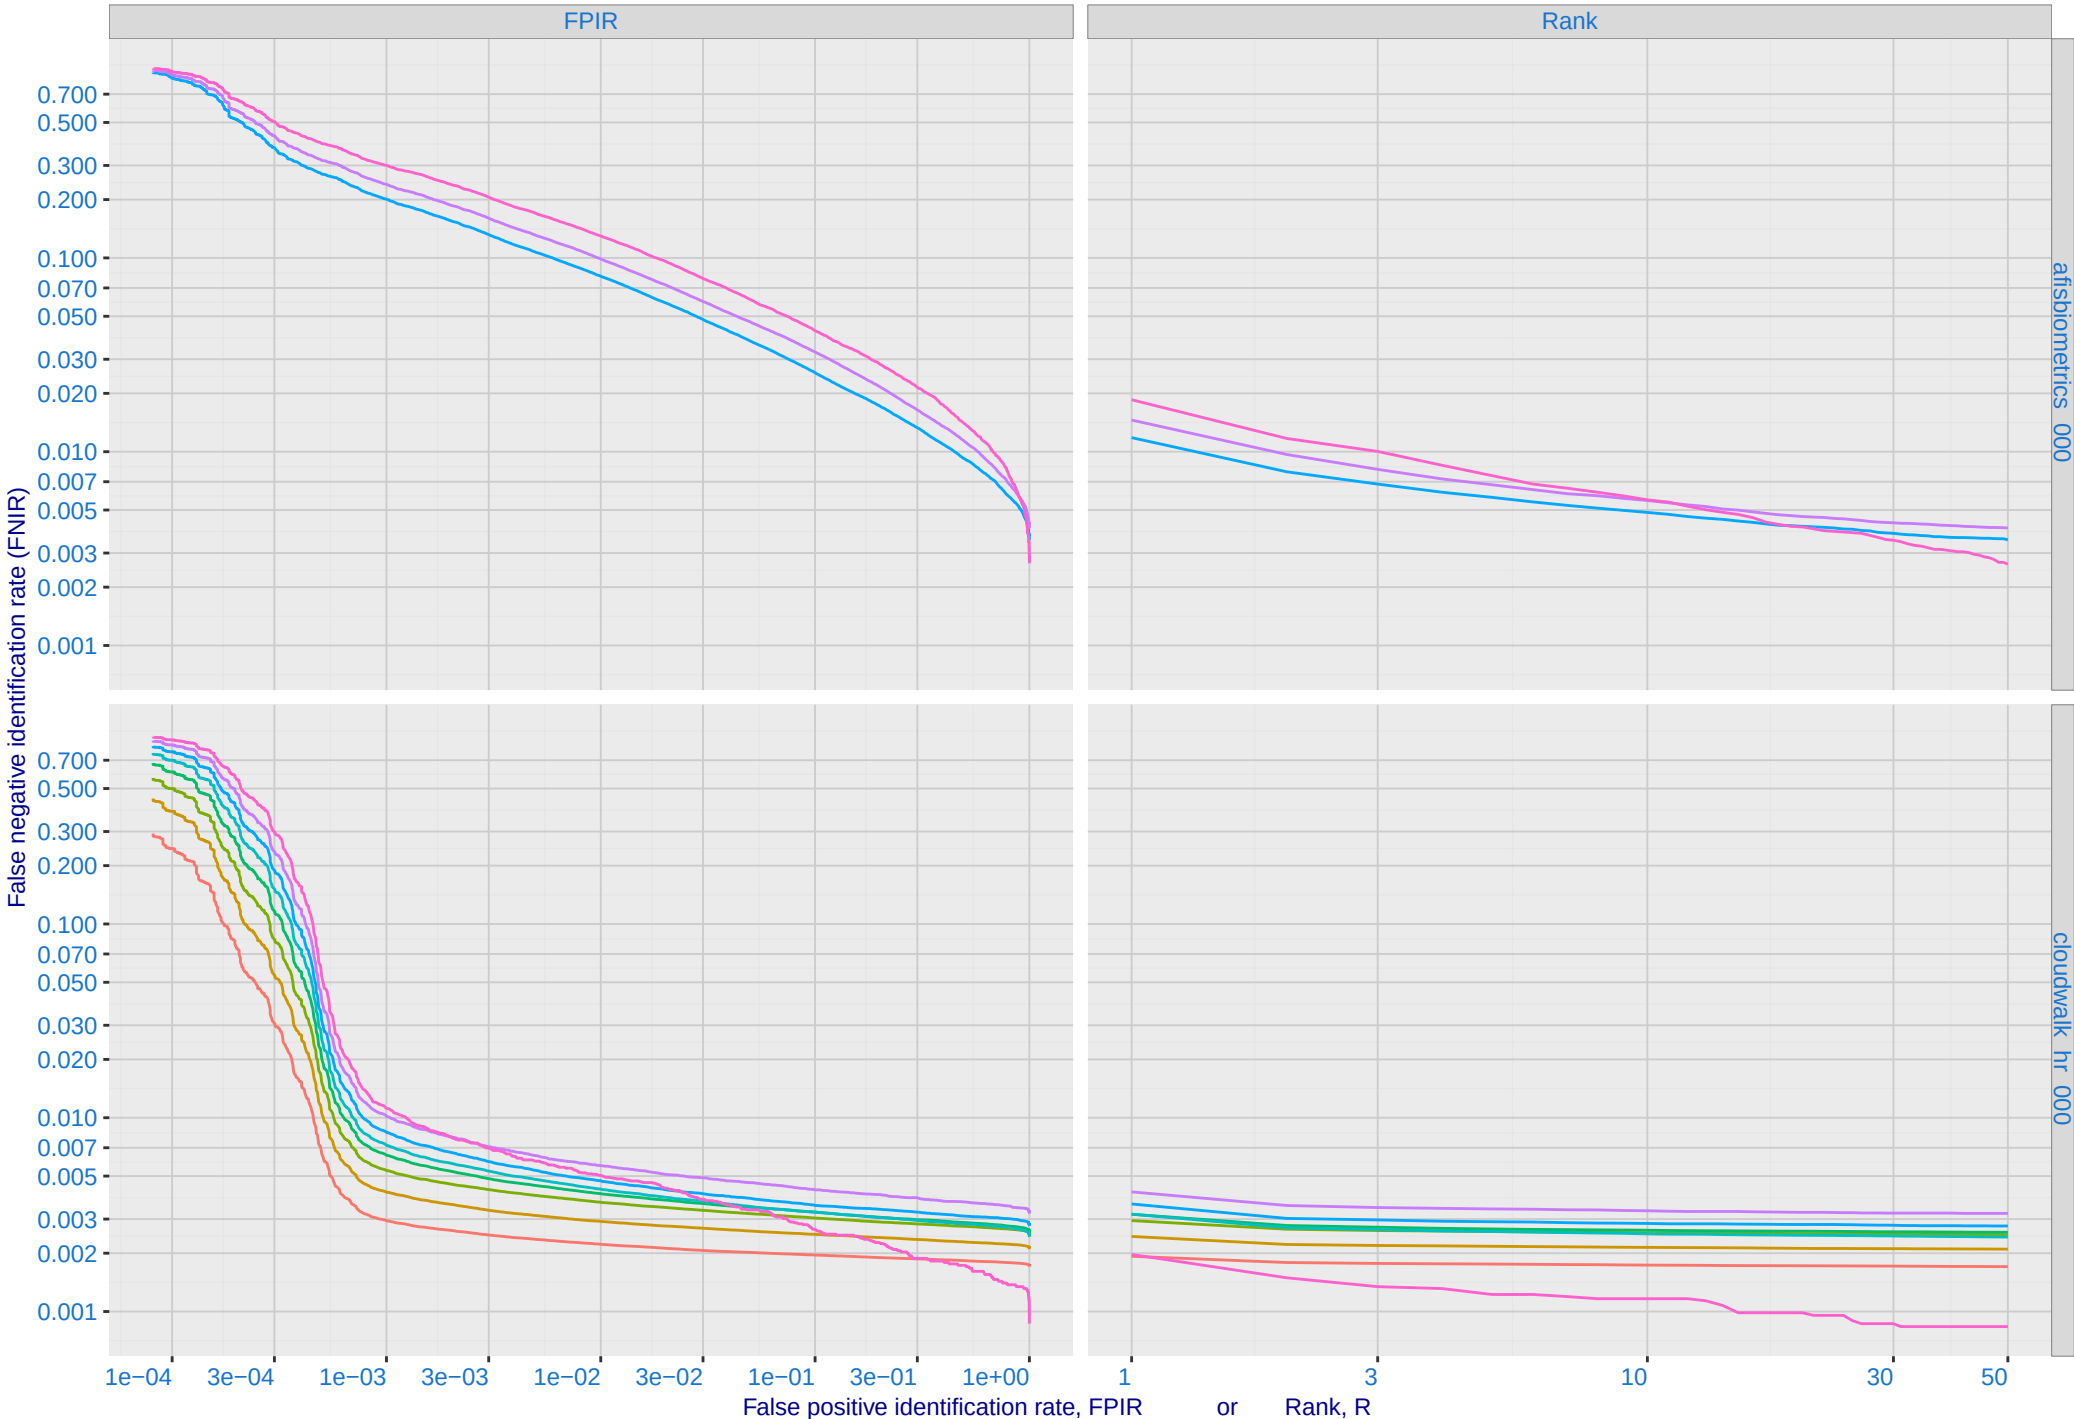

R: Decline of genuine scores with ageing, with some eventually dropping below typical thresholds shown by the horizontal lines

