1、tcl 脚本文件
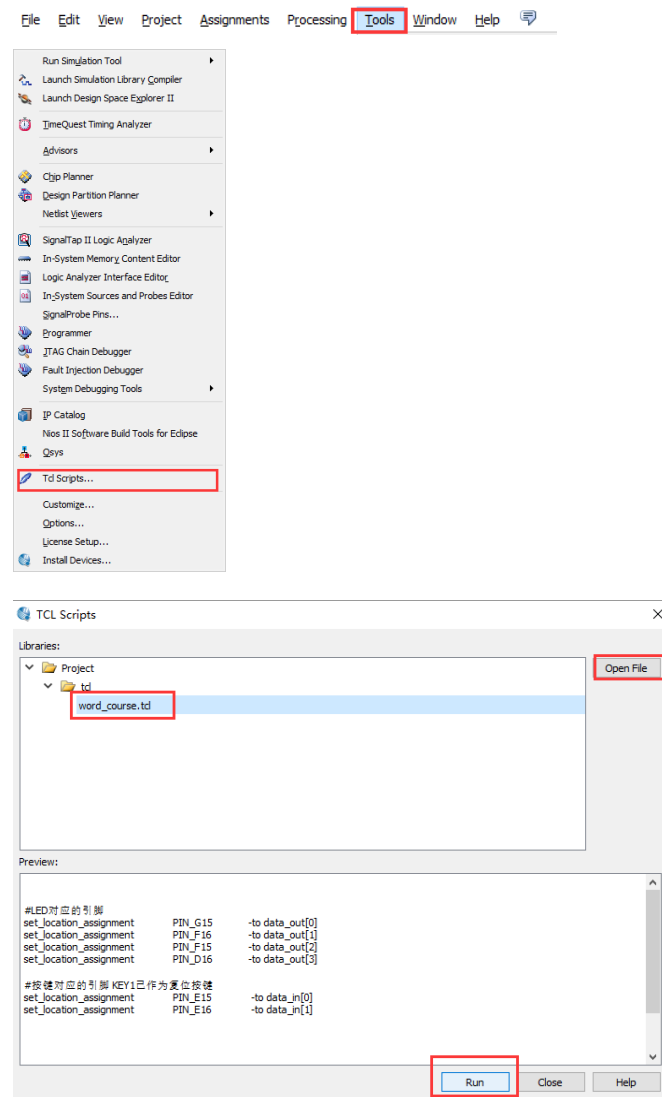

2、tcl 文件的语法

for example：

#LED 对应的引脚

set_location_assignment   PIN_G15 -to data_out[0]

set_location_assignment   PIN_F16 -to data_out[1]

set_location_assignment   PIN_F15 -to data_out[2]

set_location_assignment   PIN_D16 -to data_out[3]

#按键对应的引脚 KEY1 已作为复位按键

set_location_assignment   PIN_E15   -to data_in[0]

set_location_assignment   PIN_E16   -to data_in[1]