

# State Is All You Need: Toward World-State Processing Units

WPU Research Prototype

June 15, 2026

## Abstract

Token sequences are a powerful substrate for language, but they are not the natural computational primitive for persistent world processing. A world is not only observed; it is maintained, updated, branched, corrected, and queried as state. This paper proposes the World-State Processing Unit (WPU), a state-native model and execution abstraction in which objects, relations, time, uncertainty, events, and branch deltas are first-class components. The central operation is not token attention but state propagation: events produce sparse deltas, deltas traverse causal relations, affected regions are updated locally, and dense recomputation is invoked only when locality breaks. We define the token-state distinction, introduce propagation as a simplified local-physics prior, derive a sparse-dense crossover metric, and present a small PyTorch reference implementation, `WorldStateProcessor`. On a synthetic robot-cup object physics task, the prototype reduces next-state prediction MSE from 0.8111 to 0.0005 after 200 training steps and improves branch classification accuracy from 0.1289 to 0.7188, exceeding a 0.6680 majority baseline. Stronger v2 retrieval experiments show that explicit state also exposes pre-propagation working-set control. A regret-distilled state retriever wins 14 of 15 seed/K conditions against an interaction-teacher retriever, and a newer cross-seed experiment shows that risk-adjusted mechanism selection over state-native role/geometry/family descriptors improves held-out loss over a static learned selector for  $K = 8, 16, 32$  at  $N = 2048$ . These results do not establish broad world understanding. They establish a falsifiable research program: if world processing is dominated by persistent identity, local causal change, uncertainty, branching, and small event-conditioned causal working sets, then state should be treated as a primary computational substrate rather than as a serialization target for tokens. The experimental objective is to map the regime where this substrate is useful, not to claim universal superiority over token, graph, or latent world models.

## 1 Introduction

The dominant abstraction in modern deep learning is the token sequence. A token sequence is a list of symbols or embeddings processed through position-indexed operations, most notably attention. This abstraction has been remarkably successful for language and for many domains that can be serialized into a sequence. However, world processing has a different structure. Physical and simulated worlds contain persistent objects, typed relations, heterogeneous attributes, temporal continuity, uncertainty, local causal effects, and multiple possible futures.

This paper asks a narrow question: if the target workload is world processing, should the fundamental unit be the token or the state? We argue that tokens can *describe* state, but they do not preserve state as a computational invariant. A cup can be serialized into text, but the resulting sequence does not make object identity, relation locality, delta updates, uncertainty, or branch sharing first-class operations. A state-native model should not merely retrieve relevant positions; it should update persistent entities and propagate the consequences through a structured world memory.

We call the required conversion *objectification*: an observation, simulator export, database state, or tracker output is converted into persistent, addressable objects with typed attributes, role/affordance state, typed relations, uncertainty, admissible deltas, and branch-local overlays. Objectification is not a claim that perception is solved; it is the contract that defines the state substrate consumed by WPU. The reference implementation treats this as a measurable contract rather than a slogan: identity coverage, relation endpoint validity, confidence, delta validity, and causal-working-set locality can be reported before propagation. This separates a WPU failure caused by poor objectification from a failure caused by the propagation model itself. In the current scheduler, the same contract can act as a safety signal: low objectification quality escalates execution away from blind sparse propagation toward hybrid or dense recomputation. If object identity exists but local relation extraction misses an edge, the prototype can add conservative geometry-derived relation-repair patches. These patches are treated as hypotheses for frontier recovery, not as discovered physical laws. The repair probe now separates nominal type labels from relation-bearing object state. Ungated geometry repair recovers frontier recall but attaches distractors, and the precision collapse worsens under denser distractors. Hand-written type gating preserves precision only while type names match the gate. A small learned scorer transfers across aliased type names when role/affordance variables are preserved, but fails when both type and role information are removed. This makes the objectification boundary falsifiable: WPU does not need names alone; it needs persistent state variables that can support relation hypotheses. A toy downstream diagnostic closes the first repair-to-prediction loop: role-aware learned repair improves aliased-type branch accuracy from 0.343750 to 0.671875 and lowers loss from 1.319667 to 0.885275, while ungated dense-distractor repair restores frontier recall but worsens loss. A PyBullet objectification-loss coupling audit adds a simulator-derived stress test for the same boundary. In the current one-step corruption setting, branch accuracy moves only weakly, but WPU sparse under heavy relation drop has the largest MSE increase (0.087356), and selected- $K$  deficit is the strongest MSE predictor ( $|r| = 0.481851$ ). Thus objectification quality is now connected to downstream degradation, but the coupling remains partial and should be extended to closed-loop or multi-horizon rollouts. A second toy probe tests whether relation candidates can be learned from object histories and transferred to a held-out mechanism family. A history scorer trained on `contact_transfer` and `support_transfer` reaches five-seed mean relation precision/recall 0.987500 on held-out `hidden_field`, improving downstream accuracy from 0.494531 to 0.992188. This is still synthetic evidence; it is not a claim of physical-law discovery. A third toy probe tests relation-to-law transfer. A history-derived relation selector plus an interpretable inverse-distance local law transfers to renamed held-out `hidden_inverse`, reaching five-seed mean relation precision/recall 0.988281 and delta MSE 0.000828 versus 0.445909 for no relation or type prior. This is a controlled synthetic bridge from objectification to approximate local theory, not evidence of unknown-law discovery. An OOD version maps the failure boundary: the relation/law stack remains useful under distance, gain, and denominator shifts, but far-distance relation recall drops to 0.658594, and shifted gain or law form leaves residual MSE even with oracle relations. Thus the intended WPU loop is not “fit a law once”; it is objectify, propose a local rule, stress it, and revise the rule when OOD error separates relation failure from law mis-specification. A revision probe shows this loop can be made operational in the synthetic setting. With 64 calibration samples, gain calibration reduces `hidden_inverse_gain_shift` MSE from 0.115978 to 0.000342; form revision reduces `hidden_power_shift` MSE from 0.054596 to 0.008887. Oracle-relation form revision reaches 0.000232, identifying the remaining gap as relation selection and calibration noise rather than only law-form capacity. The implementation exposes this loop as reporting primitives: `LocalLawHypothesis` stores an interpretable rule candidate, and `LawRevisionReport` records base/revised error, revision decision, and optional relation-selection versus law-residual attribution.

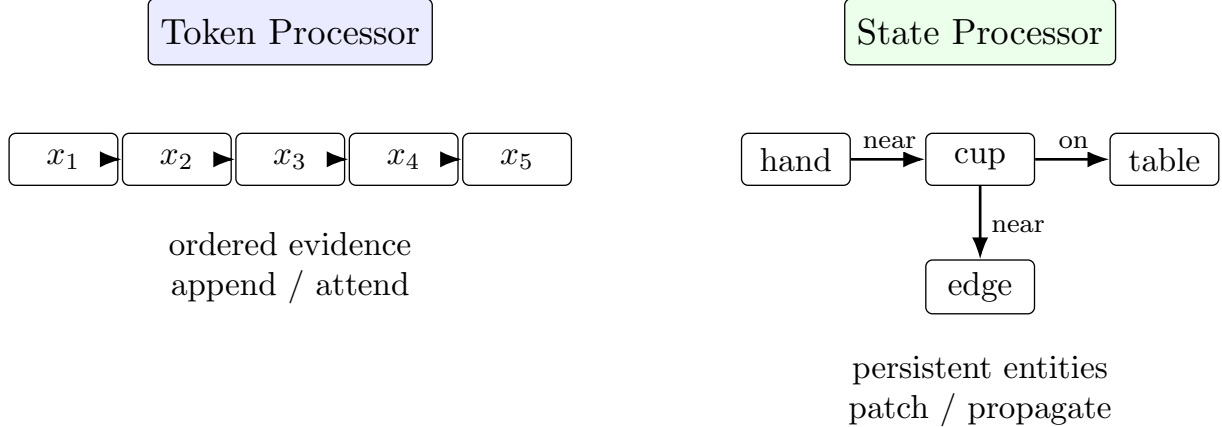


Figure 1: Token processing operates over ordered evidence. State processing operates over persistent entities and relations. The distinction is not what can be represented, but which operations are first-class.

We introduce the World-State Processing Unit (WPU) as both a model family and an execution abstraction. It is not proposed as a replacement for GPUs, TPUs, or NPUs as general numerical accelerators. Instead, it is a workload definition for world-state processing: a WPU maintains explicit state memory, performs sparse event-driven propagation when changes are local, falls back to dense recompute when affected regions become large, and represents alternative futures as deltas over a shared base state.

**Central thesis.** The central thesis is that world processing is not primarily a problem of continuing a sequence; it is a problem of maintaining a changing state under partial observation. Tokens are excellent carriers of evidence, but state is the substrate on which consequences accumulate. A state-native model should therefore make identity, locality, delta update, uncertainty, and branching operationally explicit.

**Contributions.** This paper makes four contributions. First, it formulates a token-state non-equivalence claim in operational rather than representational terms: tokens can serialize state, but serialization does not preserve state operations as invariants. Second, it defines objectification as the construction of persistent state objects, makes objectification quality measurable as a pre-propagation contract, and treats propagation as the central operation over object relations, relating this to simplified local physical causality. Third, it proposes a WPU architecture with sparse, hybrid, and dense execution paths selected by an affected-state crossover metric. Fourth, it provides a minimal reference implementation and small-scale validation task, intended as a starting point for stronger benchmarks rather than as final evidence.

## 2 Relation to Existing Work

WPU is deliberately positioned near several mature research lines rather than outside them. Object-centric representation learning studies how objects can be discovered from perceptual input, including iterative variational inference and slot-based attention mechanisms [6, 7]. Graph networks and interaction networks show that object- and relation-centric message passing is a powerful inductive bias for physical reasoning [2, 3, 9]. Set Transformers and Graph Transformers show how attention

can be adapted to sets and graphs [8]. Latent world-model agents such as PlaNet, Dreamer, DreamerV3, and IRIS learn compact dynamics models for planning or imagination [10, 11, 12, 13]. Recent object-centric and graph world models further emphasize structured entities, causal interactions, sparse attention, and planning over object representations [15, 16, 14, 17].

The WPU claim is therefore not that message passing, object-centric modeling, or world models are new. The distinction is operational and systems-oriented. WPU treats persistent state, event frontiers, sparse-dense routing, delta overlays, branch sharing, and update work as the primary interface. In contrast, most prior world models define a learned dynamics model and then optimize control or prediction quality; most object-centric perception models focus on extracting objects; most graph simulators focus on accurate dynamics under a chosen graph; and most sparse Transformer models keep attention as the central operation. WPU asks a different question: what execution abstraction is appropriate when the workload is maintaining and branching a large world state under local events?

This also clarifies an important limitation. The current prototype assumes that the object-relation state is already available. A complete WPU system would need a perception front-end, such as slot/object discovery or supervised segmentation, to construct and repair the state graph from pixels, point clouds, or multimodal observations. This front-end is outside v1 and is treated as a required next step, not as a solved problem. In the near term, perception should be treated as an object-state adapter layer: WPU can consume state graphs from supervised detectors, object discovery modules, simulators, or logs while the core execution question remains focused on update work, prediction risk, and branch memory.

### 3 Token and State Primitives

#### 3.1 Token

A token model receives a sequence

$$X = (x_1, x_2, \dots, x_T), \quad x_t \in \mathbb{R}^d.$$

Its memory is usually position-indexed: sequence context, hidden activations, or KV cache. The central operation in a Transformer is attention:

$$\text{Attn}(Q, K, V) = \text{softmax}\left(\frac{QK^\top}{\sqrt{d}}\right)V.$$

This operation answers: which positions should a position retrieve from?

#### 3.2 State

A world state is a persistent structured object:

$$\mathcal{S}_t = \{\mathcal{O}_t, \mathcal{R}_t, \mathcal{T}_t, \mathcal{P}_t\}.$$

Here  $\mathcal{O}_t$  is a set of object records,  $\mathcal{R}_t$  is a typed relation graph,  $\mathcal{T}_t$  is temporal memory, and  $\mathcal{P}_t$  represents uncertainty. An event  $e_t$  produces a delta:

$$\mathcal{S}_{t+1} = \mathcal{S}_t \oplus \Delta\mathcal{S}_t.$$

| Property       | Token sequence        | World state                 |
|----------------|-----------------------|-----------------------------|
| Basic unit     | position embedding    | object / relation / belief  |
| Identity       | implicit in context   | explicit object identity    |
| Memory update  | append or rewrite     | patch existing state        |
| Relation       | inferred by attention | stored as typed edge        |
| Future         | continuation          | branch overlay              |
| Typical target | next token            | next state / delta / branch |

Table 1: Token and state differ at the level of computational primitive, not merely at the level of data format.

The central operation is propagation:

$$\delta o_i^{(\ell+1)} = f_\theta \left( o_i, e_t, \sum_{j \in \mathcal{N}(i)} g_\theta(o_i, r_{ij}, o_j, \delta o_j^{(\ell)}) \right).$$

This operation answers: what changed, which objects are causally affected, and how far should the consequences propagate?

Propagation is also a deliberately simplified physical prior. Many useful physical approximations are local: contact forces, support constraints, occlusion, collision risk, and signal flow usually begin at a small set of entities and spread through nearby relations. The WPU does not claim that this local propagation is exact physics. It claims that, for many world-processing regimes, local causal propagation can play the role that simplified Newtonian mechanics plays below relativistic scales: an approximate but operationally useful computation before a more global correction is needed.

### 3.3 Non-equivalence Claim

The claim is not that tokens cannot encode state. Any finite state can be serialized. The claim is that serialization does not preserve the operational invariants needed for efficient world processing: persistent identity, local delta update, relation-addressed propagation, branch sharing, and uncertainty updates. In short:

$$\text{Token} = \text{representation of evidence}, \quad \text{State} = \text{substrate of update}.$$

This distinction is important because representational universality can obscure computational mismatch. A text string can describe a database, a graph, or a physical scene, but the string does not by itself provide indexed update, referential integrity, graph traversal, or copy-on-write branching. The WPU proposal is analogous: it does not deny that token models can learn world regularities; it claims that world-state operations should not have to be reconstructed from sequence position at every step.

## 4 Why a WPU?

GPUs, TPUs, and NPUs are excellent dense numerical engines. LPUs and similar sequence-oriented systems emphasize token streams. A WPU is defined by a different workload: world-state maintenance and update.

This workload has four recurring properties. First, most state persists across time. Second, most events affect only a small subset of the state. Third, effects propagate through a structured neighborhood rather than uniformly across all entities. Fourth, future uncertainty is often branching: multiple hypotheses share the same past and differ only in local deltas. A processor that treats all state as a fresh dense input at every step ignores these properties.

The term “processing unit” is used here as a workload and execution-abstraction claim, not as a completed chip design. Recent accelerator proposals for language or reasoning inference emphasize memory bandwidth and token-generation bottlenecks [18], while neuromorphic and sparse-computation surveys emphasize event-like sparsity and recurrent state dynamics [19]. WPU is complementary: it identifies the memory objects and update operations that a future world-state accelerator would need, but the present implementation remains a PyTorch reference model. Hardware, chiplet, or edge-processor claims should therefore be read as future hypotheses, not as conclusions of this paper.

The performance claim is conditional. If the world has  $N$  objects, an event initially changes  $\Delta N$  objects, relation fanout is  $k$ , propagation depth is  $h$ , and there are  $B$  branches, then the affected fraction is

$$\rho = \frac{\Delta N k^h B}{N}.$$

Dense recomputation is roughly  $O(N)$  for set-level processing or  $O(N^2)$  for full attention. Sparse WPU propagation is approximately

$$O(\Delta N k^h B).$$

Therefore, when  $\rho \ll 1$ , sparse state propagation can be more efficient than full dense recomputation. When  $\rho$  is large, the WPU should route to hybrid or dense computation. The WPU advantage is not universal; it is workload-dependent and measurable.

This complexity model is intentionally incomplete as a hardware model. It does not include graph construction, dynamic edge repair, irregular memory access, frontier queue overhead, scatter/gather efficiency, kernel launch overhead, or state-corruption recovery. Those terms determine whether a WPU-style design actually outperforms dense accelerators on real hardware. The v1 experiments therefore report CPU latency and work proxies, but they should not be read as final hardware evidence. A derived systems claim-boundary audit currently separates four supported proxy axes from two partial trained axes and one explicitly unmeasured real-power/sparse-kernel axis; it also shows that CUDA peak-memory reduction is only 0.304080 despite strong latency proxy reductions. A software runtime or middleware layer is the nearer term target: only after measuring frontier queues, relation fetch, scatter/gather, sparse kernels, delta logs, branch-overlay memory, and recovery costs can a hardware target be specified responsibly.

**Conditional performance proposition.** For workloads in which  $\Delta N k^h B \ll N$ , a WPU-style update has lower asymptotic state-update work than dense recomputation while preserving access to dense correction when locality fails. For workloads in which the affected region is global, the WPU should reduce to dense computation and offers no sparse advantage. This conditional nature is a feature of the proposal: it makes the claim measurable and falsifiable.

## 5 WPU Architecture

A WPU has five components:

1. **State memory:** object store, relation graph, temporal buffer, belief store, and branch delta store.

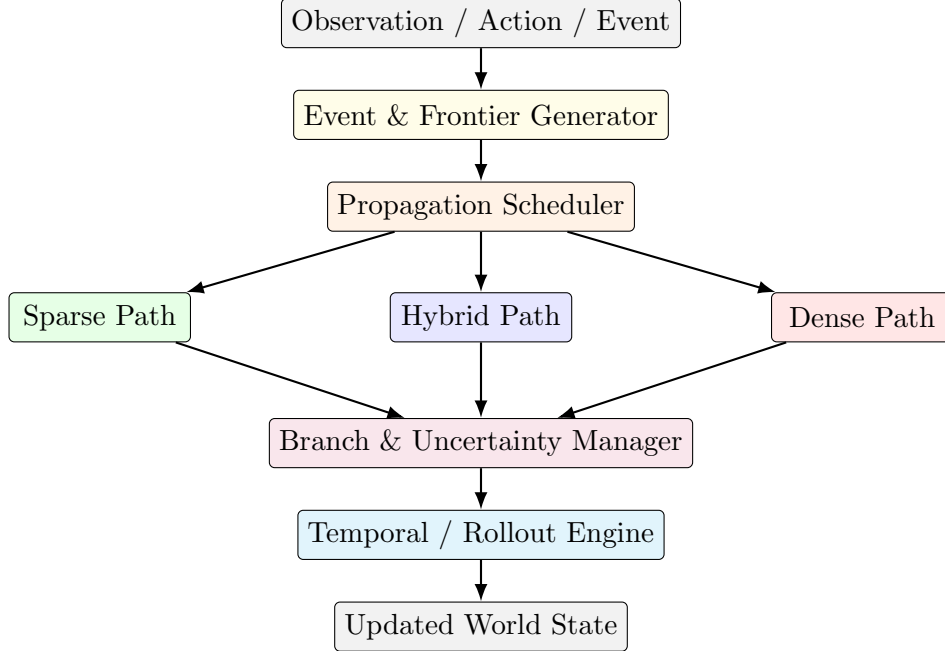


Figure 2: WPU schematic. Events generate frontiers, the scheduler chooses a sparse, hybrid, or dense execution path, and branches are maintained as deltas over shared state.


2. **Frontier generator:** maps observations and actions to initially changed objects.
3. **Propagation core:** performs event-conditioned sparse message passing through typed relations.
4. **Dense fallback:** performs global or regional recomputation when the affected fraction is high.
5. **Branch manager:** maintains multiple futures as deltas rather than full state copies.

**Memory model.** The memory hierarchy is not an implementation detail; it is part of the computational claim. Token systems primarily cache sequence positions. A WPU caches persistent objects, typed relations, recent deltas, uncertainty, and branch overlays. The intended memory operations are lookup-by-identity, neighbor-fetch, delta-append, branch-overlay, and region materialization.

## 6 Propagation Rather Than Attention

Attention remains useful inside a WPU, especially for dense fallback and global consistency. The claim is not that attention is obsolete. The claim is that attention is not the defining operation for world-state processing. For token models, attention retrieves information across positions. For WPU models, propagation computes consequences across causal relations.

This gives propagation a physical interpretation. In the same way that a mechanical disturbance first affects objects in contact or support relation, a state delta should first update the frontier of causally adjacent entities. The dense path is then analogous to a global correction step: it is invoked when the local approximation is no longer sufficient because the affected region has become too large.

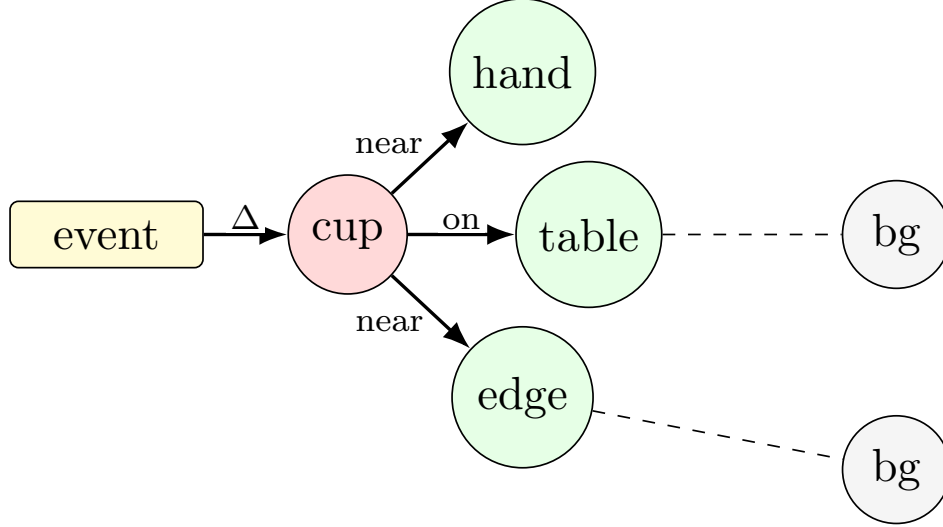

frontier expands only through affected relations

Figure 3: State propagation. An event produces a delta at a target object, and the delta propagates through typed relations until the scheduler stops or escalates the update.

The analogy is not that WPU propagation is a complete physical law. The analogy is methodological. Newtonian mechanics remains useful in regimes where relativistic corrections are negligible because it captures a stable low-order structure of the world. Similarly, local propagation is proposed as a low-order computational prior for many world-processing regimes: useful where causal effects are local, insufficient where long-range coupling dominates, and therefore paired with a dense correction path.

## 7 Reference Implementation

We implemented a small PyTorch reference model named `WorldStateProcessor`. It receives a `StateGraphBatch` containing object features, relation indices, relation features, event features, masks, and scheduler metrics. It predicts object deltas, relation logits, uncertainty, and branch probabilities.

The prototype has three paths:

- **Sparse**: learned relation-conditioned message passing from the event target.
- **Hybrid**: sparse update plus regional dense correction.
- **Dense**: global attention over the object set.

The scheduler uses fixed thresholds:

$$\rho < 0.05 \rightarrow \text{sparse}, \quad \rho < 0.25 \rightarrow \text{hybrid}, \quad \rho \geq 0.25 \rightarrow \text{dense}.$$

These thresholds are engineering defaults for making the v1 route behavior inspectable. They are not claimed to be optimal constants. The supplementary *B*-sweep and training-step sweep



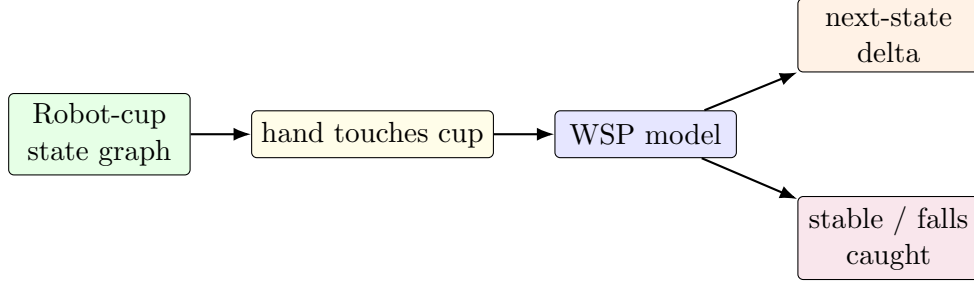


Figure 4: Validation task. The model observes an object-relation state graph and an event, then predicts next-state deltas and future branch probabilities.

| Model             | Next-state MSE | Branch NLL | Branch accuracy |
|-------------------|----------------|------------|-----------------|
| Untrained WSP     | 0.8111         | 1.2070     | 0.1289          |
| Majority baseline | –              | –          | 0.6680          |
| Trained WSP       | 0.0005         | 0.8074     | 0.7188          |

Table 2: Small-scale validation on 256 synthetic evaluation samples. The model was trained for 200 steps with batch size 16.

show that fixed thresholds can hurt accuracy; in this paper, the hard scheduler is evidence for a routing hypothesis, not a final routing policy.


The v2 scheduler should therefore optimize prediction risk and update cost jointly. It should be able to choose regional dense correction even when  $\rho$  is small, or sparse propagation in large worlds, when uncertainty, fanout, relation quality, or branch divergence make that route preferable.

The reference implementation is intentionally small. It should be read as an executable specification of the architecture, not as an optimized model. The important interface is that the same module consumes structured state graphs, routes computation by affected-state metrics, predicts deltas instead of only labels, and emits branch probabilities that can be stored as overlays.


## 8 Small-Scale Validation

The validation task is a synthetic robot-cup object physics problem. The scene contains a cup, table, robot hand, table edge, and configurable background objects. The event is a hand touching the cup with variable force. The model predicts the next object delta and one of three branch labels: stable, falls, or caught.

This task is deliberately not a benchmark of general physical reasoning. It is a unit test for the WPU hypothesis: can an explicit state graph, a local event, a sparse-dense route decision, and branch probabilities be trained and inspected in a single neural model? The experiment is therefore closer to a controlled physics-inspired assay than to a claim of broad physical competence.

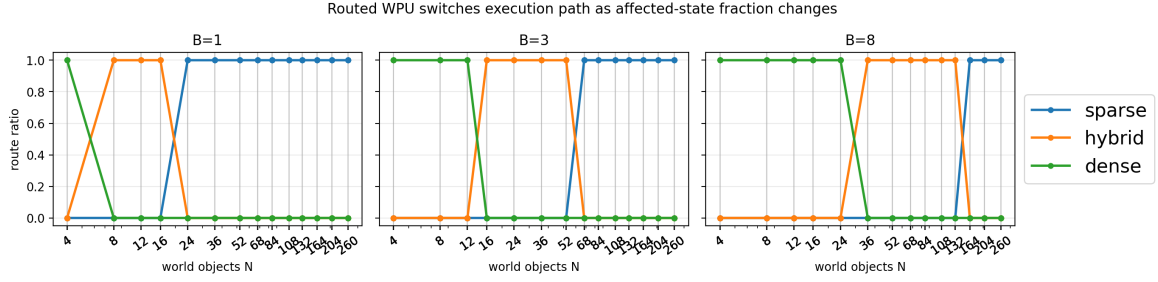


(a) Routed WPU execution-path ratios as world size and branch pressure vary.

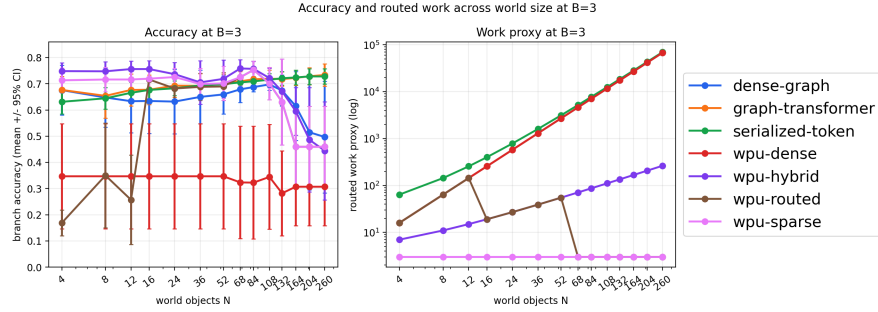


(b) Accuracy and routed work versus world size at  $B = 3$ , aggregated over seeds.

Figure 5: Regime evidence. The route diagram supports the WPU scheduler hypothesis, while the accuracy/work plot shows that lower routed work and higher accuracy do not automatically occur in the same  $N$  regime.

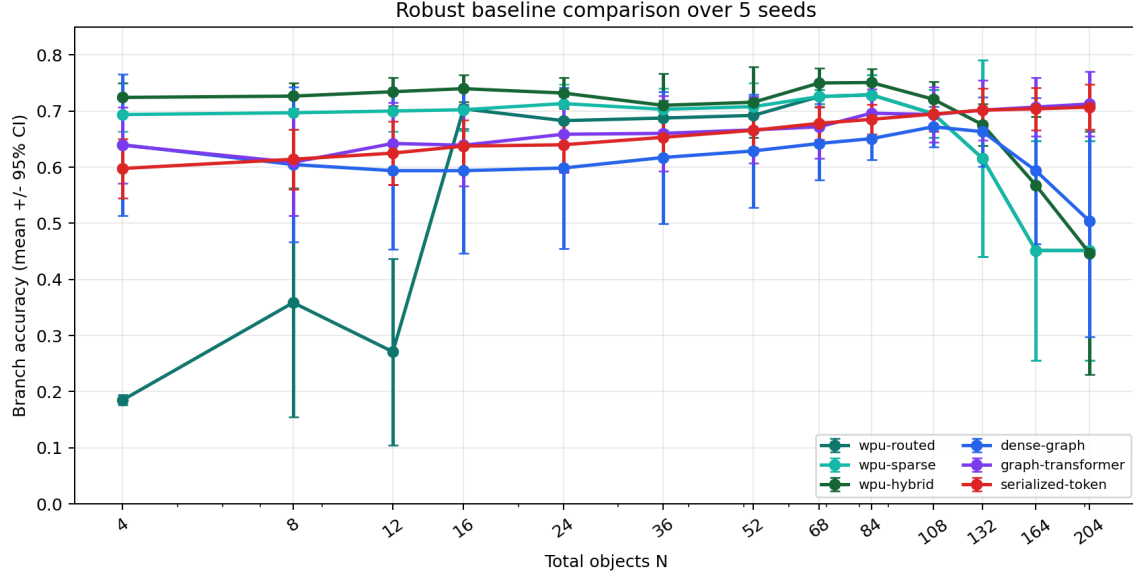

(a) Accuracy with 95% confidence intervals over five seeds.

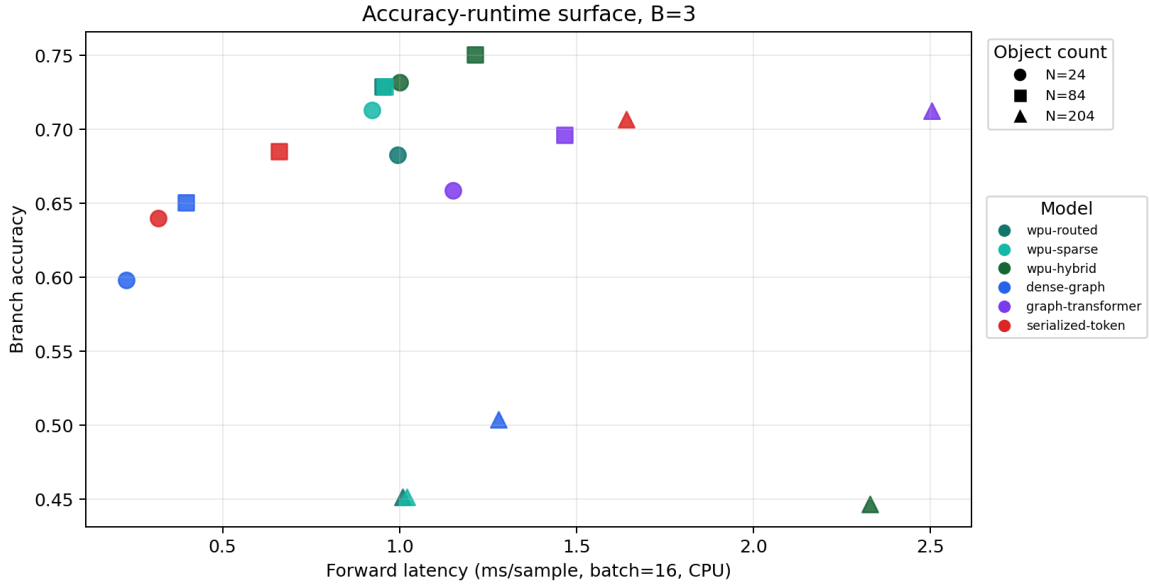

(b) Accuracy-runtime surface at branch pressure  $B = 3$ .

Figure 6: Robust evidence package. WPU variants are strongest in the medium local synthetic regimes, but graph/token baselines dominate accuracy at  $N = 204$ . Runtime advantage appears only at large  $N$ , where the current WPU accuracy fails.

## 9 V2 Retrieval: Risk-Adjusted Working-Set Control

The v1 experiments identify a precise failure boundary: sparse routed work can become attractive before sparse WPU accuracy remains reliable. The v2 question is therefore not only how to propagate better, but how to choose the local working set that should be propagated and which retrieval mechanism should be deployed. This is where explicit state creates an additional intervention point. Before any tensor propagation step, the system can select objects from the event frontier, score alternative working sets, and train that selection policy against downstream state-prediction regret.

Earlier learned retrievers imitated a hand-built interaction-density selector. That objective is state-native, but it optimizes teacher overlap rather than branch prediction loss. The retriever-regret oracle probe showed that the interaction selector is rarely the downstream oracle. We therefore first evaluated a regret-distilled retriever. On a validation split, the system evaluates base candidates `{indexed, proximity, interaction, learned}` and generated local candidates. For each sample, the candidate set with the lowest downstream branch cross-entropy is treated as a pseudo-label object set. A small state-native object scorer is then trained to recover that set from object/event features.

The regret-distilled retriever improves downstream loss at every tested  $K$  on average and wins 14 of 15 seed/ $K$  conditions against the learned interaction retriever. It also changes working-set composition: it selects fewer obstacles and does not always force the hand into the working set, more closely matching the generated oracle than the interaction teacher under the current budget.

This result strengthens the WPU claim in a specific way. Explicit state is useful not only because it enables sparse propagation; it also exposes object-level working-set control as a trainable pre-propagation operation. Token baselines can serialize the same scene, but they do not naturally expose this object-level intervention point as an independent control surface.

The same-seed result is not sufficient as a cross-seed claim. We therefore tested a stricter mechanism-selection variant. Candidate sets are described by explicit state-native features: hand inclusion, selected obstacle ratio, obstacle pair density, event force, event-relative obstacle distance statistics, lateral spread, target-axis alignment, hand/edge distance, and candidate-family flags. The deployed policy selects among static learned interaction, composition-aware candidates, and an invariant set scorer using train-seed evidence. A strict no-harm seed-stable gate is too conservative at  $K = 32$ ; a risk-adjusted selector, which penalizes worst-seed harm without requiring zero harm on every training seed, gives the best deployed tradeoff.

This result sharpens the WPU claim further. Explicit state is useful not only because it enables sparse propagation; it also exposes object-level working-set control and mechanism routing as trainable pre-propagation operations. Token baselines can serialize the same scene, but they do not naturally expose this object-level intervention point as an independent control surface.

The result remains bounded. Opaque set evaluators, score-margin confidence gates, strict no-harm seed-stable gates, and cross-fit ensemble regret gates do not solve the cross-seed selection problem, and the candidate oracle remains substantially better. In the latest cross-fit probe, best closure falls to 0.287268 and cross-fit selected closure to 0.270989, below direct candidate-regret gating. Descriptor standardization plus group-DRO no-harm training is also insufficient as a detached selector: best closure is 0.110889 and train-selected closure is 0.093863. A joint object-set candidate gate, which encodes each candidate working set before scoring it, is also negative: best and safe closure are 0.101454, train-selected closure is 0.072167, and a regression-heavy  $K = 16$  ablation reaches only 0.034751. A fixed-candidate and fixed-propagator downstream-loss selector trained on expected propagation loss and no-harm mass is also negative: best closure is 0.106927, no deployment satisfies harmful accept  $\leq 0.25$ , and train-selected closure is 0.096833. A learned

| $K$ | Learned-interaction loss | Regret-distilled loss | Accuracy before | Accuracy after |
|-----|--------------------------|-----------------------|-----------------|----------------|
| 8   | 0.988727                 | 0.977017              | 0.508889        | 0.542222       |
| 16  | 0.966098                 | 0.955077              | 0.504444        | 0.513333       |
| 32  | 1.004100                 | 0.999112              | 0.480000        | 0.513333       |

Table 3: Regret-distilled retrieval at  $N = 2048$ , averaged over five seeds. The regret-distilled retriever is trained from validation candidate sets that minimize downstream branch loss, rather than from the hand-built interaction teacher.

| $K$ | Static learned loss | Risk-adjusted loss | Accuracy before | Accuracy after |
|-----|---------------------|--------------------|-----------------|----------------|
| 8   | 0.988432            | 0.982002           | 0.506667        | 0.522222       |
| 16  | 0.966183            | 0.951243           | 0.504444        | 0.517778       |
| 32  | 1.004095            | 1.002597           | 0.475556        | 0.522222       |

Table 4: Risk-adjusted state-native mechanism selection at  $N = 2048$ , averaged over five held-out seeds. Candidate mechanisms are selected from train-seed evidence using explicit role/geometry/family descriptors before propagation.

candidate generator trained from downstream-regret object membership creates additional oracle headroom, reaching 0.361251 closure at  $K = 16$ , but the deployed evaluator recovers only 0.042951. A verified candidate controller that appends label-free sparse/local-dense propagation signatures is also weaker than direct candidate-regret gating: best closure is 0.024989, safe best is 0.023029, and train-selected closure is 0.024989. A shallow candidate-aware branch-logit propagation adapter also underperforms direct candidate-regret gating: best/safe closure is 0.092185, and train-selected closure is 0.069911. A joint utility verifier that combines candidate object-set tensors, sparse/local-dense verification signatures, uncertainty, and no-harm safety is also weaker than direct candidate-regret gating: best/safe closure is 0.097845, and train-selected closure is 0.077781. The unresolved v2 problem is therefore candidate generation and scoring learned jointly with retrieval, verification, and propagation dynamics, not merely the generation of more candidate sets, candidate-state features, post-hoc deployment gates, verification-feature descriptors, a shallow selector-loss replacement, fixed-propagator utility heads, or a small output adapter.

A separate PyBullet branch-prior audit adds an important boundary to the shift claim. In the `catch heavy` mechanism, the majority branch prior reaches 0.753968 accuracy, while the best WPU model reaches 0.408730. Thus this regime is not a clean propagation success even when WPU beats other learned baselines; it is a prior-adaptation failure. Mechanism-aware branch priors and uncertainty-gated recompute are therefore required v2 components rather than optional calibration refinements. A small seven-seed mechanism-prior adaptation probe raises shifted WPU win-rate to 0.666667, but worsens mean shifted WPU ECE by 0.024819. A prior-strength sweep finds an accuracy-best nonzero strength (0.75), but no nonzero strength preserves or improves win-rate relative to zero strength without increasing ECE. Calibration-safe prior adaptation therefore remains open. A calibration-selected prior follow-up improves shifted mean WPU ECE by -0.046204 and Brier by -0.105470, but leaves shifted WPU-versus-baseline win-rate at 0.333333. Thus branch-probability calibration and robust mechanism generalization must be reported separately. A few-shot mechanism adaptation follow-up reaches shifted WPU-versus-baseline win-rate 1.000000 and mean margin change 0.050264, but uses mechanism-specific calibration samples. It is evidence for an adapted regime, not for zero-shot physical generalization. A mechanism-aware adaptive

policy strengthens this adapted regime by using selected-prior adaptation for high prior-shift cases and few-shot parameter adaptation otherwise: shifted win-rate remains 1.000000, mean accuracy changes by 0.198412, margin by 0.058201, ECE by -0.099347, and Brier by -0.155443. This is detect-and-adapt evidence, not zero-shot evidence. A follow-up calibration-statistic detector recovers the same safe policy using base ECE and majority-prior gap rather than mechanism-name routing, with zero nominal false adaptation; it is a stricter detect-and-adapt audit, but still uses calibration labels and adaptation samples. A separate 7-seed composition-shift stress probe is a stronger zero-shot positive sub-regime: WPU local-dense wins all three compound mechanisms with mean accuracy delta 0.071428, but mean ECE ratio is 1.014879, so accuracy and calibration remain separate claims. We also ran a WPU-only uncertainty-gated recompute probe on the same compound shift family. Routing low-confidence sparse predictions to the WPU local-dense path improves aggregate accuracy by 0.071428 and ECE by -0.016396, but the effective dense recompute rate is 0.985450. A low-cost threshold with recompute rate 0.025132 improves accuracy by only 0.009260 and worsens ECE by 0.005395. This is a useful negative constraint: uncertainty routing is a plausible WPU control surface, but static confidence thresholds do not yet provide a low-cost calibrated policy. A learned sparse-output benefit gate narrows the constraint further. Using only sparse branch probabilities, entropy/margin, and event features, a source-trained low-cost gate improves aggregate accuracy by 0.052910 at recompute rate 0.205027, but worsens ECE by 0.010769. A few-shot mechanism gate improves accuracy more strongly, but exceeds the low-cost budget or worsens ECE. Thus the next calibration problem is not simply to learn a confidence gate; it is to learn mechanism-aware uncertainty that optimizes accuracy, calibration, and recompute cost jointly. A derived calibration-cost frontier audit makes this boundary explicit across static gates, learned gates, mechanism-aware adaptation, and mechanism-selective calibration routing. Global gates still fail, but the mechanism-selective audit finds one non-reference calibration-safe policy under cost proxy  $\leq 0.25$ : accuracy delta 0.029100, ECE delta -0.001652, Brier delta -0.030758, and cost 0.247355. This is a weak adapted positive sub-regime, not zero-shot calibration-safe routing.

## 10 Discussion

The next-state result shows that the prototype learns the local synthetic delta rule. The branch result is more important: the trained model exceeds the majority baseline despite class imbalance, indicating that event force and object geometry are used for future prediction. The routing sweep is the clearest architectural signal. It demonstrates that WPU compute is a function of affected-state fraction: the same event can be dense in a tiny world, hybrid in a medium world, and sparse in a large world.

The current evidence is intentionally modest. It does not show general world understanding, nor does it validate the propagation rule on real sensorimotor data. It shows that a state-native model can be implemented, trained, and evaluated with explicit state, propagation, branch deltas, and sparse-dense routing. The physical claim should therefore be read as an architectural prior: propagation is a simplified local-causality operator that must be tested against richer physics and real-world dynamics.

The robust baseline results are deliberately included because they constrain the claim. Over five seeds, WPU-hybrid is strongest at  $N = 4, 24, 84$  in this synthetic local task, but graph-transformer and serialized-token baselines dominate at  $N = 204$ . Runtime profiling tells a complementary story: routed WPU becomes faster than dense graph, graph-transformer, and serialized-token baselines at  $N = 204$ , but this is precisely where its accuracy collapses. The central unsolved problem is therefore not whether sparse state propagation can reduce work; it can. The unsolved problem is

how to make the efficiency regime and the accuracy regime overlap.

A denser  $N$ -sweep, reported in the supplement, sharpens this statement. With  $B = 3$ , routed execution changes from dense to hybrid at the measured point  $N = 16$ , and from hybrid to sparse at  $N = 68$ , consistent with the hard  $\rho$  thresholds. However, the best-WPU accuracy advantage crosses below the best non-WPU baseline at roughly  $N \approx 120$ , while routed WPU becomes faster than serialized-token around  $N \approx 124$  and faster than dense graph around  $N \approx 178$ . This is not a victory condition; it is a precise failure boundary for the current prototype.

Dense sweeps over branch pressure and training steps further constrain the claim. Increasing  $B$  is not uniformly beneficial: it can trigger a route transition that increases work and reduces accuracy. Likewise, several baselines reach their best validation accuracy before the nominal final training step. These results make the v1 conclusion stricter: future claims must report not just isolated points, but surfaces over  $N$ ,  $B$ , route, training budget, accuracy, calibration, and latency.

This reframes the experimental objective. The question is not whether WPU wins every benchmark. It is whether there exists a non-empty region over  $\rho$ ,  $N$ , branch pressure, relation noise, and affected-region size where state-native routing is faster at matched accuracy, or faster with an explicitly acceptable accuracy tradeoff.

The controlled stress tests sharpen the failure-mode picture. Under irrelevant relation noise, WPU-hybrid loses only 0.025 branch-accuracy points from 0 to 128 extra relations, while the Graph Transformer loses 0.3438 points. This is a positive result for explicit frontier/routing control: not every relation in a state graph should receive equal effective update pressure. However, the affected-count stress test is more mixed. When many background objects receive synthetic deltas, serialized-token has the best affected-background MSE at the largest affected count, and routed/sparse WPU is competitive but not dominant. This result is important because it prevents an overclaim: state-native propagation is promising for noisy local updates, but v1 does not prove broad superiority for all state-delta regimes.

This does not invalidate the WPU hypothesis; it narrows it. The present evidence supports the routing and state-interface claims more strongly than it supports a quality dominance claim.

The two external reviews of this manuscript correctly identify several limitations that are not solved by the current prototype. First, v1 assumes a structured object-relation state and does not solve perception-to-state construction. Second, the experiments are synthetic and small compared with standard physical-simulation, model-based reinforcement-learning, or robotics benchmarks. Third, WPU propagation overlaps mathematically with message passing in GNNs and Graph Network-based Simulators; the novelty is the execution model and state-memory abstraction, not a new message-passing equation. Fourth, the hard  $\rho$  scheduler is not derived from optimal control or hardware cost models. Fifth, the current memory analysis does not yet measure real branch overlay memory, irregular sparse-kernel cost, or GPU/accelerator efficiency. Sixth, persistent state introduces a safety problem: wrong deltas can corrupt future state, so checkpointing, rollback, uncertainty gates, and consistency checks are required before deployment. The latest selective-corrected rollout probe strengthens the applied-state safety story: sparse WPU reaches H=25 integrity 0.958735 with zero rollback and zero dense escalation, and it reduces the corrected-object fraction to 0.027461. However, the correction trigger still fires on 0.784166 of updates. This is evidence for a bounded memory-safety layer, not evidence that raw sparse dynamics are already stable. A correction-trigger frontier sharpens the boundary: no tested trigger policy meets integrity at least 0.8 with correction rate at most 0.25; the best low-correction entropy gate reaches integrity 0.653668. A learned correction trigger does not remove this boundary on the hard seed split: the best learned trigger reaches integrity 0.958931 only at correction rate 0.791667, while the best policy under correction rate at most 0.25 reaches integrity 0.523279. A stable-transition loss sweep is a partial positive: the strongest delta-norm configuration raises raw finite-clamped integrity to

0.633398, raises selective-correction low-disruption score to 0.809071, and lowers correction rate to 0.598333, but still yields no row satisfying both integrity at least 0.8 and correction rate at most 0.25. A separate PyBullet coverage audit includes matched  $N_{\text{bg}} = 256$ , total  $N = 261$  runs where WPU, graph, and token baselines all complete. A medium-training run improves this evidence: the best WPU reaches branch accuracy 0.466667 versus the best baseline at 0.450000, with 60.629526 times lower forward latency than that best-accuracy baseline. However, the margin is small and the task is still one cup family, so this is positive P3 evidence rather than strong simulator superiority. A 5-seed  $N_{\text{bg}} = 512$ , total  $N = 517$  baseline-complete medium run adds stronger large-state evidence: the best WPU reaches 0.387500 versus the best baseline at 0.362500, with 67.400400 times lower forward latency than that best-accuracy baseline. This is stronger than the earlier micro-screen, but it is still one cup family, one-step, and small-margin. The separate higher-budget WPU-only  $N_{\text{bg}} = 512$  extension remains systems feasibility evidence because the graph-transformer baseline did not complete under the attempted protocol.

These limitations change the paper’s scientific posture. The current claim is not that WPU already surpasses Transformers, GNN simulators, Dreamer-style agents, or object-centric world models. The claim is that world-state processing defines a testable regime: when persistent identity, local causal change, branching, and sparse affected regions dominate, explicit state propagation and delta overlays should be a better execution primitive than repeatedly serializing the whole world into tokens. The experiments in this paper are a first assay of that regime, not a final proof.

The corresponding v2 technical target is concrete: learned routing instead of fixed thresholds; regret-aware retrieval trained from downstream branch loss; invariant candidate descriptors and risk-adjusted mechanism selection across seeds and model instances; joint retriever-propagator training; large- $N$  sparse stability; regional dense correction when pure sparse propagation loses global consistency; long-horizon branch consistency and calibration; object-state adapters for perception; matched Dreamer/GNS/object-centric baselines; state integrity through checkpoint, roll-back, uncertainty gates, and consistency checks; and hardware-aware profiling before any chip or IP claim.

For the WPU proposal to be scientifically useful, it must make predictions that can fail. This paper commits to four such tests.

1. **Locality scaling:** for fixed prediction quality, routed WPU models should require less update work than dense baselines when  $\rho \ll 1$ .
2. **Crossover behavior:** as  $\rho$  increases, the optimal execution path should move from sparse to hybrid to dense rather than remaining sparse.
3. **Branch memory:** for multi-hypothesis rollout with local divergence, delta branches should use less memory than full state copies without losing branch identity.
4. **State advantage:** on tasks where object identity persists across many events, state-native models should need fewer examples or less compute than serialized-token baselines at matched accuracy.

Any of these predictions could fail. If serialized token models match state models at equal compute across controlled identity, locality, and branching benchmarks, then WPU is not a necessary primitive. If sparse routing harms accuracy before it yields meaningful efficiency, then propagation is not the right central operation. These are empirical questions, not matters of terminology.



## 11 Conclusion

World processing requires more than describing the world in tokens. It requires persistent, updateable state. The WPU proposal makes state the primary computational object and propagation the central operation. Tokens remain useful as observations and descriptions, and attention remains useful inside dense state modules, but neither is sufficient as the defining primitive for state-native world models. The current prototype is a small first step: it implements explicit world state, event-conditioned propagation, sparse-dense routing, branch deltas, regret-aware retrieval, and risk-adjusted mechanism selection in a reproducible neural model. The strongest current evidence is not universal dominance, but a more precise mechanism: when world updates depend on a small, identifiable causal working set inside a much larger state, explicit state enables both sparse propagation and trainable object-level control before propagation.

## References

- [1] Ashish Vaswani et al. Attention Is All You Need. Advances in Neural Information Processing Systems, 2017.
- [2] Peter W. Battaglia, Razvan Pascanu, Matthew Lai, Danilo J. Rezende, and Koray Kavukcuoglu. Interaction Networks for Learning about Objects, Relations and Physics. Advances in Neural Information Processing Systems, 2016.
- [3] Peter W. Battaglia et al. Relational inductive biases, deep learning, and graph networks. arXiv:1806.01261, 2018.
- [4] Thomas N. Kipf and Max Welling. Semi-Supervised Classification with Graph Convolutional Networks. ICLR, 2017.
- [5] David Ha and Jürgen Schmidhuber. World Models. arXiv:1803.10122, 2018.
- [6] Klaus Greff, Raphaël Lopez Kaufman, Rishabh Kabra, Nick Watters, Christopher P. Burgess, Daniel Zoran, Loic Matthey, Matthew Botvinick, and Alexander Lerchner. Multi-Object Representation Learning with Iterative Variational Inference. Proceedings of the 36th International Conference on Machine Learning, 2019.
- [7] Francesco Locatello, Dirk Weissenborn, Thomas Unterthiner, Aravindh Mahendran, Georg Heigold, Jakob Uszkoreit, Alexey Dosovitskiy, and Thomas Kipf. Object-Centric Learning with Slot Attention. Advances in Neural Information Processing Systems, 2020.
- [8] Juho Lee, Yoonho Lee, Jungtaek Kim, Adam R. Kosiorek, Seungjin Choi, and Yee Whye Teh. Set Transformer: A Framework for Attention-based Permutation-Invariant Neural Networks. Proceedings of the 36th International Conference on Machine Learning, 2019.
- [9] Alvaro Sanchez-Gonzalez, Jonathan Godwin, Tobias Pfaff, Rex Ying, Jure Leskovec, and Peter W. Battaglia. Learning to Simulate Complex Physics with Graph Networks. Proceedings of the 37th International Conference on Machine Learning, 2020.
- [10] Danijar Hafner, Timothy Lillicrap, Ian Fischer, Ruben Villegas, David Ha, Honglak Lee, and James Davidson. Learning Latent Dynamics for Planning from Pixels. Proceedings of the 36th International Conference on Machine Learning, 2019.

- [11] Danijar Hafner, Timothy Lillicrap, Jimmy Ba, and Mohammad Norouzi. Dream to Control: Learning Behaviors by Latent Imagination. International Conference on Learning Representations, 2020.
- [12] Danijar Hafner, Jurgis Pasukonis, Jimmy Ba, and Timothy Lillicrap. Mastering Diverse Domains through World Models. arXiv:2301.04104, 2023.
- [13] Vincent Micheli, Eloi Alonso, and François Fleuret. Transformers are Sample Efficient World Models. arXiv:2209.00588, 2022.
- [14] Anson Lei, Bernhard Schölkopf, and Ingmar Posner. SPARTAN: A Sparse Transformer World Model Attending to What Matters. Advances in Neural Information Processing Systems, 2025.
- [15] Yosuke Nishimoto and Takashi Matsubara. Object-Centric World Models for Causality-Aware Reinforcement Learning. Proceedings of the AAAI Conference on Artificial Intelligence, 40(29):24585–24593, 2026.
- [16] Rodion Vakhitov, Leonid Ugadiarov, and Aleksandr Panov. Object-Centric World Models Meet Monte Carlo Tree Search. arXiv:2601.06604, 2026.
- [17] Jiawei Liu, Senqiao Yang, Mingjun Wang, Yu Wang, and Bei Yu. Graph World Models: Concepts, Taxonomy, and Future Directions. arXiv:2604.27895, 2026.
- [18] Matthew Adiletta, Gu-Yeon Wei, and David Brooks. RPU: A Reasoning Processing Unit. arXiv:2602.18568, 2026.
- [19] Osvaldo Simeone. Modern Neuromorphic AI: From Intra-Token to Inter-Token Processing. arXiv:2601.00245, 2026.

## A Supplementary Materials

The main paper keeps only the figures and tables needed for the central claim. This supplement records secondary implementation details and dense sweeps used to bound the claim.

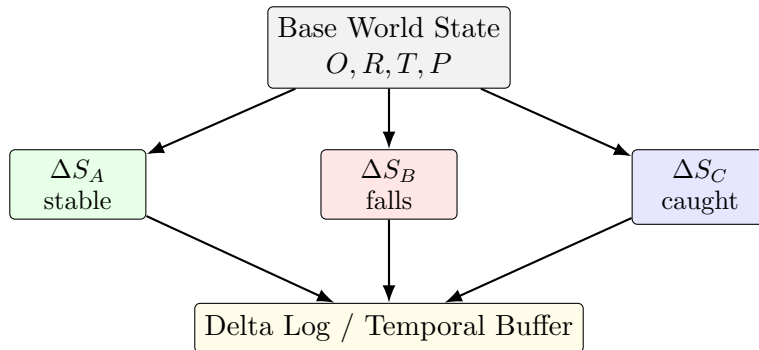


Figure 7: Supplementary branch-memory schematic. A WPU shares the base state and stores branch-specific deltas, reducing memory from  $O(BN)$  to  $O(N + B\Delta)$  when branches are local.

| Background objects | Sparse ratio | Hybrid ratio | Dense ratio |
|--------------------|--------------|--------------|-------------|
| 0                  | 0.0000       | 0.0000       | 1.0000      |
| 20                 | 0.0000       | 1.0000       | 0.0000      |
| 80                 | 1.0000       | 0.0000       | 0.0000      |

Table 5: Supplementary routing sweep. The same local event routes differently depending on the fraction of world state affected by the event.

| Model            | Acc. at $N = 4$ | Acc. at $N = 24$ | Acc. at $N = 84$ |
|------------------|-----------------|------------------|------------------|
| WPU routed       | 0.6719          | 0.7969           | 0.6719           |
| WPU sparse       | 0.7812          | 0.8047           | 0.6719           |
| WPU hybrid       | 0.7812          | 0.7969           | 0.7969           |
| WPU dense        | 0.6719          | 0.6719           | 0.6719           |
| Dense graph      | 0.4219          | 0.5000           | 0.5938           |
| Serialized token | 0.5625          | 0.6641           | 0.7891           |

Table 6: Supplementary baseline and ablation branch accuracy after 100 training steps. The result supports a regime hypothesis rather than universal WPU dominance.

| Regime    | Best WPU          | Accuracy            | Best non-WPU      | Accuracy            |
|-----------|-------------------|---------------------|-------------------|---------------------|
| $N = 4$   | WPU hybrid        | $0.7242 \pm 0.0260$ | Dense graph       | $0.6398 \pm 0.1257$ |
| $N = 24$  | WPU hybrid        | $0.7320 \pm 0.0280$ | Graph Transformer | $0.6609 \pm 0.0680$ |
| $N = 84$  | WPU hybrid        | $0.7508 \pm 0.0244$ | Graph Transformer | $0.6953 \pm 0.0388$ |
| $N = 204$ | WPU sparse/routed | $0.4516 \pm 0.1957$ | Graph Transformer | $0.7172 \pm 0.0615$ |


Table 7: Supplementary robust baseline comparison over five seeds, 150 training steps, and 256 evaluation samples per condition.

| Change type                        | Measured bracket      | Estimated $N$ | Interpretation                                |
|------------------------------------|-----------------------|---------------|-----------------------------------------------|
| Route: dense to hybrid             | $12 \rightarrow 16$   | 16 measured   | hard scheduler crosses $\rho < 0.25$          |
| Route: hybrid to sparse            | $52 \rightarrow 68$   | 68 measured   | hard scheduler crosses $\rho < 0.05$          |
| Accuracy: WPU vs non-WPU           | $108 \rightarrow 132$ | $\approx 120$ | WPU-family advantage disappears               |
| Runtime: routed WPU vs token       | $108 \rightarrow 132$ | $\approx 124$ | routed sparse becomes faster than token       |
| Runtime: routed WPU vs dense graph | $164 \rightarrow 204$ | $\approx 178$ | routed sparse becomes faster than dense graph |


Table 8: Supplementary dense  $N$ -sweep change points over  $N = 4, 8, 12, 16, 24, 36, 52, 68, 84, 108, 132, 164, 204, 260$ .

| $N$ | Best $B$ | Best routed acc. | Best runtime ms/sample | Route changes                                 |
|-----|----------|------------------|------------------------|-----------------------------------------------|
| 24  | 1        | 0.7258           | 0.6452                 | $B = 1$ sparse, $B = 2$ hybrid, $B = 6$ dense |
| 84  | 1        | 0.7531           | 0.7204                 | $B = 1$ sparse, $B = 5$ hybrid                |
| 132 | 1        | 0.6305           | 0.6050                 | $B = 1$ sparse, $B = 7$ hybrid                |
| 204 | 1        | 0.4594           | 0.6483                 | $B = 1$ sparse, $B = 11$ hybrid               |

Table 9: Supplementary dense  $B$ -sweep over  $B = 1, \dots, 16$ . Increasing branch pressure moves routed WPU toward hybrid or dense execution, but accuracy is not monotonic in  $B$ .

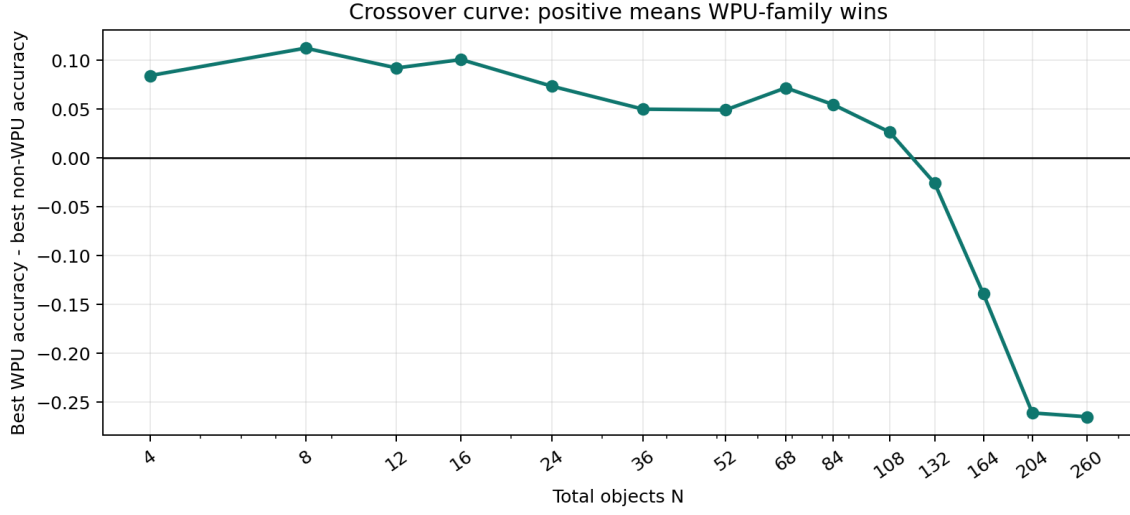

(a) Accuracy crossover curve. Positive values mean the best WPU variant exceeds the best non-WPU baseline.

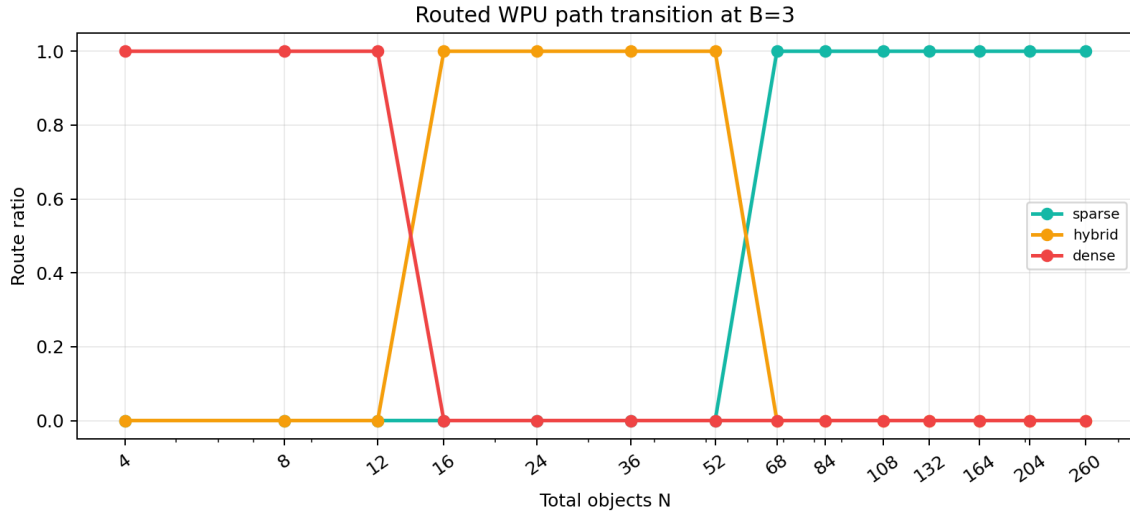


(b) Routed WPU path transition at branch pressure  $B = 3$ .


Figure 8: Supplementary dense  $N$ -sweep evidence. Scheduler transitions occur near the theoretical  $\rho$  thresholds, but accuracy and runtime crossovers do not yet align.

| Model             | Best step | Best acc. | Acc. at 150 | Acc. at 300 |
|-------------------|-----------|-----------|-------------|-------------|
| WPU routed        | 300       | 0.7477    | 0.6836      | 0.7477      |
| WPU sparse        | 300       | 0.7477    | 0.6836      | 0.7477      |
| WPU hybrid        | 100       | 0.7719    | 0.7281      | 0.7070      |
| Dense graph       | 75        | 0.7617    | 0.6125      | 0.6961      |
| Graph Transformer | 75        | 0.7906    | 0.6555      | 0.7555      |
| Serialized token  | 75        | 0.7875    | 0.6422      | 0.7063      |

Table 10: Supplementary dense training-step sweep at  $N = 84, B = 3$ . A single fixed training budget is not sufficient evidence of model-family dominance.

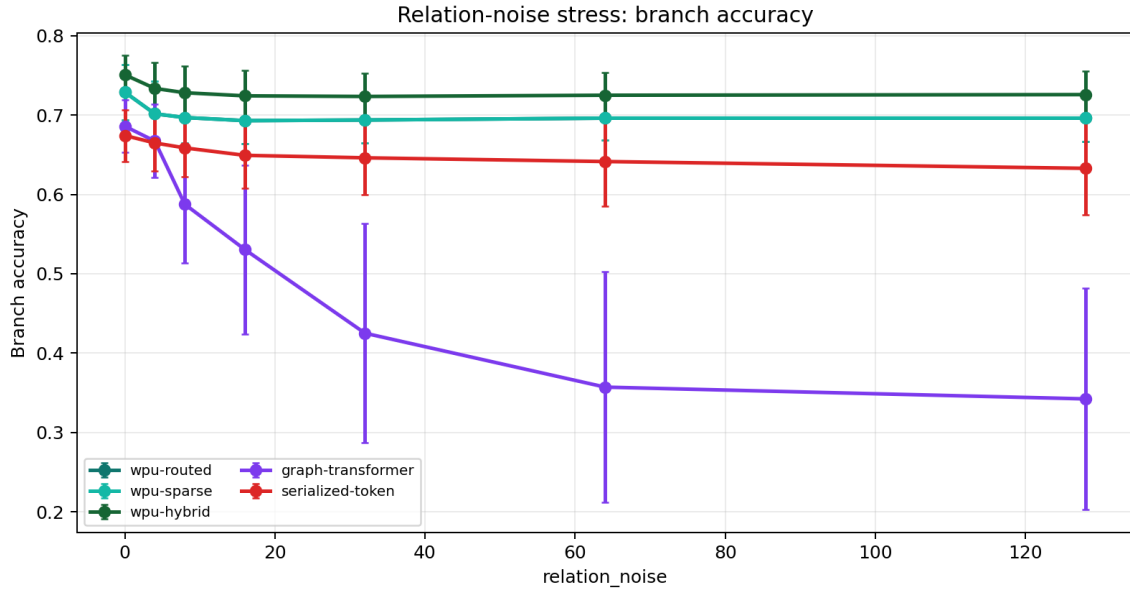

(a) Branch accuracy under irrelevant relation noise.

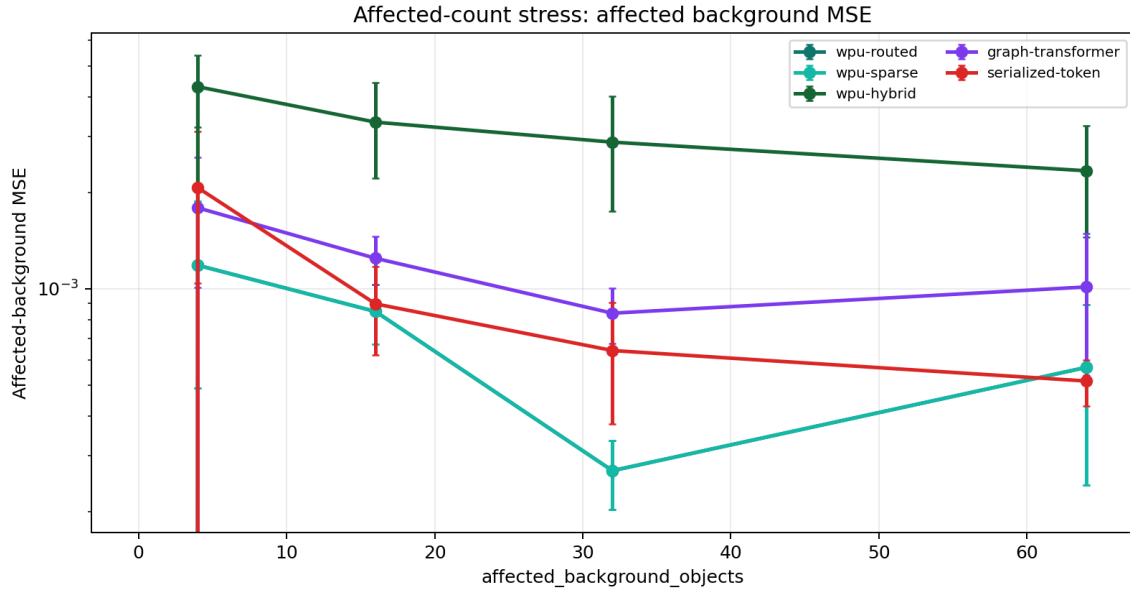

(b) Affected-background MSE under increasing affected-region size.

Figure 9: Supplementary controlled stress tests. Relation noise tests robustness to irrelevant edges; affected count tests whether local-update models remain valid when the changed region becomes less local.