```xml
<?xml version='1.0' encoding='UTF-8'?>
<Root>
<process name="Lotus Notes - Setup" version="1.0" bpversion="5.0.23.1385" narrative="." type="object" r
<appdef>
<element name="Lotus Notes - Setup">
<id>249aeb35-5cb2-4815-81d9-2de38766f897</id>
<element name="Client Configuration - Step 1">
<id>96eb686b-b30c-4e54-b578-5290c562f825</id>
<element name="Next Button">
<id>c8b2db7d-2f69-42c0-abbf-230c642c7f76</id>
<type>Window</type>
<basetype>Window</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value="&amp;amp;Next"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="IRIS.bmpbutton"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="299"/>
</attribute>
```

```xml
<attribute name="Y">
<ProcessValue datatype="number" value="276"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="100"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="24"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal" inuse="True">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
```

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration &lt;UNKNOWN&

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="IRIS.bmpbutton"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="#32770"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="443"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="235"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="499"/>

</attribute>

```xml
<attribute name="pHeight">
<ProcessValue datatype="number" value="335"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="62"/>
</attribute>
<attribute name="MatchIndex" inuse="True">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
      </attributes>
    </element>
    <type>Window</type>
    <basetype>Window</basetype>
    <datatype>text</datatype>
    <diagnose>False</diagnose>
    <attributes>
      <attribute name="WindowText" inuse="True">
        <ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration"/>
      </attribute>
      <attribute name="ClassName" inuse="True">
        <ProcessValue datatype="text" value="#32770"/>
      </attribute>
      <attribute name="CtrlID">
        <ProcessValue datatype="number" value="0"/>
      </attribute>
      <attribute name="X">
        <ProcessValue datatype="number" value="391"/>
      </attribute>
      <attribute name="Y">
        <ProcessValue datatype="number" value="161"/>
      </attribute>
      <attribute name="Width">
        <ProcessValue datatype="number" value="499"/>
      </attribute>
      <attribute name="Height">
        <ProcessValue datatype="number" value="335"/>
      </attribute>
```

```xml
</attribute>

<attribute name="Visible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="ScreenVisible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="ChildCount" inuse="True">

<ProcessValue datatype="number" value="31"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="&amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="#32770"/>
```

```xml
</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

</attributes>

</element>

<element name="Client Configuration - Step 2">

<id>85d76956-ef54-4088-a57b-b03083d643a5</id>

<element name="Name">

<id>db75d3ef-4a40-4725-bf4d-02bad3cd7cec</id>

<type>Edit</type>

<basetype>Edit</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Edit"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>
```

```xml
<attribute name="X">
<ProcessValue datatype="number" value="152"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="123"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="309"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="23"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal" inuse="True">
<ProcessValue datatype="number" value="15"/>
</attribute>
```

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration &lt;UNKNOWN&

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="Edit"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="#32770"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="443"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="235"/>

</attribute>

```xml
<attribute name="pWidth">
<ProcessValue datatype="number" value="499"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="335"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="62"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
```

```xml
<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

</attributes>

</element>

<element name="Domino Checkbox">

<id>7356b074-ed8c-4441-97ea-f2bbef532775</id>

<type>Button</type>

<basetype>Button</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="I &amp;amp;want to connect to a Domino server."/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Button"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="153"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="231"/>

</attribute>
```

```xml
<attribute name="Width">
<ProcessValue datatype="number" value="276"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="34"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal" inuse="True">
<ProcessValue datatype="number" value="20"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration &amp;lt;UNKNOWN&
</attribute>
```

```xml
<attribute name="AncestorCount">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="TypeName">
<ProcessValue datatype="text" value="Button"/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration"/>
</attribute>
<attribute name="pClassName">
<ProcessValue datatype="text" value="#32770"/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="443"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="235"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="499"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="335"/>
</attribute>
```

```xml
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="62"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
</attributes>
</element>
<type>Window</type>
```

```xml
<basetype>Window</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="#32770"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="391"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="161"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="499"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="335"/>

</attribute>

<attribute name="Visible" inuse="True">

<ProcessValue datatype="flag" value="True"/>
```

```xml
</attribute>

<attribute name="ScreenVisible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="ChildCount" inuse="True">

<ProcessValue datatype="number" value="31"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="&amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="#32770"/>

</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>
```

```xml
</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

</attributes>

</element>

<element name="Client Configuration - Step 3">

<id>ea4d4496-50a3-4f7f-844f-1e05c253df3b</id>

<element name="POP Checkbox">

<id>94195453-2dbd-4a92-aa9d-ae0202b9c780</id>

<type>Button</type>

<basetype>Button</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="&amp;amp;Internet mail servers (POP or IMAP, SMTP)"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Button"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="153"/>

</attribute>
```

```xml
<attribute name="Y">
<ProcessValue datatype="number" value="65"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="298"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="24"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="8"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
```

```xml
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration &amp;lt;UNKNOWN&
</attribute>
<attribute name="AncestorCount">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="TypeName">
<ProcessValue datatype="text" value="Button"/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration"/>
</attribute>
<attribute name="pClassName">
<ProcessValue datatype="text" value="#32770"/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="391"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="161"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="499"/>
</attribute>
```

```xml
<attribute name="pHeight">
<ProcessValue datatype="number" value="335"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="17"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
</attributes>

</element>

<type>Window</type>

<basetype>Window</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="#32770"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="391"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="161"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="499"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="335"/>
```

```xml
</attribute>

<attribute name="Visible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="ScreenVisible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="ChildCount" inuse="True">

<ProcessValue datatype="number" value="17"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="&amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="#32770"/>
```

```xml
</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

</attributes>

</element>

<element name="Not Default">

<id>d962005f-528c-4948-a3a9-d671c7136874</id>

<element name="Default Checkbox">

<id>3a2f06a6-b8a1-4392-b28a-008cde889720</id>

<type>Button</type>

<basetype>Button</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="In the future, do not perform this check"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Button"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>
```

```xml
<attribute name="X">
<ProcessValue datatype="number" value="11"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="76"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="204"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="18"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="5"/>
</attribute>
```

```xml
<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="IBM Notes &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="Button"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="IBM Notes"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="#32770"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="446"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="161"/>

</attribute>
```

```xml
<attribute name="pWidth">
<ProcessValue datatype="number" value="389"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="133"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="5"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
```

```xml
<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

</attributes>

</element>

<group name="Element1">

<id>f3382120-809b-4718-b449-eadb103ddec6</id>

</group>

<type>Label</type>

<basetype>Label</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="IBM Notes is not currently set as your default email program.  Woul

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Static"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="11"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="11"/>
```

```xml
</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="361"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="27"/>

</attribute>

<attribute name="Visible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="ScreenVisible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="IBM Notes &amp;lt;UNKNOWN&amp;gt; "/>
```

```xml
</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="Static"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="IBM Notes"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="#32770"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="446"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="161"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="389"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="number" value="133"/>
```

```xml
</attribute>

<attribute name="pVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pScreenVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pEnabled">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="5"/>

</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

</attributes>

</element>
```

```xml
<element name="Client Configuration - Step 4">
<id>553af2c2-e6e3-4de4-98a9-99a7a172b287</id>
<element name="POP Server">
<id>bb0b582e-7267-48f1-be6a-b87e6f16614b</id>
<type>Edit</type>
<basetype>Edit</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Edit"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="152"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="198"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="240"/>
</attribute>
```

```xml
<attribute name="Height">

<ProcessValue datatype="number" value="23"/>

</attribute>

<attribute name="Visible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="ScreenVisible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="40"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration &amp;lt;UNKNOWN&

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>
```

```xml
<attribute name="TypeName">
<ProcessValue datatype="text" value="Edit"/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration"/>
</attribute>
<attribute name="pClassName">
<ProcessValue datatype="text" value="#32770"/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="391"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="161"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="499"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="335"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="3"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="42"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
</attributes>
</element>
<type>Window</type>
<basetype>Window</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
```

```xml
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="#32770"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="391"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="161"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="499"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="335"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
```

```xml
</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="ChildCount" inuse="True">

<ProcessValue datatype="number" value="42"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="&amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="#32770"/>

</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>
```

```xml
</attribute>
</attributes>
</element>
<element name="Client Configuration - Step 5">
<id>8592cb9a-5d5e-402e-a35c-7c7ec2e75e94</id>
<element name="Account Name">
<id>6efeedf9-6742-4df2-8d28-544d44662eb1</id>
<type>Edit</type>
<basetype>Edit</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Edit"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="238"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="72"/>
</attribute>
```

```xml
<attribute name="Width">
<ProcessValue datatype="number" value="150"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="23"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="25"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration &amp;lt;UNKNOWN&
</attribute>
```

```xml
<attribute name="AncestorCount">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="TypeName">
<ProcessValue datatype="text" value="Edit"/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration"/>
</attribute>
<attribute name="pClassName">
<ProcessValue datatype="text" value="#32770"/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="391"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="161"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="499"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="335"/>
</attribute>
```

```xml
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="42"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
</attributes>
</element>
<element name="Password">
```

<id>0b00fb8b-eb32-4c6d-8023-7bf273ac088e</id>

<type>Window</type>

<basetype>Window</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="IRIS.password"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="237"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="106"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="148"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="24"/>

</attribute>

```xml
<attribute name="Visible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="ScreenVisible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="27"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration &amp;lt;UNKNOWN&

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="IRIS.password"/>

</attribute>
```

```xml
<attribute name="pWindowText">
<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration"/>
</attribute>
<attribute name="pClassName">
<ProcessValue datatype="text" value="#32770"/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="391"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="161"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="499"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="335"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="42"/>
</attribute>
<attribute name="MatchIndex" inuse="True">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
</attributes>
</element>
<type>Label</type>
<basetype>Label</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value="Enter your Internet account login name and password."/>
```

```xml
</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Static"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="153"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="43"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="319"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="14"/>

</attribute>

<attribute name="Visible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="ScreenVisible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>
```

```xml
</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="23"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration &amp;lt;UNKNOWN&

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="Static"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="#32770"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>
```

```xml
        </attribute>
        <attribute name="pX">
        <ProcessValue datatype="number" value="391"/>
        </attribute>
        <attribute name="pY">
        <ProcessValue datatype="number" value="161"/>
        </attribute>
        <attribute name="pWidth">
        <ProcessValue datatype="number" value="499"/>
        </attribute>
        <attribute name="pHeight">
        <ProcessValue datatype="number" value="335"/>
        </attribute>
        <attribute name="pVisible">
        <ProcessValue datatype="flag" value="True"/>
        </attribute>
        <attribute name="pScreenVisible">
        <ProcessValue datatype="flag" value="True"/>
        </attribute>
        <attribute name="pEnabled">
        <ProcessValue datatype="flag" value="True"/>
        </attribute>
        <attribute name="pActive">
        <ProcessValue datatype="flag" value="True"/>
        </attribute>
        <attribute name="pOrdinal">
        <ProcessValue datatype="number" value="3"/>
```

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="42"/>

</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

<type>Edit</type>

<basetype>Edit</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Edit"/>

</attribute>

```xml
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="152"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="188"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="242"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="23"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Ordinal">
<ProcessValue datatype="number" value="20"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration &amp;lt;UNKNOWN&
</attribute>
<attribute name="AncestorCount">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="TypeName">
<ProcessValue datatype="text" value="Edit"/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration"/>
</attribute>
<attribute name="pClassName">
<ProcessValue datatype="text" value="#32770"/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="391"/>
</attribute>
```

```xml
<attribute name="pY">
<ProcessValue datatype="number" value="161"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="499"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="335"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="42"/>
</attribute>
```

```xml
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
</attributes>
</element>
<type>Window</type>
<basetype>Window</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="#32770"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="391"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="161"/>
```

```xml
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="499"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="335"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="42"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="&amp;lt;UNKNOWN&amp;gt; "/>
```

```
</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="#32770"/>

</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

</attributes>

</element>

<element name="Client Configuration - Step 7">

<id>8b377d07-bf1a-414e-b2b3-bb702088b1cd</id>

<element name="Email Address">

<id>d9b82b55-349c-4cf9-a8a6-c88555de82d8</id>

<type>Edit</type>

<basetype>Edit</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>
```

```xml
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Edit"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="152"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="89"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="206"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="23"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal" inuse="True">

<ProcessValue datatype="number" value="9"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration &amp;lt;UNKNOWN&

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="Edit"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="#32770"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>
```

```xml
<attribute name="pX">
<ProcessValue datatype="number" value="391"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="161"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="499"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="335"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
```

```xml
<attribute name="pChildCount">

<ProcessValue datatype="number" value="42"/>

</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

</attributes>

</element>

<element name="Domain">

<id>cc077378-07f5-4b11-bc2b-44c9aabd1cdd</id>

<type>Edit</type>

<basetype>Edit</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Edit"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>
```

```xml
<attribute name="X">
<ProcessValue datatype="number" value="152"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="232"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="206"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="23"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal" inuse="True">
<ProcessValue datatype="number" value="14"/>
</attribute>
```

```xml
<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration &amp;lt;UNKNOWN&

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="Edit"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="#32770"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="391"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="161"/>

</attribute>
```

```xml
<attribute name="pWidth">
<ProcessValue datatype="number" value="499"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="335"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="42"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
```

```
<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

</attributes>

</element>

<type>Window</type>

<basetype>Window</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="IBM Notes Social Edition Client Configuration"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="#32770"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="391"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="161"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="499"/>
```

```xml
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="335"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="42"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="&amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
<attribute name="AncestorCount">
<ProcessValue datatype="number" value="1"/>
```

```xml
    </attribute>

    <attribute name="TypeName">

    <ProcessValue datatype="text" value="#32770"/>

    </attribute>

    <attribute name="MatchIndex">

    <ProcessValue datatype="number" value="1"/>

    </attribute>

    <attribute name="MatchReverse">

    <ProcessValue datatype="flag" value="True"/>

    </attribute>

    </attributes>

    </element>

    <type>Application</type>

    <basetype>Application</basetype>

    <datatype>unknown</datatype>

    <diagnose>False</diagnose>

    </element>

    <apptypeinfo>

    <id>Win32Launch</id>

    <parameters>

    <parameter>

    <name>Path</name>

    <value>C:\Program Files\IBM\Notes\nlnotes.exe</value>

    </parameter>

    <parameter>

    <name>CommandLineParams</name>

    <value>/authenticate "=c:\Program Files\IBM\Notes\notes.ini"</value>
```

<name>WorkingDirectory</name>

<value>c:\Program Files\IBM\Notes\framework\</value>

<name>NonInvasive</name>

<value>True</value>

<name>ProcessMode</name>

<value>Internal</value>

</parameters>

</apptypeinfo>

</appdef>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

<preconditions/>

<endpoint narrative=""/>

<subsheet subsheetid="4bc45686-e743-4874-b9aa-c775e55c2ac6" type="CleanUp" published="True">

<name>Clean Up</name>

<view>

<camerax>0</camerax>

```xml
<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="d4338b94-1aeb-4f7d-8e63-16a5e135cb1d" type="Normal" published="True">

<name>Launch</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="7a5322d7-07cd-4a75-9b50-e29bfde6f777" type="Normal" published="True">

<name>Terminate</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="f95f2cc4-5fdb-442d-a7fb-9c7bd3e80c08" type="Normal" published="True">

<name>Advance to Step 2</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>
```

```xml
</subsheet>
<subsheet subsheetid="ec3d6e13-2cd1-424c-9089-961500952a66" type="Normal" published="True">
<name>Advance to Step 3</name>
<view>
<camerax>0</camerax>
<cameray>69</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="ecf38691-327d-48c3-bbe8-ee7c516cec2c" type="Normal" published="True">
<name>Advance to Step 4</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="60ac50c5-292b-46ab-99c9-b0a12ec01826" type="Normal" published="True">
<name>Advance to Step 5</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="4743f460-76a8-4eb2-a5f1-c3c25774fda0" type="Normal" published="True">
<name>Advance to Step 6</name>
```

```xml
    <view>
      <camerax>0</camerax>
      <cameray>0</cameray>
      <zoom version="2">1.25</zoom>
    </view>
  </subsheet>
  <subsheet subsheetid="456a8f90-c6dc-4f1c-9334-7d8699938827" type="Normal" published="True">
    <name>Advance to Step 7</name>
    <view>
      <camerax>0</camerax>
      <cameray>0</cameray>
      <zoom version="2">1.25</zoom>
    </view>
  </subsheet>
  <subsheet subsheetid="315ad08e-79a4-497c-a876-ad58397076db" type="Normal" published="True">
    <name>Advance to Step 8</name>
    <view>
      <camerax>0</camerax>
      <cameray>0</cameray>
      <zoom version="2">1.25</zoom>
    </view>
  </subsheet>
  <stage stageid="cd0d5d87-e2e6-431a-a79f-b89c9bd604c5" name="Start" type="Start">
    <loginhibit/>
    <narrative>
    </narrative>
    <displayx>15</displayx>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>08f4e5dd-8999-4aa4-91f6-cd8d3999f869</onsuccess>

</stage>

<stage stageid="08f4e5dd-8999-4aa4-91f6-cd8d3999f869" name="End" type="End">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="4b39690a-51ae-47b7-acca-ef21fd045caf" name="Stage1" type="ProcessInfo">

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<references>

<reference>System.Data.dll</reference>

<reference>System.Xml.dll</reference>

```xml
<reference>System.Drawing.dll</reference>

</references>

<imports>

<import>System</import>

<import>System.Drawing</import>

</imports>

<language>visualbasic</language>

<globalcode></globalcode>

<code></code>

</stage>

<stage stageid="6d16f56f-7c0d-406b-83d1-69e7882ffed9" name="Clean Up" type="SubSheetInfo">

<subsheetid>4bc45686-e743-4874-b9aa-c775e55c2ac6</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="4616380c-fb6d-4ba8-a213-839f8e65c81d" name="Start" type="Start">

<subsheetid>4bc45686-e743-4874-b9aa-c775e55c2ac6</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>3cc937a7-2ed5-4d81-81bb-94fb281fd83b</onsuccess>

</stage>

<stage stageid="3cc937a7-2ed5-4d81-81bb-94fb281fd83b" name="End" type="End">

<subsheetid>4bc45686-e743-4874-b9aa-c775e55c2ac6</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="cb686e07-0ece-4d21-9545-39f413352d38" name="Launch" type="SubSheetInfo">

<subsheetid>d4338b94-1aeb-4f7d-8e63-16a5e135cb1d</subsheetid>

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="ceb8ac72-ec29-4849-a443-fa7c8b3f8788" name="Start" type="Start">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>a475e353-0bbb-4dfe-9c9b-ead299f5a422</onsuccess>

</stage>

<stage stageid="acf88427-3d5c-4199-a7a4-f9da63429bef" name="new" type="Note">

<subsheetid>4bc45686-e743-4874-b9aa-c775e55c2ac6</subsheetid>

<narrative>Clean Up Page

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically immediately after closing your business object at the end of

You will not be able to call this action from a business process, nor will it be called at any other time than be

<displayx>-180</displayx>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="477e6f08-7925-4f55-8d86-a1969ac27b51" name="new" type="Note">

<narrative>Initialise Page

This is an optional page where you might choose to perform some initialisation tasks after your business ol

The initialise action will be called automatically immediately after loading your business object.

You will not be able to call this action from a business process, nor will it be called at any other time than a

<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="c86f7c51-fc24-4be0-a2e3-312edb5b7131" name="End1" type="End">

<subsheetid>d4338b94-1aeb-4f7d-8e63-16a5e135cb1d</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="a475e353-0bbb-4dfe-9c9b-ead299f5a422" name="Navigate1" type="Navigate">

```xml
<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>8ec84b3d-97c6-4bb2-bc84-6c148a5a0ed9</onsuccess>

<step>

<element id="249aeb35-5cb2-4815-81d9-2de38766f897"/>

<action>

<id>Launch</id>

<arguments>

<argument>

<id>Path</id>

<value>

</value>

</argument>

<argument>

<id>CommandLineParams</id>

<value>

</value>

</argument>

<argument>

<id>WorkingDirectory</id>

<value>

</value>
```

```xml
      </argument>

      <argument>

      <id>NonInvasive</id>

      <value>

      </value>

      </argument>

      <argument>

      <id>ProcessMode</id>

      <value>

      </value>

      </argument>

      </arguments>

      </action>

      </step>

      </stage>

      <stage stageid="656b827f-1860-40bc-9c75-9ed2a6350a18" name="Time Out1" type="WaitEnd">

      <subsheetid>d4338b94-1aeb-4f7d-8e63-16a5e135cb1d</subsheetid>

      <loginhibit/>

      <narrative>

      </narrative>

      <displayx>240</displayx>

      <displayy>0</displayy>

      <displaywidth>30</displaywidth>

      <displayheight>30</displayheight>

      <font family="Tahoma" size="10" style="Regular" color="000000"/>

      <groupid>7a533181-3fb9-4740-a9e0-903dba9195de</groupid>

      </stage>
```

```xml
<stage stageid="8ec84b3d-97c6-4bb2-bc84-6c148a5a0ed9" name="Wait1" type="WaitStart">

<subsheetid>d4338b94-1aeb-4f7d-8e63-16a5e135cb1d</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>0</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>c86f7c51-fc24-4be0-a2e3-312edb5b7131</onsuccess>

<groupid>7a533181-3fb9-4740-a9e0-903dba9195de</groupid>

<choices>

<choice reply="True">

<name>Client Configuration - Step 1 Check Exists</name>

<distance>30</distance>

<ontrue>c86f7c51-fc24-4be0-a2e3-312edb5b7131</ontrue>

<element id="96eb686b-b30c-4e54-b578-5290c562f825"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

<choice reply="True">

<name>Not Default Check Exists</name>

<distance>135</distance>

<ontrue>8106e530-9bb8-403b-b193-a04e23e6aa5e</ontrue>
```

```xml
<element id="d962005f-528c-4948-a3a9-d671c7136874"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>[Short-Wait]</timeout>

</stage>

<stage stageid="8106e530-9bb8-403b-b193-a04e23e6aa5e" name="Navigate2" type="Navigate">

<subsheetid>d4338b94-1aeb-4f7d-8e63-16a5e135cb1d</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>150</displayx>

<displayy>105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>c86f7c51-fc24-4be0-a2e3-312edb5b7131</onsuccess>

<step>

<element id="3a2f06a6-b8a1-4392-b28a-008cde889720"/>

<action>

<id>Press</id>

</action>

</step>

</stage>
```

<stage stageid="5afd865c-0003-4eda-983b-a559f849bac4" name="Advance to Step 2" type="SubSheetInf

<subsheetid>f95f2cc4-5fdb-442d-a7fb-9c7bd3e80c08</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="7ca6fe74-519c-415f-8446-7f35ca15a920" name="Start" type="Start">

<subsheetid>f95f2cc4-5fdb-442d-a7fb-9c7bd3e80c08</subsheetid>

<displayy>-105</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>361cf831-2453-4f29-93cc-418bb2caddfa</onsuccess>

</stage>

<stage stageid="9da37860-1832-47e7-8afd-1de1b853bcbd" name="End" type="End">

```xml
<displayx>105</displayx>
<displayy>120</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="361cf831-2453-4f29-93cc-418bb2caddfa" name="Navigate3" type="Navigate">
<subsheetid>f95f2cc4-5fdb-442d-a7fb-9c7bd3e80c08</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-45</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>ea124188-1393-4a52-93c6-8e60aa01ca0e</onsuccess>
<step>
<element id="c8b2db7d-2f69-42c0-abbf-230c642c7f76"/>
<action>
<id>ClickWindowCentre</id>
<arguments>
<argument>
<id>targx</id>
<value>
</value>
</argument>
```

```xml
<argument>
<id>targy</id>
<value>
</value>
</argument>
</arguments>
</action>
</step>
</stage>
<stage stageid="9bceca7e-4b1c-4938-af0e-451ef24e05bd" name="Time Out2" type="WaitEnd">
<subsheetid>f95f2cc4-5fdb-442d-a7fb-9c7bd3e80c08</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>180</displayx>
<displayy>15</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<groupid>1b77116d-0440-4c67-af11-d96aea9b9fb1</groupid>
</stage>
<stage stageid="ea124188-1393-4a52-93c6-8e60aa01ca0e" name="Wait2" type="WaitStart">
<subsheetid>f95f2cc4-5fdb-442d-a7fb-9c7bd3e80c08</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
```

```xml
<displayy>15</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>1b77116d-0440-4c67-af11-d96aea9b9fb1</groupid>

<choices>

<choice reply="True">

<name>Client Configuration - Step 2 Check Exists</name>

<distance>90</distance>

<ontrue>9da37860-1832-47e7-8afd-1de1b853bcbd</ontrue>

<element id="85d76956-ef54-4088-a57b-b03083d643a5"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>[Short-Wait]</timeout>

</stage>

<stage stageid="19ff52fd-cc55-41f0-93e5-6c56a067d60d" name="Advance to Step 3" type="SubSheetInfo

<subsheetid>ec3d6e13-2cd1-424c-9089-961500952a66</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>
```

```xml
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="3fc5bdb0-ff87-47fc-8c58-31e345c60588" name="Start" type="Start">
<subsheetid>ec3d6e13-2cd1-424c-9089-961500952a66</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>a095345d-cbb3-463b-9c89-8171a4044c39</onsuccess>
</stage>
<stage stageid="4844eb8b-a540-4a54-8b31-4425de90cf70" name="End" type="End">
<subsheetid>ec3d6e13-2cd1-424c-9089-961500952a66</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>90</displayx>
<displayy>180</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="a095345d-cbb3-463b-9c89-8171a4044c39" name="Navigate4" type="Navigate">
<subsheetid>ec3d6e13-2cd1-424c-9089-961500952a66</subsheetid>
```

```xml
<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>19ad7dfb-3717-4512-b0e8-184e01c1b701</onsuccess>

<step>

<element id="7356b074-ed8c-4441-97ea-f2bbef532775"/>

<action>

<id>Press</id>

</action>

</step>

</stage>

<stage stageid="19ad7dfb-3717-4512-b0e8-184e01c1b701" name="Writer1" type="Write">

<subsheetid>ec3d6e13-2cd1-424c-9089-961500952a66</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>2f6905c1-6a93-4a46-9689-79f1dea57cd7</onsuccess>
```

```xml
<step expr="&amp;quot;test&amp;quot;">
<element id="db75d3ef-4a40-4725-bf4d-02bad3cd7cec"/>
</step>
</stage>
<stage stageid="c1aac973-fd97-44e6-b259-c9e5e638232c" name="Time Out3" type="WaitEnd">
<subsheetid>ec3d6e13-2cd1-424c-9089-961500952a66</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>180</displayx>
<displayy>90</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<groupid>fae1d33e-bb36-42bf-befd-1c616d29bf2d</groupid>
</stage>
<stage stageid="56f4a763-dec7-4ff2-a892-e16a7b31b55b" name="Wait3" type="WaitStart">
<subsheetid>ec3d6e13-2cd1-424c-9089-961500952a66</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>90</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<groupid>fae1d33e-bb36-42bf-befd-1c616d29bf2d</groupid>
```

```xml
<choices>
<choice reply="True">
<name>Client Configuration - Step 3 Check Exists</name>
<distance>75</distance>
<ontrue>4844eb8b-a540-4a54-8b31-4425de90cf70</ontrue>
<element id="ea4d4496-50a3-4f7f-844f-1e05c253df3b"/>
<condition>
<id>CheckExists</id>
</condition>
<comparetype>Equal</comparetype>
</choice>
</choices>
<timeout>[Short-Wait]</timeout>
</stage>
<stage stageid="2f6905c1-6a93-4a46-9689-79f1dea57cd7" name="Navigate5" type="Navigate">
<subsheetid>ec3d6e13-2cd1-424c-9089-961500952a66</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>30</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>56f4a763-dec7-4ff2-a892-e16a7b31b55b</onsuccess>
<step>
<element id="c8b2db7d-2f69-42c0-abbf-230c642c7f76"/>
```

<action>

<id>ClickWindowCentre</id>

</action>

</step>

</stage>

<stage stageid="675dcac8-5340-4bff-8c01-c27d8d7f3852" name="Advance to Step 4" type="SubSheetInfo

<subsheetid>ecf38691-327d-48c3-bbe8-ee7c516cec2c</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="f139ca3d-8bc6-4418-95f3-3c314aab26fc" name="Start" type="Start">

<subsheetid>ecf38691-327d-48c3-bbe8-ee7c516cec2c</subsheetid>

<displayy>-105</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>b2f45a3d-4e9d-40c9-8933-c452a6532869</onsuccess>

</stage>

```xml
<stage stageid="b2f45a3d-4e9d-40c9-8933-c452a6532869" name="Navigate6" type="Navigate">

<subsheetid>ecf38691-327d-48c3-bbe8-ee7c516cec2c</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>464da937-f9e5-4522-b134-ec8e51a93674</onsuccess>

<step>

<element id="94195453-2dbd-4a92-aa9d-ae0202b9c780"/>

<action>

<id>Press</id>

</action>

</step>

</stage>

<stage stageid="2f7a603c-a439-42ce-b9c2-99f6ac8474a0" name="End" type="End">

<subsheetid>ecf38691-327d-48c3-bbe8-ee7c516cec2c</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>90</displayx>

<displayy>135</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>
```

```
<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="2db13247-9445-41db-bab1-329bcfbd24c6" name="Time Out3" type="WaitEnd">

<subsheetid>ecf38691-327d-48c3-bbe8-ee7c516cec2c</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>180</displayx>

<displayy>45</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>5ae1cea0-17e2-446b-b5e7-6141e3d24dfa</groupid>

</stage>

<stage stageid="aff4c7b5-e07c-4ab0-843d-c96a0ad89956" name="Wait3" type="WaitStart">

<subsheetid>ecf38691-327d-48c3-bbe8-ee7c516cec2c</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>45</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>5ae1cea0-17e2-446b-b5e7-6141e3d24dfa</groupid>

<choices>

<choice reply="True">
```

<name>Client Configuration - Step 4 Check Exists</name>

<distance>75</distance>

<ontrue>2f7a603c-a439-42ce-b9c2-99f6ac8474a0</ontrue>

<element id="553af2c2-e6e3-4de4-98a9-99a7a172b287"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>[Short-Wait]</timeout>

</stage>

<stage stageid="464da937-f9e5-4522-b134-ec8e51a93674" name="Navigate3" type="Navigate">

<subsheetid>ecf38691-327d-48c3-bbe8-ee7c516cec2c</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>aff4c7b5-e07c-4ab0-843d-c96a0ad89956</onsuccess>

<step>

<element id="c8b2db7d-2f69-42c0-abbf-230c642c7f76"/>

<action>

<id>ClickWindowCentre</id>

</stage>

<stage stageid="c11a78a9-d015-47c6-a672-a5c15a49c87b" name="Advance to Step 5" type="SubSheetIr

<subsheetid>60ac50c5-292b-46ab-99c9-b0a12ec01826</subsheetid>

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="f7dc3c57-b3d7-484b-aeda-45253a36e51c" name="Start" type="Start">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>b8db3da8-e93f-4cb8-9ef2-5a6a40baaa1d</onsuccess>

</stage>

<stage stageid="a9e25767-2237-46b7-b1f6-4ed4c2990a7c" name="End" type="End">

<subsheetid>60ac50c5-292b-46ab-99c9-b0a12ec01826</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="b8db3da8-e93f-4cb8-9ef2-5a6a40baaa1d" name="Writer2" type="Write">

```xml
<displayy>-60</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>ea2e63b4-80b5-456a-b053-ff2ee3fed031</onsuccess>
<step expr="&amp;quot;localhost.local&amp;quot;">
<element id="bb0b582e-7267-48f1-be6a-b87e6f16614b"/>
</step>
</stage>
<stage stageid="237c4d74-2d39-42f9-9490-5434d92ffe42" name="Time Out4" type="WaitEnd">
<subsheetid>60ac50c5-292b-46ab-99c9-b0a12ec01826</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>135</displayx>
<displayy>30</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<groupid>62bd1a65-69f3-48ec-9ab5-cdb7b14990f1</groupid>
</stage>
<stage stageid="412f8cd3-db50-459f-be15-049e8679e708" name="Wait4" type="WaitStart">
<subsheetid>60ac50c5-292b-46ab-99c9-b0a12ec01826</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
```

```xml
<displayy>30</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>62bd1a65-69f3-48ec-9ab5-cdb7b14990f1</groupid>

<choices>

<choice reply="True">

<name>Client Configuration - Step 5 Check Exists</name>

<distance>60</distance>

<ontrue>a9e25767-2237-46b7-b1f6-4ed4c2990a7c</ontrue>

<element id="8592cb9a-5d5e-402e-a35c-7c7ec2e75e94"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>[Short-Wait]</timeout>

</stage>

<stage stageid="ea2e63b4-80b5-456a-b053-ff2ee3fed031" name="Navigate7" type="Navigate">

<subsheetid>60ac50c5-292b-46ab-99c9-b0a12ec01826</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>412f8cd3-db50-459f-be15-049e8679e708</onsuccess>

<step>

<element id="c8b2db7d-2f69-42c0-abbf-230c642c7f76"/>

<action>

<id>ClickWindowCentre</id>

</action>

</step>

</stage>

<stage stageid="f065b6d8-e31c-4f33-9e6c-f1c2b11234ce" name="Advance to Step 6" type="SubSheetInfo

<subsheetid>4743f460-76a8-4eb2-a5f1-c3c25774fda0</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="12488108-68af-48fb-abc2-55f0aa8ab0a9" name="Start" type="Start">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>8ded44b7-1ed4-4cc4-bd96-1fa2b1f9fe5e</onsuccess>

</stage>

<stage stageid="43720596-2a00-45e9-af34-42792aef7726" name="End" type="End">

<subsheetid>4743f460-76a8-4eb2-a5f1-c3c25774fda0</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="b73589d8-3b21-4d7b-8342-701e70e3c23c" name="Writer3" type="Write">

<subsheetid>4743f460-76a8-4eb2-a5f1-c3c25774fda0</subsheetid>

<displayy>-15</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

```xml
<step expr="&amp;quot;test.password&amp;quot;">
<element id="0b00fb8b-eb32-4c6d-8023-7bf273ac088e"/>
</step>
<step expr="&amp;quot;test.password&amp;quot;">
<element id="0b00fb8b-eb32-4c6d-8023-7bf273ac088e"/>
</step>
</stage>
<stage stageid="8ded44b7-1ed4-4cc4-bd96-1fa2b1f9fe5e" name="Writer4" type="Write">
<subsheetid>4743f460-76a8-4eb2-a5f1-c3c25774fda0</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-60</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>b73589d8-3b21-4d7b-8342-701e70e3c23c</onsuccess>
<step expr="&amp;quot;test@localhost.local&amp;quot;">
<element id="6efeedf9-6742-4df2-8d28-544d44662eb1"/>
</step>
</stage>
<stage stageid="4081dbae-29a9-4e9b-a415-de1bb95483a8" name="Navigate8" type="Navigate">
<subsheetid>4743f460-76a8-4eb2-a5f1-c3c25774fda0</subsheetid>
<loginhibit/>
<narrative>
</narrative>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>3ccbc8e9-a875-42bc-a875-1296c73e493f</onsuccess>

<step>

<element id="c8b2db7d-2f69-42c0-abbf-230c642c7f76"/>

<action>

<id>ClickWindowCentre</id>

</action>

</step>

</stage>

<stage stageid="2571bc8e-e27d-4437-a5a3-437aae26091f" name="Time Out5" type="WaitEnd">

<subsheetid>4743f460-76a8-4eb2-a5f1-c3c25774fda0</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>18be6d74-51ef-4d1e-8802-ffc9a1e9853f</groupid>

</stage>

<stage stageid="3ccbc8e9-a875-42bc-a875-1296c73e493f" name="Wait5" type="WaitStart">

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>75</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>18be6d74-51ef-4d1e-8802-ffc9a1e9853f</groupid>

<choices>

<choice reply="True">

<name>Client Configuration - Step 6 Check Exists</name>

<distance>60</distance>

<ontrue>43720596-2a00-45e9-af34-42792aef7726</ontrue>

<element id="cb586821-c37f-42b8-81fb-75f04dc3f05c"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>[Short-Wait]</timeout>

</stage>

<stage stageid="6c2da7e0-474d-4547-be7f-f5f6836e20fe" name="Advance to Step 7" type="SubSheetInfo

<subsheetid>456a8f90-c6dc-4f1c-9334-7d8699938827</subsheetid>

<narrative>

</narrative>

```
<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="855ea8dc-b4c8-4021-8c30-c9b5d3d63af0" name="Start" type="Start">

<subsheetid>456a8f90-c6dc-4f1c-9334-7d8699938827</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>af81b485-cf87-47f9-8c47-5dfff746ec44</onsuccess>

</stage>

<stage stageid="d42c77ed-f0c0-48b9-93ac-64d1d475634b" name="End" type="End">

<subsheetid>456a8f90-c6dc-4f1c-9334-7d8699938827</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>75</displayx>

<displayy>135</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>
```

```xml
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="af81b485-cf87-47f9-8c47-5dfff746ec44" name="Writer5" type="Write">
<subsheetid>456a8f90-c6dc-4f1c-9334-7d8699938827</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-60</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>528514eb-a1c9-4211-af99-3a850d5964b0</onsuccess>
<step expr="&amp;quot;localhost.local&amp;quot;">
<element id="06467971-1459-450f-a90e-e1ae1759b205"/>
</step>
</stage>
<stage stageid="528514eb-a1c9-4211-af99-3a850d5964b0" name="Navigate8" type="Navigate">
<subsheetid>456a8f90-c6dc-4f1c-9334-7d8699938827</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-15</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
```

<onsuccess>e705630a-852f-4488-8624-4fd5aac9b1f9</onsuccess>

<step>

<element id="c8b2db7d-2f69-42c0-abbf-230c642c7f76"/>

<action>

<id>ClickWindowCentre</id>

</action>

</step>

</stage>

<stage stageid="c0fe59f4-0ffe-4197-96c2-5b80cb2041d2" name="Time Out5" type="WaitEnd">

<subsheetid>456a8f90-c6dc-4f1c-9334-7d8699938827</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>2d9f641a-9e98-4d46-badd-9d11e9c9d159</groupid>

</stage>

<stage stageid="e705630a-852f-4488-8624-4fd5aac9b1f9" name="Wait5" type="WaitStart">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>2d9f641a-9e98-4d46-badd-9d11e9c9d159</groupid>

<choices>

<choice reply="True">

<name>Client Configuration - Step 7 Check Exists</name>

<distance>60</distance>

<ontrue>d42c77ed-f0c0-48b9-93ac-64d1d475634b</ontrue>

<element id="8b377d07-bf1a-414e-b2b3-bb702088b1cd"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>[Short-Wait]</timeout>

</stage>

<stage stageid="e82048ab-87e7-428f-8fc5-6226020522ef" name="Advance to Step 8" type="SubSheetInf

<subsheetid>315ad08e-79a4-497c-a876-ad58397076db</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

```
</stage>

<stage stageid="b3c2b6cb-76d1-4127-893c-33609ea1b497" name="Start" type="Start">

<subsheetid>315ad08e-79a4-497c-a876-ad58397076db</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>4fc33be1-d5bb-4e68-89ff-b544fbf0764d</onsuccess>

</stage>

<stage stageid="4fc33be1-d5bb-4e68-89ff-b544fbf0764d" name="Writer6" type="Write">

<subsheetid>315ad08e-79a4-497c-a876-ad58397076db</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>1fe9b7f8-d288-4e58-a16f-fabf8f74b6a0</onsuccess>

<step expr="&amp;quot;test@localhost.local&amp;quot;">

<element id="d9b82b55-349c-4cf9-a8a6-c88555de82d8"/>

</step>
```

```xml
<step expr="&amp;quot;localhost.local&amp;quot;">
<element id="cc077378-07f5-4b11-bc2b-44c9aabd1cdd"/>
</step>
</stage>
<stage stageid="71c0b764-3a24-4c13-8c8b-bbbdc032363e" name="End" type="End">
<subsheetid>315ad08e-79a4-497c-a876-ad58397076db</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>75</displayx>
<displayy>135</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="1fe9b7f8-d288-4e58-a16f-fabf8f74b6a0" name="Navigate8" type="Navigate">
<subsheetid>315ad08e-79a4-497c-a876-ad58397076db</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-15</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>3f8cf0d2-3d11-42e7-ab69-fc58d652eb1a</onsuccess>
<step>
```

```
<element id="c8b2db7d-2f69-42c0-abbf-230c642c7f76"/>

<action>

<id>ClickWindowCentre</id>

</action>

</step>

</stage>

<stage stageid="be5c965d-99e4-42ba-881e-0668de107a75" name="Time Out5" type="WaitEnd">

<subsheetid>315ad08e-79a4-497c-a876-ad58397076db</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>150</displayx>

<displayy>30</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>38d8ac5d-e885-43a7-b8ea-15e1d165620f</groupid>

</stage>

<stage stageid="3f8cf0d2-3d11-42e7-ab69-fc58d652eb1a" name="Wait5" type="WaitStart">

<subsheetid>315ad08e-79a4-497c-a876-ad58397076db</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>30</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>38d8ac5d-e885-43a7-b8ea-15e1d165620f</groupid>

<choices>

<choice reply="True">

<name>Client Configuration - Step 7 Check Exists</name>

<distance>60</distance>

<ontrue>71c0b764-3a24-4c13-8c8b-bbbdc032363e</ontrue>

<element id="8b377d07-bf1a-414e-b2b3-bb702088b1cd"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>NotEqual</comparetype>

</choice>

</choices>

<timeout>[Short-Wait]</timeout>

</stage>

<stage stageid="8bafe0d2-3921-4301-9be8-b28837af29c1" name="Short-Wait" type="Data">

<loginhibit/>

<narrative>

</narrative>

<displayx>105</displayx>

<displayy>-90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

</stage>

<stage stageid="9e78a76c-a39c-419b-b97c-33ced555d220" name="Terminate" type="SubSheetInfo">

<subsheetid>7a5322d7-07cd-4a75-9b50-e29bfde6f777</subsheetid>

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Arial" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="9eccaca3-b5dd-4946-a141-39cd2d6428ec" name="Start" type="Start">

<subsheetid>7a5322d7-07cd-4a75-9b50-e29bfde6f777</subsheetid>

<displayy>-105</displayy>

<font family="Arial" size="10" style="Regular" color="000000"/>

<onsuccess>57d86d3b-ffbf-42cd-9528-26518c8726eb</onsuccess>

</stage>

<stage stageid="a6c17f34-cb72-4345-aaa2-a3f82d4ce8b0" name="End" type="End">

```xml
        <narrative>
        </narrative>
        <displayx>15</displayx>
        <displayy>-15</displayy>
        <displaywidth>60</displaywidth>
        <displayheight>30</displayheight>
        <font family="Arial" size="10" style="Regular" color="000000"/>
      </stage>
      <stage stageid="57d86d3b-ffbf-42cd-9528-26518c8726eb" name="Terminate" type="Navigate">
        <subsheetid>7a5322d7-07cd-4a75-9b50-e29bfde6f777</subsheetid>
        <loginhibit/>
        <narrative>
        </narrative>
        <displayx>15</displayx>
        <displayy>-60</displayy>
        <displaywidth>60</displaywidth>
        <displayheight>30</displayheight>
        <font family="Arial" size="10" style="Regular" color="000000"/>
        <onsuccess>a6c17f34-cb72-4345-aaa2-a3f82d4ce8b0</onsuccess>
        <step>
          <element id="249aeb35-5cb2-4815-81d9-2de38766f897"/>
          <action>
            <id>Terminate</id>
          </action>
        </step>
      </stage>
    </process>
```

```xml
<process name="Mainframe - GetCursorPos Attachmate Extra!" version="1.0" bpversion="5.0.23.1343" na
<appdef>
<element name="Mainframe - GetCursorPos Attachmate Extra!">
<id>eb0c0f8a-3af9-4732-8529-ab6a1369ec77</id>
<element name="Top Left">
<id>c355ab76-d8b9-4877-8fdb-f92fbb2f2338</id>
<type>TerminalField</type>
<basetype>TerminalField</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="StartX" inuse="True">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="StartY" inuse="True">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="EndX" inuse="True">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="EndY" inuse="True">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="FieldType" inuse="True">
<ProcessValue datatype="text" value="Rectangular"/>
</attribute>
<attribute name="FieldText">
```

```xml
<ProcessValue datatype="text" value=" "/>
</attribute>
</attributes>
</element>
<element name="File">
<id>8866da07-4ec2-4c70-8ebb-d746ba7f04c4</id>
<type>TerminalField</type>
<basetype>TerminalField</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="StartX" inuse="True">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="StartY" inuse="True">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="EndX" inuse="True">
<ProcessValue datatype="number" value="3"/>
</attribute>
<attribute name="EndY" inuse="True">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="FieldType" inuse="True">
<ProcessValue datatype="text" value="Rectangular"/>
</attribute>
<attribute name="FieldText">
```

```xml
<ProcessValue datatype="text" value="  "/>

</attribute>

</attributes>

</element>

<type>Application</type>

<basetype>Application</basetype>

<datatype>unknown</datatype>

<diagnose>False</diagnose>

</element>

<apptypeinfo>

<id>MainframeATM</id>

<parameters>

<parameter>

<name>Session ID</name>

<value>B</value>

</parameter>

<parameter>

<name>Attachmate Variant</name>

<value>Extra!</value>

</parameter>

<parameter>

<name>ProcessMode</name>

<value>Internal</value>

</parameter>

<parameter>

<name>Options</name>

<value>
```

```xml
        </value>

      </parameter>

    </parameters>

  </apptypeinfo>

</appdef>

<view>

  <camerax>0</camerax>

  <cameray>0</cameray>

  <zoom version="2">1.25</zoom>

</view>

<preconditions/>

<endpoint narrative=""/>

<subsheet subsheetid="94fd9556-0ea4-4765-8af3-a10e061cca82" type="CleanUp" published="True">

  <name>Clean Up</name>

  <view>

    <camerax>0</camerax>

    <cameray>0</cameray>

    <zoom version="2">1.25</zoom>

  </view>

</subsheet>

<subsheet subsheetid="0d2967e4-d0f4-482b-9dbb-614b2af181b8" type="Normal" published="True">

  <name>Test Cursor Pos</name>

  <view>

    <camerax>0</camerax>

    <cameray>89</cameray>

    <zoom version="2">1.25</zoom>

  </view>
```

</subsheet>

<subsheet subsheetid="29c00c09-2f2f-42de-bc18-4d6462d03268" type="Normal" published="True">

<name>Launch</name>

<view>

<camerax>0</camerax>

<cameray>54</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="14eb1852-4abb-4dd8-bd13-07c88769fc99" type="Normal" published="True">

<name>Terminate</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<stage stageid="20ea80b0-5773-4f97-b0aa-7b638bdbabcb" name="Start" type="Start">

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

```xml
</stage>

<stage stageid="b698a983-3165-4953-a40d-0cf10724f48e" name="End" type="End">

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="c4224c5f-0983-4ee3-9e41-0731968bbc0a" name="Stage1" type="ProcessInfo">

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<references>

<reference>System.dll</reference>

</references>

<imports>

<import>System</import>

<import>System.Diagnostics</import>

</imports>

<language>csharp</language>
```

```xml
<globalcode></globalcode>

<code></code>

</stage>

<stage stageid="8d502b9f-0ca2-46d7-a09d-6acc3ef2e810" name="Clean Up" type="SubSheetInfo">

<subsheetid>94fd9556-0ea4-4765-8af3-a10e061cca82</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="32c9c6ae-d653-4581-b08e-0e99bb0ade53" name="Start" type="Start">

<subsheetid>94fd9556-0ea4-4765-8af3-a10e061cca82</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>d5883fee-e5dc-4ccf-8a27-c51e7bf38494</onsuccess>

</stage>

<stage stageid="d5883fee-e5dc-4ccf-8a27-c51e7bf38494" name="End" type="End">

<subsheetid>94fd9556-0ea4-4765-8af3-a10e061cca82</subsheetid>
```

```xml
<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="c01491ea-51d2-4b10-8cc5-440d6878b4c1" name="Test Cursor Pos" type="SubSheetInfo

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<narrative>

</narrative>

<displayx>-225</displayx>

<displayy>-45</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="35ba7a41-66f5-41aa-bb8c-10e4397e8dbd" name="Start" type="Start">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-75</displayx>

<displayy>-75</displayy>

<displaywidth>60</displaywidth>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>79873224-5db6-4f3a-822a-e49d556ff2d9</onsuccess>

</stage>

<stage stageid="bafd383a-9311-47ec-86c2-3f6815230622" name="End" type="End">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="81e4600f-d9ec-4379-8842-c39833eaaef9" name="Note1" type="Note">

<subsheetid>94fd9556-0ea4-4765-8af3-a10e061cca82</subsheetid>

<narrative>Clean Up Page

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically immediately after closing your business object at the end of

You will not be able to call this action from a business process, nor will it be called at any other time than be

<displayx>-180</displayx>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="745e1c8b-8412-4e90-80f1-4f0a0f607b18" name="Note2" type="Note">

<narrative>Initialise Page

This is an optional page where you might choose to perform some initialisation tasks after your business ol

The initialise action will be called automatically immediately after loading your business object.

You will not be able to call this action from a business process, nor will it be called at any other time than a

<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="8928a76e-ce09-46c9-9e2d-c1dd9da285dc" name="Set Cursor Pos" type="Navigate">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>1286f1ee-807a-4319-81a4-c8922a079a2a</onsuccess>

<step>

<element id="eb0c0f8a-3af9-4732-8529-ab6a1369ec77"/>

<action>

<id>SetMainframeCursorPos</id>

<arguments>

<argument>

<id>TargY</id>

<value>[Row]</value>

</argument>

<argument>

<id>TargX</id>

<value>[Column]</value>

</argument>

</arguments>

</action>

</step>

</stage>

<stage stageid="1286f1ee-807a-4319-81a4-c8922a079a2a" name="Get Cursor Pos" type="Read">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>150</displayx>

<displayy>30</displayy>

<displaywidth>60</displaywidth>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>5bfdcad5-3ea6-4030-8c99-e39dfd0452eb</onsuccess>

<step stage="Value from Mainframe - GetCursorPos IBM Pcom">

<element id="eb0c0f8a-3af9-4732-8529-ab6a1369ec77"/>

<action>

<id>GetMainframeCursorPos</id>

</action>

</step>

</stage>

<stage stageid="7af05cf2-afff-4c3a-bd78-8b513ceb7a7c" name="Value from Mainframe - GetCursorPos IB

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>collection</datatype>

</stage>

<stage stageid="5bfdcad5-3ea6-4030-8c99-e39dfd0452eb" name="Check" type="Decision">

```
<displayx>150</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<decision expression="[Value from Mainframe - GetCursorPos IBM Pcom.Row] = [Row] AND [Value from I

<ontrue>4dd20c40-adc5-4f76-8ee6-905e7a2ff34c</ontrue>

<onfalse>d4cfecbd-7dd0-478f-afd0-a552273da7f4</onfalse>

</stage>

<stage stageid="d4cfecbd-7dd0-478f-afd0-a552273da7f4" name="Failed" type="Exception">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<narrative>

</narrative>

<displayx>240</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="" detail="&amp;quot;Cursor position is not what was expected&amp;quot;"/>

</stage>

<stage stageid="8d53bcdf-2c20-49e7-8329-e7fba81c5a3c" name="Row" type="Data">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>0</displayx>

<displayy>-75</displayy>
```

```
<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

<initialvalue>0</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="440af652-fb03-4953-8148-0b14d64d1fca" name="Column" type="Data">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>75</displayx>

<displayy>-75</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

<initialvalue>0</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="79873224-5db6-4f3a-822a-e49d556ff2d9" name="Row++" type="Calculation">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<narrative>
```

```xml
</narrative>

<displayx>-75</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>8585c32b-63fc-4e86-8077-dad362eeeb92</onsuccess>

<calculation expression="[Row]+1" stage="Row"/>

</stage>

<stage stageid="65d69bab-c14e-4dae-aae7-fcff600255b0" name="Col++" type="Calculation">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>75</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>8928a76e-ce09-46c9-9e2d-c1dd9da285dc</onsuccess>

<calculation expression="[Column]+1" stage="Column"/>

</stage>

<stage stageid="82822b36-3895-465b-80eb-850bdccacbfe" name="Row&amp;lt;24" type="Decision">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<narrative>

</narrative>
```

```xml
<displayx>-75</displayx>

<displayy>195</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<decision expression="[Row]&amp;lt;24"/>

<ontrue>79873224-5db6-4f3a-822a-e49d556ff2d9</ontrue>

<onfalse>bafd383a-9311-47ec-86c2-3f6815230622</onfalse>

</stage>

<stage stageid="4dd20c40-adc5-4f76-8ee6-905e7a2ff34c" name="Col&amp;lt;80" type="Decision">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>150</displayx>

<displayy>150</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<decision expression="[Column]&amp;lt;80"/>

<ontrue>2ecf1198-42ca-4b79-8e5c-ee8e44dfd831</ontrue>

<onfalse>26cbd5cf-a16d-42fc-88a6-db0990ebc38d</onfalse>

</stage>

<stage stageid="2ecf1198-42ca-4b79-8e5c-ee8e44dfd831" name="Anchor2" type="Anchor">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<narrative>
```

```xml
</narrative>

<displayx>75</displayx>

<displayy>150</displayy>

<displaywidth>10</displaywidth>

<displayheight>10</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>65d69bab-c14e-4dae-aae7-fcff600255b0</onsuccess>

</stage>

<stage stageid="26cbd5cf-a16d-42fc-88a6-db0990ebc38d" name="Anchor3" type="Anchor">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>150</displayx>

<displayy>195</displayy>

<displaywidth>10</displaywidth>

<displayheight>10</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>82822b36-3895-465b-80eb-850bdccacbfe</onsuccess>

</stage>

<stage stageid="8585c32b-63fc-4e86-8077-dad362eeeb92" name="Col=0" type="Calculation">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>0</displayx>

<displayy>-15</displayy>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>65d69bab-c14e-4dae-aae7-fcff600255b0</onsuccess>

<calculation expression="0" stage="Column"/>

</stage>

<stage stageid="710c2289-2183-45ba-b9f1-ffdfc73fb880" name="Launch" type="SubSheetInfo">

<subsheetid>29c00c09-2f2f-42de-bc18-4d6462d03268</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="75dae58f-22b8-479f-9040-21c9a46be666" name="Start" type="Start">

<subsheetid>29c00c09-2f2f-42de-bc18-4d6462d03268</subsheetid>

<displayy>-105</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

```xml
</stage>

<stage stageid="f37a6991-26bd-4b2e-837a-69afdfe754f8" name="Terminate" type="SubSheetInfo">

<subsheetid>14eb1852-4abb-4dd8-bd13-07c88769fc99</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="02db4057-2594-4f51-bf12-dbe1db18bd39" name="Start" type="Start">

<subsheetid>14eb1852-4abb-4dd8-bd13-07c88769fc99</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>1940320c-b9b3-46ce-8aec-9a1cc32516fc</onsuccess>

</stage>

<stage stageid="ab100422-6d9e-4623-9043-841ac1e293f5" name="End" type="End">

<subsheetid>14eb1852-4abb-4dd8-bd13-07c88769fc99</subsheetid>

<loginhibit/>

<narrative>
```

```xml
</narrative>

<displayx>15</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="1940320c-b9b3-46ce-8aec-9a1cc32516fc" name="Terminate" type="Navigate">

<subsheetid>14eb1852-4abb-4dd8-bd13-07c88769fc99</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>ab100422-6d9e-4623-9043-841ac1e293f5</onsuccess>

<step>

<element id="eb0c0f8a-3af9-4732-8529-ab6a1369ec77"/>

<action>

<id>Terminate</id>

</action>

</step>

</stage>

<stage stageid="ecad1f33-45f7-49be-b4a0-63f3f89b4d00" name="End" type="End">

<subsheetid>29c00c09-2f2f-42de-bc18-4d6462d03268</subsheetid>
```

```xml
<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>75</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="af2b19a5-8072-446b-a7cc-ebeca96965a6" name="Connect" type="Navigate">

<subsheetid>29c00c09-2f2f-42de-bc18-4d6462d03268</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Microsoft Sans Serif" size="10" style="Regular" color="000000"/>

<onsuccess>52adb88d-108b-4915-af80-623698503654</onsuccess>

<step>

<element id="eb0c0f8a-3af9-4732-8529-ab6a1369ec77"/>

<action>

<id>Launch</id>

<arguments>

<argument>

<id>Path</id>
```

```xml
<value>[Session File]</value>
</argument>
<argument>
<id>Session ID</id>
<value>
</value>
</argument>
<argument>
<id>WaitSleepTime</id>
<value>
</value>
</argument>
<argument>
<id>WaitTimeout</id>
<value>
</value>
</argument>
<argument>
<id>ProcessMode</id>
<value>
</value>
</argument>
<argument>
<id>Options</id>
<value>
</value>
</argument>
```

<argument>

<id>Attachmate Variant</id>

</argument>

</arguments>

</action>

</step>

</stage>

<stage stageid="adcb2f85-97c0-494b-be26-2a4113dcb2f0" name="O" type="WaitEnd">

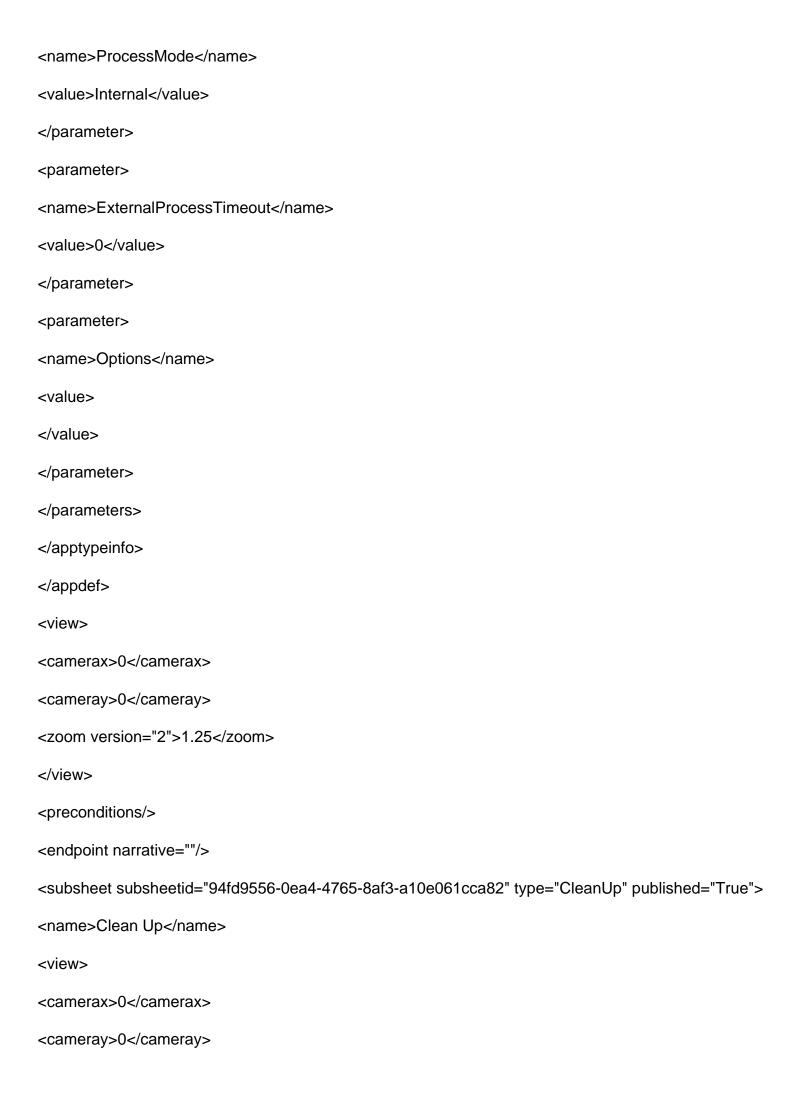<subsheetid>29c00c09-2f2f-42de-bc18-4d6462d03268</subsheetid>

<font family="Microsoft Sans Serif" size="10" style="Regular" color="000000"/>

<onsuccess>ecad1f33-45f7-49be-b4a0-63f3f89b4d00</onsuccess>

<groupid>5695913b-f738-4c82-980b-5ff7c7f55152</groupid>

</stage>

<stage stageid="52adb88d-108b-4915-af80-623698503654" name="Wait 15" type="WaitStart">

```xml
<displayx>15</displayx>
<displayy>-15</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Microsoft Sans Serif" size="10" style="Regular" color="000000"/>
<groupid>5695913b-f738-4c82-980b-5ff7c7f55152</groupid>
<choices/>
<timeout>15</timeout>
</stage>
</process>
<process name="Mainframe - GetCursorPos HostExplorer" version="1.0" bpversion="6.7.0.16843" narrativ
<appdef>
<element name="Mainframe - GetCursorPos HostExplorer">
<id>eb0c0f8a-3af9-4732-8529-ab6a1369ec77</id>
<element name="Top Left">
<id>c355ab76-d8b9-4877-8fdb-f92fbb2f2338</id>
<type>TerminalField</type>
<basetype>TerminalField</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="StartX" inuse="True">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="StartY" inuse="True">
<ProcessValue datatype="number" value="1"/>
</attribute>
```

```xml
<attribute name="EndX" inuse="True">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="EndY" inuse="True">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="FieldType" inuse="True">
<ProcessValue datatype="text" value="Rectangular"/>
</attribute>
<attribute name="FieldText">
<ProcessValue datatype="text" value=" "/>
</attribute>
</attributes>
</element>
<element name="File">
<id>8866da07-4ec2-4c70-8ebb-d746ba7f04c4</id>
<type>TerminalField</type>
<basetype>TerminalField</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="StartX" inuse="True">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="StartY" inuse="True">
<ProcessValue datatype="number" value="2"/>
</attribute>
```

```xml
<attribute name="EndX" inuse="True">

<ProcessValue datatype="number" value="3"/>

</attribute>

<attribute name="EndY" inuse="True">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="FieldType" inuse="True">

<ProcessValue datatype="text" value="Rectangular"/>

</attribute>

<attribute name="FieldText">

<ProcessValue datatype="text" value="  "/>

</attribute>

</attributes>

</element>

<type>Application</type>

<basetype>Application</basetype>

<datatype>unknown</datatype>

<diagnose>False</diagnose>

</element>

<apptypeinfo>

<id>MainframeHUM</id>

<parameters>

<parameter>

<name>Path</name>

<value>C:\BluePrism\QA\Code\hostexplorer\GetCursorPos.hep</value>

</parameter>

<parameter>
```

```xml
<name>ProcessMode</name>

<value>Internal</value>

</parameter>

<parameter>

<name>ExternalProcessTimeout</name>

<value>0</value>

</parameter>

<parameter>

<name>Options</name>

<value>

</value>

</parameter>

</parameters>

</apptypeinfo>

</appdef>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

<preconditions/>

<endpoint narrative=""/>

<subsheet subsheetid="94fd9556-0ea4-4765-8af3-a10e061cca82" type="CleanUp" published="True">

<name>Clean Up</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>
```

```xml
<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="0d2967e4-d0f4-482b-9dbb-614b2af181b8" type="Normal" published="True">

<name>Test Cursor Pos</name>

<view>

<camerax>-50</camerax>

<cameray>68</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="29c00c09-2f2f-42de-bc18-4d6462d03268" type="Normal" published="True">

<name>Launch</name>

<view>

<camerax>0</camerax>

<cameray>12</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="14eb1852-4abb-4dd8-bd13-07c88769fc99" type="Normal" published="True">

<name>Terminate</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>
```

```xml
<stage stageid="20ea80b0-5773-4f97-b0aa-7b638bdbabcb" name="Start" type="Start">

<loginhibit/>

<display x="15" y="-105"/>

<onsuccess>b698a983-3165-4953-a40d-0cf10724f48e</onsuccess>

</stage>

<stage stageid="b698a983-3165-4953-a40d-0cf10724f48e" name="End" type="End">

<loginhibit/>

<display x="15" y="90"/>

</stage>

<stage stageid="c4224c5f-0983-4ee3-9e41-0731968bbc0a" name="Stage1" type="ProcessInfo">

<display x="-195" y="-105" w="150" h="90"/>

<references>

<reference>System.dll</reference>

</references>

<imports>

<import>System</import>

<import>System.Diagnostics</import>

</imports>

<language>csharp</language>

<globalcode></globalcode>

<code></code>

</stage>

<stage stageid="8d502b9f-0ca2-46d7-a09d-6acc3ef2e810" name="Clean Up" type="SubSheetInfo">

<subsheetid>94fd9556-0ea4-4765-8af3-a10e061cca82</subsheetid>

<display x="-195" y="-105" w="150" h="90"/>

</stage>

<stage stageid="32c9c6ae-d653-4581-b08e-0e99bb0ade53" name="Start" type="Start">
```

```xml
<subsheetid>94fd9556-0ea4-4765-8af3-a10e061cca82</subsheetid>

<loginhibit/>

<display x="15" y="-105"/>

<onsuccess>d5883fee-e5dc-4ccf-8a27-c51e7bf38494</onsuccess>

</stage>

<stage stageid="d5883fee-e5dc-4ccf-8a27-c51e7bf38494" name="End" type="End">

<subsheetid>94fd9556-0ea4-4765-8af3-a10e061cca82</subsheetid>

<loginhibit/>

<display x="15" y="90"/>

</stage>

<stage stageid="c01491ea-51d2-4b10-8cc5-440d6878b4c1" name="Test Cursor Pos" type="SubSheetInfo

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<display x="-225" y="-45" w="150" h="90"/>

</stage>

<stage stageid="35ba7a41-66f5-41aa-bb8c-10e4397e8dbd" name="Start" type="Start">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<display x="-75" y="-60"/>

<onsuccess>79873224-5db6-4f3a-822a-e49d556ff2d9</onsuccess>

</stage>

<stage stageid="bafd383a-9311-47ec-86c2-3f6815230622" name="End" type="End">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<display x="-75" y="255"/>

</stage>

<stage stageid="81e4600f-d9ec-4379-8842-c39833eaaef9" name="Note1" type="Note">

<subsheetid>94fd9556-0ea4-4765-8af3-a10e061cca82</subsheetid>
```

<narrative>Clean Up Page

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically immediately after closing your business object at the end of

You will not be able to call this action from a business process, nor will it be called at any other time than b
<display x="-180" y="60" w="180" h="230"/>
</stage>
<stage stageid="745e1c8b-8412-4e90-80f1-4f0a0f607b18" name="Note2" type="Note">
<narrative>Initialise Page

This is an optional page where you might choose to perform some initialisation tasks after your business ol

The initialise action will be called automatically immediately after loading your business object.

You will not be able to call this action from a business process, nor will it be called at any other time than a
<display x="-180" y="60" w="180" h="230"/>
</stage>
<stage stageid="8928a76e-ce09-46c9-9e2d-c1dd9da285dc" name="Set Cursor Pos" type="Navigate">
<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>
<loginhibit/>
<display x="150" y="-15"/>
<onsuccess>1286f1ee-807a-4319-81a4-c8922a079a2a</onsuccess>
<step>
<element id="eb0c0f8a-3af9-4732-8529-ab6a1369ec77"/>
<action>

<id>SetMainframeCursorPos</id>

<arguments>

<argument>

<id>TargY</id>

<value>[Row]</value>

</argument>

<argument>

<id>TargX</id>

<value>[Column]</value>

</argument>

</arguments>

</action>

</step>

</stage>

<stage stageid="1286f1ee-807a-4319-81a4-c8922a079a2a" name="Get Cursor Pos" type="Read">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<display x="150" y="30"/>

<onsuccess>5bfdcad5-3ea6-4030-8c99-e39dfd0452eb</onsuccess>

<step stage="Value from Mainframe - GetCursorPos IBM Pcom">

<element id="eb0c0f8a-3af9-4732-8529-ab6a1369ec77"/>

<action>

<id>GetMainframeCursorPos</id>

</action>

</step>

</stage>

<stage stageid="7af05cf2-afff-4c3a-bd78-8b513ceb7a7c" name="Value from Mainframe - GetCursorPos IE

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<display x="240" y="30"/>

<datatype>collection</datatype>

<private/>

<alwaysinit/>

</stage>

<stage stageid="5bfdcad5-3ea6-4030-8c99-e39dfd0452eb" name="Check" type="Decision">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<display x="150" y="90"/>

<decision expression="[Value from Mainframe - GetCursorPos IBM Pcom.Row] = [Row] AND [Value from I

<ontrue>4dd20c40-adc5-4f76-8ee6-905e7a2ff34c</ontrue>

<onfalse>d4cfecbd-7dd0-478f-afd0-a552273da7f4</onfalse>

</stage>

<stage stageid="d4cfecbd-7dd0-478f-afd0-a552273da7f4" name="Failed" type="Exception">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<display x="240" y="90"/>

<exception type="" detail="&quot;Cursor position is not what was expected&quot;"/>

</stage>

<stage stageid="8d53bcdf-2c20-49e7-8329-e7fba81c5a3c" name="Row" type="Data">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<display x="0" y="-60"/>

<datatype>number</datatype>

<initialvalue>0</initialvalue>

<private/>

<alwaysinit/>

```
</stage>

<stage stageid="440af652-fb03-4953-8148-0b14d64d1fca" name="Column" type="Data">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<display x="75" y="-60"/>

<datatype>number</datatype>

<initialvalue>0</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="79873224-5db6-4f3a-822a-e49d556ff2d9" name="Row++" type="Calculation">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<display x="-75" y="-15"/>

<onsuccess>8585c32b-63fc-4e86-8077-dad362eeeb92</onsuccess>

<calculation expression="[Row]+1" stage="Row"/>

</stage>

<stage stageid="65d69bab-c14e-4dae-aae7-fcff600255b0" name="Col++" type="Calculation">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<display x="75" y="-15"/>

<onsuccess>8928a76e-ce09-46c9-9e2d-c1dd9da285dc</onsuccess>

<calculation expression="[Column]+1" stage="Column"/>

</stage>

<stage stageid="82822b36-3895-465b-80eb-850bdccacbfe" name="Row&amp;lt;24" type="Decision">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>
```

```
<display x="-75" y="195"/>

<decision expression="[Row]&amp;lt;24"/>

<ontrue>79873224-5db6-4f3a-822a-e49d556ff2d9</ontrue>

<onfalse>bafd383a-9311-47ec-86c2-3f6815230622</onfalse>

</stage>

<stage stageid="4dd20c40-adc5-4f76-8ee6-905e7a2ff34c" name="Col&amp;lt;80" type="Decision">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<display x="150" y="150"/>

<decision expression="[Column]&amp;lt;80"/>

<ontrue>2ecf1198-42ca-4b79-8e5c-ee8e44dfd831</ontrue>

<onfalse>26cbd5cf-a16d-42fc-88a6-db0990ebc38d</onfalse>

</stage>

<stage stageid="2ecf1198-42ca-4b79-8e5c-ee8e44dfd831" name="Anchor2" type="Anchor">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<display x="75" y="150" w="10" h="10"/>

<onsuccess>65d69bab-c14e-4dae-aae7-fcff600255b0</onsuccess>

</stage>

<stage stageid="26cbd5cf-a16d-42fc-88a6-db0990ebc38d" name="Anchor3" type="Anchor">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>

<loginhibit/>

<display x="150" y="195" w="10" h="10"/>

<onsuccess>82822b36-3895-465b-80eb-850bdccacbfe</onsuccess>

</stage>

<stage stageid="8585c32b-63fc-4e86-8077-dad362eeeb92" name="Col=0" type="Calculation">

<subsheetid>0d2967e4-d0f4-482b-9dbb-614b2af181b8</subsheetid>
```

```xml
<loginhibit/>

<display x="0" y="-15"/>

<onsuccess>65d69bab-c14e-4dae-aae7-fcff600255b0</onsuccess>

<calculation expression="0" stage="Column"/>

</stage>

<stage stageid="710c2289-2183-45ba-b9f1-ffdfc73fb880" name="Launch" type="SubSheetInfo">

<subsheetid>29c00c09-2f2f-42de-bc18-4d6462d03268</subsheetid>

<display x="-195" y="-105" w="150" h="90"/>

</stage>

<stage stageid="75dae58f-22b8-479f-9040-21c9a46be666" name="Start" type="Start">

<subsheetid>29c00c09-2f2f-42de-bc18-4d6462d03268</subsheetid>

<loginhibit/>

<display x="15" y="-105"/>

<onsuccess>af2b19a5-8072-446b-a7cc-ebeca96965a6</onsuccess>

</stage>

<stage stageid="f37a6991-26bd-4b2e-837a-69afdfe754f8" name="Terminate" type="SubSheetInfo">

<subsheetid>14eb1852-4abb-4dd8-bd13-07c88769fc99</subsheetid>

<display x="-195" y="-105" w="150" h="90"/>

</stage>

<stage stageid="02db4057-2594-4f51-bf12-dbe1db18bd39" name="Start" type="Start">

<subsheetid>14eb1852-4abb-4dd8-bd13-07c88769fc99</subsheetid>

<loginhibit/>

<display x="15" y="-105"/>

<onsuccess>1940320c-b9b3-46ce-8aec-9a1cc32516fc</onsuccess>

</stage>

<stage stageid="ab100422-6d9e-4623-9043-841ac1e293f5" name="End" type="End">

<subsheetid>14eb1852-4abb-4dd8-bd13-07c88769fc99</subsheetid>
```

```xml
<loginhibit/>

<display x="15" y="-15"/>

</stage>

<stage stageid="1940320c-b9b3-46ce-8aec-9a1cc32516fc" name="Terminate" type="Navigate">

<subsheetid>14eb1852-4abb-4dd8-bd13-07c88769fc99</subsheetid>

<loginhibit/>

<display x="15" y="-60"/>

<onsuccess>ab100422-6d9e-4623-9043-841ac1e293f5</onsuccess>

<step>

<element id="eb0c0f8a-3af9-4732-8529-ab6a1369ec77"/>

<action>

<id>Terminate</id>

</action>

</step>

</stage>

<stage stageid="ecad1f33-45f7-49be-b4a0-63f3f89b4d00" name="End" type="End">

<subsheetid>29c00c09-2f2f-42de-bc18-4d6462d03268</subsheetid>

<loginhibit/>

<display x="15" y="75"/>

</stage>

<stage stageid="af2b19a5-8072-446b-a7cc-ebeca96965a6" name="Connect" type="Navigate">

<subsheetid>29c00c09-2f2f-42de-bc18-4d6462d03268</subsheetid>

<loginhibit/>

<display x="15" y="-60"/>

<font family="Microsoft Sans Serif" size="10" style="Regular" color="000000"/>

<onsuccess>52adb88d-108b-4915-af80-623698503654</onsuccess>

<step>
```

```xml
<element id="eb0c0f8a-3af9-4732-8529-ab6a1369ec77"/>
<action>
<id>Launch</id>
<arguments>
<argument>
<id>Path</id>
<value>[QA Root]&amp;amp;[Session File]</value>
</argument>
<argument>
<id>ProcessMode</id>
<value>
</value>
</argument>
<argument>
<id>Options</id>
<value>
</value>
</argument>
</arguments>
</action>
</step>
</stage>
<stage stageid="ec7d9a69-984c-4655-89fa-4727c21523c1" name="Session File" type="Data">
<subsheetid>29c00c09-2f2f-42de-bc18-4d6462d03268</subsheetid>
<loginhibit/>
<display x="-195" y="15"/>
<font family="Microsoft Sans Serif" size="10" style="Regular" color="000000"/>
```

```xml
<datatype>text</datatype>

<initialvalue xml:space="preserve">\Code\hostexplorer\GetCursorPos.hep</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="adcb2f85-97c0-494b-be26-2a4113dcb2f0" name="O" type="WaitEnd">

<subsheetid>29c00c09-2f2f-42de-bc18-4d6462d03268</subsheetid>

<loginhibit/>

<display x="15" y="30" w="30" h="30"/>

<font family="Microsoft Sans Serif" size="10" style="Regular" color="000000"/>

<onsuccess>ecad1f33-45f7-49be-b4a0-63f3f89b4d00</onsuccess>

<groupid>5695913b-f738-4c82-980b-5ff7c7f55152</groupid>

</stage>

<stage stageid="52adb88d-108b-4915-af80-623698503654" name="Wait 15" type="WaitStart">

<subsheetid>29c00c09-2f2f-42de-bc18-4d6462d03268</subsheetid>

<loginhibit/>

<display x="15" y="-15" w="30" h="30"/>

<font family="Microsoft Sans Serif" size="10" style="Regular" color="000000"/>

<groupid>5695913b-f738-4c82-980b-5ff7c7f55152</groupid>

<choices/>

<timeout>15</timeout>

</stage>

<stage stageid="13a57815-5824-4fe6-9dde-06051c63aaf8" name="QA Root" type="Data">

<subsheetid>29c00c09-2f2f-42de-bc18-4d6462d03268</subsheetid>

<loginhibit/>

<display x="-195" y="-30"/>

<font family="Microsoft Sans Serif" size="10" style="Regular" color="000000"/>
```

```
<datatype>text</datatype>

<initialvalue xml:space="preserve">C:\BluePrism\QA\Code\hostexplorer\GetCursorPos.hep</initialvalue>

<exposure>Environment</exposure>

<private/>

<alwaysinit/>

</stage>

</process>

</Root>
```