```xml
<?xml version='1.0' encoding='UTF-8'?>
<Root>
<process name="Calc OCR (Win10)" version="1.0" bpversion="6.2.0.2233" narrative="" type="object" runn
<appdef>
<element name="Calculator">
<id>e7b35717-0b55-4ee6-86c0-51740394d719</id>
<group name="Numbers">
<id>a83aa72c-6bb3-4622-aae0-8e65e02e4e6f</id>
<element name="9">
<id>b4f4f3b5-100d-44cb-a4de-f397d2486d05</id>
<type>AAButton</type>
<basetype>AAButton</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="0"/>
</attribute>
```

```xml
<attribute name="Y">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="321"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="545"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
```

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Calculator &lt;UNKNOWN&gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:341,120,664,661"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="ApplicationFrameWindow"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="333"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="120"/>

</attribute>

```xml
<attribute name="pWidth">
<ProcessValue datatype="number" value="337"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="553"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="aX">
<ProcessValue datatype="number" value="160"/>
</attribute>
```

```xml
<attribute name="aY">
<ProcessValue datatype="number" value="323"/>
</attribute>
<attribute name="aWidth">
<ProcessValue datatype="number" value="80"/>
</attribute>
<attribute name="aHeight">
<ProcessValue datatype="number" value="55"/>
</attribute>
<attribute name="Name" inuse="True">
<ProcessValue datatype="text" value="Nine"/>
</attribute>
<attribute name="Description" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="Role" inuse="True">
<ProcessValue datatype="text" value="PushButton"/>
</attribute>
<attribute name="ID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="State">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="Value2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
```

```xml
<attribute name="KeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="DefaultAction" inuse="True">
<ProcessValue datatype="text" value="Press"/>
</attribute>
<attribute name="ElementCount" inuse="True">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="aAncestorCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="Unavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Selected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focused">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Pressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="aChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Mixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Hottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Default">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Expanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Collapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Busy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Floating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Marqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Animated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Invisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Offscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Sizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Moveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="SelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Selectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Linked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Traversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Multiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Extselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:501,443,498,581"/>
</attribute>
<attribute name="paX">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paY">
<ProcessValue datatype="number" value="0"/>
</attribute>
```

```xml
<attribute name="paWidth">
<ProcessValue datatype="number" value="320"/>
</attribute>
<attribute name="paHeight">
<ProcessValue datatype="number" value="544"/>
</attribute>
<attribute name="pName" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pDescription" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pRole" inuse="True">
<ProcessValue datatype="text" value="Window"/>
</attribute>
<attribute name="pID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="pState">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="pValue2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pKeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
```

```xml
<attribute name="pDefaultAction" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pElementCount">
<ProcessValue datatype="number" value="35"/>
</attribute>
<attribute name="pUnavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFocused">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pPressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="paChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pHottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pDefault">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExpanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pCollapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pBusy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFloating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMarqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAnimated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pInvisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pOffscreen">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSizeable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMoveable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSelfVoicing">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pFocusable">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pSelectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pLinked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pTraversed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMultiselectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="pExtselectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pAlert_low">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pAlert_medium">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pAlert_high">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

</attributes>

</element>

<element name="8">

<id>9c7a2636-d70d-4ef0-a937-79803cffaef7</id>

<type>AAButton</type>

<basetype>AAButton</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>
```

```xml
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="321"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="545"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```
<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:341,120,664,661"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>
```

```xml
<attribute name="pClassName">
<ProcessValue datatype="text" value="ApplicationFrameWindow"/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="333"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="120"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="337"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="553"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```
<attribute name="pActive">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="aX">

<ProcessValue datatype="number" value="80"/>

</attribute>

<attribute name="aY">

<ProcessValue datatype="number" value="323"/>

</attribute>

<attribute name="aWidth">

<ProcessValue datatype="number" value="80"/>

</attribute>

<attribute name="aHeight">

<ProcessValue datatype="number" value="55"/>

</attribute>

<attribute name="Name" inuse="True">

<ProcessValue datatype="text" value="Eight"/>

</attribute>

<attribute name="Description" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>
```

```xml
<attribute name="Role" inuse="True">
<ProcessValue datatype="text" value="PushButton"/>
</attribute>
<attribute name="ID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="State">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="Value2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="KeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="DefaultAction" inuse="True">
<ProcessValue datatype="text" value="Press"/>
</attribute>
<attribute name="ElementCount" inuse="True">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="aAncestorCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="Unavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Selected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focused">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Pressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="aChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Mixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Hottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Default">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Expanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Collapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Busy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Floating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Marqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Animated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Invisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Offscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Sizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Moveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="SelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Selectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Linked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Traversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Multiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Extselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```
<attribute name="Alert_high">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:421,443,498,501"/>

</attribute>

<attribute name="paX">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="paY">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="paWidth">

<ProcessValue datatype="number" value="320"/>

</attribute>

<attribute name="paHeight">

<ProcessValue datatype="number" value="544"/>

</attribute>

<attribute name="pName" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pDescription" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pRole" inuse="True">

<ProcessValue datatype="text" value="Window"/>

</attribute>
```

```xml
<attribute name="pID" inuse="True">

<ProcessValue datatype="text" value="Self"/>

</attribute>

<attribute name="pState">

<ProcessValue datatype="text" value="focusable"/>

</attribute>

<attribute name="pValue2" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pKeyboardShortcut" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pDefaultAction" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pElementCount">

<ProcessValue datatype="number" value="35"/>

</attribute>

<attribute name="pUnavailable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSelected">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pFocused">

<ProcessValue datatype="flag" value="True"/>

</attribute>
```

```xml
<attribute name="pPressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="paChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pHottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pDefault">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExpanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pCollapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pBusy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pFloating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMarqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAnimated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pInvisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOffscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMoveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFocusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="pSelectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pLinked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pTraversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMultiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExtselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
```

```xml
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
</attributes>
</element>
<element name="7">
<id>d998db01-abdb-4f66-b6e5-7d18abe17a92</id>
<type>AAButton</type>
<basetype>AAButton</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="0"/>
</attribute>
```

```xml
<attribute name="Width">
<ProcessValue datatype="number" value="321"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="545"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
```

```xml
<attribute name="AncestorCount">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="TypeName">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:341,120,664,661"/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pClassName">
<ProcessValue datatype="text" value="ApplicationFrameWindow"/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="333"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="120"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="337"/>
</attribute>
```

```xml
<attribute name="pHeight">
<ProcessValue datatype="number" value="553"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="aX">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="aY">
<ProcessValue datatype="number" value="323"/>
</attribute>
```

```xml
<attribute name="aWidth">
<ProcessValue datatype="number" value="80"/>
</attribute>
<attribute name="aHeight">
<ProcessValue datatype="number" value="55"/>
</attribute>
<attribute name="Name" inuse="True">
<ProcessValue datatype="text" value="Seven"/>
</attribute>
<attribute name="Description" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="Role" inuse="True">
<ProcessValue datatype="text" value="PushButton"/>
</attribute>
<attribute name="ID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="State">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="Value2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="KeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
```

```xml
<attribute name="DefaultAction" inuse="True">
<ProcessValue datatype="text" value="Press"/>
</attribute>
<attribute name="ElementCount" inuse="True">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="aAncestorCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="Unavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Selected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focused">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Pressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="aChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Mixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="ReadOnly">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Hottracked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Default">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Expanded">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Collapsed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Busy">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Floating">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Marqueed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Animated">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="Invisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Offscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Sizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Moveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="SelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Selectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Linked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Traversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Multiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Extselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:341,443,498,421"/>
</attribute>
<attribute name="paX">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paY">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paWidth">
<ProcessValue datatype="number" value="320"/>
</attribute>
```

```xml
<attribute name="paHeight">
<ProcessValue datatype="number" value="544"/>
</attribute>
<attribute name="pName" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pDescription" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pRole" inuse="True">
<ProcessValue datatype="text" value="Window"/>
</attribute>
<attribute name="pID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="pState">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="pValue2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pKeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pDefaultAction" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
```

```xml
<attribute name="pElementCount">
<ProcessValue datatype="number" value="35"/>
</attribute>
<attribute name="pUnavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFocused">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pPressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="paChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pHottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pDefault">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pExpanded">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pCollapsed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pBusy">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pFloating">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMarqueed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pAnimated">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pInvisible">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pOffscreen">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="pSizeable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMoveable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSelfVoicing">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pFocusable">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pSelectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pLinked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pTraversed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMultiselectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pExtselectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="pAlert_low">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pAlert_medium">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pAlert_high">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

</attributes>

</element>

<element name="6">

<id>ff599e68-0084-4c23-b4b3-a6016016787e</id>

<type>AAButton</type>

<basetype>AAButton</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>
```

```xml
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="321"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="545"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
<attribute name="AncestorCount">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="TypeName">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:341,120,664,661"/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pClassName">
<ProcessValue datatype="text" value="ApplicationFrameWindow"/>
</attribute>
```

```xml
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="333"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="120"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="337"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="553"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="aX">
<ProcessValue datatype="number" value="160"/>
</attribute>
<attribute name="aY">
<ProcessValue datatype="number" value="378"/>
</attribute>
<attribute name="aWidth">
<ProcessValue datatype="number" value="80"/>
</attribute>
<attribute name="aHeight">
<ProcessValue datatype="number" value="55"/>
</attribute>
<attribute name="Name" inuse="True">
<ProcessValue datatype="text" value="Six"/>
</attribute>
<attribute name="Description" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="Role" inuse="True">
<ProcessValue datatype="text" value="PushButton"/>
</attribute>
```

```xml
<attribute name="ID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="State">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="Value2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="KeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="DefaultAction" inuse="True">
<ProcessValue datatype="text" value="Press"/>
</attribute>
<attribute name="ElementCount" inuse="True">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="aAncestorCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="Unavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Selected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Focused">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Pressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="aChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Mixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Hottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Default">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Expanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Collapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Busy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Floating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Marqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Animated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Invisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Offscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Sizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Moveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="SelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Focusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Selectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Linked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Traversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Multiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Extselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:501,498,553,581"/>

</attribute>

<attribute name="paX">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="paY">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="paWidth">

<ProcessValue datatype="number" value="320"/>

</attribute>

<attribute name="paHeight">

<ProcessValue datatype="number" value="544"/>

</attribute>

<attribute name="pName" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pDescription" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pRole" inuse="True">

<ProcessValue datatype="text" value="Window"/>

</attribute>

<attribute name="pID" inuse="True">

<ProcessValue datatype="text" value="Self"/>

</attribute>
```

```xml
<attribute name="pState">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="pValue2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pKeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pDefaultAction" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pElementCount">
<ProcessValue datatype="number" value="35"/>
</attribute>
<attribute name="pUnavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFocused">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pPressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="paChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pHottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pDefault">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExpanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pCollapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pBusy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFloating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pMarqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pAnimated">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pInvisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pOffscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pSizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pMoveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pSelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pFocusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>

<attribute name="pSelectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pLinked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pTraversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMultiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExtselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```
</attributes>

</element>

<element name="5">

<id>0e7bfd43-306c-495d-8045-cde6c32728c6</id>

<type>AAButton</type>

<basetype>AAButton</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="321"/>

</attribute>
```

```xml
<attribute name="Height">
<ProcessValue datatype="number" value="545"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
<attribute name="AncestorCount">
<ProcessValue datatype="number" value="2"/>
</attribute>
```

```xml
<attribute name="TypeName">
<ProcessValue datatype="text" value=""/>
</attribute>

<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:341,120,664,661"/>
</attribute>

<attribute name="pWindowText">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>

<attribute name="pClassName">
<ProcessValue datatype="text" value="ApplicationFrameWindow"/>
</attribute>

<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>

<attribute name="pX">
<ProcessValue datatype="number" value="333"/>
</attribute>

<attribute name="pY">
<ProcessValue datatype="number" value="120"/>
</attribute>

<attribute name="pWidth">
<ProcessValue datatype="number" value="337"/>
</attribute>

<attribute name="pHeight">
<ProcessValue datatype="number" value="553"/>
</attribute>
```

```xml
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="aX">
<ProcessValue datatype="number" value="80"/>
</attribute>
<attribute name="aY">
<ProcessValue datatype="number" value="378"/>
</attribute>
<attribute name="aWidth">
<ProcessValue datatype="number" value="80"/>
</attribute>
```

```xml
<attribute name="aHeight">
<ProcessValue datatype="number" value="55"/>
</attribute>
<attribute name="Name" inuse="True">
<ProcessValue datatype="text" value="Five"/>
</attribute>
<attribute name="Description" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="Role" inuse="True">
<ProcessValue datatype="text" value="PushButton"/>
</attribute>
<attribute name="ID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="State">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="Value2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="KeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="DefaultAction" inuse="True">
<ProcessValue datatype="text" value="Press"/>
</attribute>
```

```xml
<attribute name="ElementCount" inuse="True">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="aAncestorCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="Unavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Selected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focused">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Pressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="aChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Mixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Hottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Default">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Expanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Collapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Busy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Floating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Marqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Animated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Invisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Offscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="Sizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="Moveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="SelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="Focusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>

<attribute name="Selectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="Linked">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="Traversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="Multiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Extselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:421,498,553,501"/>
</attribute>
<attribute name="paX">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paY">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paWidth">
<ProcessValue datatype="number" value="320"/>
</attribute>
<attribute name="paHeight">
<ProcessValue datatype="number" value="544"/>
</attribute>
```

```xml
<attribute name="pName" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pDescription" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pRole" inuse="True">
<ProcessValue datatype="text" value="Window"/>
</attribute>
<attribute name="pID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="pState">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="pValue2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pKeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pDefaultAction" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pElementCount">
<ProcessValue datatype="number" value="35"/>
</attribute>
```

```xml
<attribute name="pUnavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFocused">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pPressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="paChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pHottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pDefault">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pExpanded">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pCollapsed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pBusy">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pFloating">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMarqueed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pAnimated">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pInvisible">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pOffscreen">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSizeable">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="pMoveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFocusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pSelectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pLinked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pTraversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMultiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExtselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pAlert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
</attributes>
</element>
<element name="4">
<id>4e97e3d1-aff7-418a-85bd-6480a02c92e5</id>
<type>AAButton</type>
<basetype>AAButton</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>
</attribute>
```

```xml
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="321"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="545"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```
<attribute name="Ordinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:341,120,664,661"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="ApplicationFrameWindow"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>
```

```xml
<attribute name="pX">
<ProcessValue datatype="number" value="333"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="120"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="337"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="553"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="2"/>
</attribute>
```

```xml
<attribute name="pChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="aX">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="aY">
<ProcessValue datatype="number" value="378"/>
</attribute>
<attribute name="aWidth">
<ProcessValue datatype="number" value="80"/>
</attribute>
<attribute name="aHeight">
<ProcessValue datatype="number" value="55"/>
</attribute>
<attribute name="Name" inuse="True">
<ProcessValue datatype="text" value="Four"/>
</attribute>
<attribute name="Description" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="Role" inuse="True">
<ProcessValue datatype="text" value="PushButton"/>
</attribute>
<attribute name="ID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
```

```xml
<attribute name="State">

<ProcessValue datatype="text" value="focusable"/>

</attribute>

<attribute name="Value2" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="KeyboardShortcut" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="DefaultAction" inuse="True">

<ProcessValue datatype="text" value="Press"/>

</attribute>

<attribute name="ElementCount" inuse="True">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="aAncestorCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="Unavailable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Selected">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Focused">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="Pressed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="aChecked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Mixed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="ReadOnly">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Hottracked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Default">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Expanded">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Collapsed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Busy">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="Floating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Marqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Animated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Invisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Offscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Sizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Moveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="SelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="Selectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Linked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Traversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Multiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Extselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:341,498,553,421"/>
</attribute>
```

```xml
<attribute name="paX">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paY">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paWidth">
<ProcessValue datatype="number" value="320"/>
</attribute>
<attribute name="paHeight">
<ProcessValue datatype="number" value="544"/>
</attribute>
<attribute name="pName" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pDescription" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pRole" inuse="True">
<ProcessValue datatype="text" value="Window"/>
</attribute>
<attribute name="pID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="pState">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
```

```xml
<attribute name="pValue2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pKeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pDefaultAction" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pElementCount">
<ProcessValue datatype="number" value="35"/>
</attribute>
<attribute name="pUnavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFocused">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pPressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="paChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pMixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pHottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pDefault">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExpanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pCollapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pBusy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFloating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMarqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pAnimated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pInvisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOffscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMoveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFocusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pSelectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pLinked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pTraversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMultiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExtselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
</attributes>
</element>
<element name="3">
```

<id>0fb8c394-18fa-4eb6-bd0d-564b6aede689</id>

<type>AAButton</type>

<basetype>AAButton</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="321"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="545"/>

</attribute>

```xml
<attribute name="Visible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="ScreenVisible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value=""/>

</attribute>
```

```xml
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:341,120,664,661"/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pClassName">
<ProcessValue datatype="text" value="ApplicationFrameWindow"/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="333"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="120"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="337"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="553"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="aX">
<ProcessValue datatype="number" value="160"/>
</attribute>
<attribute name="aY">
<ProcessValue datatype="number" value="433"/>
</attribute>
<attribute name="aWidth">
<ProcessValue datatype="number" value="80"/>
</attribute>
<attribute name="aHeight">
<ProcessValue datatype="number" value="56"/>
</attribute>
```

```xml
<attribute name="Name" inuse="True">
<ProcessValue datatype="text" value="Three"/>
</attribute>
<attribute name="Description" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="Role" inuse="True">
<ProcessValue datatype="text" value="PushButton"/>
</attribute>
<attribute name="ID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="State">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="Value2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="KeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="DefaultAction" inuse="True">
<ProcessValue datatype="text" value="Press"/>
</attribute>
<attribute name="ElementCount" inuse="True">
<ProcessValue datatype="number" value="0"/>
</attribute>
```

```xml
<attribute name="aAncestorCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="Unavailable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Selected">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Focused">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Pressed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="aChecked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Mixed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="ReadOnly">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Hottracked">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="Default">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Expanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Collapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Busy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Floating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Marqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Animated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Invisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Offscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Sizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Moveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="SelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Selectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Linked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Traversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Multiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Extselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Alert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:501,553,609,581"/>
</attribute>
<attribute name="paX">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paY">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paWidth">
<ProcessValue datatype="number" value="320"/>
</attribute>
<attribute name="paHeight">
<ProcessValue datatype="number" value="544"/>
</attribute>
<attribute name="pName" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
```

```xml
<attribute name="pDescription" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pRole" inuse="True">

<ProcessValue datatype="text" value="Window"/>

</attribute>

<attribute name="pID" inuse="True">

<ProcessValue datatype="text" value="Self"/>

</attribute>

<attribute name="pState">

<ProcessValue datatype="text" value="focusable"/>

</attribute>

<attribute name="pValue2" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pKeyboardShortcut" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pDefaultAction" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pElementCount">

<ProcessValue datatype="number" value="35"/>

</attribute>

<attribute name="pUnavailable">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="pSelected">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pFocused">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pPressed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="paChecked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMixed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pReadOnly">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pHottracked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pDefault">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pExpanded">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="pCollapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pBusy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFloating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMarqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAnimated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pInvisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOffscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMoveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pSelfVoicing">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pFocusable">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pSelectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pLinked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pTraversed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMultiselectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pExtselectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pAlert_low">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pAlert_medium">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

<attribute name="pAlert_high">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

<type>AAButton</type>

<basetype>AAButton</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

```xml
<attribute name="X">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="321"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="545"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
```

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Calculator &lt;UNKNOWN&gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:341,120,664,661"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="ApplicationFrameWindow"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="333"/>

</attribute>

```xml
<attribute name="pY">
<ProcessValue datatype="number" value="120"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="337"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="553"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
```

```xml
<attribute name="aX">
<ProcessValue datatype="number" value="80"/>
</attribute>
<attribute name="aY">
<ProcessValue datatype="number" value="433"/>
</attribute>
<attribute name="aWidth">
<ProcessValue datatype="number" value="80"/>
</attribute>
<attribute name="aHeight">
<ProcessValue datatype="number" value="56"/>
</attribute>
<attribute name="Name" inuse="True">
<ProcessValue datatype="text" value="Two"/>
</attribute>
<attribute name="Description" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="Role" inuse="True">
<ProcessValue datatype="text" value="PushButton"/>
</attribute>
<attribute name="ID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="State">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
```

```xml
<attribute name="Value2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="KeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="DefaultAction" inuse="True">
<ProcessValue datatype="text" value="Press"/>
</attribute>
<attribute name="ElementCount" inuse="True">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="aAncestorCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="Unavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Selected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focused">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Pressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="aChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Mixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Hottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Default">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Expanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Collapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Busy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Floating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Marqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Animated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Invisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Offscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Sizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Moveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="SelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Selectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Linked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Traversed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Multiselectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Extselectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Alert_low">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Alert_medium">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Alert_high">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:421,553,609,501"/>

</attribute>

<attribute name="paX">

<ProcessValue datatype="number" value="0"/>

</attribute>
```

```xml
<attribute name="paY">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paWidth">
<ProcessValue datatype="number" value="320"/>
</attribute>
<attribute name="paHeight">
<ProcessValue datatype="number" value="544"/>
</attribute>
<attribute name="pName" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pDescription" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pRole" inuse="True">
<ProcessValue datatype="text" value="Window"/>
</attribute>
<attribute name="pID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="pState">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="pValue2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
```

```xml
<attribute name="pKeyboardShortcut" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pDefaultAction" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pElementCount">

<ProcessValue datatype="number" value="35"/>

</attribute>

<attribute name="pUnavailable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSelected">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pFocused">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pPressed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="paChecked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMixed">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="pReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pHottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pDefault">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExpanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pCollapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pBusy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFloating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMarqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAnimated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pInvisible">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pOffscreen">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSizeable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMoveable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSelfVoicing">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pFocusable">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pSelectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pLinked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pTraversed">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="pMultiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExtselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
</attributes>
</element>
<element name="1">
<id>ccf38153-2898-464b-b9b1-b0c2d18e9d38</id>
<type>AAButton</type>
<basetype>AAButton</basetype>
```

```xml
<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="321"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="545"/>

</attribute>

<attribute name="Visible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>
```

```xml
<attribute name="ScreenVisible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:341,120,664,661"/>

</attribute>
```

```xml
<attribute name="pWindowText">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pClassName">
<ProcessValue datatype="text" value="ApplicationFrameWindow"/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="333"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="120"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="337"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="553"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="aX">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="aY">
<ProcessValue datatype="number" value="433"/>
</attribute>
<attribute name="aWidth">
<ProcessValue datatype="number" value="80"/>
</attribute>
<attribute name="aHeight">
<ProcessValue datatype="number" value="56"/>
</attribute>
<attribute name="Name" inuse="True">
<ProcessValue datatype="text" value="One"/>
</attribute>
```

```xml
<attribute name="Description" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="Role" inuse="True">
<ProcessValue datatype="text" value="PushButton"/>
</attribute>
<attribute name="ID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="State">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="Value2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="KeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="DefaultAction" inuse="True">
<ProcessValue datatype="text" value="Press"/>
</attribute>
<attribute name="ElementCount" inuse="True">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="aAncestorCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
```

```xml
<attribute name="Unavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Selected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focused">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Pressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="aChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Mixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Hottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Default">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Expanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Collapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Busy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Floating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Marqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Animated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Invisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Offscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Sizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Moveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="SelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Selectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Linked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Traversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Multiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Extselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Alert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:341,553,609,421"/>
</attribute>
<attribute name="paX">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paY">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paWidth">
<ProcessValue datatype="number" value="320"/>
</attribute>
<attribute name="paHeight">
<ProcessValue datatype="number" value="544"/>
</attribute>
<attribute name="pName" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pDescription" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
```

```xml
<attribute name="pRole" inuse="True">

<ProcessValue datatype="text" value="Window"/>

</attribute>

<attribute name="pID" inuse="True">

<ProcessValue datatype="text" value="Self"/>

</attribute>

<attribute name="pState">

<ProcessValue datatype="text" value="focusable"/>

</attribute>

<attribute name="pValue2" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pKeyboardShortcut" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pDefaultAction" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pElementCount">

<ProcessValue datatype="number" value="35"/>

</attribute>

<attribute name="pUnavailable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSelected">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="pFocused">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pPressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="paChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pHottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pDefault">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExpanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pCollapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pBusy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFloating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMarqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAnimated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pInvisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOffscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMoveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pFocusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>

<attribute name="pSelectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pLinked">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pTraversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pMultiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pExtselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pAlert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pAlert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pAlert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
</attributes>
</element>
<element name="0">
<id>5ceb7ed3-2631-4093-9c21-534dab1ae211</id>
<type>AAButton</type>
<basetype>AAButton</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="0"/>
</attribute>
```

```xml
<attribute name="Y">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="321"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="545"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
```

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Calculator &lt;UNKNOWN&gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:341,120,664,661"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="ApplicationFrameWindow"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="333"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="120"/>

</attribute>

```xml
<attribute name="pWidth">
<ProcessValue datatype="number" value="337"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="553"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="aX">
<ProcessValue datatype="number" value="80"/>
</attribute>
```

```xml
<attribute name="aY">
<ProcessValue datatype="number" value="489"/>
</attribute>
<attribute name="aWidth">
<ProcessValue datatype="number" value="80"/>
</attribute>
<attribute name="aHeight">
<ProcessValue datatype="number" value="55"/>
</attribute>
<attribute name="Name" inuse="True">
<ProcessValue datatype="text" value="Zero"/>
</attribute>
<attribute name="Description" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="Role" inuse="True">
<ProcessValue datatype="text" value="PushButton"/>
</attribute>
<attribute name="ID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="State">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="Value2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
```

```xml
<attribute name="KeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="DefaultAction" inuse="True">
<ProcessValue datatype="text" value="Press"/>
</attribute>
<attribute name="ElementCount" inuse="True">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="aAncestorCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="Unavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Selected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focused">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Pressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="aChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Mixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Hottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Default">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Expanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Collapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Busy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Floating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Marqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Animated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Invisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Offscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Sizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Moveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="SelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Selectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Linked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Traversed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Multiselectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Extselectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Alert_low">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Alert_medium">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Alert_high">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:421,609,664,501"/>

</attribute>

<attribute name="paX">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="paY">

<ProcessValue datatype="number" value="0"/>

</attribute>
```

```xml
<attribute name="paWidth">
<ProcessValue datatype="number" value="320"/>
</attribute>
<attribute name="paHeight">
<ProcessValue datatype="number" value="544"/>
</attribute>
<attribute name="pName" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pDescription" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pRole" inuse="True">
<ProcessValue datatype="text" value="Window"/>
</attribute>
<attribute name="pID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="pState">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="pValue2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pKeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
```

```xml
<attribute name="pDefaultAction" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pElementCount">
<ProcessValue datatype="number" value="35"/>
</attribute>
<attribute name="pUnavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFocused">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pPressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="paChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pHottracked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pDefault">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pExpanded">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pCollapsed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pBusy">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pFloating">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMarqueed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pAnimated">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pInvisible">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="pOffscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMoveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFocusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pSelectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pLinked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pTraversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMultiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pExtselectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pAlert_low">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pAlert_medium">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pAlert_high">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

</attributes>

</element>

</group>

<group name="Result">

<id>8a0f9887-39cc-4c3b-a03d-5efb42bf8ec9</id>

<element name="Result">

<id>9c3dafc4-0791-4a4e-8d23-7f90348410ce</id>

<type>AAElement</type>

<basetype>AAElement</basetype>
```

```xml
<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="321"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="545"/>

</attribute>

<attribute name="Visible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>
```

<attribute name="ScreenVisible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Calculator &lt;UNKNOWN&gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:341,120,664,661"/>

</attribute>

```xml
<attribute name="pWindowText">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>

<attribute name="pClassName">
<ProcessValue datatype="text" value="ApplicationFrameWindow"/>
</attribute>

<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>

<attribute name="pX">
<ProcessValue datatype="number" value="333"/>
</attribute>

<attribute name="pY">
<ProcessValue datatype="number" value="120"/>
</attribute>

<attribute name="pWidth">
<ProcessValue datatype="number" value="337"/>
</attribute>

<attribute name="pHeight">
<ProcessValue datatype="number" value="553"/>
</attribute>

<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>

<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="aX">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="aY">
<ProcessValue datatype="number" value="102"/>
</attribute>
<attribute name="aWidth">
<ProcessValue datatype="number" value="320"/>
</attribute>
<attribute name="aHeight">
<ProcessValue datatype="number" value="77"/>
</attribute>
<attribute name="Name" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
```

```xml
<attribute name="Description" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="Role" inuse="True">
<ProcessValue datatype="text" value="StaticText"/>
</attribute>
<attribute name="ID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="State">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="Value2">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="KeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="DefaultAction" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="ElementCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="aAncestorCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
```

```xml
<attribute name="Unavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Selected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focused">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Pressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="aChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Mixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Hottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Default">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Expanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Collapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Busy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Floating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Marqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Animated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Invisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Offscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Sizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Moveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="SelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Selectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Linked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Traversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Multiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Extselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Alert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:341,222,299,661"/>
</attribute>
<attribute name="paX">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paY">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paWidth">
<ProcessValue datatype="number" value="320"/>
</attribute>
<attribute name="paHeight">
<ProcessValue datatype="number" value="544"/>
</attribute>
<attribute name="pName" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pDescription" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
```

<attribute name="pRole" inuse="True">

<ProcessValue datatype="text" value="Window"/>

</attribute>

<attribute name="pID" inuse="True">

<ProcessValue datatype="text" value="Self"/>

</attribute>

<attribute name="pState">

<ProcessValue datatype="text" value="focusable"/>

</attribute>

<attribute name="pValue2" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pKeyboardShortcut" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pDefaultAction" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pElementCount">

<ProcessValue datatype="number" value="35"/>

</attribute>

<attribute name="pUnavailable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSelected">

<ProcessValue datatype="flag" value="False"/>

</attribute>

```xml
<attribute name="pFocused">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pPressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="paChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pHottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pDefault">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExpanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pCollapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pBusy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFloating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMarqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAnimated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pInvisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOffscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMoveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pFocusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pSelectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pLinked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pTraversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMultiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExtselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

</attributes>

</element>

</group>

<group name="Operators">

<id>36918c11-dde0-4274-810b-366a51a663fc</id>

<element name="=">

<id>a7368c35-20be-4eaf-9b1f-49fbc74dc454</id>

<type>AAButton</type>

<basetype>AAButton</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>
```

```xml
<attribute name="X">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="321"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="545"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
```

```xml
<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:341,120,664,661"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="ApplicationFrameWindow"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="333"/>

</attribute>
```

```xml
<attribute name="pY">
<ProcessValue datatype="number" value="120"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="337"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="553"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
```

```xml
<attribute name="aX">
<ProcessValue datatype="number" value="240"/>
</attribute>
<attribute name="aY">
<ProcessValue datatype="number" value="489"/>
</attribute>
<attribute name="aWidth">
<ProcessValue datatype="number" value="80"/>
</attribute>
<attribute name="aHeight">
<ProcessValue datatype="number" value="55"/>
</attribute>
<attribute name="Name" inuse="True">
<ProcessValue datatype="text" value="Equals"/>
</attribute>
<attribute name="Description" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="Role" inuse="True">
<ProcessValue datatype="text" value="PushButton"/>
</attribute>
<attribute name="ID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="State">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
```

```
<attribute name="Value2" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="KeyboardShortcut" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="DefaultAction" inuse="True">

<ProcessValue datatype="text" value="Press"/>

</attribute>

<attribute name="ElementCount" inuse="True">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="aAncestorCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="Unavailable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Selected">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Focused">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Pressed">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="aChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Mixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Hottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Default">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Expanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Collapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Busy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Floating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Marqueed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Animated">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Invisible">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Offscreen">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Sizeable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Moveable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="SelfVoicing">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Focusable">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Selectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="Linked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Traversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Multiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Extselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:581,609,664,661"/>
</attribute>
<attribute name="paX">
<ProcessValue datatype="number" value="0"/>
</attribute>
```

```xml
<attribute name="paY">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paWidth">
<ProcessValue datatype="number" value="320"/>
</attribute>
<attribute name="paHeight">
<ProcessValue datatype="number" value="544"/>
</attribute>
<attribute name="pName" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pDescription" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pRole" inuse="True">
<ProcessValue datatype="text" value="Window"/>
</attribute>
<attribute name="pID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="pState">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="pValue2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
```

```xml
<attribute name="pKeyboardShortcut" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pDefaultAction" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pElementCount">

<ProcessValue datatype="number" value="35"/>

</attribute>

<attribute name="pUnavailable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSelected">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pFocused">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pPressed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="paChecked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMixed">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="pReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pHottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pDefault">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pExpanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pCollapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pBusy">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pFloating">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pMarqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pAnimated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pInvisible">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pOffscreen">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSizeable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMoveable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSelfVoicing">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pFocusable">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pSelectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pLinked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pTraversed">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="pMultiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExtselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
</attributes>
</element>
<element name="\">
<id>2e5aaa71-8cdb-4ebf-9938-e5123fa679d6</id>
<type>AAButton</type>
<basetype>AAButton</basetype>
```

```xml
<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="321"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="545"/>

</attribute>

<attribute name="Visible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>
```

```xml
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
<attribute name="AncestorCount">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="TypeName">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:341,120,664,661"/>
</attribute>
```

```xml
<attribute name="pWindowText">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pClassName">
<ProcessValue datatype="text" value="ApplicationFrameWindow"/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="333"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="120"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="337"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="553"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="aX">
<ProcessValue datatype="number" value="240"/>
</attribute>
<attribute name="aY">
<ProcessValue datatype="number" value="268"/>
</attribute>
<attribute name="aWidth">
<ProcessValue datatype="number" value="80"/>
</attribute>
<attribute name="aHeight">
<ProcessValue datatype="number" value="55"/>
</attribute>
<attribute name="Name" inuse="True">
<ProcessValue datatype="text" value="Divide by"/>
</attribute>
```

```xml
<attribute name="Description" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="Role" inuse="True">
<ProcessValue datatype="text" value="PushButton"/>
</attribute>
<attribute name="ID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="State">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="Value2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="KeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="DefaultAction" inuse="True">
<ProcessValue datatype="text" value="Press"/>
</attribute>
<attribute name="ElementCount" inuse="True">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="aAncestorCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
```

```xml
<attribute name="Unavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Selected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focused">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Pressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="aChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Mixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Hottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Default">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Expanded">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Collapsed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Busy">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Floating">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Marqueed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Animated">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Invisible">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Offscreen">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Sizeable">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="Moveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="SelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Selectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Linked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Traversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Multiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Extselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Alert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:581,388,443,661"/>
</attribute>
<attribute name="paX">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paY">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paWidth">
<ProcessValue datatype="number" value="320"/>
</attribute>
<attribute name="paHeight">
<ProcessValue datatype="number" value="544"/>
</attribute>
<attribute name="pName" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pDescription" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
```

```xml
<attribute name="pRole" inuse="True">
<ProcessValue datatype="text" value="Window"/>
</attribute>
<attribute name="pID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="pState">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="pValue2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pKeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pDefaultAction" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pElementCount">
<ProcessValue datatype="number" value="35"/>
</attribute>
<attribute name="pUnavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pFocused">
<ProcessValue datatype="flag" value="True"/>
</attribute>

<attribute name="pPressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="paChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pMixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pHottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pDefault">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pExpanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="pCollapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pBusy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFloating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMarqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAnimated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pInvisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOffscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMoveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pFocusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pSelectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pLinked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pTraversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMultiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExtselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

</attributes>

</element>

<element name="-">

<id>288bcfb3-107f-49a3-90e1-e15cbc95a7dd</id>

<type>AAButton</type>

<basetype>AAButton</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="0"/>

</attribute>
```

```xml
<attribute name="Y">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="321"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="545"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
```

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Calculator &lt;UNKNOWN&gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:341,120,664,661"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="ApplicationFrameWindow"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="333"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="120"/>

</attribute>

```xml
<attribute name="pWidth">
<ProcessValue datatype="number" value="337"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="553"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="aX">
<ProcessValue datatype="number" value="240"/>
</attribute>
```

```xml
<attribute name="aY">
<ProcessValue datatype="number" value="378"/>
</attribute>
<attribute name="aWidth">
<ProcessValue datatype="number" value="80"/>
</attribute>
<attribute name="aHeight">
<ProcessValue datatype="number" value="55"/>
</attribute>
<attribute name="Name" inuse="True">
<ProcessValue datatype="text" value="Minus"/>
</attribute>
<attribute name="Description" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="Role" inuse="True">
<ProcessValue datatype="text" value="PushButton"/>
</attribute>
<attribute name="ID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="State">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="Value2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
```

```xml
<attribute name="KeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="DefaultAction" inuse="True">
<ProcessValue datatype="text" value="Press"/>
</attribute>
<attribute name="ElementCount" inuse="True">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="aAncestorCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="Unavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Selected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focused">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Pressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="aChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Mixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Hottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Default">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Expanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Collapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Busy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Floating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Marqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Animated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Invisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Offscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Sizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Moveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="SelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Selectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Linked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Traversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Multiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Extselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:581,498,553,661"/>
</attribute>
<attribute name="paX">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paY">
<ProcessValue datatype="number" value="0"/>
</attribute>
```

```xml
<attribute name="paWidth">
<ProcessValue datatype="number" value="320"/>
</attribute>
<attribute name="paHeight">
<ProcessValue datatype="number" value="544"/>
</attribute>
<attribute name="pName" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pDescription" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pRole" inuse="True">
<ProcessValue datatype="text" value="Window"/>
</attribute>
<attribute name="pID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="pState">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="pValue2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pKeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
```

```xml
<attribute name="pDefaultAction" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pElementCount">

<ProcessValue datatype="number" value="35"/>

</attribute>

<attribute name="pUnavailable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSelected">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pFocused">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pPressed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="paChecked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMixed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pReadOnly">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="pHottracked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pDefault">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pExpanded">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pCollapsed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pBusy">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pFloating">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMarqueed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pAnimated">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pInvisible">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="pOffscreen">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSizeable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMoveable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSelfVoicing">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pFocusable">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pSelectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pLinked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pTraversed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMultiselectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="pExtselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
</attributes>
</element>
<element name="+">
<id>3ccf4fd9-1cba-460f-ac97-8a46627b310a</id>
<type>AAButton</type>
<basetype>AAButton</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
```

```xml
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="321"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="545"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:341,120,664,661"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>
```

<attribute name="pClassName">

<ProcessValue datatype="text" value="ApplicationFrameWindow"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="333"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="120"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="337"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="number" value="553"/>

</attribute>

<attribute name="pVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pScreenVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pEnabled">

<ProcessValue datatype="flag" value="True"/>

</attribute>

```
<attribute name="pActive">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="aX">

<ProcessValue datatype="number" value="240"/>

</attribute>

<attribute name="aY">

<ProcessValue datatype="number" value="433"/>

</attribute>

<attribute name="aWidth">

<ProcessValue datatype="number" value="80"/>

</attribute>

<attribute name="aHeight">

<ProcessValue datatype="number" value="56"/>

</attribute>

<attribute name="Name" inuse="True">

<ProcessValue datatype="text" value="Plus"/>

</attribute>

<attribute name="Description" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>
```

```xml
<attribute name="Role" inuse="True">
<ProcessValue datatype="text" value="PushButton"/>
</attribute>
<attribute name="ID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="State">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="Value2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="KeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="DefaultAction" inuse="True">
<ProcessValue datatype="text" value="Press"/>
</attribute>
<attribute name="ElementCount" inuse="True">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="aAncestorCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="Unavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Selected">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Focused">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Pressed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="aChecked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Mixed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="ReadOnly">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Hottracked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Default">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Expanded">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="Collapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Busy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Floating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Marqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Animated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Invisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Offscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Sizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Moveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="SelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Selectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Linked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Traversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Multiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Extselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Alert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:581,553,609,661"/>
</attribute>
<attribute name="paX">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paY">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paWidth">
<ProcessValue datatype="number" value="320"/>
</attribute>
<attribute name="paHeight">
<ProcessValue datatype="number" value="544"/>
</attribute>
<attribute name="pName" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pDescription" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pRole" inuse="True">
<ProcessValue datatype="text" value="Window"/>
</attribute>
```

```xml
<attribute name="pID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="pState">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="pValue2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pKeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pDefaultAction" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pElementCount">
<ProcessValue datatype="number" value="35"/>
</attribute>
<attribute name="pUnavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFocused">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="pPressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="paChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pHottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pDefault">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExpanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pCollapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pBusy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pFloating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMarqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAnimated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pInvisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOffscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMoveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFocusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="pSelectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pLinked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pTraversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMultiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExtselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
```

```xml
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
</attributes>
</element>
<element name="*">
<id>796c0672-dab8-4be6-adeb-eed8bc127718</id>
<type>AAButton</type>
<basetype>AAButton</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="0"/>
</attribute>
```

```xml
<attribute name="Width">
<ProcessValue datatype="number" value="321"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="545"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
```

```xml
<attribute name="AncestorCount">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="TypeName">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:341,120,664,661"/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pClassName">
<ProcessValue datatype="text" value="ApplicationFrameWindow"/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="333"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="120"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="337"/>
</attribute>
```

```xml
<attribute name="pHeight">
<ProcessValue datatype="number" value="553"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="aX">
<ProcessValue datatype="number" value="240"/>
</attribute>
<attribute name="aY">
<ProcessValue datatype="number" value="323"/>
</attribute>
```

```xml
<attribute name="aWidth">
<ProcessValue datatype="number" value="80"/>
</attribute>
<attribute name="aHeight">
<ProcessValue datatype="number" value="55"/>
</attribute>
<attribute name="Name" inuse="True">
<ProcessValue datatype="text" value="Multiply by"/>
</attribute>
<attribute name="Description" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="Role" inuse="True">
<ProcessValue datatype="text" value="PushButton"/>
</attribute>
<attribute name="ID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="State">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="Value2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="KeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
```

```xml
<attribute name="DefaultAction" inuse="True">
<ProcessValue datatype="text" value="Press"/>
</attribute>
<attribute name="ElementCount" inuse="True">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="aAncestorCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="Unavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Selected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focused">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Pressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="aChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Mixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="ReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Hottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Default">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Expanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Collapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Busy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Floating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Marqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Animated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Invisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Offscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Sizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Moveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="SelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Selectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Linked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Traversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Multiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="Extselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="Alert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="Alert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="Alert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:581,443,498,661"/>
</attribute>

<attribute name="paX">
<ProcessValue datatype="number" value="0"/>
</attribute>

<attribute name="paY">
<ProcessValue datatype="number" value="0"/>
</attribute>

<attribute name="paWidth">
<ProcessValue datatype="number" value="320"/>
</attribute>
```

```xml
<attribute name="paHeight">
<ProcessValue datatype="number" value="544"/>
</attribute>
<attribute name="pName" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pDescription" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pRole" inuse="True">
<ProcessValue datatype="text" value="Window"/>
</attribute>
<attribute name="pID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="pState">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="pValue2" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pKeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pDefaultAction" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
```

```xml
<attribute name="pElementCount">
<ProcessValue datatype="number" value="35"/>
</attribute>
<attribute name="pUnavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFocused">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pPressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="paChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pHottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pDefault">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExpanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pCollapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pBusy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFloating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMarqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAnimated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pInvisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOffscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pSizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMoveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFocusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pSelectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pLinked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pTraversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMultiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExtselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pAlert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
</attributes>
</element>
</group>
<element name="Main Window">
<id>4bbd315c-2c57-4124-a4bd-8a09ab64c152</id>
<element name="Main Window - Standard Mode">
<id>a4b15f4e-5695-403f-998e-a902a0745cd0</id>
<type>Window</type>
<basetype>Window</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
```

```xml
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="271"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="513"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
<attribute name="AncestorCount">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="TypeName">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:341,120,632,611"/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
```

```xml
<attribute name="pClassName">
<ProcessValue datatype="text" value="ApplicationFrameWindow"/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="333"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="120"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="287"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="521"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="pActive">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
</attributes>
</element>
<element name="Main Window - Scientific Mode">
<id>fc82ebdb-34fb-4bf2-ab76-40d5e7b5aaea</id>
<type>Window</type>
<basetype>Window</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
```

```xml
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="321"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="545"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:341,120,664,661"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="ApplicationFrameWindow"/>

</attribute>
```

```xml
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>

<attribute name="pX">
<ProcessValue datatype="number" value="333"/>
</attribute>

<attribute name="pY">
<ProcessValue datatype="number" value="120"/>
</attribute>

<attribute name="pWidth">
<ProcessValue datatype="number" value="337"/>
</attribute>

<attribute name="pHeight">
<ProcessValue datatype="number" value="553"/>
</attribute>

<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>

<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>

<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>

<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```
<attribute name="pOrdinal">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

</attributes>

</element>

<element name="Menu Button">

<id>ba85fba2-158a-4e91-bfb8-c03ef3d25772</id>

<element name=" Menu DropDown">

<id>e6f0886d-ab28-4e4d-bbaa-82666c9287da</id>

<element name="Dynamic Calculator Mode">

<id>854f64be-52dc-4ec6-95c2-b63fe9577723</id>

<type>AAElement</type>

<basetype>AAElement</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>
```

```xml
</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="501"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="533"/>

</attribute>

<attribute name="Visible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="ScreenVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>
```

```xml
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
<attribute name="AncestorCount">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="TypeName">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:1249,133,665,1749"/>
</attribute>
<attribute name="Style">
<ProcessValue datatype="number" value="1409286144"/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value="Calculator"/>
```

```xml
</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="ApplicationFrameWindow"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="1241"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="133"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="517"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="number" value="541"/>

</attribute>

<attribute name="pVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pScreenVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pEnabled">

<ProcessValue datatype="flag" value="True"/>
```

```xml
    </attribute>
    <attribute name="pActive">
    <ProcessValue datatype="flag" value="True"/>
    </attribute>
    <attribute name="pOrdinal">
    <ProcessValue datatype="number" value="1"/>
    </attribute>
    <attribute name="pChildCount">
    <ProcessValue datatype="number" value="1"/>
    </attribute>
    <attribute name="pStyle">
    <ProcessValue datatype="number" value="1409286144"/>
    </attribute>
    <attribute name="aX">
    <ProcessValue datatype="number" value="0"/>
    </attribute>
    <attribute name="aY">
    <ProcessValue datatype="number" value="48"/>
    </attribute>
    <attribute name="aWidth">
    <ProcessValue datatype="number" value="256"/>
    </attribute>
    <attribute name="aHeight">
    <ProcessValue datatype="number" value="48"/>
    </attribute>
    <attribute name="Name" comparisontype="dynamic" inuse="True">
    <ProcessValue datatype="text" value="Standard"/>
```

```xml
</attribute>

<attribute name="Description">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="Role" inuse="True">

<ProcessValue datatype="text" value="ListItem"/>

</attribute>

<attribute name="ID">

<ProcessValue datatype="text" value="Self"/>

</attribute>

<attribute name="State">

<ProcessValue datatype="text" value="selectable"/>

</attribute>

<attribute name="Value2">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="KeyboardShortcut">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="DefaultAction">

<ProcessValue datatype="text" value="Double Click"/>

</attribute>

<attribute name="ElementCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="aAncestorCount">

<ProcessValue datatype="number" value="3"/>
```

```xml
</attribute>

<attribute name="Unavailable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Selected">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Focused">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Pressed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="aChecked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Mixed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="ReadOnly">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Hottracked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Default">

<ProcessValue datatype="flag" value="False"/>
```

```xml
</attribute>

<attribute name="Expanded">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Collapsed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Busy">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Floating">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Marqueed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Animated">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Invisible">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Offscreen">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Sizeable">

<ProcessValue datatype="flag" value="False"/>
```

```xml
</attribute>

<attribute name="Moveable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="SelfVoicing">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Focusable">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Selectable">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Linked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Traversed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Multiselectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Extselectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Alert_low">

<ProcessValue datatype="flag" value="False"/>
```

</attribute>

<attribute name="Alert_medium">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Alert_high">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:1249,213,261,1505"/>

</attribute>

<attribute name="paX">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="paY">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="paWidth">

<ProcessValue datatype="number" value="256"/>

</attribute>

<attribute name="paHeight">

<ProcessValue datatype="number" value="452"/>

</attribute>

<attribute name="pName">

<ProcessValue datatype="text" value="Mode DropDown"/>

</attribute>

<attribute name="pDescription">

<ProcessValue datatype="text" value=""/>

```xml
</attribute>

<attribute name="pRole">

<ProcessValue datatype="text" value="List"/>

</attribute>

<attribute name="pID">

<ProcessValue datatype="text" value="Self"/>

</attribute>

<attribute name="pState">

<ProcessValue datatype="text" value="normal"/>

</attribute>

<attribute name="pValue2">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pKeyboardShortcut">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pDefaultAction">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pElementCount">

<ProcessValue datatype="number" value="19"/>

</attribute>

<attribute name="pUnavailable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSelected">

<ProcessValue datatype="flag" value="False"/>
```

```xml
</attribute>

<attribute name="pFocused">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pPressed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="paChecked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMixed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pReadOnly">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pHottracked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pDefault">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pExpanded">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pCollapsed">

<ProcessValue datatype="flag" value="False"/>
```

```xml
</attribute>
<attribute name="pBusy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFloating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMarqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAnimated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pInvisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOffscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMoveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelfVoicing">
<ProcessValue datatype="flag" value="False"/>
```

```xml
</attribute>

<attribute name="pFocusable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSelectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pLinked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pTraversed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMultiselectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pExtselectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pAlert_low">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pAlert_medium">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pAlert_high">

<ProcessValue datatype="flag" value="False"/>
```

</attribute>

<attribute name="MatchIndex" inuse="True">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

</attributes>

</element>

<element name="Dynamic Calculator Title">

<id>ca181a42-9af6-4122-9fd6-403bcc2ad888</id>

<type>AAElement</type>

<basetype>AAElement</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="0"/>

```xml
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="501"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="533"/>
</attribute>
<attribute name="Visible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
```

```
</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:1249,133,665,1749"/>

</attribute>

<attribute name="Style">

<ProcessValue datatype="number" value="1409286144"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="ApplicationFrameWindow"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="1241"/>
```

```xml
    </attribute>
    <attribute name="pY">
      <ProcessValue datatype="number" value="133"/>
    </attribute>
    <attribute name="pWidth">
      <ProcessValue datatype="number" value="517"/>
    </attribute>
    <attribute name="pHeight">
      <ProcessValue datatype="number" value="541"/>
    </attribute>
    <attribute name="pVisible">
      <ProcessValue datatype="flag" value="True"/>
    </attribute>
    <attribute name="pScreenVisible">
      <ProcessValue datatype="flag" value="True"/>
    </attribute>
    <attribute name="pEnabled">
      <ProcessValue datatype="flag" value="True"/>
    </attribute>
    <attribute name="pActive">
      <ProcessValue datatype="flag" value="True"/>
    </attribute>
    <attribute name="pOrdinal">
      <ProcessValue datatype="number" value="2"/>
    </attribute>
    <attribute name="pChildCount">
      <ProcessValue datatype="number" value="1"/>
```

```
</attribute>

<attribute name="pStyle">

<ProcessValue datatype="number" value="1409286144"/>

</attribute>

<attribute name="aX">

<ProcessValue datatype="number" value="60"/>

</attribute>

<attribute name="aY">

<ProcessValue datatype="number" value="38"/>

</attribute>

<attribute name="aWidth">

<ProcessValue datatype="number" value="91"/>

</attribute>

<attribute name="aHeight">

<ProcessValue datatype="number" value="42"/>

</attribute>

<attribute name="Name" comparisontype="Wildcard" inuse="True">

<ProcessValue datatype="text" value="*mode"/>

</attribute>

<attribute name="Description">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="Role" inuse="True">

<ProcessValue datatype="text" value="StaticText"/>

</attribute>

<attribute name="ID">

<ProcessValue datatype="text" value="Self"/>
```

```xml
    </attribute>
    <attribute name="State">
        <ProcessValue datatype="text" value="normal"/>
    </attribute>
    <attribute name="Value2">
        <ProcessValue datatype="text" value=""/>
    </attribute>
    <attribute name="KeyboardShortcut">
        <ProcessValue datatype="text" value=""/>
    </attribute>
    <attribute name="DefaultAction">
        <ProcessValue datatype="text" value=""/>
    </attribute>
    <attribute name="ElementCount">
        <ProcessValue datatype="number" value="0"/>
    </attribute>
    <attribute name="aAncestorCount">
        <ProcessValue datatype="number" value="1"/>
    </attribute>
    <attribute name="Unavailable">
        <ProcessValue datatype="flag" value="False"/>
    </attribute>
    <attribute name="Selected">
        <ProcessValue datatype="flag" value="False"/>
    </attribute>
    <attribute name="Focused">
        <ProcessValue datatype="flag" value="False"/>
```

```xml
</attribute>

<attribute name="Pressed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="aChecked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Mixed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="ReadOnly">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Hottracked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Default">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Expanded">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Collapsed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Busy">

<ProcessValue datatype="flag" value="False"/>
```

```xml
        </attribute>

        <attribute name="Floating">

            <ProcessValue datatype="flag" value="False"/>

        </attribute>

        <attribute name="Marqueed">

            <ProcessValue datatype="flag" value="False"/>

        </attribute>

        <attribute name="Animated">

            <ProcessValue datatype="flag" value="False"/>

        </attribute>

        <attribute name="Invisible">

            <ProcessValue datatype="flag" value="False"/>

        </attribute>

        <attribute name="Offscreen">

            <ProcessValue datatype="flag" value="False"/>

        </attribute>

        <attribute name="Sizeable">

            <ProcessValue datatype="flag" value="False"/>

        </attribute>

        <attribute name="Moveable">

            <ProcessValue datatype="flag" value="False"/>

        </attribute>

        <attribute name="SelfVoicing">

            <ProcessValue datatype="flag" value="False"/>

        </attribute>

        <attribute name="Focusable">

            <ProcessValue datatype="flag" value="False"/>
```

```xml
</attribute>

<attribute name="Selectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Linked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Traversed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Multiselectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Extselectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Alert_low">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Alert_medium">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Alert_high">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:1309,171,213,1400"/>
```

```xml
</attribute>
<attribute name="paX">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paY">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paWidth">
<ProcessValue datatype="number" value="500"/>
</attribute>
<attribute name="paHeight">
<ProcessValue datatype="number" value="532"/>
</attribute>
<attribute name="pName">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pDescription">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pRole">
<ProcessValue datatype="text" value="Window"/>
</attribute>
<attribute name="pID">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="pState">
<ProcessValue datatype="text" value="focusable"/>
```

```xml
        </attribute>
        <attribute name="pValue2">
          <ProcessValue datatype="text" value=""/>
        </attribute>
        <attribute name="pKeyboardShortcut">
          <ProcessValue datatype="text" value=""/>
        </attribute>
        <attribute name="pDefaultAction">
          <ProcessValue datatype="text" value=""/>
        </attribute>
        <attribute name="pElementCount">
          <ProcessValue datatype="number" value="18"/>
        </attribute>
        <attribute name="pUnavailable">
          <ProcessValue datatype="flag" value="False"/>
        </attribute>
        <attribute name="pSelected">
          <ProcessValue datatype="flag" value="False"/>
        </attribute>
        <attribute name="pFocused">
          <ProcessValue datatype="flag" value="True"/>
        </attribute>
        <attribute name="pPressed">
          <ProcessValue datatype="flag" value="False"/>
        </attribute>
        <attribute name="paChecked">
          <ProcessValue datatype="flag" value="False"/>
```

```xml
</attribute>
<attribute name="pMixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pHottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pDefault">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExpanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pCollapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pBusy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFloating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMarqueed">
<ProcessValue datatype="flag" value="False"/>
```

```xml
</attribute>
<attribute name="pAnimated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pInvisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOffscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMoveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFocusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pSelectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pLinked">
<ProcessValue datatype="flag" value="False"/>
```

```xml
</attribute>
<attribute name="pTraversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMultiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExtselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
</attributes>
</element>
```

```xml
<type>AAListBox</type>

<basetype>AAListBox</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="501"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="533"/>

</attribute>

<attribute name="Visible">
```

```xml
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
<attribute name="AncestorCount">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="TypeName">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="ScreenBounds">
```

<ProcessValue datatype="text" value="RECT:1249,133,665,1749"/>

</attribute>

<attribute name="Style">

<ProcessValue datatype="number" value="1409286144"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="ApplicationFrameWindow"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="1241"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="133"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="517"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="number" value="541"/>

</attribute>

<attribute name="pVisible">

```xml
<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pScreenVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pEnabled">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="pStyle">

<ProcessValue datatype="number" value="1409286144"/>

</attribute>

<attribute name="aX">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="aY">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="aWidth">
```

```xml
<ProcessValue datatype="number" value="256"/>

</attribute>

<attribute name="aHeight">

<ProcessValue datatype="number" value="452"/>

</attribute>

<attribute name="Name" inuse="True">

<ProcessValue datatype="text" value="Mode DropDown"/>

</attribute>

<attribute name="Description">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="Role" inuse="True">

<ProcessValue datatype="text" value="List"/>

</attribute>

<attribute name="ID">

<ProcessValue datatype="text" value="Self"/>

</attribute>

<attribute name="State">

<ProcessValue datatype="text" value="normal"/>

</attribute>

<attribute name="Value2">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="KeyboardShortcut">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="DefaultAction">
```

```xml
<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ElementCount">

<ProcessValue datatype="number" value="19"/>

</attribute>

<attribute name="aAncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="Unavailable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Selected">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Focused">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Pressed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="aChecked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Mixed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="ReadOnly">
```

```xml
<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Hottracked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Default">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Expanded">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Collapsed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Busy">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Floating">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Marqueed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Animated">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Invisible">
```

```xml
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Offscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Sizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Moveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="SelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focusable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Selectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Linked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Traversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Multiselectable">
```

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Extselectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Alert_low">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Alert_medium">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Alert_high">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:1249,165,617,1505"/>

</attribute>

<attribute name="paX">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="paY">

<ProcessValue datatype="number" value="32"/>

</attribute>

<attribute name="paWidth">

<ProcessValue datatype="number" value="256"/>

</attribute>

<attribute name="paHeight">

```xml
<ProcessValue datatype="number" value="500"/>

</attribute>

<attribute name="pName">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pDescription">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pRole">

<ProcessValue datatype="text" value="Window"/>

</attribute>

<attribute name="pID">

<ProcessValue datatype="text" value="Self"/>

</attribute>

<attribute name="pState">

<ProcessValue datatype="text" value="normal"/>

</attribute>

<attribute name="pValue2">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pKeyboardShortcut">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pDefaultAction">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pElementCount">
```

```xml
<ProcessValue datatype="number" value="3"/>
</attribute>
<attribute name="pUnavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFocused">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pPressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="paChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pHottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pDefault">
```

```xml
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExpanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pCollapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pBusy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFloating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMarqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAnimated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pInvisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOffscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSizeable">
```

```xml
<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMoveable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSelfVoicing">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pFocusable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSelectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pLinked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pTraversed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMultiselectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pExtselectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pAlert_low">
```

```xml
<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pAlert_medium">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pAlert_high">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

</attributes>

</element>

<type>AAButton</type>

<basetype>AAButton</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>

</attribute>
```

```xml
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="501"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="533"/>
</attribute>
<attribute name="Visible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```
<attribute name="Ordinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:1249,133,665,1749"/>

</attribute>

<attribute name="Style">

<ProcessValue datatype="number" value="1409286144"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="ApplicationFrameWindow"/>

</attribute>
```

```xml
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>

<attribute name="pX">
<ProcessValue datatype="number" value="1241"/>
</attribute>

<attribute name="pY">
<ProcessValue datatype="number" value="133"/>
</attribute>

<attribute name="pWidth">
<ProcessValue datatype="number" value="517"/>
</attribute>

<attribute name="pHeight">
<ProcessValue datatype="number" value="541"/>
</attribute>

<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>

<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>

<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>

<attribute name="pActive">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="pStyle">
<ProcessValue datatype="number" value="1409286144"/>
</attribute>
<attribute name="aX">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="aY">
<ProcessValue datatype="number" value="32"/>
</attribute>
<attribute name="aWidth">
<ProcessValue datatype="number" value="48"/>
</attribute>
<attribute name="aHeight">
<ProcessValue datatype="number" value="48"/>
</attribute>
<attribute name="Name" inuse="True">
<ProcessValue datatype="text" value="Menu"/>
</attribute>
<attribute name="Description">
<ProcessValue datatype="text" value=""/>
</attribute>
```

```xml
<attribute name="Role" inuse="True">
<ProcessValue datatype="text" value="PushButton"/>
</attribute>
<attribute name="ID" inuse="True">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="State">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="Value2">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="KeyboardShortcut" inuse="True">
<ProcessValue datatype="text" value="Alt, H"/>
</attribute>
<attribute name="DefaultAction" inuse="True">
<ProcessValue datatype="text" value="Press"/>
</attribute>
<attribute name="ElementCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="aAncestorCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="Unavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Selected">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Focused">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Pressed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="aChecked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Mixed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="ReadOnly">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Hottracked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Default">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Expanded">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="Collapsed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Busy">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Floating">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Marqueed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Animated">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Invisible">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Offscreen">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Sizeable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Moveable">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="SelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Selectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Linked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Traversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Multiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Extselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Alert_high">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:1249,165,213,1297"/>

</attribute>

<attribute name="paX">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="paY">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="paWidth">

<ProcessValue datatype="number" value="500"/>

</attribute>

<attribute name="paHeight">

<ProcessValue datatype="number" value="532"/>

</attribute>

<attribute name="pName">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pDescription">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pRole" inuse="True">

<ProcessValue datatype="text" value="Window"/>

</attribute>
```

```xml
<attribute name="pID">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="pState">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="pValue2">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pKeyboardShortcut">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pDefaultAction">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pElementCount">
<ProcessValue datatype="number" value="12"/>
</attribute>
<attribute name="pUnavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFocused">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pPressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="paChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pHottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pDefault">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExpanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pCollapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pBusy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pFloating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMarqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAnimated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pInvisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOffscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMoveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFocusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="pSelectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pLinked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pTraversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMultiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExtselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
```

```xml
<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

</attributes>

</element>

<element name="Element1">

<id>2c823fb2-90e8-4205-8dc2-d76998e5330c</id>

<type>AAElement</type>

<basetype>AAElement</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="0"/>

</attribute>
```

```xml
<attribute name="Width">
<ProcessValue datatype="number" value="501"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="533"/>
</attribute>
<attribute name="Visible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
```

```xml
<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:1249,133,665,1749"/>

</attribute>

<attribute name="Style">

<ProcessValue datatype="number" value="1409286144"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="ApplicationFrameWindow"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="1241"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="133"/>

</attribute>
```

```xml
<attribute name="pWidth">
<ProcessValue datatype="number" value="517"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="541"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="pStyle">
<ProcessValue datatype="number" value="1409286144"/>
</attribute>
```

```xml
<attribute name="aX">
<ProcessValue datatype="number" value="60"/>
</attribute>
<attribute name="aY">
<ProcessValue datatype="number" value="38"/>
</attribute>
<attribute name="aWidth">
<ProcessValue datatype="number" value="91"/>
</attribute>
<attribute name="aHeight">
<ProcessValue datatype="number" value="42"/>
</attribute>
<attribute name="Name" inuse="True">
<ProcessValue datatype="text" value="Standard Calculator mode"/>
</attribute>
<attribute name="Description">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="Role" inuse="True">
<ProcessValue datatype="text" value="StaticText"/>
</attribute>
<attribute name="ID">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="State">
<ProcessValue datatype="text" value="normal"/>
</attribute>
```

```xml
<attribute name="Value2">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="KeyboardShortcut">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="DefaultAction">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="ElementCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="aAncestorCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="Unavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Selected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focused">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Pressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="aChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Mixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Hottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Default">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Expanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Collapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Busy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Floating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Marqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Animated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Invisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Offscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Sizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Moveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="SelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focusable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Selectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Linked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Traversed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Multiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Extselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Alert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:1309,171,213,1400"/>
</attribute>
<attribute name="paX">
<ProcessValue datatype="number" value="0"/>
</attribute>
```

```xml
<attribute name="paY">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="paWidth">
<ProcessValue datatype="number" value="500"/>
</attribute>
<attribute name="paHeight">
<ProcessValue datatype="number" value="532"/>
</attribute>
<attribute name="pName">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pDescription">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pRole">
<ProcessValue datatype="text" value="Window"/>
</attribute>
<attribute name="pID">
<ProcessValue datatype="text" value="Self"/>
</attribute>
<attribute name="pState">
<ProcessValue datatype="text" value="focusable"/>
</attribute>
<attribute name="pValue2">
<ProcessValue datatype="text" value=""/>
</attribute>
```

```xml
<attribute name="pKeyboardShortcut">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pDefaultAction">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pElementCount">
<ProcessValue datatype="number" value="18"/>
</attribute>
<attribute name="pUnavailable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pSelected">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFocused">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pPressed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="paChecked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMixed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pReadOnly">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pHottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pDefault">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExpanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pCollapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pBusy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFloating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMarqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAnimated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="pInvisible">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pOffscreen">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSizeable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMoveable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSelfVoicing">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pFocusable">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pSelectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pLinked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pTraversed">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="pMultiselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExtselectable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_low">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_medium">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAlert_high">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
</attributes>
</element>
<type>Window</type>
<basetype>Window</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
```

```xml
<description>Windows.UI.Core.CoreWindow</description>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="ApplicationFrameWindow"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="271"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="513"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
```

```xml
<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:341,120,632,611"/>

</attribute>

<attribute name="pWindowText">
```

```xml
<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="ApplicationFrameWindow"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="333"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="120"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="287"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="number" value="521"/>

</attribute>

<attribute name="pVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pScreenVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pEnabled">
```

```xml
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
</attributes>
</element>
<region-container name="MC Button">
<id>35dd1db9-d036-4f1d-af12-4f95805c3079</id>
<region name="MC Button Region">
<container>35dd1db9-d036-4f1d-af12-4f95805c3079</container>
<id>bcd7d148-297b-4adf-a187-7c468ade3696</id>
<type>WindowRect</type>
<basetype>WindowRect</basetype>
<datatype>text</datatype>
```

```xml
<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="271"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="513"/>

</attribute>

<attribute name="Visible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="ScreenVisible" inuse="True">
```

```xml
<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:128,96,608,398"/>

</attribute>

<attribute name="pWindowText">
```

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="ApplicationFrameWindow"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="120"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="96"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="287"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="number" value="521"/>

</attribute>

<attribute name="pVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pScreenVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pEnabled">

```xml
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="StartX" inuse="True">
<ProcessValue datatype="number" value="4"/>
</attribute>
<attribute name="StartY" inuse="True">
<ProcessValue datatype="number" value="175"/>
</attribute>
<attribute name="EndX" inuse="True">
<ProcessValue datatype="number" value="39"/>
</attribute>
<attribute name="EndY" inuse="True">
```

```xml
<ProcessValue datatype="number" value="206"/>

</attribute>

<attribute name="RetainImage" system="True">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="ElementSnapshot" inuse="True" system="True">

<ProcessValue datatype="image" value=""/>

</attribute>

<attribute name="FontName" inuse="True" system="True">

<ProcessValue datatype="text" value=""/>

</attribute>

</attributes>

</region>

<region name="MC Region Win10">

<container>7e31699d-b1e7-4da4-ae8e-66cf3477014a</container>

<id>464e7287-bf46-4e49-98ad-61f44b29ca06</id>

<type>WindowRect</type>

<basetype>WindowRect</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>

</attribute>
```

```xml
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="501"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="533"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```
<attribute name="Ordinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:72,210,742,572"/>

</attribute>

<attribute name="Style">

<ProcessValue datatype="number" value="1409286144"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="ApplicationFrameWindow"/>

</attribute>
```

```xml
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="64"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="210"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="517"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="541"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="pStyle">
<ProcessValue datatype="number" value="1409286144"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="StartX" inuse="True">
<ProcessValue datatype="number" value="17"/>
</attribute>
<attribute name="StartY" inuse="True">
<ProcessValue datatype="number" value="195"/>
</attribute>
<attribute name="EndX" inuse="True">
<ProcessValue datatype="number" value="71"/>
</attribute>
<attribute name="EndY" inuse="True">
<ProcessValue datatype="number" value="215"/>
</attribute>
```

```xml
<attribute name="RetainImage" system="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ElementSnapshot" inuse="True" system="True">
<ProcessValue datatype="image" value="55,21,137224,iVBORw0KGgoAAAANSUhEUgAAADcAAAAVCA
</attribute>
<attribute name="FontName" inuse="True" system="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="LocationMethod" inuse="True" system="True">
<ProcessValue datatype="text" value="Image"/>
</attribute>
<attribute name="RegionPosition" inuse="True" system="True">
<ProcessValue datatype="text" value="Fixed"/>
</attribute>
<attribute name="ImageSearchPadding" inuse="True" system="True">
<ProcessValue datatype="text" value="20, 15, 20, 15"/>
</attribute>
<attribute name="ColourTolerance" inuse="True" system="True">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Greyscale" inuse="True" system="True">
<ProcessValue datatype="flag" value="False"/>
</attribute>
</attributes>
</region>
<type>Window</type>
```

```xml
<basetype>Window</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="271"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="513"/>

</attribute>

<attribute name="Visible" inuse="True">

<ProcessValue datatype="flag" value="True"/>
```

```
</attribute>

<attribute name="ScreenVisible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:128,96,608,398"/>
```

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="ApplicationFrameWindow"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="120"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="96"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="287"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="number" value="521"/>

</attribute>

<attribute name="pVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pScreenVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pEnabled">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Screenshot">

<ProcessValue datatype="image" value="270,512,137224,iVBORw0KGgoAAAANSUhEUgAAAQ4AAAIAO

```xml
<container>a6ddbb25-c6a1-4baa-8dde-62c69403c7a3</container>

<id>078d534f-93d2-417e-b363-7548fa409ea3</id>

<type>WindowRect</type>

<basetype>WindowRect</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="271"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="513"/>
```

```xml
    </attribute>

    <attribute name="Visible" inuse="True">

    <ProcessValue datatype="flag" value="True"/>

    </attribute>

    <attribute name="ScreenVisible" inuse="True">

    <ProcessValue datatype="flag" value="True"/>

    </attribute>

    <attribute name="Enabled" inuse="True">

    <ProcessValue datatype="flag" value="True"/>

    </attribute>

    <attribute name="Active">

    <ProcessValue datatype="flag" value="False"/>

    </attribute>

    <attribute name="Ordinal">

    <ProcessValue datatype="number" value="1"/>

    </attribute>

    <attribute name="ChildCount">

    <ProcessValue datatype="number" value="0"/>

    </attribute>

    <attribute name="AncestorsText">

    <ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>

    </attribute>

    <attribute name="AncestorCount">

    <ProcessValue datatype="number" value="2"/>

    </attribute>

    <attribute name="TypeName">

    <ProcessValue datatype="text" value=""/>
```

```xml
</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:128,96,608,398"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="ApplicationFrameWindow"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="120"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="96"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="287"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="number" value="521"/>

</attribute>

<attribute name="pVisible">

<ProcessValue datatype="flag" value="True"/>
```

```xml
</attribute>

<attribute name="pScreenVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pEnabled">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="StartX" inuse="True">

<ProcessValue datatype="number" value="71"/>

</attribute>

<attribute name="StartY" inuse="True">

<ProcessValue datatype="number" value="354"/>
```

</attribute>

<attribute name="EndX" inuse="True">

<ProcessValue datatype="number" value="134"/>

</attribute>

<attribute name="EndY" inuse="True">

<ProcessValue datatype="number" value="411"/>

</attribute>

<attribute name="RetainImage" system="True">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="ElementSnapshot" inuse="True" system="True">

<ProcessValue datatype="image" value=""/>

</attribute>

<attribute name="FontName" inuse="True" system="True">

<ProcessValue datatype="text" value=""/>

</attribute>

</attributes>

</region>

<region name="5 Button Region Win 10">

<container>e86473de-f6f2-475a-8477-ca9f8688f222</container>

<id>22048b1f-e619-4d74-a24e-fffdda834549</id>

<type>WindowRect</type>

<basetype>WindowRect</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

```xml
<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="501"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="533"/>

</attribute>

<attribute name="Visible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="ScreenVisible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">
```

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Calculator &lt;UNKNOWN&gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:72,210,742,572"/>

</attribute>

<attribute name="Style">

<ProcessValue datatype="number" value="1409286144"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="ApplicationFrameWindow"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="64"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="210"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="517"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="number" value="541"/>

</attribute>

<attribute name="pVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pScreenVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pEnabled">

```xml
<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="pStyle">

<ProcessValue datatype="number" value="1409286144"/>

</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="StartX" inuse="True">

<ProcessValue datatype="number" value="202"/>

</attribute>

<attribute name="StartY" inuse="True">

<ProcessValue datatype="number" value="401"/>

</attribute>

<attribute name="EndX" inuse="True">
```

<ProcessValue datatype="number" value="298"/>

</attribute>

<attribute name="EndY" inuse="True">

<ProcessValue datatype="number" value="440"/>

</attribute>

<attribute name="RetainImage" system="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="ElementSnapshot" inuse="True" system="True">

<ProcessValue datatype="image" value="97,40,137224,iVBORw0KGgoAAAANSUhEUgAAAGEAAAAoCA

</attribute>

<attribute name="FontName" inuse="True" system="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="LocationMethod" inuse="True" system="True">

<ProcessValue datatype="text" value="Image"/>

</attribute>

<attribute name="RegionPosition" inuse="True" system="True">

<ProcessValue datatype="text" value="Fixed"/>

</attribute>

<attribute name="ImageSearchPadding" inuse="True" system="True">

<ProcessValue datatype="text" value="20, 15, 20, 15"/>

</attribute>

<attribute name="ColourTolerance" inuse="True" system="True">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="Greyscale" inuse="True" system="True">

```xml
<ProcessValue datatype="flag" value="False"/>
</attribute>
</attributes>
</region>
<type>Window</type>
<basetype>Window</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Windows.UI.Core.CoreWindow"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="271"/>
</attribute>
```

```xml
<attribute name="Height">
<ProcessValue datatype="number" value="513"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
<attribute name="AncestorCount">
<ProcessValue datatype="number" value="2"/>
</attribute>
```

```xml
<attribute name="TypeName">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:128,96,608,398"/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pClassName">
<ProcessValue datatype="text" value="ApplicationFrameWindow"/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="120"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="96"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="287"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="521"/>
</attribute>
```

```xml
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Screenshot">
<ProcessValue datatype="image" value="270,512,137224,iVBORw0KGgoAAAANSUhEUgAAAQ4AAAIAC
</attribute>
```

```xml
    </attributes>
  </region-container>
  <type>Application</type>
  <basetype>Application</basetype>
  <datatype>unknown</datatype>
  <diagnose>False</diagnose>
</element>
<apptypeinfo>
  <id>Win32Launch</id>
  <parameters>
    <parameter>
      <name>Path</name>
      <value>&amp;lt;Microsoft.WindowsCalculator&amp;gt;</value>
    </parameter>
    <parameter>
      <name>CommandLineParams</name>
      <value>
      </value>
    </parameter>
    <parameter>
      <name>WorkingDirectory</name>
      <value>
      </value>
    </parameter>
    <parameter>
      <name>NonInvasive</name>
      <value>True</value>
```

```xml
      </parameter>

      <parameter>

      <name>ProcessMode</name>

      <value>Internal</value>

      </parameter>

      <parameter>

      <name>ExternalProcessTimeout</name>

      <value>0</value>

      </parameter>

      <parameter>

      <name>Options</name>

      <value>

      </value>

      </parameter>

      </parameters>

      </apptypeinfo>

      </appdef>

      <view>

      <camerax>0</camerax>

      <cameray>0</cameray>

      <zoom version="2">1.25</zoom>

      </view>

      <preconditions/>

      <endpoint narrative=""/>

      <subsheet subsheetid="af18e4cb-2c21-4f2a-852d-e80d90c2f467" type="CleanUp" published="True">

      <name>Clean Up</name>

      <view>
```

```
<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="45ae527c-3e74-4aa7-862c-4a9129e12540" type="Normal" published="True">

<name>Start Calculator</name>

<view>

<camerax>178</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="8e041464-fa0c-4cae-b352-a21242b590c5" type="Normal" published="True">

<name>Set Display Mode</name>

<view>

<camerax>0</camerax>

<cameray>123</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="48eda2af-2294-4834-8fab-715f42c7855d" type="Normal" published="True">

<name>Set Display Mode - New</name>

<view>

<camerax>-46</camerax>

<cameray>60</cameray>

<zoom version="2">1.25</zoom>
```

```xml
</view>
</subsheet>
<subsheet subsheetid="d7fce23f-48bc-4d07-b80c-4815b7ddb800" type="Normal" published="True">
<name>Close</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="d8d2df8b-7d08-4016-ace4-c001e583ba21" type="Normal" published="True">
<name>Read OCR - single char</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="998562d4-0fb7-4521-83c2-16d5bef4334c" type="Normal" published="True">
<name>Read OCR - Single Char Win 10</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="72314ab4-eac2-486e-bdfd-146ef447c430" type="Normal" published="True">
```

<name>Read OCR - multi char</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="d91b848b-683f-472b-a6e8-a5959aea4605" type="Normal" published="True">

<name>Read OCR Multi Char Win 10</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<stage stageid="5f8f50f9-f8be-4f26-b5ac-b043d7449ecd" name="Start" type="Start">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>46a7ed31-cf1c-4336-90c1-98a2f0b8058b</onsuccess>

</stage>

<stage stageid="9bd3a369-3047-4681-9a37-f644cf79d2fb" name="End" type="End">

```
<loginhibit/>

<narrative>

</narrative>

<displayx>30</displayx>

<displayy>60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="b43a3dd6-299a-4b3f-b29d-0f354b501304" name="" type="ProcessInfo">

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<references/>

<imports/>

<language>visualbasic</language>

<globalcode></globalcode>

<code></code>

</stage>

<stage stageid="ffc09728-844e-4105-b44b-5088f98109f4" name="Clean Up" type="SubSheetInfo">

<subsheetid>af18e4cb-2c21-4f2a-852d-e80d90c2f467</subsheetid>

<loginhibit/>
```

```
<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="bc947a23-0749-48b3-ac76-6233c0b9e00c" name="Start" type="Start">

<subsheetid>af18e4cb-2c21-4f2a-852d-e80d90c2f467</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>30</displayx>

<displayy>-120</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>e4327d40-ecad-4f94-b1f3-dc27f2c4e298</onsuccess>

</stage>

<stage stageid="11f35921-067a-43c1-b37c-bc63f11c9c17" name="End" type="End">

<subsheetid>af18e4cb-2c21-4f2a-852d-e80d90c2f467</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>30</displayx>

<displayy>60</displayy>
```

```xml
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="3083bc8d-dee6-40be-ba91-c9b3a1e7ef21" name="Start Calculator" type="SubSheetInfo"
<subsheetid>45ae527c-3e74-4aa7-862c-4a9129e12540</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-105</displayy>
<displaywidth>150</displaywidth>
<displayheight>60</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="17513368-7d51-4ee0-8762-49f209123736" name="Start" type="Start">
<subsheetid>45ae527c-3e74-4aa7-862c-4a9129e12540</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>30</displayx>
<displayy>-150</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<inputs>
<input type="flag" name="Hide Window?" stage="Hide Window?"/>
```

</inputs>

<onsuccess>08265c9f-d50a-47c1-b334-b4556e270c78</onsuccess>

</stage>

<stage stageid="826a8968-da7d-4988-854a-d069c1a2686b" name="End" type="End">

<subsheetid>45ae527c-3e74-4aa7-862c-4a9129e12540</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="08265c9f-d50a-47c1-b334-b4556e270c78" name="Start Calculator" type="Navigate">

<subsheetid>45ae527c-3e74-4aa7-862c-4a9129e12540</subsheetid>

<displayy>-90</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>1dc99f9b-9b3c-4023-a66d-70e06f79dba3</onsuccess>

<step>

<element id="e7b35717-0b55-4ee6-86c0-51740394d719"/>

```xml
<id>Launch</id>
</action>
</step>
</stage>
<stage stageid="46a7ed31-cf1c-4336-90c1-98a2f0b8058b" name="Running Init Page" type="Note">
<narrative>This is just here to get logged for test purposes</narrative>
<displayx>30</displayx>
<displayy>-45</displayy>
<displaywidth>90</displaywidth>
<displayheight>60</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>9bd3a369-3047-4681-9a37-f644cf79d2fb</onsuccess>
</stage>
<stage stageid="5f5a9471-66f5-4c1e-b638-530b74291949" name="Wait For" type="Data">
<subsheetid>45ae527c-3e74-4aa7-862c-4a9129e12540</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-240</displayx>
<displayy>-45</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>timespan</datatype>
<initialvalue>0.00:00:10</initialvalue>
<private/>
</stage>
```

```xml
<stage stageid="1dc99f9b-9b3c-4023-a66d-70e06f79dba3" name="Wait for Calc" type="WaitStart">
<subsheetid>45ae527c-3e74-4aa7-862c-4a9129e12540</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-15</displayx>
<displayy>-30</displayy>
<displaywidth>60</displaywidth>
<displayheight>60</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<groupid>bd0c2f0d-17bf-4c7a-b46f-2f734d7400ff</groupid>
<choices>
<choice reply="True">
<name>Main Window Check Exists</name>
<distance>0</distance>
<ontrue>826a8968-da7d-4988-854a-d069c1a2686b</ontrue>
<element id="4bbd315c-2c57-4124-a4bd-8a09ab64c152"/>
<condition>
<id>CheckExists</id>
</condition>
<comparetype>Equal</comparetype>
</choice>
</choices>
<timeout>10</timeout>
</stage>
<stage stageid="233691ca-4dfd-4806-9684-562981550d74" name="O" type="WaitEnd">
<subsheetid>45ae527c-3e74-4aa7-862c-4a9129e12540</subsheetid>
```

```
<loginhibit/>

<narrative>

</narrative>

<displayx>60</displayx>

<displayy>-30</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>20b2426f-02e5-4c1b-b023-9c8a01e7321b</onsuccess>

<groupid>bd0c2f0d-17bf-4c7a-b46f-2f734d7400ff</groupid>

</stage>

<stage stageid="20b2426f-02e5-4c1b-b023-9c8a01e7321b" name="Raise Error" type="Note">

<subsheetid>45ae527c-3e74-4aa7-862c-4a9129e12540</subsheetid>

<loginhibit/>

<narrative>I need to raise an error, but I can't!</narrative>

<displayx>135</displayx>

<displayy>-30</displayy>

<displaywidth>90</displaywidth>

<displayheight>60</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="f387aefb-3950-436d-b892-7794345babf7" name="Close" type="SubSheetInfo">

<subsheetid>d7fce23f-48bc-4d07-b80c-4815b7ddb800</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>
```

```xml
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="bb984449-4cea-4e00-8668-a1cb982857d1" name="Start" type="Start">
<subsheetid>d7fce23f-48bc-4d07-b80c-4815b7ddb800</subsheetid>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>ff262cee-4a72-4718-940c-d996ba3d1264</onsuccess>
</stage>
<stage stageid="bcd02527-b16d-4519-ad17-61769f612a52" name="End" type="End">
<subsheetid>d7fce23f-48bc-4d07-b80c-4815b7ddb800</subsheetid>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-15</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="ff262cee-4a72-4718-940c-d996ba3d1264" name="Close Main Window" type="Navigate">
<subsheetid>d7fce23f-48bc-4d07-b80c-4815b7ddb800</subsheetid>
```
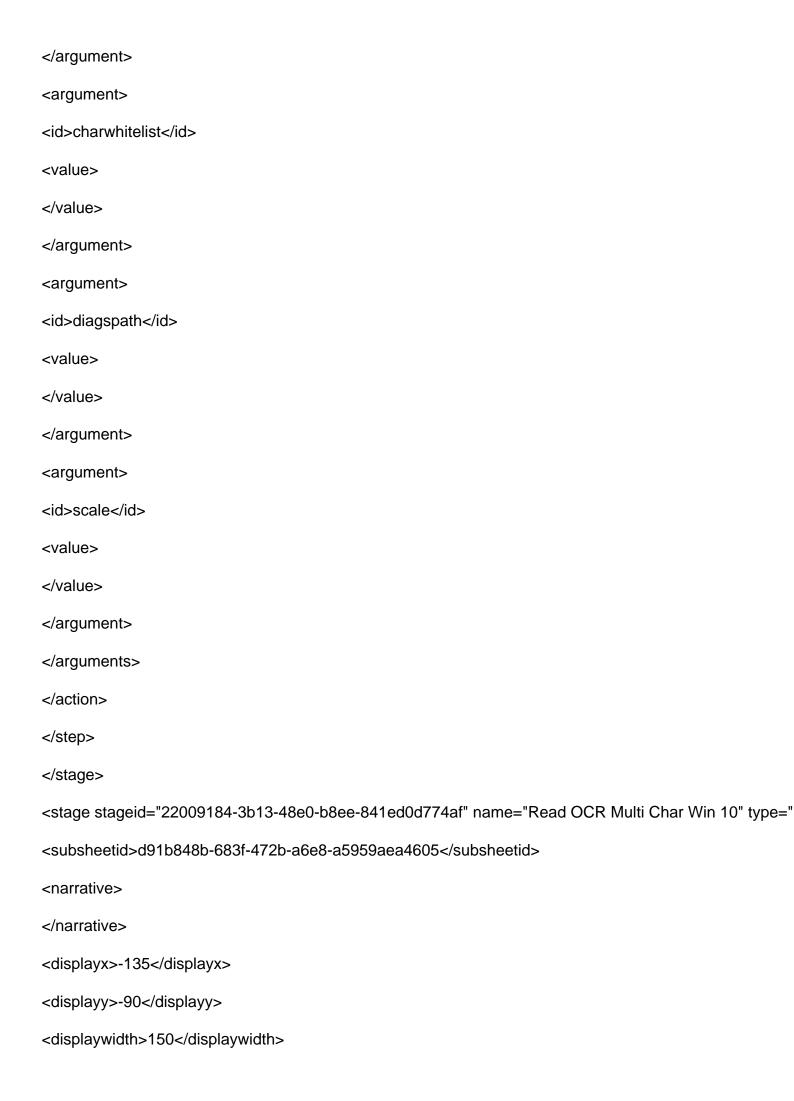
```xml
<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>bcd02527-b16d-4519-ad17-61769f612a52</onsuccess>

<step>

<element id="4bbd315c-2c57-4124-a4bd-8a09ab64c152"/>

<action>

<id>CloseWindow</id>

</action>

</step>

</stage>

<stage stageid="e4327d40-ecad-4f94-b1f3-dc27f2c4e298" name="Running Clean Up Page" type="Note">

<subsheetid>af18e4cb-2c21-4f2a-852d-e80d90c2f467</subsheetid>

<narrative>This is just here to get logged for test purposes</narrative>

<displayx>30</displayx>

<displayy>-30</displayy>

<displaywidth>90</displaywidth>

<displayheight>60</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>11f35921-067a-43c1-b37c-bc63f11c9c17</onsuccess>

</stage>

<stage stageid="f217f097-7d64-47a2-a508-2b8848244fad" name="Note1" type="Note">
```

<narrative>Integration Notes -

Windows 2000 contains a different version of calculator.

The Win2K version does not have any window text on the buttons, so we identify buttons by location</narra

<displayx>-135</displayx>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="ed68f0c0-453b-45e6-b704-ae04b22f1dad" name="Hide Window?" type="Data">

<subsheetid>45ae527c-3e74-4aa7-862c-4a9129e12540</subsheetid>

<displayy>-150</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

</stage>

```xml
<stage stageid="7f8249d6-9ccc-4896-86f6-34d5db5f95a9" name="Set Display Mode" type="SubSheetInfo
<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-105</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="24e0268f-1683-498d-93a9-56c05d4bb030" name="Start" type="Start">
<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>
<loginhibit/>
<narrative>Display Mode is either "Standard" or "Scientific"</narrative>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<inputs>
<input type="text" name="Display Mode" stage="Display Mode"/>
</inputs>
<onsuccess>cc85b7c3-449f-4fa8-9635-17abf5edb499</onsuccess>
</stage>
<stage stageid="966dda8e-c7aa-4d0e-bc0a-0c8d1eee42d5" name="End" type="End">
<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>
<loginhibit/>
```

```xml
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>300</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="fb95b85e-c418-4e2d-9118-2d226480b43b" name="Display Mode" type="Data">
<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>
<narrative>
</narrative>
<displayx>90</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
<stage stageid="cc85b7c3-449f-4fa8-9635-17abf5edb499" name="Validate Input" type="Decision">
<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>
<narrative>
</narrative>
<displayx>15</displayx>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="[Display Mode] = &quot;Scientific&quot;&#xA;or&#xA;[Display I

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="fb3941c2-cf96-4775-a8c8-f3b1a2134e98" name="Set Display Mode" type="Navigate">

```xml
<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>c0344e99-9911-4fad-933f-a717db910286</onsuccess>

<step>

<element id="4bbd315c-2c57-4124-a4bd-8a09ab64c152"/>

<action>

<id>SelectMenuItem</id>

<arguments>

<argument>

<id>Value</id>

<value>"{View}{" &amp;amp; [Display Mode] &amp;amp; "}"</value>

</argument>

</arguments>

</action>

</step>

</stage>

<stage stageid="c0344e99-9911-4fad-933f-a717db910286" name="Scientific Mode?" type="Decision">

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>240</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="[Display Mode] = &amp;quot;Scientific&amp;quot;"/>

<ontrue>5e5838da-f212-4542-a0aa-77c39c29fcad</ontrue>
```

</stage>

<stage stageid="b94f2076-1c6d-4d3c-a422-d55936d708e5" name="Time Out2" type="WaitEnd">

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>6d5d9844-bb4a-4037-ba13-63ede01dbf37</groupid>

</stage>

<stage stageid="5e5838da-f212-4542-a0aa-77c39c29fcad" name="Wait for Window Change" type="WaitS

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>6d5d9844-bb4a-4037-ba13-63ede01dbf37</groupid>

<choices>

<choice reply="True">

<name>Main Window - Scientific Mode Check Exists</name>

<distance>60</distance>

<ontrue>966dda8e-c7aa-4d0e-bc0a-0c8d1eee42d5</ontrue>

<element id="fc82ebdb-34fb-4bf2-ab76-40d5e7b5aaea"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>5</timeout>

</stage>

<stage stageid="04b3c5f1-ae9f-48d8-bb3e-a805f60d233d" name="Time Out3" type="WaitEnd">

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-225</displayx>

<displayy>360</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>98eac13a-e982-4bc0-aeeb-78b21a92ee54</groupid>

</stage>

<stage stageid="8b664bb6-eb67-4520-9ec4-e3a58800aad3" name="Wait for Window Change" type="Wai

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

```xml
<narrative>

</narrative>

<displayx>-225</displayx>

<displayy>240</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>98eac13a-e982-4bc0-aeeb-78b21a92ee54</groupid>

<choices>

<choice reply="True">

<name>Main Window - Standard Mode Check Exists</name>

<distance>60</distance>

<ontrue>966dda8e-c7aa-4d0e-bc0a-0c8d1eee42d5</ontrue>

<element id="a4b15f4e-5695-403f-998e-a902a0745cd0"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>5</timeout>

</stage>

<stage stageid="b269fd7a-dcbc-4e17-89fa-b296cbd5c940" name="Windows 7?" type="Decision">

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

<loginhibit/>

<narrative>

</narrative>
```

```
<displayx>15</displayx>

<displayy>15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="GetOSVersionMajor()&amp;gt;=6 AND GetOSVersionMinor()&amp;gt;=1"/>

<ontrue>48e9688f-72d5-425d-899f-f17e54834715</ontrue>

<onfalse>b0f5bc9b-d793-4001-8cc3-c444d5c0b340</onfalse>

</stage>

<stage stageid="48e9688f-72d5-425d-899f-f17e54834715" name="Mode" type="ChoiceStart">

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>195</displayx>

<displayy>15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>4f0bffc8-cdf2-4547-85bb-3e328cee3d08</groupid>

<choices>

<choice expression="[Display Mode]=&amp;quot;Standard&amp;quot;">

<name>Standard</name>

<distance>60</distance>

<ontrue>bf4540f1-1242-4f38-9a46-7803f41af02d</ontrue>

</choice>

<choice expression="[Display Mode]=&amp;quot;Scientific&amp;quot;">
```

```xml
<name>Scientific</name>
<distance>105</distance>
<ontrue>8102f9d0-dbef-487a-90e6-3b58f34f6802</ontrue>
</choice>
</choices>
</stage>
<stage stageid="2c1224de-037f-4f01-a228-7d7c3d450a88" name="Otherwise1" type="ChoiceEnd">
<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>195</displayx>
<displayy>180</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<groupid>4f0bffc8-cdf2-4547-85bb-3e328cee3d08</groupid>
</stage>
<stage stageid="bf4540f1-1242-4f38-9a46-7803f41af02d" name="Amend Display Mode" type="Calculation
<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>105</displayx>
<displayy>75</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>b0f5bc9b-d793-4001-8cc3-c444d5c0b340</onsuccess>

<calculation expression="[Display Mode]&amp;Chr(9)&amp;&quot;Alt+1&quot;" stage=

</stage>

<stage stageid="b0f5bc9b-d793-4001-8cc3-c444d5c0b340" name="anchor22" type="Anchor">

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>46ccba6c-337f-47d5-8c02-8095296dc3ab</onsuccess>

</stage>

<stage stageid="46ccba6c-337f-47d5-8c02-8095296dc3ab" name="anchor23" type="Anchor">

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="8102f9d0-dbef-487a-90e6-3b58f34f6802" name="Amend Display Mode" type="Calculation

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>46ccba6c-337f-47d5-8c02-8095296dc3ab</onsuccess>

<calculation expression="[Display Mode]&amp;Chr(9)&amp;&quot;Alt+2&quot;" stage=

</stage>

<stage stageid="57466776-3724-41e2-8d34-95a0fcaac52c" name="Read OCR - single char" type="SubSh

<subsheetid>d8d2df8b-7d08-4016-ace4-c001e583ba21</subsheetid>

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="3d88060a-7bcb-499d-84ce-9dcb07250b4d" name="Start" type="Start">

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Page Segmentation Mode" stage="Page Segmentation Mode"/>

</inputs>

<onsuccess>2db10ca8-f682-498b-a3bd-d8e6769f40e0</onsuccess>

</stage>

<stage stageid="78c31776-c4b2-4122-8063-7bfbce52f655" name="End" type="End">

<subsheetid>d8d2df8b-7d08-4016-ace4-c001e583ba21</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

</outputs>

</stage>

<stage stageid="13c03467-118a-4735-9256-e856cdc3dacc" name="Value from Single Character Read" ty

<subsheetid>d8d2df8b-7d08-4016-ace4-c001e583ba21</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

</stage>

<stage stageid="6ae0ff89-f46b-4698-8193-47669aa629d0" name="Read OCR - multi char" type="SubShe

<subsheetid>72314ab4-eac2-486e-bdfd-146ef447c430</subsheetid>

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="48ccec3b-c3b9-4834-9b01-6f0f95642867" name="Start" type="Start">

<subsheetid>72314ab4-eac2-486e-bdfd-146ef447c430</subsheetid>

```xml
</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Page Segmentation Mode" stage="Page Segmentation Mode"/>

</inputs>

<onsuccess>9a40d95c-52ae-4c62-872a-3ba9cb2595e8</onsuccess>

</stage>

<stage stageid="d4d981be-5bb6-4efe-8486-4afd4a110dfb" name="End" type="End">

<subsheetid>72314ab4-eac2-486e-bdfd-146ef447c430</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="text" name="Value" stage="Value from Region Multi Character Read"/>

</outputs>

</stage>

<stage stageid="5331dbd2-00f5-4990-bf4f-d4525368e4c1" name="Value from Region Multi Character Rea

<subsheetid>72314ab4-eac2-486e-bdfd-146ef447c430</subsheetid>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

</stage>

<stage stageid="846c2ea7-f1ab-445c-b865-546882dc63ff" name="Page Segmentation Mode" type="Data"

<subsheetid>d8d2df8b-7d08-4016-ace4-c001e583ba21</subsheetid>

<displayy>-105</displayy>

<font family="Microsoft Sans Serif" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue xml:space="preserve">Character</initialvalue>

</stage>

<stage stageid="7f22c6e8-3295-497a-bc25-a563842429e1" name="Page Segmentation Mode" type="Dat

<subsheetid>72314ab4-eac2-486e-bdfd-146ef447c430</subsheetid>

<font family="Microsoft Sans Serif" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue xml:space="preserve">Auto</initialvalue>

</stage>

<stage stageid="9a40d95c-52ae-4c62-872a-3ba9cb2595e8" name="Read multiple character string " type=

<subsheetid>72314ab4-eac2-486e-bdfd-146ef447c430</subsheetid>

<displayy>-60</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>d4d981be-5bb6-4efe-8486-4afd4a110dfb</onsuccess>

<step stage="Value from Region Multi Character Read">

<element id="bcd7d148-297b-4adf-a187-7c468ade3696"/>

```xml
<action>

<id>ReadTextOCR</id>

<arguments>

<argument>

<id>language</id>

<value>

</value>

</argument>

<argument>

<id>pagesegmode</id>

<value>[Page Segmentation Mode]</value>

</argument>

<argument>

<id>charwhitelist</id>

<value>

</value>

</argument>

<argument>

<id>diagspath</id>

<value>

</value>

</argument>

<argument>

<id>scale</id>

<value>

</value>

</argument>
```

</arguments>

</action>

</step>

</stage>

<stage stageid="2db10ca8-f682-498b-a3bd-d8e6769f40e0" name="Read a single Character" type="Read"

<subsheetid>d8d2df8b-7d08-4016-ace4-c001e583ba21</subsheetid>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>78c31776-c4b2-4122-8063-7bfbce52f655</onsuccess>

<step stage="Value from Single Character Read">

<element id="078d534f-93d2-417e-b363-7548fa409ea3"/>

<action>

<id>ReadTextOCR</id>

[Page Segmentation Mode]

</stage>

<stage stageid="22009184-3b13-48e0-b8ee-841ed0d774af" name="Read OCR Multi Char Win 10" type="

<subsheetid>d91b848b-683f-472b-a6e8-a5959aea4605</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="fd2fc763-7b88-4041-a7ac-6bc89089f737" name="Start" type="Start">

<subsheetid>d91b848b-683f-472b-a6e8-a5959aea4605</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Page Segmentation Mode" stage="Page Segmentation Mode"/>

</inputs>

<onsuccess>7095c322-9efd-496c-a519-966cb9a588b0</onsuccess>

</stage>

<stage stageid="c8d69982-8e1b-4cfa-b34a-31a8d191a2c1" name="End" type="End">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

</outputs>

</stage>

<stage stageid="3d4fb57d-90e5-4cd3-b1d9-f288f74ec18a" name="Value from Region Multi Character Rea

<subsheetid>d91b848b-683f-472b-a6e8-a5959aea4605</subsheetid>

<narrative>

</narrative>

<displayx>135</displayx>

<displayy>-60</displayy>

<displaywidth>150</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="df792df4-8107-46e0-ac84-3d16bc02505f" name="Page Segmentation Mode" type="Data"

<subsheetid>d91b848b-683f-472b-a6e8-a5959aea4605</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>135</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<font family="Microsoft Sans Serif" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue xml:space="preserve">Auto</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="7095c322-9efd-496c-a519-966cb9a588b0" name="Read multiple character string " type="

<subsheetid>d91b848b-683f-472b-a6e8-a5959aea4605</subsheetid>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>c8d69982-8e1b-4cfa-b34a-31a8d191a2c1</onsuccess>

<step stage="Value from Region Multi Character Read">

<element id="464e7287-bf46-4e49-98ad-61f44b29ca06"/>

<action>

<id>ReadTextOCR</id>

</stage>

<stage stageid="9316169a-6858-4fb7-9561-5b219dd276b5" name="Read OCR - Single Char Win 10" type

<subsheetid>998562d4-0fb7-4521-83c2-16d5bef4334c</subsheetid>

```
</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="f0b86518-d88c-499c-a2f6-49b81067496e" name="Start" type="Start">

<subsheetid>998562d4-0fb7-4521-83c2-16d5bef4334c</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Page Segmentation Mode" stage="Page Segmentation Mode"/>

</inputs>

<onsuccess>df0a8583-50bd-4f8e-b7b5-bdfdbffa34f0</onsuccess>

</stage>

<stage stageid="a0931216-e99c-491c-a271-e4798d7598cc" name="End" type="End">

<subsheetid>998562d4-0fb7-4521-83c2-16d5bef4334c</subsheetid>

<loginhibit/>

<narrative>

</narrative>
```

```xml
<displayx>15</displayx>
<displayy>-15</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<outputs>
<output type="text" name="Value" stage="Value from Single Character Read"/>
</outputs>
</stage>
<stage stageid="cdd2a626-7f72-4add-b2cc-7c920e53756f" name="Value from Single Character Read" typ
<subsheetid>998562d4-0fb7-4521-83c2-16d5bef4334c</subsheetid>
<narrative>
</narrative>
<displayx>135</displayx>
<displayy>-60</displayy>
<displaywidth>150</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
<stage stageid="5805ae14-9d28-40dc-8d59-5461fc4b81cc" name="Page Segmentation Mode" type="Data
<subsheetid>998562d4-0fb7-4521-83c2-16d5bef4334c</subsheetid>
<loginhibit/>
<narrative>
```

```xml
</narrative>

<displayx>135</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>30</displayheight>

<font family="Microsoft Sans Serif" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue xml:space="preserve">Character</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="df0a8583-50bd-4f8e-b7b5-bdfdbffa34f0" name="Read a single Character" type="Read">

<subsheetid>998562d4-0fb7-4521-83c2-16d5bef4334c</subsheetid>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>a0931216-e99c-491c-a271-e4798d7598cc</onsuccess>

<step stage="Value from Single Character Read">

<element id="22048b1f-e619-4d74-a24e-fffdda834549"/>

<action>

<id>ReadTextOCR</id>

<arguments>

<argument>
```

```xml
        <id>language</id>

        <value>

        </value>

        </argument>

        <argument>

        <id>pagesegmode</id>

        <value>"Word"</value>

        </argument>

        <argument>

        <id>charwhitelist</id>

        <value>

        </value>

        </argument>

        <argument>

        <id>diagspath</id>

        <value>

        </value>

        </argument>

        <argument>

        <id>scale</id>

        <value>

        </value>

        </argument>

        </arguments>

        </action>

        </step>

        </stage>
```

<stage stageid="6886a2e4-bec6-44d6-8378-7bfc209c096d" name="Set Display Mode - New" type="SubSI

<subsheetid>48eda2af-2294-4834-8fab-715f42c7855d</subsheetid>

<narrative>Changes the Display Mode of Calculator

NOTE: This action does not account for mode that require scrolling down in the calculator menu.</narrative

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="d875c6ad-6f31-4877-aa64-1fbfc99015e6" name="End" type="End">

<subsheetid>48eda2af-2294-4834-8fab-715f42c7855d</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>300</displayx>

<displayy>450</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="9a706b06-bf7e-4e3e-878a-f2267953a53f" name="Start" type="Start">

<subsheetid>48eda2af-2294-4834-8fab-715f42c7855d</subsheetid>

<loginhibit/>

<preconditions>

<condition narrative="Calculator is launched and attached."/>

</preconditions>

```xml
<postconditions>
<condition narrative="Mode is set."/>
</postconditions>
<narrative>Display Mode is either "Standard" or "Scientific"</narrative>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<inputs>
<input type="text" name="Display Mode" stage="Display Mode"/>
</inputs>
<onsuccess>43775d4e-2cb3-427f-a9b6-2f29cf3b9a38</onsuccess>
</stage>
<stage stageid="09124cd6-e55a-4526-884b-5f59fd3f297e" name="Display Mode" type="Data">
<subsheetid>48eda2af-2294-4834-8fab-715f42c7855d</subsheetid>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-15</displayy>
<displaywidth>120</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
```

```xml
</stage>
<stage stageid="ad343007-1a50-40e8-9df9-3364c9ab3a23" name="Input Variables" type="Block">
<subsheetid>48eda2af-2294-4834-8fab-715f42c7855d</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-270</displayx>
<displayy>-45</displayy>
<displaywidth>150</displaywidth>
<displayheight>60</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="7FB2E5"/>
</stage>
<stage stageid="43775d4e-2cb3-427f-a9b6-2f29cf3b9a38" name="Activate Calculator" type="Navigate">
<subsheetid>48eda2af-2294-4834-8fab-715f42c7855d</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-45</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>58cffb97-f286-4b0d-a6a8-61f436c85c90</onsuccess>
<step>
<element id="4bbd315c-2c57-4124-a4bd-8a09ab64c152"/>
<action>
<id>ActivateApp</id>
```

```
</action>

</step>

</stage>

<stage stageid="7e3767a3-dfd1-4b2a-a540-fc9a885fdef5" name="Time Out - Wait Activated" type="WaitE

<subsheetid>48eda2af-2294-4834-8fab-715f42c7855d</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>165</displayx>

<displayy>30</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>1ce4b53e-9141-48bd-8467-8c3c4fbf20c1</onsuccess>

<groupid>13254574-c048-4577-85fd-b1cef4297388</groupid>

</stage>

<stage stageid="58cffb97-f286-4b0d-a6a8-61f436c85c90" name="Wait Activated" type="WaitStart">

<subsheetid>48eda2af-2294-4834-8fab-715f42c7855d</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>30</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>13254574-c048-4577-85fd-b1cef4297388</groupid>
```

```xml
<choices>
<choice reply="True">
<name>Main Window Check Window Active</name>
<distance>75</distance>
<ontrue>996e369a-e720-48ac-b11a-4be2860ea337</ontrue>
<element id="4bbd315c-2c57-4124-a4bd-8a09ab64c152"/>
<condition>
<id>CheckWindowActive</id>
</condition>
<comparetype>Equal</comparetype>
</choice>
</choices>
<timeout>10</timeout>
</stage>
<stage stageid="1ce4b53e-9141-48bd-8467-8c3c4fbf20c1" name="Failed to Activate Calculator" type="Ex
<subsheetid>48eda2af-2294-4834-8fab-715f42c7855d</subsheetid>
<narrative>
</narrative>
<displayx>255</displayx>
<displayy>30</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<exception type="System Exception" detail="&amp;quot;Failed to activate Calculator window.&amp;quot;"/
</stage>
<stage stageid="996e369a-e720-48ac-b11a-4be2860ea337" name="Click Menu" type="Navigate">
<subsheetid>48eda2af-2294-4834-8fab-715f42c7855d</subsheetid>
```

<loginhibit/>

<narrative>

</narrative>

<displayx>90</displayx>

<displayy>75</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>80dda937-f487-4a98-bacd-383e716296d2</onsuccess>

<step>

<element id="ba85fba2-158a-4e91-bfb8-c03ef3d25772"/>

<action>

<id>AAClickCentre</id>

</stage>

<stage stageid="1fb06ae9-92cb-44fd-a640-3736f9bbdf8e" name="Time Out - Wait Menu" type="WaitEnd":

<subsheetid>48eda2af-2294-4834-8fab-715f42c7855d</subsheetid>

<loginhibit/>

```xml
</narrative>

<displayx>240</displayx>

<displayy>150</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>c2b4d3a1-2387-49d4-bb1f-58c78fa42575</onsuccess>

<groupid>4901cb25-0e2e-4845-8abe-bf24d375c212</groupid>

</stage>

<stage stageid="80dda937-f487-4a98-bacd-383e716296d2" name="Wait Menu" type="WaitStart">

<subsheetid>48eda2af-2294-4834-8fab-715f42c7855d</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>90</displayx>

<displayy>150</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>4901cb25-0e2e-4845-8abe-bf24d375c212</groupid>

<choices>

<choice reply="True">

<name> Menu DropDown Check Exists</name>

<distance>75</distance>

<ontrue>975e2284-4f99-4216-86ec-3b5c0f9b05dd</ontrue>

<element id="e6f0886d-ab28-4e4d-bbaa-82666c9287da"/>

<condition>
```

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>10</timeout>

</stage>

<stage stageid="c2b4d3a1-2387-49d4-bb1f-58c78fa42575" name="Failed to Activate Calculator" type="Ex

<subsheetid>48eda2af-2294-4834-8fab-715f42c7855d</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="System Exception" detail="&quot;Calculator menu did not appear.&quot;"/>

</stage>

<stage stageid="975e2284-4f99-4216-86ec-3b5c0f9b05dd" name="Set Calculator Mode" type="Navigate":

<subsheetid>48eda2af-2294-4834-8fab-715f42c7855d</subsheetid>

```xml
<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>8bdb8486-8575-4fb9-9f5a-2ed5efdb7a1d</onsuccess>

<step>

<element id="854f64be-52dc-4ec6-95c2-b63fe9577723">

<elementparameter>

<name>Name</name>

<expression>[Display Mode]</expression>

<datatype>text</datatype>

<comparisontype>Equal</comparisontype>

</elementparameter>

</element>

<action>

<id>AAClickCentre</id>

<arguments>

<argument>

<id>newtext</id>

<value>

</value>

</argument>

</arguments>

</action>

</step>

</stage>

<stage stageid="5ad90cee-cedd-4c32-8df9-3c2f4442ae59" name="Time Out - Wait Menu Disappear" type

<subsheetid>48eda2af-2294-4834-8fab-715f42c7855d</subsheetid>

<loginhibit/>

<narrative>
```

```xml
</narrative>

<displayx>315</displayx>

<displayy>285</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>94995ca7-55e1-4fc2-aa7d-c4bf1c69f7de</onsuccess>

<groupid>46a2f93d-23c5-4b39-a764-051290487bea</groupid>

</stage>

<stage stageid="8bdb8486-8575-4fb9-9f5a-2ed5efdb7a1d" name="Wait Menu Disappear" type="WaitStart

<subsheetid>48eda2af-2294-4834-8fab-715f42c7855d</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>165</displayx>

<displayy>285</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>46a2f93d-23c5-4b39-a764-051290487bea</groupid>

<choices>

<choice reply="True">

<name> Menu DropDown Check Exists</name>

<distance>75</distance>

<ontrue>d2c54eac-1143-462d-86d3-f0dbba2a0ecc</ontrue>

<element id="e6f0886d-ab28-4e4d-bbaa-82666c9287da"/>

<condition>
```

<id>CheckExists</id>

</condition>

<comparetype>NotEqual</comparetype>

</choice>

</choices>

<timeout>10</timeout>

</stage>

<stage stageid="94995ca7-55e1-4fc2-aa7d-c4bf1c69f7de" name="Failed to Set Mode" type="Exception">

<subsheetid>48eda2af-2294-4834-8fab-715f42c7855d</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="System Exception" detail="&quot;Failed to set the calculator mode&quot;"/>

</stage>

<stage stageid="60ed04d6-e16f-4f01-9807-dea30e01707a" name="Time Out - Correct Mode?" type="Wait

```xml
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>de06bb8a-3086-4cf0-89f0-13a4e14cd580</onsuccess>
<groupid>2e200872-da3a-4f5b-9df2-9f50488c3de1</groupid>
</stage>
<stage stageid="d2c54eac-1143-462d-86d3-f0dbba2a0ecc" name="Correct Mode?" type="WaitStart">
<subsheetid>48eda2af-2294-4834-8fab-715f42c7855d</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>240</displayx>
<displayy>375</displayy>
<displaywidth>60</displaywidth>
<displayheight>60</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<breakpoint type="0">
<condition>
</condition>
</breakpoint>
<groupid>2e200872-da3a-4f5b-9df2-9f50488c3de1</groupid>
<choices>
<choice reply="&amp;quot;*&amp;quot; &amp;amp; [Display Mode] &amp;amp; &amp;quot;*&amp;quot;">
<name>Dynamic Calculator Title Check AA Attribute</name>
<distance>60</distance>
<ontrue>d875c6ad-6f31-4877-aa64-1fbfc99015e6</ontrue>
<element id="ca181a42-9af6-4122-9fd6-403bcc2ad888"/>
<condition>
<id>CheckAAIdentifier</id>
```

```xml
<arguments>
<argument>
<id>idname</id>
<value>"Name"</value>
</argument>
</arguments>
</condition>
<comparetype>Wildcard</comparetype>
</choice>
</choices>
<timeout>5</timeout>
</stage>
<stage stageid="de06bb8a-3086-4cf0-89f0-13a4e14cd580" name="Failed to Set Mode" type="Exception">
<subsheetid>48eda2af-2294-4834-8fab-715f42c7855d</subsheetid>
<narrative>
</narrative>
<displayx>450</displayx>
<displayy>375</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<exception type="System Exception" detail="&amp;quot;Failed to set the calculator mode&amp;quot;"/>
</stage>
</process>
<process name="Calc OCR" version="1.0" bpversion="5.0.23.1385" narrative="fdsf" type="object" runmod
<appdef>
<element name="Calculator">
```

<id>e7b35717-0b55-4ee6-86c0-51740394d719</id>

<group name="Numbers">

<id>a83aa72c-6bb3-4622-aae0-8e65e02e4e6f</id>

<element name="9">

<id>b4f4f3b5-100d-44cb-a4de-f397d2486d05</id>

<type>Button</type>

<basetype>Button</basetype>

<datatype>unknown</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText">

<ProcessValue datatype="text" value="9"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Button"/>

</attribute>

<attribute name="X" inuse="True">

<ProcessValue datatype="text" value="132"/>

</attribute>

<attribute name="Y" inuse="True">

<ProcessValue datatype="text" value="73"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="text" value="37"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="text" value="30"/>

```
</attribute>

<attribute name="Visible" inuse="True">

<ProcessValue datatype="text" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="text" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="text" value="True"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="text" value="14"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="text" value="0"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="text" value="57"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="text" value="99"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="text" value="261"/>
```

```xml
        </attribute>

        <attribute name="pHeight">

        <ProcessValue datatype="text" value="261"/>

        </attribute>

        <attribute name="pActive">

        <ProcessValue datatype="text" value="True"/>

        </attribute>

        <attribute name="pOrdinal">

        <ProcessValue datatype="text" value="2"/>

        </attribute>

        <attribute name="pChildCount">

        <ProcessValue datatype="text" value="30"/>

        </attribute>

        </attributes>

        </element>

        <element name="8">

        <id>9c7a2636-d70d-4ef0-a937-79803cffaef7</id>

        <type>Button</type>

        <basetype>Button</basetype>

        <datatype>unknown</datatype>

        <diagnose>False</diagnose>

        <attributes>

        <attribute name="WindowText">

        <ProcessValue datatype="text" value="8"/>

        </attribute>

        <attribute name="ClassName" inuse="True">

        <ProcessValue datatype="text" value="Button"/>
```

</attribute>

<attribute name="X" inuse="True">

<ProcessValue datatype="text" value="93"/>

</attribute>

<attribute name="Y" inuse="True">

<ProcessValue datatype="text" value="73"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="text" value="37"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="text" value="30"/>

</attribute>

<attribute name="Visible">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Enabled">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="text" value="10"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="text" value="0"/>

```xml
          </attribute>
          <attribute name="pWindowText">
          <ProcessValue datatype="text" value="Calculator"/>
          </attribute>
          <attribute name="pX">
          <ProcessValue datatype="text" value="57"/>
          </attribute>
          <attribute name="pY">
          <ProcessValue datatype="text" value="99"/>
          </attribute>
          <attribute name="pWidth">
          <ProcessValue datatype="text" value="261"/>
          </attribute>
          <attribute name="pHeight">
          <ProcessValue datatype="text" value="261"/>
          </attribute>
          <attribute name="pActive">
          <ProcessValue datatype="text" value="Yes"/>
          </attribute>
          <attribute name="pOrdinal">
          <ProcessValue datatype="text" value="2"/>
          </attribute>
          <attribute name="pChildCount">
          <ProcessValue datatype="text" value="30"/>
          </attribute>
          </attributes>
          </element>
```

```xml
<element name="7">
<id>d998db01-abdb-4f66-b6e5-7d18abe17a92</id>
<type>Button</type>
<basetype>Button</basetype>
<datatype>unknown</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText">
<ProcessValue datatype="text" value="7"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Button"/>
</attribute>
<attribute name="X" inuse="True">
<ProcessValue datatype="text" value="54"/>
</attribute>
<attribute name="Y" inuse="True">
<ProcessValue datatype="text" value="73"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="text" value="37"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="text" value="30"/>
</attribute>
<attribute name="Visible">
<ProcessValue datatype="text" value="Yes"/>
```

</attribute>

<attribute name="Enabled">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="text" value="6"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="text" value="0"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="text" value="57"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="text" value="99"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="text" value="261"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="text" value="261"/>

```xml
</attribute>

<attribute name="pActive">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="text" value="2"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="text" value="30"/>

</attribute>

</attributes>

</element>

<element name="6">

<id>ff599e68-0084-4c23-b4b3-a6016016787e</id>

<type>Button</type>

<basetype>Button</basetype>

<datatype>unknown</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText">

<ProcessValue datatype="text" value="6"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Button"/>

</attribute>

<attribute name="X" inuse="True">

<ProcessValue datatype="text" value="132"/>
```

```xml
</attribute>

<attribute name="Y" inuse="True">

<ProcessValue datatype="text" value="106"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="text" value="37"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="text" value="30"/>

</attribute>

<attribute name="Visible">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Enabled">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="text" value="15"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="text" value="0"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>
```

```xml
    </attribute>
    <attribute name="pX">
    <ProcessValue datatype="text" value="57"/>
    </attribute>
    <attribute name="pY">
    <ProcessValue datatype="text" value="99"/>
    </attribute>
    <attribute name="pWidth">
    <ProcessValue datatype="text" value="261"/>
    </attribute>
    <attribute name="pHeight">
    <ProcessValue datatype="text" value="261"/>
    </attribute>
    <attribute name="pActive">
    <ProcessValue datatype="text" value="Yes"/>
    </attribute>
    <attribute name="pOrdinal">
    <ProcessValue datatype="text" value="2"/>
    </attribute>
    <attribute name="pChildCount">
    <ProcessValue datatype="text" value="30"/>
    </attribute>
    </attributes>
    </element>
    <element name="5">
    <id>0e7bfd43-306c-495d-8045-cde6c32728c6</id>
    <type>Button</type>
```

```xml
<basetype>Button</basetype>
<datatype>unknown</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText">
<ProcessValue datatype="text" value="5"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Button"/>
</attribute>
<attribute name="X" inuse="True">
<ProcessValue datatype="text" value="93"/>
</attribute>
<attribute name="Y" inuse="True">
<ProcessValue datatype="text" value="106"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="text" value="37"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="text" value="30"/>
</attribute>
<attribute name="Visible">
<ProcessValue datatype="text" value="Yes"/>
</attribute>
<attribute name="Enabled">
<ProcessValue datatype="text" value="Yes"/>
```

```xml
</attribute>

<attribute name="Active">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="text" value="11"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="text" value="0"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="text" value="57"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="text" value="99"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="text" value="261"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="text" value="261"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="text" value="Yes"/>
```

```xml
</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="text" value="2"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="text" value="30"/>

</attribute>

</attributes>

</element>

<element name="4">

<id>4e97e3d1-aff7-418a-85bd-6480a02c92e5</id>

<type>Button</type>

<basetype>Button</basetype>

<datatype>unknown</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText">

<ProcessValue datatype="text" value="4"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Button"/>

</attribute>

<attribute name="X" inuse="True">

<ProcessValue datatype="text" value="54"/>

</attribute>

<attribute name="Y" inuse="True">

<ProcessValue datatype="text" value="106"/>
```

</attribute>

<attribute name="Width">

<ProcessValue datatype="text" value="37"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="text" value="30"/>

</attribute>

<attribute name="Visible">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Enabled">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="text" value="7"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="text" value="0"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="text" value="57"/>

```xml
        </attribute>
        <attribute name="pY">
          <ProcessValue datatype="text" value="99"/>
        </attribute>
        <attribute name="pWidth">
          <ProcessValue datatype="text" value="261"/>
        </attribute>
        <attribute name="pHeight">
          <ProcessValue datatype="text" value="261"/>
        </attribute>
        <attribute name="pActive">
          <ProcessValue datatype="text" value="Yes"/>
        </attribute>
        <attribute name="pOrdinal">
          <ProcessValue datatype="text" value="2"/>
        </attribute>
        <attribute name="pChildCount">
          <ProcessValue datatype="text" value="30"/>
        </attribute>
      </attributes>
    </element>
    <element name="3">
      <id>0fb8c394-18fa-4eb6-bd0d-564b6aede689</id>
      <type>Button</type>
      <basetype>Button</basetype>
      <datatype>unknown</datatype>
      <diagnose>False</diagnose>
```

```xml
<attributes>
<attribute name="WindowText">
<ProcessValue datatype="text" value="3"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Button"/>
</attribute>
<attribute name="X" inuse="True">
<ProcessValue datatype="text" value="132"/>
</attribute>
<attribute name="Y" inuse="True">
<ProcessValue datatype="text" value="138"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="text" value="37"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="text" value="30"/>
</attribute>
<attribute name="Visible">
<ProcessValue datatype="text" value="Yes"/>
</attribute>
<attribute name="Enabled">
<ProcessValue datatype="text" value="Yes"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="text" value="Yes"/>
```

```xml
    </attribute>
    <attribute name="Ordinal">
    <ProcessValue datatype="text" value="16"/>
    </attribute>
    <attribute name="ChildCount">
    <ProcessValue datatype="text" value="0"/>
    </attribute>
    <attribute name="pWindowText">
    <ProcessValue datatype="text" value="Calculator"/>
    </attribute>
    <attribute name="pX">
    <ProcessValue datatype="text" value="57"/>
    </attribute>
    <attribute name="pY">
    <ProcessValue datatype="text" value="99"/>
    </attribute>
    <attribute name="pWidth">
    <ProcessValue datatype="text" value="261"/>
    </attribute>
    <attribute name="pHeight">
    <ProcessValue datatype="text" value="261"/>
    </attribute>
    <attribute name="pActive">
    <ProcessValue datatype="text" value="Yes"/>
    </attribute>
    <attribute name="pOrdinal">
    <ProcessValue datatype="text" value="2"/>
```

```xml
    </attribute>

    <attribute name="pChildCount">

    <ProcessValue datatype="text" value="30"/>

    </attribute>

    </attributes>

    </element>

    <element name="2">

    <id>c696cba9-8b50-4bf9-890d-9c73b4811342</id>

    <type>Button</type>

    <basetype>Button</basetype>

    <datatype>unknown</datatype>

    <diagnose>False</diagnose>

    <attributes>

    <attribute name="WindowText">

    <ProcessValue datatype="text" value="2"/>

    </attribute>

    <attribute name="ClassName" inuse="True">

    <ProcessValue datatype="text" value="Button"/>

    </attribute>

    <attribute name="X" inuse="True">

    <ProcessValue datatype="text" value="93"/>

    </attribute>

    <attribute name="Y" inuse="True">

    <ProcessValue datatype="text" value="138"/>

    </attribute>

    <attribute name="Width">

    <ProcessValue datatype="text" value="37"/>
```

```xml
</attribute>
<attribute name="Height">
<ProcessValue datatype="text" value="30"/>
</attribute>
<attribute name="Visible">
<ProcessValue datatype="text" value="Yes"/>
</attribute>
<attribute name="Enabled">
<ProcessValue datatype="text" value="Yes"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="text" value="Yes"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="text" value="12"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="text" value="0"/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="text" value="57"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="text" value="99"/>
```

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="text" value="261"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="text" value="261"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="text" value="2"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="text" value="30"/>

<type>Button</type>

<basetype>Button</basetype>

<datatype>unknown</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText">

<ProcessValue datatype="text" value="1"/>

```xml
</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Button"/>

</attribute>

<attribute name="X" inuse="True">

<ProcessValue datatype="text" value="54"/>

</attribute>

<attribute name="Y" inuse="True">

<ProcessValue datatype="text" value="138"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="text" value="37"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="text" value="30"/>

</attribute>

<attribute name="Visible">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Enabled">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="text" value="8"/>
```

```xml
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="text" value="0"/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="text" value="110"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="text" value="145"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="text" value="261"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="text" value="261"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="text" value="Yes"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="text" value="2"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="text" value="30"/>
```

```xml
</attribute>
</attributes>
</element>
<element name="0">
<id>5ceb7ed3-2631-4093-9c21-534dab1ae211</id>
<type>Button</type>
<basetype>Button</basetype>
<datatype>unknown</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText">
<ProcessValue datatype="text" value="0"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Button"/>
</attribute>
<attribute name="X" inuse="True">
<ProcessValue datatype="text" value="54"/>
</attribute>
<attribute name="Y" inuse="True">
<ProcessValue datatype="text" value="171"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="text" value="37"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="text" value="30"/>
```

```xml
</attribute>

<attribute name="Visible">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Enabled">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Ordinal" inuse="True">

<ProcessValue datatype="text" value="9"/>

</attribute>

<attribute name="ChildCount" inuse="True">

<ProcessValue datatype="text" value="0"/>

</attribute>

<attribute name="pWindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pX" inuse="True">

<ProcessValue datatype="text" value="22"/>

</attribute>

<attribute name="pY" inuse="True">

<ProcessValue datatype="text" value="29"/>

</attribute>

<attribute name="pWidth" inuse="True">

<ProcessValue datatype="text" value="261"/>
```

```xml
</attribute>
<attribute name="pHeight" inuse="True">
<ProcessValue datatype="text" value="261"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="text" value="Yes"/>
</attribute>
<attribute name="pOrdinal" inuse="True">
<ProcessValue datatype="text" value="2"/>
</attribute>
<attribute name="pChildCount" inuse="True">
<ProcessValue datatype="text" value="30"/>
</attribute>
</attributes>
</element>
</group>
<group name="Result">
<id>8a0f9887-39cc-4c3b-a03d-5efb42bf8ec9</id>
<element name="Result">
<id>9c3dafc4-0791-4a4e-8d23-7f90348410ce</id>
<type>Edit</type>
<basetype>Edit</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText">
<ProcessValue datatype="text" value=""/>
```

```xml
</attribute>
<attribute name="ClassName">
<ProcessValue datatype="text" value="Edit"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="text" value="8"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="text" value="2"/>
</attribute>
<attribute name="Width" inuse="True">
<ProcessValue datatype="text" value="240"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="text" value="24"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="text" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="text" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="text" value="Yes"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="text" value="1"/>
```

```xml
        </attribute>

        <attribute name="ChildCount">

          <ProcessValue datatype="text" value="0"/>

        </attribute>

        <attribute name="pWindowText">

          <ProcessValue datatype="text" value="Calculator"/>

        </attribute>

        <attribute name="pX">

          <ProcessValue datatype="text" value="57"/>

        </attribute>

        <attribute name="pY">

          <ProcessValue datatype="text" value="99"/>

        </attribute>

        <attribute name="pWidth">

          <ProcessValue datatype="text" value="261"/>

        </attribute>

        <attribute name="pHeight">

          <ProcessValue datatype="text" value="261"/>

        </attribute>

        <attribute name="pActive">

          <ProcessValue datatype="text" value="Yes"/>

        </attribute>

        <attribute name="pOrdinal">

          <ProcessValue datatype="text" value="2"/>

        </attribute>

        <attribute name="pChildCount">

          <ProcessValue datatype="text" value="30"/>
```

```xml
</attribute>

</attributes>

</element>

</group>

<group name="Operators">

<id>36918c11-dde0-4274-810b-366a51a663fc</id>

<element name="=">

<id>a7368c35-20be-4eaf-9b1f-49fbc74dc454</id>

<type>Button</type>

<basetype>Button</basetype>

<datatype>unknown</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText">

<ProcessValue datatype="text" value="="/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Button"/>

</attribute>

<attribute name="X" inuse="True">

<ProcessValue datatype="text" value="210"/>

</attribute>

<attribute name="Y" inuse="True">

<ProcessValue datatype="text" value="171"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="text" value="37"/>
```

```xml
</attribute>

<attribute name="Height">

<ProcessValue datatype="text" value="30"/>

</attribute>

<attribute name="Visible">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Enabled">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="text" value="22"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="text" value="0"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="text" value="57"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="text" value="99"/>
```

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="text" value="261"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="text" value="261"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="text" value="2"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="text" value="30"/>

<type>Button</type>

<basetype>Button</basetype>

<datatype>unknown</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText">

<ProcessValue datatype="text" value="*"/>

```xml
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Button"/>
</attribute>
<attribute name="X" inuse="True">
<ProcessValue datatype="text" value="171"/>
</attribute>
<attribute name="Y" inuse="True">
<ProcessValue datatype="text" value="106"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="text" value="37"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="text" value="30"/>
</attribute>
<attribute name="Visible">
<ProcessValue datatype="text" value="Yes"/>
</attribute>
<attribute name="Enabled">
<ProcessValue datatype="text" value="Yes"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="text" value="Yes"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="text" value="19"/>
```

```xml
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="text" value="0"/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="text" value="57"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="text" value="99"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="text" value="261"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="text" value="261"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="text" value="Yes"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="text" value="2"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="text" value="30"/>
```

```
</attribute>

</attributes>

</element>

<element name="\">

<id>2e5aaa71-8cdb-4ebf-9938-e5123fa679d6</id>

<type>Button</type>

<basetype>Button</basetype>

<datatype>unknown</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText">

<ProcessValue datatype="text" value="/"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Button"/>

</attribute>

<attribute name="X" inuse="True">

<ProcessValue datatype="text" value="171"/>

</attribute>

<attribute name="Y" inuse="True">

<ProcessValue datatype="text" value="73"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="text" value="37"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="text" value="30"/>
```

```xml
    </attribute>
    <attribute name="Visible">
    <ProcessValue datatype="text" value="Yes"/>
    </attribute>
    <attribute name="Enabled">
    <ProcessValue datatype="text" value="Yes"/>
    </attribute>
    <attribute name="Active">
    <ProcessValue datatype="text" value="Yes"/>
    </attribute>
    <attribute name="Ordinal">
    <ProcessValue datatype="text" value="18"/>
    </attribute>
    <attribute name="ChildCount">
    <ProcessValue datatype="text" value="0"/>
    </attribute>
    <attribute name="pWindowText">
    <ProcessValue datatype="text" value="Calculator"/>
    </attribute>
    <attribute name="pX">
    <ProcessValue datatype="text" value="57"/>
    </attribute>
    <attribute name="pY">
    <ProcessValue datatype="text" value="99"/>
    </attribute>
    <attribute name="pWidth">
    <ProcessValue datatype="text" value="261"/>
```

```xml
</attribute>

<attribute name="pHeight">

<ProcessValue datatype="text" value="261"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="text" value="2"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="text" value="30"/>

</attribute>

</attributes>

</element>

<element name="-">

<id>288bcfb3-107f-49a3-90e1-e15cbc95a7dd</id>

<type>Button</type>

<basetype>Button</basetype>

<datatype>unknown</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText">

<ProcessValue datatype="text" value="-"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Button"/>
```

```xml
</attribute>

<attribute name="X" inuse="True">

<ProcessValue datatype="text" value="171"/>

</attribute>

<attribute name="Y" inuse="True">

<ProcessValue datatype="text" value="138"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="text" value="37"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="text" value="30"/>

</attribute>

<attribute name="Visible">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Enabled">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="text" value="20"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="text" value="0"/>
```

```xml
</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="text" value="57"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="text" value="99"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="text" value="261"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="text" value="261"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="text" value="2"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="text" value="30"/>

</attribute>

</attributes>

</element>
```

```xml
<element name="+">
<id>3ccf4fd9-1cba-460f-ac97-8a46627b310a</id>
<type>Button</type>
<basetype>Button</basetype>
<datatype>unknown</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText">
<ProcessValue datatype="text" value="+"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Button"/>
</attribute>
<attribute name="X" inuse="True">
<ProcessValue datatype="text" value="171"/>
</attribute>
<attribute name="Y" inuse="True">
<ProcessValue datatype="text" value="171"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="text" value="37"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="text" value="30"/>
</attribute>
<attribute name="Visible">
<ProcessValue datatype="text" value="Yes"/>
```

```xml
</attribute>

<attribute name="Enabled">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="text" value="21"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="text" value="0"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="text" value="57"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="text" value="99"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="text" value="261"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="text" value="261"/>
```

```xml
</attribute>

<attribute name="pActive">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="text" value="2"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="text" value="30"/>

</attribute>

</attributes>

</element>

</group>

<element name="9ButtonByRect">

<id>4ff11b26-04cb-4eaf-8c1f-898704226d15</id>

<type>WindowRect</type>

<basetype>WindowRect</basetype>

<datatype>unknown</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText">

<ProcessValue datatype="text" value="9"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Button"/>

</attribute>

<attribute name="X" inuse="True">
```

```xml
<ProcessValue datatype="text" value="312"/>
</attribute>
<attribute name="Y" inuse="True">
<ProcessValue datatype="text" value="98"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="text" value="37"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="text" value="30"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="text" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="text" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="text" value="Yes"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="text" value="53"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="text" value="0"/>
</attribute>
<attribute name="pWindowText">
```

```xml
<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="text" value="66"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="text" value="66"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="text" value="481"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="text" value="310"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="text" value="Yes"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="text" value="2"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="text" value="78"/>

</attribute>

<attribute name="StartX" inuse="True">

<ProcessValue datatype="text" value="5"/>

</attribute>

<attribute name="StartY" inuse="True">
```

```xml
<ProcessValue datatype="text" value="4"/>

</attribute>

<attribute name="EndX" inuse="True">

<ProcessValue datatype="text" value="32"/>

</attribute>

<attribute name="EndY" inuse="True">

<ProcessValue datatype="text" value="23"/>

</attribute>

</attributes>

</element>

<element name="Main Window">

<id>4bbd315c-2c57-4124-a4bd-8a09ab64c152</id>

<element name="Main Window - Standard Mode">

<id>a4b15f4e-5695-403f-998e-a902a0745cd0</id>

<type>Window</type>

<basetype>Window</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="ClassName">

<ProcessValue datatype="text" value="#32770"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="-1134122024"/>
```

```xml
</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="22"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="22"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="261"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="253"/>

</attribute>

<attribute name="Visible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="ScreenVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="1"/>
```

```xml
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="30"/>
</attribute>
</attributes>
</element>
<element name="Main Window - Scientific Mode">
<id>fc82ebdb-34fb-4bf2-ab76-40d5e7b5aaea</id>
<type>Window</type>
<basetype>Window</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="ClassName">
<ProcessValue datatype="text" value="#32770"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="-1134122024"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="22"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="22"/>
```

```xml
        </attribute>

        <attribute name="Width">

            <ProcessValue datatype="number" value="481"/>

        </attribute>

        <attribute name="Height">

            <ProcessValue datatype="number" value="310"/>

        </attribute>

        <attribute name="Visible">

            <ProcessValue datatype="flag" value="True"/>

        </attribute>

        <attribute name="ScreenVisible">

            <ProcessValue datatype="flag" value="True"/>

        </attribute>

        <attribute name="Enabled">

            <ProcessValue datatype="flag" value="True"/>

        </attribute>

        <attribute name="Active">

            <ProcessValue datatype="flag" value="True"/>

        </attribute>

        <attribute name="Ordinal">

            <ProcessValue datatype="number" value="1"/>

        </attribute>

        <attribute name="ChildCount">

            <ProcessValue datatype="number" value="78"/>

        </attribute>

    </attributes>

</element>
```

```xml
<type>Window</type>

<basetype>Window</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="ClassName">

<ProcessValue datatype="text" value="SciCalc"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="44"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="44"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="481"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="310"/>

</attribute>

<attribute name="Visible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">
```

```xml
<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="78"/>

</attribute>

</attributes>

</element>

<group name="Win7">

<id>95ba12c1-ced3-4a74-9d8e-576f348934f6</id>

<group name="Numbers">

<id>1d355f69-c3b4-4d4d-a5c7-a6c999a56cdb</id>

<element name="1">

<id>6d26a128-f008-453b-9b9d-65a73cd15f08</id>

<type>Button</type>

<basetype>Button</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>
```

```xml
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Button"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X" inuse="True">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Y" inuse="True">
<ProcessValue datatype="number" value="128"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="35"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="28"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="5"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="  Calculator &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="11"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="65"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="191"/>

</attribute>
```

<attribute name="pHeight">

<ProcessValue datatype="number" value="192"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="number" value="3"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="28"/>

<type>Button</type>

<basetype>Button</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Button"/>

</attribute>

```xml
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X" inuse="True">
<ProcessValue datatype="number" value="39"/>
</attribute>
<attribute name="Y" inuse="True">
<ProcessValue datatype="number" value="128"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="35"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="28"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Ordinal">

<ProcessValue datatype="number" value="11"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="  Calculator &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="11"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="65"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="191"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="number" value="192"/>

</attribute>
```

```xml
<attribute name="pActive">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="number" value="3"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="28"/>

</attribute>

</attributes>

</element>

<element name="3">

<id>d65c3c9e-a081-4237-9dcf-a1bfe75602f7</id>

<type>Button</type>

<basetype>Button</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Button"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>
```

```xml
<attribute name="X" inuse="True">
<ProcessValue datatype="number" value="78"/>
</attribute>
<attribute name="Y" inuse="True">
<ProcessValue datatype="number" value="128"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="35"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="28"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="16"/>
</attribute>
```

```xml
<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="  Calculator &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="11"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="65"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="191"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="number" value="192"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

```xml
<attribute name="pOrdinal">

<ProcessValue datatype="number" value="3"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="28"/>

</attribute>

</attributes>

</element>

<element name="4">

<id>d0352731-70c6-4930-8586-56380b00612e</id>

<type>Button</type>

<basetype>Button</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Button"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X" inuse="True">

<ProcessValue datatype="number" value="0"/>

</attribute>
```

```xml
<attribute name="Y" inuse="True">
<ProcessValue datatype="number" value="96"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="35"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="28"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="4"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
```

```xml
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="  Calculator &amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="11"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="65"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="191"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="192"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="3"/>
</attribute>
```

```xml
<attribute name="pChildCount">
<ProcessValue datatype="number" value="28"/>
</attribute>
</attributes>
</element>
<element name="5">
<id>bca989ac-238f-4c9c-bf98-a03ba7dcdb0f</id>
<type>Button</type>
<basetype>Button</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Button"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X" inuse="True">
<ProcessValue datatype="number" value="39"/>
</attribute>
<attribute name="Y" inuse="True">
<ProcessValue datatype="number" value="96"/>
</attribute>
```

```xml
<attribute name="Width">
<ProcessValue datatype="number" value="35"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="28"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="10"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="  Calculator &amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
```

```xml
<attribute name="pWindowText">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="11"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="65"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="191"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="192"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="3"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="28"/>
</attribute>
```

```xml
</attributes>
</element>
<element name="6">
<id>171e4e2e-90f5-4037-8d3f-893d9b82b8a8</id>
<type>Button</type>
<basetype>Button</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Button"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X" inuse="True">
<ProcessValue datatype="number" value="78"/>
</attribute>
<attribute name="Y" inuse="True">
<ProcessValue datatype="number" value="96"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="35"/>
</attribute>
</attribute>
```

```xml
<attribute name="Height">
<ProcessValue datatype="number" value="28"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="15"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="  Calculator &amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value=""/>
</attribute>
```

```xml
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="11"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="65"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="191"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="192"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="3"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="28"/>
</attribute>
</attributes>
</element>
<element name="7">
```

```xml
<id>37c6fa51-5a0e-4344-9059-247f890abbd6</id>
<type>Button</type>
<basetype>Button</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Button"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X" inuse="True">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Y" inuse="True">
<ProcessValue datatype="number" value="64"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="35"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="28"/>
</attribute>
```

```xml
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="3"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="  Calculator &amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
```

```xml
<attribute name="pX">
<ProcessValue datatype="number" value="11"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="65"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="191"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="192"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="3"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="28"/>
</attribute>
</attributes>
</element>
<element name="8">
<id>7f35a18a-8376-4aff-944b-2046a940a9d5</id>
<type>Button</type>
<basetype>Button</basetype>
```

```xml
<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Button"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X" inuse="True">

<ProcessValue datatype="number" value="39"/>

</attribute>

<attribute name="Y" inuse="True">

<ProcessValue datatype="number" value="64"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="35"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="28"/>

</attribute>

<attribute name="Visible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>
```

```xml
<attribute name="ScreenVisible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="9"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="  Calculator &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="11"/>

</attribute>
```

```xml
<attribute name="pY">
<ProcessValue datatype="number" value="65"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="191"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="192"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="3"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="28"/>
</attribute>
</attributes>
</element>
<element name="9">
<id>39630e52-0637-4e1b-a80f-8bf52e0f0af3</id>
<type>Button</type>
<basetype>Button</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
```

```xml
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Button"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X" inuse="True">
<ProcessValue datatype="number" value="78"/>
</attribute>
<attribute name="Y" inuse="True">
<ProcessValue datatype="number" value="64"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="35"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="28"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="14"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="  Calculator &amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="11"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="65"/>
</attribute>
```

```xml
<attribute name="pWidth">
<ProcessValue datatype="number" value="191"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="192"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="3"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="28"/>
</attribute>
</attributes>
</element>
</group>
<group name="Operators">
<id>4d7d62a0-9ce4-4337-83d7-ba294b88d7e1</id>
<element name="+">
<id>f47b9eda-d343-4978-bdc6-e6ef50660dff</id>
<type>Button</type>
<basetype>Button</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
```

```xml
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Button"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X" inuse="True">
<ProcessValue datatype="number" value="117"/>
</attribute>
<attribute name="Y" inuse="True">
<ProcessValue datatype="number" value="160"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="35"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="28"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="23"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="  Calculator &amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="11"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="65"/>
</attribute>
```

```xml
<attribute name="pWidth">
<ProcessValue datatype="number" value="191"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="192"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="3"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="28"/>
</attribute>
</attributes>
</element>
<element name="=">
<id>6100d04c-2979-473e-ba69-c86b27e93ec6</id>
<type>Button</type>
<basetype>Button</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
```

```xml
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Button"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X" inuse="True">
<ProcessValue datatype="number" value="156"/>
</attribute>
<attribute name="Y" inuse="True">
<ProcessValue datatype="number" value="128"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="35"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="60"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="28"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="  Calculator &amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="11"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="65"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="191"/>
</attribute>
```

```xml
<attribute name="pHeight">
<ProcessValue datatype="number" value="192"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="3"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="28"/>
</attribute>
</attributes>
</element>
<element name="*">
<id>29ce6e41-5ccb-44c7-ac81-f2122a99f346</id>
<type>Button</type>
<basetype>Button</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Button"/>
</attribute>
```

```xml
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X" inuse="True">
<ProcessValue datatype="number" value="117"/>
</attribute>
<attribute name="Y" inuse="True">
<ProcessValue datatype="number" value="96"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="35"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="28"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
```

```xml
<attribute name="Ordinal">
<ProcessValue datatype="number" value="21"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="  Calculator &amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="11"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="65"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="191"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="192"/>
</attribute>
```

```xml
<attribute name="pActive">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="3"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="28"/>
</attribute>
</attributes>
</element>
<element name="/">
<id>16642c22-1777-4cc8-8766-916af3cf3982</id>
<type>Button</type>
<basetype>Button</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Button"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
```

```xml
<attribute name="X" inuse="True">
<ProcessValue datatype="number" value="117"/>
</attribute>
<attribute name="Y" inuse="True">
<ProcessValue datatype="number" value="64"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="35"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="28"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="20"/>
</attribute>
```

```xml
<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="  Calculator &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="11"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="65"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="191"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="number" value="192"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="flag" value="False"/>

</attribute>
```

<attribute name="pOrdinal">

<ProcessValue datatype="number" value="3"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="28"/>

<type>Button</type>

<basetype>Button</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Button"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X" inuse="True">

<ProcessValue datatype="number" value="117"/>

</attribute>

```xml
<attribute name="Y" inuse="True">
<ProcessValue datatype="number" value="128"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="35"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="28"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="22"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
```

```xml
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="  Calculator &amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value=""/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="11"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="65"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="191"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="192"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="3"/>
</attribute>
```

```xml
<attribute name="pChildCount">
<ProcessValue datatype="number" value="28"/>
</attribute>
</attributes>
</element>
</group>
<group name="Result">
<id>5347e8a7-f737-475a-beb3-6b32cf9eada0</id>
<element name="Result">
<id>aba6529c-090c-4e22-a2a3-eacca010be6a</id>
<type>Label</type>
<basetype>Label</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText">
<ProcessValue datatype="text" value="8"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Static"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="18"/>
</attribute>
```

```xml
<attribute name="Y">
<ProcessValue datatype="number" value="15"/>
</attribute>
<attribute name="Width" inuse="True">
<ProcessValue datatype="number" value="168"/>
</attribute>
<attribute name="Height" inuse="True">
<ProcessValue datatype="number" value="29"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="3"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
```

```
<attribute name="AncestorsText">

<ProcessValue datatype="text" value="  Calculator &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="11"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="10"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="191"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="number" value="51"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="number" value="2"/>

</attribute>
```

```xml
<attribute name="pChildCount">

<ProcessValue datatype="number" value="4"/>

</attribute>

</attributes>

</element>

</group>

</group>

<region-container name="MC Button (WinXP)">

<id>c88fadfc-0577-48a5-93e8-e52ebc94d2ff</id>

<region name="MC Button Region (WinXP)">

<container>c88fadfc-0577-48a5-93e8-e52ebc94d2ff</container>

<id>354b58eb-92ee-472f-8701-b6e1c4efabf8</id>

<type>WindowRect</type>

<basetype>WindowRect</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="MC"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Button"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">
```

```xml
<ProcessValue datatype="number" value="8"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="73"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="37"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="30"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="ChildCount">
```

```xml
<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="Button"/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:58,410,439,94"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="#32770"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="-1142053856"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="47"/>

</attribute>

<attribute name="pY">
```

<ProcessValue datatype="number" value="288"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="261"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="number" value="261"/>

</attribute>

<attribute name="pVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pScreenVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pEnabled">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="30"/>

</attribute>

<attribute name="MatchIndex">

```xml
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="StartX" inuse="True">
<ProcessValue datatype="number" value="6"/>
</attribute>
<attribute name="StartY" inuse="True">
<ProcessValue datatype="number" value="6"/>
</attribute>
<attribute name="EndX" inuse="True">
<ProcessValue datatype="number" value="29"/>
</attribute>
<attribute name="EndY" inuse="True">
<ProcessValue datatype="number" value="22"/>
</attribute>
<attribute name="RetainImage" system="True">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ElementSnapshot" inuse="True" system="True">
<ProcessValue datatype="image" value=""/>
</attribute>
<attribute name="FontName" inuse="True" system="True">
<ProcessValue datatype="text" value=""/>
</attribute>
</attribute>
</attributes>
```

```
</region>

<type>Button</type>

<basetype>Button</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="MC"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Button"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="8"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="73"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="37"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="30"/>

</attribute>
```

```xml
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
<attribute name="AncestorCount">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="TypeName">
<ProcessValue datatype="text" value="Button"/>
</attribute>
```

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:58,410,439,94"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="#32770"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="-1142053856"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="47"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="288"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="261"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="number" value="261"/>

</attribute>

<attribute name="pVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pScreenVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pEnabled">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="30"/>

</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Screenshot">

<ProcessValue datatype="image" value="36,29,137224,iVBORw0KGgoAAAANSUhEUgAAACQAAAAdCA

</attribute>

</attributes>

</region-container>

<region-container name="5 Button (WinXP)">

<type>WindowRect</type>

<basetype>WindowRect</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="5"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Button"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="93"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="106"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="37"/>

</attribute>

```xml
<attribute name="Height">
<ProcessValue datatype="number" value="30"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="11"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
<attribute name="AncestorCount">
<ProcessValue datatype="number" value="2"/>
</attribute>
```

```xml
<attribute name="TypeName">
<ProcessValue datatype="text" value="Button"/>
</attribute>
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:525,263,292,561"/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="pClassName">
<ProcessValue datatype="text" value="#32770"/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="-1133899440"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="429"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="108"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="261"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="261"/>
</attribute>
```

```xml
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pOrdinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="pChildCount">
<ProcessValue datatype="number" value="30"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="StartX" inuse="True">
<ProcessValue datatype="number" value="9"/>
</attribute>
```

```xml
<attribute name="StartY" inuse="True">

<ProcessValue datatype="number" value="6"/>

</attribute>

<attribute name="EndX" inuse="True">

<ProcessValue datatype="number" value="27"/>

</attribute>

<attribute name="EndY" inuse="True">

<ProcessValue datatype="number" value="24"/>

</attribute>

<attribute name="RetainImage" system="True">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="ElementSnapshot" inuse="True" system="True">

<ProcessValue datatype="image" value=""/>

</attribute>

<attribute name="FontName" inuse="True" system="True">

<ProcessValue datatype="text" value=""/>

</attribute>

</attributes>

</region>

<type>Button</type>

<basetype>Button</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="5"/>
```

```xml
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Button"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="93"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="106"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="37"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="30"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
```

```xml
</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="11"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Calculator &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="Button"/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:525,263,292,561"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="#32770"/>
```

```xml
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="-1133899440"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="429"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="108"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="261"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="261"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="False"/>
```

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="30"/>

</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Screenshot">

<ProcessValue datatype="image" value="36,29,137224,iVBORw0KGgoAAAANSUhEUgAAACQAAAAdCA

</attribute>

</attributes>

</region-container>

<region-container name="MC Button (Win7/8)">

<id>35dd1db9-d036-4f1d-af12-4f95805c3079</id>

<region name="MC Button Region (Win7/8)">

<container>35dd1db9-d036-4f1d-af12-4f95805c3079</container>

<id>a5381322-24aa-4c41-82cc-b0cba738781a</id>

<type>WindowRect</type>

<basetype>WindowRect</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

```xml
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="CalcFrame"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="-1066875152"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="-1525"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="191"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="229"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="323"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
```

```xml
</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="&amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="CalcFrame"/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:-1517,241,505,-1305"/>

</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>
```

```xml
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="StartX" inuse="True">
<ProcessValue datatype="number" value="22"/>
</attribute>
<attribute name="StartY" inuse="True">
<ProcessValue datatype="number" value="118"/>
</attribute>
<attribute name="EndX" inuse="True">
<ProcessValue datatype="number" value="49"/>
</attribute>
<attribute name="EndY" inuse="True">
<ProcessValue datatype="number" value="138"/>
</attribute>
<attribute name="RetainImage" system="True">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="ElementSnapshot" inuse="True" system="True">
<ProcessValue datatype="image" value=""/>
</attribute>
<attribute name="FontName" inuse="True" system="True">
<ProcessValue datatype="text" value=""/>
</attribute>
</attributes>
</region>
```

```xml
<type>Window</type>

<basetype>Window</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="CalcFrame"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="-1066875152"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="-1525"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="191"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="229"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="323"/>

</attribute>

<attribute name="Visible" inuse="True">
```

```xml
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="&amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
<attribute name="AncestorCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="TypeName">
<ProcessValue datatype="text" value="CalcFrame"/>
</attribute>
<attribute name="ScreenBounds">
```

<ProcessValue datatype="text" value="RECT:-1517,241,505,-1305"/>

</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Screenshot">

<ProcessValue datatype="image" value="228,322,137224,iVBORw0KGgoAAAANSUhEUgAAAOQAAAFC

<type>WindowRect</type>

<basetype>WindowRect</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Calculator"/>

</attribute>

<attribute name="ClassName" inuse="True">

```xml
<ProcessValue datatype="text" value="CalcFrame"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="-1066875152"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="-1525"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="191"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="229"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="323"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
```

```xml
<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="&amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="CalcFrame"/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:-1517,241,505,-1305"/>

</attribute>

<attribute name="MatchIndex">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="StartX" inuse="True">
```

```xml
<ProcessValue datatype="number" value="61"/>

</attribute>

<attribute name="StartY" inuse="True">

<ProcessValue datatype="number" value="215"/>

</attribute>

<attribute name="EndX" inuse="True">

<ProcessValue datatype="number" value="88"/>

</attribute>

<attribute name="EndY" inuse="True">

<ProcessValue datatype="number" value="234"/>

</attribute>

<attribute name="RetainImage" system="True">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="ElementSnapshot" inuse="True" system="True">

<ProcessValue datatype="image" value=""/>

</attribute>

<attribute name="FontName" inuse="True" system="True">

<ProcessValue datatype="text" value=""/>

</attribute>

</attributes>

</region>

<type>Window</type>

<basetype>Window</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>
```

```xml
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value="Calculator"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="CalcFrame"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="-1066875152"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="-1525"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="191"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="229"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="323"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>

<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>

<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>

<attribute name="ChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>

<attribute name="AncestorsText">
<ProcessValue datatype="text" value="&amp;lt;UNKNOWN&amp;gt; "/>
</attribute>

<attribute name="AncestorCount">
<ProcessValue datatype="number" value="1"/>
</attribute>

<attribute name="TypeName">
<ProcessValue datatype="text" value="CalcFrame"/>
</attribute>

<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:-1517,241,505,-1305"/>
</attribute>

<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
```

```xml
<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Screenshot">

<ProcessValue datatype="image" value="228,322,137224,iVBORw0KGgoAAAANSUhEUgAAAOQAAAFC

</attribute>

</attributes>

</region-container>

<type>Application</type>

<basetype>Application</basetype>

<datatype>unknown</datatype>

<diagnose>False</diagnose>

</element>

<apptypeinfo>

<id>Win32Launch</id>

<parameters>

<parameter>

<name>Path</name>

<value>calc.exe</value>

</parameter>

<parameter>

<name>CommandLineParams</name>

<value>

</value>

</parameter>

<parameter>

<name>WorkingDirectory</name>
```

```xml
    <value>

    </value>

  </parameter>

  <parameter>

    <name>NonInvasive</name>

    <value>True</value>

  </parameter>

  <parameter>

    <name>ProcessMode</name>

    <value>Internal</value>

  </parameter>

  </parameters>

  </apptypeinfo>

</appdef>

<view>

  <camerax>0</camerax>

  <cameray>0</cameray>

  <zoom version="2">1.25</zoom>

</view>

<preconditions/>

<endpoint narrative=""/>

<subsheet subsheetid="af18e4cb-2c21-4f2a-852d-e80d90c2f467" type="CleanUp" published="True">

  <name>Clean Up</name>

  <view>

    <camerax>0</camerax>

    <cameray>0</cameray>

    <zoom version="2">1.25</zoom>
```

```xml
</view>

</subsheet>

<subsheet subsheetid="45ae527c-3e74-4aa7-862c-4a9129e12540" type="Normal" published="True">

<name>Start Calculator</name>

<view>

<camerax>-6</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="8e041464-fa0c-4cae-b352-a21242b590c5" type="Normal" published="True">

<name>Set Display Mode</name>

<view>

<camerax>0</camerax>

<cameray>102</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="d7fce23f-48bc-4d07-b80c-4815b7ddb800" type="Normal" published="True">

<name>Close</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="d8d2df8b-7d08-4016-ace4-c001e583ba21" type="Normal" published="True">
```

```xml
<name>Read OCR - single char</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="72314ab4-eac2-486e-bdfd-146ef447c430" type="Normal" published="True">

<name>Read OCR - multi char</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<stage stageid="5f8f50f9-f8be-4f26-b5ac-b043d7449ecd" name="Start" type="Start">

<loginhibit/>

<narrative>

</narrative>

<displayx>30</displayx>

<displayy>-135</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>46a7ed31-cf1c-4336-90c1-98a2f0b8058b</onsuccess>

</stage>

<stage stageid="9bd3a369-3047-4681-9a37-f644cf79d2fb" name="End" type="End">
```

```
<loginhibit/>

<narrative>

</narrative>

<displayx>30</displayx>

<displayy>60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="b43a3dd6-299a-4b3f-b29d-0f354b501304" name="" type="ProcessInfo">

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<references/>

<imports/>

<language>visualbasic</language>

<globalcode></globalcode>

<code></code>

</stage>

<stage stageid="ffc09728-844e-4105-b44b-5088f98109f4" name="Clean Up" type="SubSheetInfo">

<subsheetid>af18e4cb-2c21-4f2a-852d-e80d90c2f467</subsheetid>

<loginhibit/>
```

```xml
<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="bc947a23-0749-48b3-ac76-6233c0b9e00c" name="Start" type="Start">

<subsheetid>af18e4cb-2c21-4f2a-852d-e80d90c2f467</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>30</displayx>

<displayy>-120</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>e4327d40-ecad-4f94-b1f3-dc27f2c4e298</onsuccess>

</stage>

<stage stageid="11f35921-067a-43c1-b37c-bc63f11c9c17" name="End" type="End">

<subsheetid>af18e4cb-2c21-4f2a-852d-e80d90c2f467</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>30</displayx>

<displayy>60</displayy>
```

```xml
<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="3083bc8d-dee6-40be-ba91-c9b3a1e7ef21" name="Start Calculator" type="SubSheetInfo"

<subsheetid>45ae527c-3e74-4aa7-862c-4a9129e12540</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>60</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="17513368-7d51-4ee0-8762-49f209123736" name="Start" type="Start">

<subsheetid>45ae527c-3e74-4aa7-862c-4a9129e12540</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>30</displayx>

<displayy>-150</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="Hide Window?" stage="Hide Window?"/>
```

</inputs>

<onsuccess>08265c9f-d50a-47c1-b334-b4556e270c78</onsuccess>

</stage>

<stage stageid="826a8968-da7d-4988-854a-d069c1a2686b" name="End" type="End">

<subsheetid>45ae527c-3e74-4aa7-862c-4a9129e12540</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="08265c9f-d50a-47c1-b334-b4556e270c78" name="Start Calculator" type="Navigate">

<subsheetid>45ae527c-3e74-4aa7-862c-4a9129e12540</subsheetid>

<displayy>-90</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>1dc99f9b-9b3c-4023-a66d-70e06f79dba3</onsuccess>

<step>

<element id="e7b35717-0b55-4ee6-86c0-51740394d719"/>

```xml
<id>Launch</id>
</action>
</step>
</stage>
<stage stageid="46a7ed31-cf1c-4336-90c1-98a2f0b8058b" name="Running Init Page" type="Note">
<narrative>This is just here to get logged for test purposes</narrative>
<displayx>30</displayx>
<displayy>-45</displayy>
<displaywidth>90</displaywidth>
<displayheight>60</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>9bd3a369-3047-4681-9a37-f644cf79d2fb</onsuccess>
</stage>
<stage stageid="5f5a9471-66f5-4c1e-b638-530b74291949" name="Wait For" type="Data">
<subsheetid>45ae527c-3e74-4aa7-862c-4a9129e12540</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-240</displayx>
<displayy>-45</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>timespan</datatype>
<initialvalue>0.00:00:10</initialvalue>
<private/>
</stage>
```

```xml
<stage stageid="1dc99f9b-9b3c-4023-a66d-70e06f79dba3" name="Wait1" type="WaitStart">
<subsheetid>45ae527c-3e74-4aa7-862c-4a9129e12540</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>30</displayx>
<displayy>-30</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<groupid>bd0c2f0d-17bf-4c7a-b46f-2f734d7400ff</groupid>
<choices>
<choice reply="True">
<name>
</name>
<distance>0</distance>
<ontrue>f206835b-7924-4a52-b435-fb886263f208</ontrue>
<element id="4bbd315c-2c57-4124-a4bd-8a09ab64c152"/>
<condition>
<id>CheckExists</id>
</condition>
<comparetype>Equal</comparetype>
</choice>
</choices>
<timeout>10</timeout>
</stage>
<stage stageid="233691ca-4dfd-4806-9684-562981550d74" name="Time Out1" type="WaitEnd">
```

```xml
<subsheetid>45ae527c-3e74-4aa7-862c-4a9129e12540</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>30</displayx>

<displayy>90</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>20b2426f-02e5-4c1b-b023-9c8a01e7321b</onsuccess>

<groupid>bd0c2f0d-17bf-4c7a-b46f-2f734d7400ff</groupid>

</stage>

<stage stageid="20b2426f-02e5-4c1b-b023-9c8a01e7321b" name="Raise Error" type="Note">

<subsheetid>45ae527c-3e74-4aa7-862c-4a9129e12540</subsheetid>

<loginhibit/>

<narrative>I need to raise an error, but I can't!</narrative>

<displayx>30</displayx>

<displayy>150</displayy>

<displaywidth>90</displaywidth>

<displayheight>60</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="f387aefb-3950-436d-b892-7794345babf7" name="Close" type="SubSheetInfo">

<subsheetid>d7fce23f-48bc-4d07-b80c-4815b7ddb800</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="bb984449-4cea-4e00-8668-a1cb982857d1" name="Start" type="Start">

<subsheetid>d7fce23f-48bc-4d07-b80c-4815b7ddb800</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>ff262cee-4a72-4718-940c-d996ba3d1264</onsuccess>

</stage>

<stage stageid="bcd02527-b16d-4519-ad17-61769f612a52" name="End" type="End">

<subsheetid>d7fce23f-48bc-4d07-b80c-4815b7ddb800</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="ff262cee-4a72-4718-940c-d996ba3d1264" name="Close Main Window" type="Navigate">

```xml
<subsheetid>d7fce23f-48bc-4d07-b80c-4815b7ddb800</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>bcd02527-b16d-4519-ad17-61769f612a52</onsuccess>

<step>

<element id="4bbd315c-2c57-4124-a4bd-8a09ab64c152"/>

<action>

<id>CloseWindow</id>

</action>

</step>

</stage>

<stage stageid="e4327d40-ecad-4f94-b1f3-dc27f2c4e298" name="Running Clean Up Page" type="Note">

<subsheetid>af18e4cb-2c21-4f2a-852d-e80d90c2f467</subsheetid>

<narrative>This is just here to get logged for test purposes</narrative>

<displayx>30</displayx>

<displayy>-30</displayy>

<displaywidth>90</displaywidth>

<displayheight>60</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>11f35921-067a-43c1-b37c-bc63f11c9c17</onsuccess>

</stage>
```

```xml
<stage stageid="f217f097-7d64-47a2-a508-2b8848244fad" name="Note1" type="Note">
<subsheetid>45ae527c-3e74-4aa7-862c-4a9129e12540</subsheetid>
<loginhibit/>
<narrative>Integration Notes -

Windows 2000 contains a different version of calculator.

The Win2K version does not have any window text on the buttons, so we identify buttons by location</narrative>
<displayx>-135</displayx>
<displayy>30</displayy>
<displaywidth>120</displaywidth>
<displayheight>180</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="f206835b-7924-4a52-b435-fb886263f208" name="Hide Window?" type="Decision">
<subsheetid>45ae527c-3e74-4aa7-862c-4a9129e12540</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>105</displayx>
<displayy>30</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<decision expression="[Hide Window?]"/>
<ontrue>84832a51-5779-4693-b6d5-f90ceae1197d</ontrue>
<onfalse>826a8968-da7d-4988-854a-d069c1a2686b</onfalse>
```

```xml
</stage>
<stage stageid="ed68f0c0-453b-45e6-b704-ae04b22f1dad" name="Hide Window?" type="Data">
<subsheetid>45ae527c-3e74-4aa7-862c-4a9129e12540</subsheetid>
<narrative>
</narrative>
<displayx>105</displayx>
<displayy>-150</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>flag</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
<stage stageid="84832a51-5779-4693-b6d5-f90ceae1197d" name="Hide Window" type="Navigate">
<subsheetid>45ae527c-3e74-4aa7-862c-4a9129e12540</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>180</displayx>
<displayy>90</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>826a8968-da7d-4988-854a-d069c1a2686b</onsuccess>
<step>
```

<element id="4bbd315c-2c57-4124-a4bd-8a09ab64c152"/>

<action>

<id>HideWindow</id>

</action>

</step>

</stage>

<stage stageid="7f8249d6-9ccc-4896-86f6-34d5db5f95a9" name="Set Display Mode" type="SubSheetInfo

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="24e0268f-1683-498d-93a9-56c05d4bb030" name="Start" type="Start">

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

<loginhibit/>

<narrative>Display Mode is either "Standard" or "Scientific"</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Display Mode" stage="Display Mode"/>

</inputs>

<onsuccess>cc85b7c3-449f-4fa8-9635-17abf5edb499</onsuccess>

</stage>

<stage stageid="966dda8e-c7aa-4d0e-bc0a-0c8d1eee42d5" name="End" type="End">

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="fb95b85e-c418-4e2d-9118-2d226480b43b" name="Display Mode" type="Data">

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

<displayy>-105</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

```xml
    </stage>
    <stage stageid="cc85b7c3-449f-4fa8-9635-17abf5edb499" name="Validate Input" type="Decision">
      <subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>
      <narrative>
      </narrative>
      <displayx>15</displayx>
      <displayy>-45</displayy>
      <displaywidth>60</displaywidth>
      <displayheight>30</displayheight>
      <font family="Tahoma" size="10" style="Regular" color="000000"/>
      <decision expression="[Display Mode] = &amp;quot;Scientific&amp;quot;&amp;#xA;or&amp;#xA;[Display M
      <ontrue>b269fd7a-dcbc-4e17-89fa-b296cbd5c940</ontrue>
      <onfalse>20f9bd02-ce2d-434f-b00a-03e07d15d961</onfalse>
    </stage>
    <stage stageid="20f9bd02-ce2d-434f-b00a-03e07d15d961" name="Note2" type="Note">
      <subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>
      <loginhibit/>
      <narrative>FAIL</narrative>
      <displayx>135</displayx>
      <displayy>-45</displayy>
      <displaywidth>60</displaywidth>
      <displayheight>30</displayheight>
      <font family="Tahoma" size="10" style="Regular" color="000000"/>
    </stage>
    <stage stageid="fb3941c2-cf96-4775-a8c8-f3b1a2134e98" name="Set Display Mode" type="Navigate">
      <subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>
      <loginhibit/>
```

```xml
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>195</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>c0344e99-9911-4fad-933f-a717db910286</onsuccess>
<step>
<element id="4bbd315c-2c57-4124-a4bd-8a09ab64c152"/>
<action>
<id>SelectMenuItem</id>
<arguments>
<argument>
<id>Value</id>
<value>"{View}{" &amp;amp; [Display Mode] &amp;amp; "}"</value>
</argument>
</arguments>
</action>
</step>
</stage>
<stage stageid="c0344e99-9911-4fad-933f-a717db910286" name="Scientific Mode?" type="Decision">
<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
```

<displayy>240</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="[Display Mode] = &quot;Scientific&quot;"/>

<ontrue>5e5838da-f212-4542-a0aa-77c39c29fcad</ontrue>

<onfalse>8b664bb6-eb67-4520-9ec4-e3a58800aad3</onfalse>

</stage>

<stage stageid="b94f2076-1c6d-4d3c-a422-d55936d708e5" name="Time Out2" type="WaitEnd">

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>300</displayx>

<displayy>360</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>6d5d9844-bb4a-4037-ba13-63ede01dbf37</groupid>

</stage>

<stage stageid="5e5838da-f212-4542-a0aa-77c39c29fcad" name="Wait for Window Change" type="WaitS

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>300</displayx>

<displayy>240</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>6d5d9844-bb4a-4037-ba13-63ede01dbf37</groupid>

<choices>

<choice reply="True">

<name>Main Window - Scientific Mode Check Exists</name>

<distance>60</distance>

<ontrue>966dda8e-c7aa-4d0e-bc0a-0c8d1eee42d5</ontrue>

<element id="fc82ebdb-34fb-4bf2-ab76-40d5e7b5aaea"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>5</timeout>

</stage>

<stage stageid="04b3c5f1-ae9f-48d8-bb3e-a805f60d233d" name="Time Out3" type="WaitEnd">

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-225</displayx>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>98eac13a-e982-4bc0-aeeb-78b21a92ee54</groupid>

</stage>

<stage stageid="8b664bb6-eb67-4520-9ec4-e3a58800aad3" name="Wait for Window Change" type="Wait

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-225</displayx>

<displayy>240</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>98eac13a-e982-4bc0-aeeb-78b21a92ee54</groupid>

<choices>

<choice reply="True">

<name>Main Window - Standard Mode Check Exists</name>

<distance>60</distance>

<ontrue>966dda8e-c7aa-4d0e-bc0a-0c8d1eee42d5</ontrue>

<element id="a4b15f4e-5695-403f-998e-a902a0745cd0"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>5</timeout>

```xml
</stage>
<stage stageid="b269fd7a-dcbc-4e17-89fa-b296cbd5c940" name="Windows 7?" type="Decision">
<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>15</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<decision expression="GetOSVersionMajor()&amp;gt;=6 AND GetOSVersionMinor()&amp;gt;=1"/>
<ontrue>48e9688f-72d5-425d-899f-f17e54834715</ontrue>
<onfalse>b0f5bc9b-d793-4001-8cc3-c444d5c0b340</onfalse>
</stage>
<stage stageid="48e9688f-72d5-425d-899f-f17e54834715" name="Mode" type="ChoiceStart">
<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>195</displayx>
<displayy>15</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<groupid>4f0bffc8-cdf2-4547-85bb-3e328cee3d08</groupid>
<choices>
```

```xml
<choice expression="[Display Mode]=&amp;quot;Standard&amp;quot;">

<name>Standard</name>

<distance>60</distance>

<ontrue>bf4540f1-1242-4f38-9a46-7803f41af02d</ontrue>

</choice>

<choice expression="[Display Mode]=&amp;quot;Scientific&amp;quot;">

<name>Scientific</name>

<distance>105</distance>

<ontrue>8102f9d0-dbef-487a-90e6-3b58f34f6802</ontrue>

</choice>

</choices>

</stage>

<stage stageid="2c1224de-037f-4f01-a228-7d7c3d450a88" name="Otherwise1" type="ChoiceEnd">

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>195</displayx>

<displayy>180</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>4f0bffc8-cdf2-4547-85bb-3e328cee3d08</groupid>

</stage>

<stage stageid="bf4540f1-1242-4f38-9a46-7803f41af02d" name="Amend Display Mode" type="Calculation

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

<loginhibit/>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>b0f5bc9b-d793-4001-8cc3-c444d5c0b340</onsuccess>

<calculation expression="[Display Mode]&amp;Chr(9)&amp;&quot;Alt+1&quot;" stage=

</stage>

<stage stageid="b0f5bc9b-d793-4001-8cc3-c444d5c0b340" name="anchor22" type="Anchor">

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>46ccba6c-337f-47d5-8c02-8095296dc3ab</onsuccess>

</stage>

<stage stageid="46ccba6c-337f-47d5-8c02-8095296dc3ab" name="anchor23" type="Anchor">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>fb3941c2-cf96-4775-a8c8-f3b1a2134e98</onsuccess>

</stage>

<stage stageid="8102f9d0-dbef-487a-90e6-3b58f34f6802" name="Amend Display Mode" type="Calculation

<subsheetid>8e041464-fa0c-4cae-b352-a21242b590c5</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>46ccba6c-337f-47d5-8c02-8095296dc3ab</onsuccess>

<calculation expression="[Display Mode]&amp;Chr(9)&amp;&quot;Alt+2&quot;" stage=

</stage>

<stage stageid="57466776-3724-41e2-8d34-95a0fcaac52c" name="Read OCR - single char" type="SubSh

<subsheetid>d8d2df8b-7d08-4016-ace4-c001e583ba21</subsheetid>

```xml
<displayheight>90</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="3d88060a-7bcb-499d-84ce-9dcb07250b4d" name="Start" type="Start">
<subsheetid>d8d2df8b-7d08-4016-ace4-c001e583ba21</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<inputs>
<input type="text" name="Page Segmentation Mode" stage="Page Segmentation Mode"/>
</inputs>
<onsuccess>a57837c0-abaa-498d-8cd0-9cfd460c82cf</onsuccess>
</stage>
<stage stageid="78c31776-c4b2-4122-8063-7bfbce52f655" name="End" type="End">
<subsheetid>d8d2df8b-7d08-4016-ace4-c001e583ba21</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>75</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
```

```xml
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<outputs>
<output type="text" name="Value" stage="Value from Single Character Read"/>
</outputs>
</stage>
<stage stageid="f3d7827d-eef1-4f16-85e8-19c72f81c21e" name="Read a single Character (WinXP)" type=
<subsheetid>d8d2df8b-7d08-4016-ace4-c001e583ba21</subsheetid>
<narrative>
</narrative>
<displayx>-30</displayx>
<displayy>0</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>78c31776-c4b2-4122-8063-7bfbce52f655</onsuccess>
<step stage="Value from Single Character Read">
<element id="30a3ec90-d894-41e3-bc32-f27b348775e3"/>
<action>
<id>ReadTextOCR</id>
<arguments>
<argument>
<id>language</id>
<value>
</value>
</argument>
<argument>
<id>pagesegmode</id>
```

```xml
<value>[Page Segmentation Mode]</value>

</argument>

<argument>

<id>charwhitelist</id>

<value>

</value>

</argument>

<argument>

<id>diagspath</id>

<value>

</value>

</argument>

<argument>

<id>scale</id>

<value>

</value>

</argument>

</arguments>

</action>

</step>

</stage>

<stage stageid="13c03467-118a-4735-9256-e856cdc3dacc" name="Value from Single Character Read" ty

<subsheetid>d8d2df8b-7d08-4016-ace4-c001e583ba21</subsheetid>

<narrative>

</narrative>

<displayx>180</displayx>

<displayy>0</displayy>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

</stage>

<stage stageid="6ae0ff89-f46b-4698-8193-47669aa629d0" name="Read OCR - multi char" type="SubShe

<subsheetid>72314ab4-eac2-486e-bdfd-146ef447c430</subsheetid>

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="48ccec3b-c3b9-4834-9b01-6f0f95642867" name="Start" type="Start">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Page Segmentation Mode" stage="Page Segmentation Mode"/>

</inputs>

<onsuccess>7dd53dc9-e522-4395-bc8a-e83ea9d90ddc</onsuccess>

</stage>

<stage stageid="d4d981be-5bb6-4efe-8486-4afd4a110dfb" name="End" type="End">

<subsheetid>72314ab4-eac2-486e-bdfd-146ef447c430</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="a6f17cf4-4362-437e-813c-1643dbc2e5a4" name="Read multiple character string (XP)" typ

<subsheetid>72314ab4-eac2-486e-bdfd-146ef447c430</subsheetid>

<displayx>-30</displayx>

```xml
<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>d4d981be-5bb6-4efe-8486-4afd4a110dfb</onsuccess>

<step stage="Value from Region Multi Character Read">

<element id="354b58eb-92ee-472f-8701-b6e1c4efabf8"/>

<action>

<id>ReadTextOCR</id>

<arguments>

<argument>

<id>language</id>

<value>

</value>

</argument>

<argument>

<id>charwhitelist</id>

<value>

</value>

</argument>

<argument>

<id>diagspath</id>

<value>

</value>

</argument>

<argument>

<id>scale</id>

<value>

</value>
```

</argument>

<argument>

<id>pagesegmode</id>

<value>[Page Segmentation Mode]</value>

</argument>

</arguments>

</action>

</step>

</stage>

<stage stageid="5331dbd2-00f5-4990-bf4f-d4525368e4c1" name="Value from Region Multi Character Rea

<subsheetid>72314ab4-eac2-486e-bdfd-146ef447c430</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

</stage>

<stage stageid="846c2ea7-f1ab-445c-b865-546882dc63ff" name="Page Segmentation Mode" type="Data"

<subsheetid>d8d2df8b-7d08-4016-ace4-c001e583ba21</subsheetid>

</narrative>

<displayx>165</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>30</displayheight>

<font family="Microsoft Sans Serif" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue xml:space="preserve">Character</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="7f22c6e8-3295-497a-bc25-a563842429e1" name="Page Segmentation Mode" type="Dat

<subsheetid>72314ab4-eac2-486e-bdfd-146ef447c430</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>135</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>30</displayheight>

<font family="Microsoft Sans Serif" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue xml:space="preserve">Auto</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="7dd53dc9-e522-4395-bc8a-e83ea9d90ddc" name="WinXP?" type="Decision">

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Microsoft Sans Serif" size="10" style="Regular" color="000000"/>

<decision expression="GetOSVersionMajor()=5 AND GetOSVersionMinor()=1"/>

<ontrue>a6f17cf4-4362-437e-813c-1643dbc2e5a4</ontrue>

<onfalse>9a40d95c-52ae-4c62-872a-3ba9cb2595e8</onfalse>

</stage>

<stage stageid="9a40d95c-52ae-4c62-872a-3ba9cb2595e8" name="Read multiple character string " type=

<subsheetid>72314ab4-eac2-486e-bdfd-146ef447c430</subsheetid>

<narrative>

</narrative>

<displayx>60</displayx>

<displayy>0</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>d4d981be-5bb6-4efe-8486-4afd4a110dfb</onsuccess>

<step stage="Value from Region Multi Character Read">

<element id="a5381322-24aa-4c41-82cc-b0cba738781a"/>

<action>

<id>ReadTextOCR</id>

```xml
<arguments>
<argument>
<id>language</id>
<value>
</value>
</argument>
<argument>
<id>charwhitelist</id>
<value>
</value>
</argument>
<argument>
<id>diagspath</id>
<value>
</value>
</argument>
<argument>
<id>scale</id>
<value>
</value>
</argument>
<argument>
<id>pagesegmode</id>
<value>
</value>
</argument>
</arguments>
```

</action>

</step>

</stage>

<stage stageid="a57837c0-abaa-498d-8cd0-9cfd460c82cf" name="WinXP?" type="Decision">

<subsheetid>d8d2df8b-7d08-4016-ace4-c001e583ba21</subsheetid>

<font family="Microsoft Sans Serif" size="10" style="Regular" color="000000"/>

<decision expression="GetOSVersionMajor()=5 AND GetOSVersionMinor()=1"/>

<ontrue>f3d7827d-eef1-4f16-85e8-19c72f81c21e</ontrue>

<onfalse>2db10ca8-f682-498b-a3bd-d8e6769f40e0</onfalse>

</stage>

<stage stageid="2db10ca8-f682-498b-a3bd-d8e6769f40e0" name="Read a single Character" type="Read"

<subsheetid>d8d2df8b-7d08-4016-ace4-c001e583ba21</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

```xml
<step stage="Value from Single Character Read">
<element id="b94078ad-9f03-4e20-b5f7-36dea91be862"/>
<action>
<id>ReadTextOCR</id>
<arguments>
<argument>
<id>language</id>
<value>
</value>
</argument>
<argument>
<id>charwhitelist</id>
<value>
</value>
</argument>
<argument>
<id>diagspath</id>
<value>
</value>
</argument>
<argument>
<id>scale</id>
<value>
</value>
</argument>
<argument>
<id>pagesegmode</id>
```

```xml
<value>[Page Segmentation Mode]</value>

</argument>

</arguments>

</action>

</step>

</stage>

</process>

<process name="Calendars" version="6.7.0.0" narrative="" type="object" runmode="Background">

<appdef/>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom>1</zoom>

</view>

<preconditions/>

<endpoint narrative=""/>

<subsheet subsheetid="d49338d6-237c-49c5-8825-47a2bb3febb0" type="CleanUp" published="True">

<name>Clean Up</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom>1</zoom>

</view>

</subsheet>

<subsheet subsheetid="bd3e9b22-3f41-48ac-a7fd-d05753de027a" type="Normal" published="True">

<name>Get Working Days In Range</name>

<view>
```

```xml
<camerax>0</camerax>

<cameray>0</cameray>

<zoom>1</zoom>

</view>

</subsheet>

<subsheet subsheetid="965cc9f2-498f-4ef0-b7dc-4ab56e0480dd" type="Normal" published="True">

<name>Count Working Days In Range</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom>1</zoom>

</view>

</subsheet>

<subsheet subsheetid="1d429796-6a7a-44da-8ca9-ef499ba401ea" type="Normal" published="True">

<name>Is Working Day</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom>1</zoom>

</view>

</subsheet>

<subsheet subsheetid="5e76b9f9-ab63-47b5-9b92-e10ead7940ae" type="Normal" published="True">

<name>Add Working Days</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom>1</zoom>
```

```xml
</view>
</subsheet>
<subsheet subsheetid="b154d267-2c42-4ac1-85dc-a288a5cc24d4" type="Normal" published="True">
<name>Is Weekend</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom>1</zoom>
</view>
</subsheet>
<subsheet subsheetid="c1e1ba25-3ae5-4fd8-81e5-5077698a3034" type="Normal" published="True">
<name>Is Public Holiday</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom>1</zoom>
</view>
</subsheet>
<subsheet subsheetid="45597991-1758-413f-8131-4b3ea1bbc18e" type="Normal" published="True">
<name>Is Other Holiday</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom>1</zoom>
</view>
</subsheet>
<subsheet subsheetid="ee2903b5-086e-4367-b0dd-96c4bf602733" type="Normal" published="True">
```

<name>Get Public Holidays In Range</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom>1</zoom>

</view>

</subsheet>

<subsheet subsheetid="3fec8081-2673-45f8-9eb4-88ff1140d74b" type="Normal" published="True">

<name>Get Other Holidays In Range</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom>1</zoom>

</view>

</subsheet>

<stage stageid="20cae0db-6b2c-4b0c-92f0-3e97d9cf68ba" name="Start" type="Start">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>31b11cec-272c-498c-853b-cae0fb369b01</onsuccess>

</stage>

<stage stageid="31b11cec-272c-498c-853b-cae0fb369b01" name="End" type="End">

```
<narrative/>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="a5187ff6-38d1-420a-a8a2-1ff809f631c3" name="Stage1" type="ProcessInfo">

<narrative>This Internal Business Object provides the ability for processes to interact with working days de

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<references>

<reference>System.Data.dll</reference>

<reference>System.Xml.dll</reference>

<reference>System.Drawing.dll</reference>

</references>

<imports>

<import>System</import>

<import>System.Drawing</import>

</imports>

<language>visualbasic</language>

<globalcode></globalcode>

<code></code>

</stage>
```

```xml
<stage stageid="d314f88f-7de1-46c3-80c2-72a615f58fb5" name="Clean Up" type="SubSheetInfo">
<subsheetid>d49338d6-237c-49c5-8825-47a2bb3febb0</subsheetid>
<narrative/>
<displayx>-195</displayx>
<displayy>-105</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="fc2d7b2a-aa89-4a2c-ae01-32e33a994529" name="Start" type="Start">
<subsheetid>d49338d6-237c-49c5-8825-47a2bb3febb0</subsheetid>
<loginhibit/>
<narrative/>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>5aaa31a3-7330-458c-92f0-fcde607b74c5</onsuccess>
</stage>
<stage stageid="5aaa31a3-7330-458c-92f0-fcde607b74c5" name="End" type="End">
<subsheetid>d49338d6-237c-49c5-8825-47a2bb3febb0</subsheetid>
<loginhibit/>
<narrative/>
<displayx>15</displayx>
<displayy>90</displayy>
<displaywidth>60</displaywidth>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="4b711667-8785-4994-b0c2-e127402df12c" name="Get Working Days In Range" type="Su

<subsheetid>bd3e9b22-3f41-48ac-a7fd-d05753de027a</subsheetid>

<narrative>Gets the working days as configured on the specified calendar, starting and ending on the spec

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="9716a572-7585-49ee-9716-cbe49b7f3907" name="Start" type="Start">

<subsheetid>bd3e9b22-3f41-48ac-a7fd-d05753de027a</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Calendar Name" narrative="The name of the calendar defined in System Manag

<input type="date" name="First Date" narrative="The first date to consider working days from" stage="First

<input type="date" name="Last Date" narrative="The last date to consider working days until" stage="Last

</inputs>

<onsuccess>26b649f6-0f5c-4f90-ac61-612930862481</onsuccess>

</stage>

<stage stageid="deac57b3-038b-4dbf-885a-700d0348a0a7" name="End" type="End">

<subsheetid>bd3e9b22-3f41-48ac-a7fd-d05753de027a</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="collection" name="Working Days" narrative="The working days which fall between the speci

</outputs>

</stage>

<stage stageid="26b649f6-0f5c-4f90-ac61-612930862481" name="Do Action" type="Action">

<subsheetid>bd3e9b22-3f41-48ac-a7fd-d05753de027a</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Calendar Name" narrative="The name of the calendar defined in System Manag

<input type="date" name="First Date" narrative="The first date to consider working days from" stage="First

<input type="date" name="Last Date" narrative="The last date to consider working days until" stage="Last

</inputs>

```xml
<outputs>
<output type="collection" name="Working Days" narrative="The working days which fall between the speci
</outputs>
<onsuccess>deac57b3-038b-4dbf-885a-700d0348a0a7</onsuccess>
<resource object="clsCalendarsBusinessObject" action="Get Working Days In Range"/>
</stage>
<stage stageid="41f489a4-d2c2-4d03-b411-51b0bc1f81ab" name="Calendar Name" type="Data">
<subsheetid>bd3e9b22-3f41-48ac-a7fd-d05753de027a</subsheetid>
<narrative/>
<displayx>90</displayx>
<displayy>-75</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
<stage stageid="3022a2b3-4001-4e9f-83fc-9b22f37481be" name="First Date" type="Data">
<subsheetid>bd3e9b22-3f41-48ac-a7fd-d05753de027a</subsheetid>
<narrative/>
<displayx>90</displayx>
<displayy>-30</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
```

</stage>

<stage stageid="54c86d75-a729-4964-b690-1a36912e5950" name="Last Date" type="Data">

<subsheetid>bd3e9b22-3f41-48ac-a7fd-d05753de027a</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>date</datatype>

</stage>

<stage stageid="b3f9a129-8c29-438d-bb7d-818be70048e9" name="Working Days" type="Data">

<subsheetid>bd3e9b22-3f41-48ac-a7fd-d05753de027a</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="a5b8ce0b-327f-42fb-8853-544faec823d3" name="Count Working Days In Range" type="S

<subsheetid>965cc9f2-498f-4ef0-b7dc-4ab56e0480dd</subsheetid>

<narrative>Counts the number of working days found within the given range (inclusive). </narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="546f5c78-05f1-410b-b539-0f00d04cf68c" name="Start" type="Start">

<subsheetid>965cc9f2-498f-4ef0-b7dc-4ab56e0480dd</subsheetid>

<displayy>-105</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Calendar Name" narrative="The name of the calendar defined in System Manag

<input type="date" name="First Date" narrative="The first date to consider working days from" stage="First

<input type="date" name="Last Date" narrative="The last date to consider working days until" stage="Last

</inputs>

```xml
<onsuccess>e2e9680b-e7a0-421b-aa6d-98effbaffdc4</onsuccess>
</stage>
<stage stageid="d5bdccc2-a148-46fe-9936-880090ef833c" name="End" type="End">
<subsheetid>965cc9f2-498f-4ef0-b7dc-4ab56e0480dd</subsheetid>
<loginhibit/>
<narrative/>
<displayx>15</displayx>
<displayy>90</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<outputs>
<output type="number" name="Days" narrative="The number of working days found within the specified ra
</outputs>
</stage>
<stage stageid="e2e9680b-e7a0-421b-aa6d-98effbaffdc4" name="Do Action" type="Action">
<subsheetid>965cc9f2-498f-4ef0-b7dc-4ab56e0480dd</subsheetid>
<narrative/>
<displayx>15</displayx>
<displayy>0</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<inputs>
<input type="text" name="Calendar Name" narrative="The name of the calendar defined in System Manag
<input type="date" name="First Date" narrative="The first date to consider working days from" stage="First
<input type="date" name="Last Date" narrative="The last date to consider working days until" stage="Last
```

```xml
</inputs>

<outputs>

<output type="number" name="Days" narrative="The number of working days found within the specified ra

</outputs>

<onsuccess>d5bdccc2-a148-46fe-9936-880090ef833c</onsuccess>

<resource object="clsCalendarsBusinessObject" action="Count Working Days In Range"/>

</stage>

<stage stageid="d181e8d6-58a6-4713-a245-13fd76332de2" name="Calendar Name" type="Data">

<subsheetid>965cc9f2-498f-4ef0-b7dc-4ab56e0480dd</subsheetid>

<narrative/>

<displayx>90</displayx>

<displayy>-75</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="a74a2e88-a17f-4d86-b5f8-b927b38e2737" name="First Date" type="Data">

<subsheetid>965cc9f2-498f-4ef0-b7dc-4ab56e0480dd</subsheetid>

<narrative/>

<displayx>90</displayx>

<displayy>-30</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>
```

```xml
<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>date</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="942844b1-8caf-4076-bdfe-93f8b3055beb" name="Last Date" type="Data">

<subsheetid>965cc9f2-498f-4ef0-b7dc-4ab56e0480dd</subsheetid>

<narrative/>

<displayx>90</displayx>

<displayy>15</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>date</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="07ea0b85-5f3f-474e-8e6e-ad7b169f5d37" name="Days" type="Data">

<subsheetid>965cc9f2-498f-4ef0-b7dc-4ab56e0480dd</subsheetid>

<narrative/>

<displayx>90</displayx>

<displayy>60</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>
```

```xml
<datatype>number</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="6c6afc7f-8a89-4805-b945-e86dc848783a" name="Is Working Day" type="SubSheetInfo">

<subsheetid>1d429796-6a7a-44da-8ca9-ef499ba401ea</subsheetid>

<narrative>Checks if the given date is a working day or not according to the specified calendar.</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="c9fb15f5-0b6c-4485-a3b7-5334ca461b73" name="Start" type="Start">

<subsheetid>1d429796-6a7a-44da-8ca9-ef499ba401ea</subsheetid>

<loginhibit/>

<narrative/>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Calendar Name" narrative="The name of the calendar defined in System Manag

<input type="date" name="Date" narrative="The date to consider whether it is a working day or not" stage=

</inputs>
```

```xml
<onsuccess>b431f6d8-fdb6-402f-b923-1c4e582a0f6f</onsuccess>
</stage>
<stage stageid="8c6afeae-56bb-4efe-b4c5-24cdb70fde0b" name="End" type="End">
<subsheetid>1d429796-6a7a-44da-8ca9-ef499ba401ea</subsheetid>
<loginhibit/>
<narrative/>
<displayx>15</displayx>
<displayy>90</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<outputs>
<output type="flag" name="Is Working Day" narrative="True to indicate the given date was a working day, 
</outputs>
</stage>
<stage stageid="b431f6d8-fdb6-402f-b923-1c4e582a0f6f" name="Do Action" type="Action">
<subsheetid>1d429796-6a7a-44da-8ca9-ef499ba401ea</subsheetid>
<narrative/>
<displayx>15</displayx>
<displayy>0</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<inputs>
<input type="text" name="Calendar Name" narrative="The name of the calendar defined in System Manag
<input type="date" name="Date" narrative="The date to consider whether it is a working day or not" stage=
</inputs>
```

```xml
<outputs>
<output type="flag" name="Is Working Day" narrative="True to indicate the given date was a working day, l
</outputs>
<onsuccess>8c6afeae-56bb-4efe-b4c5-24cdb70fde0b</onsuccess>
<resource object="clsCalendarsBusinessObject" action="Is Working Day"/>
</stage>
<stage stageid="7751d710-d4ac-4c61-bc85-6117aee980b4" name="Calendar Name" type="Data">
<subsheetid>1d429796-6a7a-44da-8ca9-ef499ba401ea</subsheetid>
<narrative/>
<displayx>90</displayx>
<displayy>-75</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
<stage stageid="5d819eb8-210b-4a8a-a9a1-99ad469bb51b" name="Date" type="Data">
<subsheetid>1d429796-6a7a-44da-8ca9-ef499ba401ea</subsheetid>
<narrative/>
<displayx>90</displayx>
<displayy>-30</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
```

</stage>

<stage stageid="561fdc8d-35d8-496f-bd07-201d7cd04f4d" name="Is Working Day" type="Data">

<subsheetid>1d429796-6a7a-44da-8ca9-ef499ba401ea</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

</stage>

<stage stageid="c0a45d36-c33a-4e71-b353-adf66b7d359c" name="Add Working Days" type="SubSheetIr

<subsheetid>5e76b9f9-ab63-47b5-9b92-e10ead7940ae</subsheetid>

<narrative>Adds the specified number of working days to a start date returning the result. In order to get th

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

```xml
<stage stageid="d96714d5-5d41-4920-968c-1081ab15ef2e" name="Start" type="Start">
<subsheetid>5e76b9f9-ab63-47b5-9b92-e10ead7940ae</subsheetid>
<loginhibit/>
<narrative/>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<inputs>
<input type="text" name="Calendar Name" narrative="The name of the calendar defined in System Manag
<input type="date" name="Date" narrative="The date to which the number of working days should be adde
<input type="number" name="Days" narrative="The number of days to be added. Note that a value of zero
</inputs>
<onsuccess>31c8d488-52a9-4669-ab0e-9c5273f409da</onsuccess>
</stage>
<stage stageid="3af331f4-bc18-4c22-b244-62a51bdad584" name="End" type="End">
<subsheetid>5e76b9f9-ab63-47b5-9b92-e10ead7940ae</subsheetid>
<loginhibit/>
<narrative/>
<displayx>15</displayx>
<displayy>90</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<outputs>
<output type="date" name="Result Date" narrative="The date with the specified number of days added to i
```

```
</outputs>

</stage>

<stage stageid="31c8d488-52a9-4669-ab0e-9c5273f409da" name="Do Action" type="Action">

<subsheetid>5e76b9f9-ab63-47b5-9b92-e10ead7940ae</subsheetid>

<narrative/>

<displayx>15</displayx>

<displayy>0</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Calendar Name" narrative="The name of the calendar defined in System Manag

<input type="date" name="Date" narrative="The date to which the number of working days should be adde

<input type="number" name="Days" narrative="The number of days to be added. Note that a value of zero

</inputs>

<outputs>

<output type="date" name="Result Date" narrative="The date with the specified number of days added to i

</outputs>

<onsuccess>3af331f4-bc18-4c22-b244-62a51bdad584</onsuccess>

<resource object="clsCalendarsBusinessObject" action="Add Working Days"/>

</stage>

<stage stageid="7a8e41fc-7b36-4e4f-96a5-2f9b73e3ab93" name="Calendar Name" type="Data">

<subsheetid>5e76b9f9-ab63-47b5-9b92-e10ead7940ae</subsheetid>

<narrative/>

<displayx>90</displayx>

<displayy>-75</displayy>

<displaywidth>90</displaywidth>
```

```xml
<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="9235802f-0e15-4c37-88cd-01779e50ca21" name="Date" type="Data">

<subsheetid>5e76b9f9-ab63-47b5-9b92-e10ead7940ae</subsheetid>

<narrative/>

<displayx>90</displayx>

<displayy>-30</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>date</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="19bb9103-d36e-48f1-92dc-fe1e449447c3" name="Days" type="Data">

<subsheetid>5e76b9f9-ab63-47b5-9b92-e10ead7940ae</subsheetid>

<narrative/>

<displayx>90</displayx>

<displayy>15</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>
```

```
<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="77aee100-9d94-4af4-895d-08da8daec729" name="Result Date" type="Data">

<subsheetid>5e76b9f9-ab63-47b5-9b92-e10ead7940ae</subsheetid>

<narrative/>

<displayx>90</displayx>

<displayy>60</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>date</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="9ee242ad-486c-4d30-94c7-11536477afea" name="Is Weekend" type="SubSheetInfo">

<subsheetid>b154d267-2c42-4ac1-85dc-a288a5cc24d4</subsheetid>

<narrative>Checks if the given date falls outside the working week - ie. the weekend - as defined in the spe

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>
```

```xml
</stage>
<stage stageid="4f274f0b-0b2c-409d-8062-3cd75bdc8885" name="Start" type="Start">
<subsheetid>b154d267-2c42-4ac1-85dc-a288a5cc24d4</subsheetid>
<loginhibit/>
<narrative/>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<inputs>
<input type="text" name="Calendar Name" narrative="The name of the calendar defined in System Manag
<input type="date" name="Date" narrative="The date to check" stage="Date"/>
</inputs>
<onsuccess>a3347849-6f51-424d-88ef-9403f9e7df0d</onsuccess>
</stage>
<stage stageid="1c6375db-cff5-4ca9-bda7-c9306589f276" name="End" type="End">
<subsheetid>b154d267-2c42-4ac1-85dc-a288a5cc24d4</subsheetid>
<loginhibit/>
<narrative/>
<displayx>15</displayx>
<displayy>90</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<outputs>
<output type="flag" name="Is Weekend" narrative="True to indicate that the given date falls outside the wo
```

```
</outputs>

</stage>

<stage stageid="a3347849-6f51-424d-88ef-9403f9e7df0d" name="Do Action" type="Action">

<subsheetid>b154d267-2c42-4ac1-85dc-a288a5cc24d4</subsheetid>

<narrative/>

<displayx>15</displayx>

<displayy>0</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Calendar Name" narrative="The name of the calendar defined in System Manag

<input type="date" name="Date" narrative="The date to check" stage="Date"/>

</inputs>

<outputs>

<output type="flag" name="Is Weekend" narrative="True to indicate that the given date falls outside the wo

</outputs>

<onsuccess>1c6375db-cff5-4ca9-bda7-c9306589f276</onsuccess>

<resource object="clsCalendarsBusinessObject" action="Is Weekend"/>

</stage>

<stage stageid="a3d7a412-2a12-4fdc-834e-635f8cda9db8" name="Calendar Name" type="Data">

<subsheetid>b154d267-2c42-4ac1-85dc-a288a5cc24d4</subsheetid>

<narrative/>

<displayx>90</displayx>

<displayy>-75</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>
```

```xml
<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="22a6386f-e203-4dfd-b89e-86cdc7172a3b" name="Date" type="Data">

<subsheetid>b154d267-2c42-4ac1-85dc-a288a5cc24d4</subsheetid>

<narrative/>

<displayx>90</displayx>

<displayy>-30</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>date</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="15006cba-0805-4ac1-bfe9-11891a3b37f7" name="Is Weekend" type="Data">

<subsheetid>b154d267-2c42-4ac1-85dc-a288a5cc24d4</subsheetid>

<narrative/>

<displayx>90</displayx>

<displayy>15</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>
```

```xml
<datatype>flag</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="5ed6f6c4-c486-409c-91e6-1826eb6af584" name="Is Public Holiday" type="SubSheetInfo">

<subsheetid>c1e1ba25-3ae5-4fd8-81e5-5077698a3034</subsheetid>

<narrative>Checks if the given date represents an enabled public holiday as defined in the specified calen

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="d166390a-2cbc-4604-842f-c26ce1d14508" name="Start" type="Start">

<subsheetid>c1e1ba25-3ae5-4fd8-81e5-5077698a3034</subsheetid>

<loginhibit/>

<narrative/>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Calendar Name" narrative="The name of the calendar defined in System Manag

<input type="date" name="Date" narrative="The date to check" stage="Date"/>

</inputs>
```

</stage>

<stage stageid="e169946d-c7ca-4809-9fae-59e78ed637a1" name="End" type="End">

<subsheetid>c1e1ba25-3ae5-4fd8-81e5-5077698a3034</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="flag" name="Is Public Holiday" narrative="True to indicate that the given date falls on a publi

<output type="text" name="Name" narrative="If date is a public holiday, this contains the label of that publi

</outputs>

</stage>

<stage stageid="2e9a73e0-5a05-4619-82c6-2afbb748fd50" name="Do Action" type="Action">

<subsheetid>c1e1ba25-3ae5-4fd8-81e5-5077698a3034</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Calendar Name" narrative="The name of the calendar defined in System Manag

<input type="date" name="Date" narrative="The date to check" stage="Date"/>

```xml
</inputs>
<outputs>
<output type="flag" name="Is Public Holiday" narrative="True to indicate that the given date falls on a publi
<output type="text" name="Name" narrative="If date is a public holiday, this contains the label of that publi
</outputs>
<onsuccess>e169946d-c7ca-4809-9fae-59e78ed637a1</onsuccess>
<resource object="clsCalendarsBusinessObject" action="Is Public Holiday"/>
</stage>
<stage stageid="1122191c-533d-41fa-becb-b9823c1013f9" name="Calendar Name" type="Data">
<subsheetid>c1e1ba25-3ae5-4fd8-81e5-5077698a3034</subsheetid>
<narrative/>
<displayx>90</displayx>
<displayy>-75</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
<stage stageid="5a2f895b-5bd4-4b15-877f-2912a785fce5" name="Date" type="Data">
<subsheetid>c1e1ba25-3ae5-4fd8-81e5-5077698a3034</subsheetid>
<narrative/>
<displayx>90</displayx>
<displayy>-30</displayy>
<displaywidth>90</displaywidth>
```

```xml
<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>date</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="ddac0e0a-759f-4624-b164-769ee58d41fd" name="Is Public Holiday" type="Data">

<subsheetid>c1e1ba25-3ae5-4fd8-81e5-5077698a3034</subsheetid>

<narrative/>

<displayx>90</displayx>

<displayy>15</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="b15384f6-6c4c-47d4-846e-8193afc45f3b" name="Name" type="Data">

<subsheetid>c1e1ba25-3ae5-4fd8-81e5-5077698a3034</subsheetid>

<narrative/>

<displayx>90</displayx>

<displayy>60</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>
```

```xml
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
<stage stageid="51b75699-11c0-4065-92f2-a89842237d8b" name="Is Other Holiday" type="SubSheetInfo
<subsheetid>45597991-1758-413f-8131-4b3ea1bbc18e</subsheetid>
<narrative>Checks if the given date represents a date defined as an 'other holiday' in the specified calenda
<displayx>-195</displayx>
<displayy>-105</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="8ce295f5-0a46-4eb5-a955-617151e3db13" name="Start" type="Start">
<subsheetid>45597991-1758-413f-8131-4b3ea1bbc18e</subsheetid>
<loginhibit/>
<narrative/>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<inputs>
<input type="text" name="Calendar Name" narrative="The name of the calendar defined in System Manag
<input type="date" name="Date" narrative="The date to check" stage="Date"/>
```

</inputs>

<onsuccess>0987e9dc-8cd8-4b46-b823-53cda5776c19</onsuccess>

</stage>

<stage stageid="4bb2a3cd-8b24-4f73-bd1c-a00aba8fdb6d" name="End" type="End">

<subsheetid>45597991-1758-413f-8131-4b3ea1bbc18e</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="flag" name="Is Other Holiday" narrative="True to indicate that the given date falls on an othe

</outputs>

</stage>

<stage stageid="0987e9dc-8cd8-4b46-b823-53cda5776c19" name="Do Action" type="Action">

<subsheetid>45597991-1758-413f-8131-4b3ea1bbc18e</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Calendar Name" narrative="The name of the calendar defined in System Manag

<input type="date" name="Date" narrative="The date to check" stage="Date"/>

\</inputs\>

\<outputs\>

\<output type="flag" name="Is Other Holiday" narrative="True to indicate that the given date falls on an othe

\</outputs\>

\<onsuccess\>4bb2a3cd-8b24-4f73-bd1c-a00aba8fdb6d\</onsuccess\>

\<resource object="clsCalendarsBusinessObject" action="Is Other Holiday"/\>

\</stage\>

\<stage stageid="2cc592fd-fcdc-450f-85f0-5e73ea858976" name="Calendar Name" type="Data"\>

\<subsheetid\>45597991-1758-413f-8131-4b3ea1bbc18e\</subsheetid\>

\<narrative/\>

\<displayx\>90\</displayx\>

\<displayy\>-75\</displayy\>

\<displaywidth\>90\</displaywidth\>

\<displayheight\>30\</displayheight\>

\<font family="Tahoma" size="10" style="Regular" color="000000"/\>

\<datatype\>text\</datatype\>

\<initialvalue/\>

\<private/\>

\<alwaysinit/\>

\</stage\>

\<stage stageid="f19789e8-211d-4b4a-b8f2-8b9d4ecf7f8e" name="Date" type="Data"\>

\<subsheetid\>45597991-1758-413f-8131-4b3ea1bbc18e\</subsheetid\>

\<narrative/\>

\<displayx\>90\</displayx\>

\<displayy\>-30\</displayy\>

\<displaywidth\>90\</displaywidth\>

\<displayheight\>30\</displayheight\>

```xml
<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>date</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="36b08b21-c7b6-4823-ac97-58765eb64456" name="Is Other Holiday" type="Data">

<subsheetid>45597991-1758-413f-8131-4b3ea1bbc18e</subsheetid>

<narrative/>

<displayx>90</displayx>

<displayy>15</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="5bfd72f2-404b-401e-9475-79637ba15426" name="Get Public Holidays In Range" type="S

<subsheetid>ee2903b5-086e-4367-b0dd-96c4bf602733</subsheetid>

<narrative>Gets all the enabled public holidays defined on a calendar which fall within the (inclusive) date

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>
```

```
</stage>

<stage stageid="5938c431-32dc-4214-a1f0-1cea2a7283a1" name="Start" type="Start">

<subsheetid>ee2903b5-086e-4367-b0dd-96c4bf602733</subsheetid>

<loginhibit/>

<narrative/>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Calendar Name" narrative="The name of the calendar defined in System Manag

<input type="date" name="First Date" narrative="The first date to consider public holidays from" stage="Fir

<input type="date" name="Last Date" narrative="The last date to consider public holidays until" stage="Las

</inputs>

<onsuccess>0f656fcb-91ff-471e-a5a6-5acf9b7020ca</onsuccess>

</stage>

<stage stageid="f21781af-4591-4b1c-aea9-c808566db4e8" name="End" type="End">

<subsheetid>ee2903b5-086e-4367-b0dd-96c4bf602733</subsheetid>

<loginhibit/>

<narrative/>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>
```

<output type="collection" name="Public Holidays" narrative="The public holidays which fall between the sp

</outputs>

</stage>

<stage stageid="0f656fcb-91ff-471e-a5a6-5acf9b7020ca" name="Do Action" type="Action">

<subsheetid>ee2903b5-086e-4367-b0dd-96c4bf602733</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Calendar Name" narrative="The name of the calendar defined in System Manag

<input type="date" name="First Date" narrative="The first date to consider public holidays from" stage="Fir

<input type="date" name="Last Date" narrative="The last date to consider public holidays until" stage="Las

</inputs>

<outputs>

<output type="collection" name="Public Holidays" narrative="The public holidays which fall between the sp

</outputs>

<onsuccess>f21781af-4591-4b1c-aea9-c808566db4e8</onsuccess>

<resource object="clsCalendarsBusinessObject" action="Get Public Holidays In Range"/>

</stage>

<stage stageid="a6a2fb17-f5f0-4393-aca1-03dff7174e65" name="Calendar Name" type="Data">

```xml
<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="5463e5ef-fefd-4ea8-bdb3-766502f31f23" name="First Date" type="Data">

<subsheetid>ee2903b5-086e-4367-b0dd-96c4bf602733</subsheetid>

<narrative/>

<displayx>90</displayx>

<displayy>-30</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>date</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="a0c902af-40b7-4bac-a042-b720957c3ea3" name="Last Date" type="Data">

<subsheetid>ee2903b5-086e-4367-b0dd-96c4bf602733</subsheetid>

<narrative/>

<displayx>90</displayx>

<displayy>15</displayy>

<displaywidth>90</displaywidth>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>date</datatype>

</stage>

<stage stageid="3a60e9e8-eede-4f67-8b48-e9accd441248" name="Public Holidays" type="Data">

<subsheetid>ee2903b5-086e-4367-b0dd-96c4bf602733</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>collection</datatype>

</stage>

<stage stageid="c3b8aea0-e827-4b62-b309-c5ce373bfeb3" name="Get Other Holidays In Range" type="S

<subsheetid>3fec8081-2673-45f8-9eb4-88ff1140d74b</subsheetid>

<narrative>Gets all the other holidays specified in a calendar which fall within the (inclusive) date range giv

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="f8292f4f-707c-45ef-b723-6a365986a6a2" name="Start" type="Start">

<subsheetid>3fec8081-2673-45f8-9eb4-88ff1140d74b</subsheetid>

<loginhibit/>

<narrative/>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Calendar Name" narrative="The name of the calendar defined in System Manag

<input type="date" name="First Date" narrative="The first date to consider other holidays from" stage="Firs

<input type="date" name="Last Date" narrative="The last date to consider other holidays until" stage="Last

</inputs>

<onsuccess>b1d7a0b3-9505-4f2b-a5e1-cc320d0084fa</onsuccess>

</stage>

<stage stageid="d6d3bae7-0d6a-4d93-af5b-a15f3ae6f8d2" name="End" type="End">

<subsheetid>3fec8081-2673-45f8-9eb4-88ff1140d74b</subsheetid>

<loginhibit/>

<narrative/>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

```xml
<outputs>

<output type="collection" name="Other Holidays" narrative="The other holidays which fall between the spe

</outputs>

</stage>

<stage stageid="b1d7a0b3-9505-4f2b-a5e1-cc320d0084fa" name="Do Action" type="Action">

<subsheetid>3fec8081-2673-45f8-9eb4-88ff1140d74b</subsheetid>

<narrative/>

<displayx>15</displayx>

<displayy>0</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Calendar Name" narrative="The name of the calendar defined in System Manag

<input type="date" name="First Date" narrative="The first date to consider other holidays from" stage="Firs

<input type="date" name="Last Date" narrative="The last date to consider other holidays until" stage="Last

</inputs>

<outputs>

<output type="collection" name="Other Holidays" narrative="The other holidays which fall between the spe

</outputs>

<onsuccess>d6d3bae7-0d6a-4d93-af5b-a15f3ae6f8d2</onsuccess>

<resource object="clsCalendarsBusinessObject" action="Get Other Holidays In Range"/>

</stage>

<stage stageid="d4381153-4a61-45b0-aace-d180dcf385a9" name="Calendar Name" type="Data">

<subsheetid>3fec8081-2673-45f8-9eb4-88ff1140d74b</subsheetid>

<narrative/>

<displayx>90</displayx>
```

```xml
<displayy>-75</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="f6677d1d-b1d4-431c-a168-ed560b3cdabc" name="First Date" type="Data">

<subsheetid>3fec8081-2673-45f8-9eb4-88ff1140d74b</subsheetid>

<narrative/>

<displayx>90</displayx>

<displayy>-30</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>date</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="a0705113-0e5b-4580-91de-81d420e49aee" name="Last Date" type="Data">

<subsheetid>3fec8081-2673-45f8-9eb4-88ff1140d74b</subsheetid>

<narrative/>

<displayx>90</displayx>

<displayy>15</displayy>
```

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>date</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="f317798c-a975-44c5-b794-10864e7e531c" name="Other Holidays" type="Data">

<subsheetid>3fec8081-2673-45f8-9eb4-88ff1140d74b</subsheetid>

<narrative/>

<displayx>90</displayx>

<displayy>60</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>collection</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

</process>

<process name="Call AutomateC" version="1.0" bpversion="7.1.0.46621" narrative="" byrefcollection="true

<appdef>

<element name="Application Root">

<id>254d90c0-734d-4d18-be60-0711bf78dc5c</id>

<type>Application</type>

```xml
<basetype>Application</basetype>

<datatype>unknown</datatype>

<diagnose>False</diagnose>

</element>

</appdef>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

<preconditions/>

<endpoint narrative=""/>

<subsheet subsheetid="c10943fe-d798-4713-b346-b1c08c635d94" type="CleanUp" published="True">

<name>Clean Up</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="d4db2d80-f88d-42ab-ad94-a7f346a9cbe0" type="Normal" published="True">

<name>Call AutomateC</name>

<view>

<camerax>0</camerax>

<cameray>168</cameray>

<zoom version="2">1.25</zoom>

</view>
```

```xml
</subsheet>

<stage stageid="439f5d63-daa4-47c6-82de-15e1d05b890c" name="Start" type="Start">

<loginhibit/>

<display x="15" y="-105"/>

<onsuccess>dfe88c54-b111-4488-ab75-f9822d4e0700</onsuccess>

</stage>

<stage stageid="dfe88c54-b111-4488-ab75-f9822d4e0700" name="End" type="End">

<loginhibit/>

<display x="15" y="90"/>

</stage>

<stage stageid="8ed89574-942a-4766-9a24-fb0c7ce5b50a" name="Stage1" type="ProcessInfo">

<display x="-195" y="-105" w="150" h="90"/>

<references>

<reference>System.dll</reference>

<reference>System.Data.dll</reference>

<reference>System.Xml.dll</reference>

<reference>System.Drawing.dll</reference>

</references>

<imports>

<import>System</import>

<import>System.Drawing</import>

<import>System.Data</import>

</imports>

<language>visualbasic</language>

<globalcode></globalcode>

<code></code>

</stage>
```

```xml
<stage stageid="dc39df58-31bb-4029-b0df-de15fa363a07" name="Clean Up" type="SubSheetInfo">
<subsheetid>c10943fe-d798-4713-b346-b1c08c635d94</subsheetid>
<display x="-195" y="-105" w="150" h="90"/>
</stage>
<stage stageid="1fce7cdc-2e98-4003-80d1-8f8a8dc27291" name="Start" type="Start">
<subsheetid>c10943fe-d798-4713-b346-b1c08c635d94</subsheetid>
<loginhibit/>
<display x="15" y="-105"/>
<onsuccess>885047d2-0c55-4150-ac3b-38d6c0343ac8</onsuccess>
</stage>
<stage stageid="885047d2-0c55-4150-ac3b-38d6c0343ac8" name="End" type="End">
<subsheetid>c10943fe-d798-4713-b346-b1c08c635d94</subsheetid>
<loginhibit/>
<display x="15" y="90"/>
</stage>
<stage stageid="eb103880-198c-4db6-9d9f-2f6950519fa0" name="Note1" type="Note">
<subsheetid>c10943fe-d798-4713-b346-b1c08c635d94</subsheetid>
<narrative>Clean Up Page


This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically immediately after closing your business object at the end of

You will not be able to call this action from a business process, nor will it be called at any other time than be
<display x="-180" y="60" w="180" h="230"/>
</stage>
<stage stageid="13d1b656-d72b-43b7-9d9d-5ffc7f5f2825" name="Note2" type="Note">
```

<narrative>Initialise Page

This is an optional page where you might choose to perform some initialisation tasks after your business ob

The initialise action will be called automatically immediately after loading your business object.

You will not be able to call this action from a business process, nor will it be called at any other time than a

<display x="-180" y="60" w="180" h="230"/>

</stage>

<stage stageid="e1ba1f90-bf64-4bb5-aa76-fa7e8ba736b8" name="Call AutomateC" type="SubSheetInfo">

<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>

<display x="-150" y="-105" w="150" h="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="c741d940-5c58-4176-8724-db64610942cf" name="Start" type="Start">

<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>

<display x="-15" y="-135"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="Requires Login" narrative="Flag indicating if the login info should be given too" s

<input type="text" name="Arguments" narrative="The arguments to pass to automatec, not including the au

<input type="text" name="Username" narrative="The username that you want to authenticate against." stag

<input type="text" name="Password" narrative="The password for the username." stage="Password"/>

</inputs>

<onsuccess>34645473-b26a-44c8-9e88-a0a32eae0b31</onsuccess>

</stage>

```xml
<stage stageid="ca540852-dcb5-463b-8380-ad3167afc623" name="End" type="End">

<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>

<loginhibit/>

<display x="-15" y="150"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="text" name="Output" narrative="The output from the command" stage="Output"/>

</outputs>

</stage>

<stage stageid="0c4d0b50-6d8a-47b4-9784-7b5cdb842017" name="Call AutomateC" type="Code">

<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>

<loginhibit/>

<display x="-15" y="60" w="90" h="30"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="args" expr="[Arguments]"/>

<input type="text" name="automateC" expr="[AutomateC EXE]"/>

</inputs>

<outputs>

<output type="text" name="stdout" stage="Output"/>

<output type="flag" name="success" stage="Success"/>

</outputs>

<onsuccess>df14f440-97f1-48a2-aa9d-edd5afe87715</onsuccess>

<code>Using proc as New System.Diagnostics.Process()

With proc.StartInfo

.FileName = automateC

.CreateNoWindow = True
```

```
        .UseShellExecute = False

        .Arguments = args

        .RedirectStandardOutput = True

        End With

        proc.Start()

        stdout = proc.StandardOutput.ReadToEnd()

        proc.WaitForExit()

        success = (proc.ExitCode = 0)

        End Using</code>
```

</stage>

<stage stageid="392d29b6-f1c2-4f38-8473-e6cb007bc793" name="Requires Login" type="Data">

<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>

<display x="-150" y="-15" w="150" h="30"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

</stage>

<stage stageid="32788e97-b7ec-495f-bfc7-4b3750846486" name="Arguments" type="Data">

<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>

<display x="-150" y="15" w="150" h="30"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

```xml
</stage>
<stage stageid="34645473-b26a-44c8-9e88-a0a32eae0b31" name="Requires Login?" type="Decision">
<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>
<loginhibit/>
<display x="-15" y="-90" w="90" h="30"/>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<decision expression="[Requires Login]"/>
<ontrue>15b54037-029c-481c-99aa-dcb01f730463</ontrue>
<onfalse>89dc45eb-8a87-4017-b388-91b868c0b9f0</onfalse>
</stage>
<stage stageid="ae95dc24-5dd6-4d51-8dd2-5c3d16354a4b" name="Add login arguments" type="Calculati
<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>
<loginhibit/>
<narrative>Ensure that the leading slash is prepended to the login args before use</narrative>
<display x="90" y="0" w="90" h="30"/>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>a7d8fffc-fa17-4c2e-af04-f7eb2f6211e8</onsuccess>
<calculation expression="&amp;quot;/user &amp;quot; &amp;amp; [Username] &amp;amp; &amp;quot; &a
</stage>
<stage stageid="89dc45eb-8a87-4017-b388-91b868c0b9f0" name="anchor51" type="Anchor">
<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>
<loginhibit/>
<display x="150" y="-90" w="10" h="10"/>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>a6ebb6b8-cdb1-4361-99fe-d7e3fc8f9c5a</onsuccess>
</stage>
<stage stageid="a6ebb6b8-cdb1-4361-99fe-d7e3fc8f9c5a" name="anchor51" type="Anchor">
```

<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>

<loginhibit/>

<display x="150" y="60" w="10" h="10"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>0c4d0b50-6d8a-47b4-9784-7b5cdb842017</onsuccess>

</stage>

<stage stageid="07aa53f1-ef8a-4392-b242-9008aa13a3a1" name="Success" type="Data">

<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>

<display x="-150" y="225" w="150" h="30"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="87fe45f5-dbd7-4b76-b839-db6743dd2217" name="Output" type="Data">

<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>

<display x="-150" y="255" w="150" h="30"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="df14f440-97f1-48a2-aa9d-edd5afe87715" name="Success?" type="Decision">

<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>

<loginhibit/>

```
<display x="-15" y="105" w="90" h="30"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="[Success]"/>

<ontrue>ca540852-dcb5-463b-8380-ad3167afc623</ontrue>

<onfalse>f71722c8-3ee1-491d-a0ee-a621e3f34fc2</onfalse>

</stage>

<stage stageid="f71722c8-3ee1-491d-a0ee-a621e3f34fc2" name="FAIL" type="Exception">

<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>

<display x="60" y="105" w="30" h="30"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="Command Failure" detail="&amp;quot;Error occurred calling: automatec &amp;quot; &amp;an

</stage>

<stage stageid="37c3cf94-9d14-407e-b62e-e1f3d8a8d2dd" name="AutomateC EXE" type="Data">

<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>

<loginhibit/>

<display x="-150" y="105" w="150" h="30"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue xml:space="preserve">H:\automate\BluePrism.Automate\bin\AutomateC.exe</initialvalue>

<exposure>Environment</exposure>

<private/>

<alwaysinit/>

</stage>

<stage stageid="45d70733-e9f3-44cc-8b31-6d9d01cc7051" name="Input Variables" type="Block">

<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>

<loginhibit/>

<display x="-225" y="-45" w="150" h="210"/>
```

```xml
<font family="Segoe UI" size="10" style="Regular" color="7FB2E5"/>

</stage>

<stage stageid="8e2fff96-5ff5-49fd-b0b4-a6c27eec054e" name="Output Variables" type="Block">

<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>

<loginhibit/>

<display x="-225" y="195" w="150" h="90"/>

<font family="Segoe UI" size="10" style="Regular" color="7FB2E5"/>

</stage>

<stage stageid="1bc915ee-4e8b-4c77-b1d1-4a69bae91232" name="Username" type="Data">

<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>

<display x="-150" y="45" w="150" h="30"/>

<datatype>text</datatype>

<initialvalue xml:space="preserve">admin</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="37f21bec-82cc-45fe-be48-de02f0b59ba7" name="Password" type="Data">

<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>

<display x="-150" y="75" w="150" h="30"/>

<datatype>text</datatype>

<initialvalue xml:space="preserve">admin</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="15b54037-029c-481c-99aa-dcb01f730463" name="SSO?" type="Decision">

<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>

<loginhibit/>
```

```xml
<display x="-15" y="-45" w="90" h="30"/>
<decision expression="[SSO]"/>
<ontrue>d57315c4-746c-4e23-9b8c-6cfe5edf7d53</ontrue>
<onfalse>4ed68491-fe17-4c4a-bb1b-fb00e3faf531</onfalse>
</stage>
<stage stageid="d57315c4-746c-4e23-9b8c-6cfe5edf7d53" name="Add login arguments (SSO)" type="Cal
<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>
<loginhibit/>
<display x="-15" y="0" w="90" h="30"/>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>3c100536-2d18-436d-a552-5503c7a6da1c</onsuccess>
<calculation expression="&amp;quot;/sso&amp;quot; &amp;amp; &amp;quot; &amp;quot; &amp;amp; [Arg
</stage>
<stage stageid="3c100536-2d18-436d-a552-5503c7a6da1c" name="Anchor1" type="Anchor">
<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>
<loginhibit/>
<display x="-15" y="30" w="10" h="10"/>
<onsuccess>0c4d0b50-6d8a-47b4-9784-7b5cdb842017</onsuccess>
</stage>
<stage stageid="4ed68491-fe17-4c4a-bb1b-fb00e3faf531" name="Anchor2" type="Anchor">
<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>
<loginhibit/>
<display x="90" y="-45" w="10" h="10"/>
<onsuccess>ae95dc24-5dd6-4d51-8dd2-5c3d16354a4b</onsuccess>
</stage>
<stage stageid="a7d8fffc-fa17-4c2e-af04-f7eb2f6211e8" name="Anchor3" type="Anchor">
<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>
```

<loginhibit/>

<display x="90" y="30" w="10" h="10"/>

<onsuccess>3c100536-2d18-436d-a552-5503c7a6da1c</onsuccess>

</stage>

<stage stageid="6cbfb9af-2e99-4168-a1ab-a3832cb86016" name="SSO" type="Data">

<subsheetid>d4db2d80-f88d-42ab-ad94-a7f346a9cbe0</subsheetid>

<loginhibit/>

<display x="-150" y="135" w="150" h="30"/>

<datatype>flag</datatype>

<initialvalue/>

<exposure>Environment</exposure>

<private/>

<alwaysinit/>

</stage>

</process>

<process name="CanExecuteObject" version="1.0" bpversion="6.2.0.2732" narrative="" type="object" runn

<appdef>

<element name="Application Root">

<id>35fa5c89-97e5-498d-8fed-7f9f0861762e</id>

<type>Application</type>

<datatype>unknown</datatype>

<diagnose>False</diagnose>

</element>

</appdef>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

```xml
<zoom version="2">1.25</zoom>
</view>
<preconditions/>
<endpoint narrative=""/>
<subsheet subsheetid="e2fd11d1-32a1-4ce6-870b-ea8ba68ef0fd" type="CleanUp" published="True">
<name>Clean Up</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="462504c4-caff-4e20-bbde-1cc31cb470de" type="Normal" published="False">
<name>Action 1</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<stage stageid="cfd02df6-5afb-43b9-aa64-db2377334fc7" name="Start" type="Start">
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
```

```
<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>a96019b4-51f9-4fd5-93eb-002a47cf9461</onsuccess>

</stage>

<stage stageid="851bc9b8-ee10-488d-b1e2-9168070aecc4" name="End" type="End">

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="1c2fa1df-5403-469d-85db-fe90824f32a4" name="Stage1" type="ProcessInfo">

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<references>

<reference>System.dll</reference>

<reference>System.Data.dll</reference>

<reference>System.Xml.dll</reference>

<reference>System.Drawing.dll</reference>
```

</references>

<imports>

<import>System</import>

<import>System.Drawing</import>

<import>System.Data</import>

</imports>

<language>visualbasic</language>

<code></code>

</stage>

<stage stageid="6a4384be-0097-402a-9118-8c35900e2181" name="Clean Up" type="SubSheetInfo">

<subsheetid>e2fd11d1-32a1-4ce6-870b-ea8ba68ef0fd</subsheetid>

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="b105a16d-a30e-425c-90de-b0b444db3a4e" name="Start" type="Start">

<subsheetid>e2fd11d1-32a1-4ce6-870b-ea8ba68ef0fd</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>6df9b2d5-d43d-4aea-a6d6-6bb51066f416</onsuccess>

</stage>

<stage stageid="6df9b2d5-d43d-4aea-a6d6-6bb51066f416" name="End" type="End">

<subsheetid>e2fd11d1-32a1-4ce6-870b-ea8ba68ef0fd</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="91c8b667-8b20-477d-9f99-2ab01db204c3" name="Action 1" type="SubSheetInfo">

<subsheetid>462504c4-caff-4e20-bbde-1cc31cb470de</subsheetid>

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="0a24644b-0bab-4fa5-9642-f9c8b6abcca9" name="Start" type="Start">

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="24b00229-d430-467a-a4e1-2e07634ec8d4" name="End" type="End">

<subsheetid>462504c4-caff-4e20-bbde-1cc31cb470de</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="c7aa1d6a-ea78-4202-88b0-e30ccee6293a" name="Note1" type="Note">

<subsheetid>e2fd11d1-32a1-4ce6-870b-ea8ba68ef0fd</subsheetid>

<narrative>Clean Up Page

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically immediately after closing your business object at the end of

You will not be able to call this action from a business process, nor will it be called at any other time than b

<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="1f759412-9548-49a2-b4d3-79cd40e36c99" name="Note2" type="Note">

<narrative>Initialise Page

This is an optional page where you might choose to perform some initialisation tasks after your business ol

The initialise action will be called automatically immediately after loading your business object.

You will not be able to call this action from a business process, nor will it be called at any other time than a

<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="a96019b4-51f9-4fd5-93eb-002a47cf9461" name="Call action on CannotExecuteObject" ty

```xml
<displayx>15</displayx>
<displayy>-15</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>851bc9b8-ee10-488d-b1e2-9168070aecc4</onsuccess>
<resource object="CannotExecuteObject" action="Action 1"/>
</stage>
</process>
<process name="CannotExecuteObject" version="1.0" bpversion="6.2.0.2732" narrative="" type="object" r
<appdef>
<element name="Application Root">
<id>6f34a0e6-f548-4288-bc2c-9ab73acf1155</id>
<type>Application</type>
<datatype>unknown</datatype>
<diagnose>False</diagnose>
</element>
</appdef>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
<preconditions/>
<endpoint narrative=""/>
<subsheet subsheetid="b36673d3-c66b-4bdf-a116-d17936e3d4af" type="CleanUp" published="True">
<name>Clean Up</name>
```

```xml
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="5852005c-6f1f-46be-81ad-488455ef6fa1" type="Normal" published="True">
<name>Action 1</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<stage stageid="aff2b57b-8683-4fa0-9d7a-88529a59a5bc" name="Start" type="Start">
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>d606babc-4989-4d77-b062-0fc8088eb7ab</onsuccess>
</stage>
<stage stageid="d606babc-4989-4d77-b062-0fc8088eb7ab" name="End" type="End">
<loginhibit/>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="6b06f08e-33ed-42c8-b583-be6b3b2b02a9" name="Stage1" type="ProcessInfo">

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<references>

<reference>System.dll</reference>

<reference>System.Data.dll</reference>

<reference>System.Xml.dll</reference>

<reference>System.Drawing.dll</reference>

</references>

<imports>

<import>System</import>

<import>System.Drawing</import>

<import>System.Data</import>

</imports>

```xml
<language>visualbasic</language>

<globalcode></globalcode>

<code></code>

</stage>

<stage stageid="d5c96834-0d89-4bc9-902c-c38e450da4f1" name="Clean Up" type="SubSheetInfo">

<subsheetid>b36673d3-c66b-4bdf-a116-d17936e3d4af</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="f4990de2-fbfb-4da4-bb90-95a9e42d9f35" name="Start" type="Start">

<subsheetid>b36673d3-c66b-4bdf-a116-d17936e3d4af</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>dadc9a32-7cd0-4dfd-a599-2cf24b78f039</onsuccess>

</stage>

<stage stageid="dadc9a32-7cd0-4dfd-a599-2cf24b78f039" name="End" type="End">
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="13b6d783-0245-4e49-a7f1-39dcb4d2c39f" name="Action 1" type="SubSheetInfo">

<subsheetid>5852005c-6f1f-46be-81ad-488455ef6fa1</subsheetid>

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="8b1633d5-8ba7-4894-a546-9bd2a6005a18" name="Start" type="Start">

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>cf90c86f-7450-4747-8886-a6eb9d492b13</onsuccess>

</stage>

<stage stageid="cf90c86f-7450-4747-8886-a6eb9d492b13" name="End" type="End">

<subsheetid>5852005c-6f1f-46be-81ad-488455ef6fa1</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="44af7c39-8627-426d-8310-f53a5237681c" name="Note1" type="Note">

<subsheetid>b36673d3-c66b-4bdf-a116-d17936e3d4af</subsheetid>

<narrative>Clean Up Page

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically immediately after closing your business object at the end of

You will not be able to call this action from a business process, nor will it be called at any other time than b

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="381fe6c5-464d-4907-8f95-b3f9edc831a4" name="Note2" type="Note">

<narrative>Initialise Page

This is an optional page where you might choose to perform some initialisation tasks after your business ob

The initialise action will be called automatically immediately after loading your business object.

You will not be able to call this action from a business process, nor will it be called at any other time than a

<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

</process>

<process name="Cassini" version="1.0" bpversion="6.4.0.6747" narrative="Actions and activities regarding

```xml
<type>Edit</type>

<basetype>Edit</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<description>Match Index 1 = Application Directory, Match Index 2 = Server Port, Match Index 3 = Virtual F

<attributes>

<attribute name="WindowText">

<ProcessValue datatype="text" value="Cass"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Edit"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="168"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="98"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="315"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="21"/>

</attribute>
```

```
<attribute name="Visible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="ScreenVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="3"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Cassini Personal Web Server &amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="WindowsForms10.EDIT.app.0.33c0d9d"/>

</attribute>
```

```xml
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:391,399,415,701"/>
</attribute>
<attribute name="Style">
<ProcessValue datatype="number" value="1442906304"/>
</attribute>
<attribute name="pWindowText">
<ProcessValue datatype="text" value="Cassini Personal Web Server"/>
</attribute>
<attribute name="pClassName">
<ProcessValue datatype="text" value="WindowsForms10.Window"/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="213"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="268"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="528"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="365"/>
</attribute>
```

```xml
<attribute name="pVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pScreenVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pEnabled">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="10"/>

</attribute>

<attribute name="pStyle">

<ProcessValue datatype="number" value="1442906304"/>

</attribute>

<attribute name="MatchIndex" comparisontype="dynamic" inuse="True">

<ProcessValue datatype="number" value=""/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>
```

```xml
</attributes>

</element>

<element name="Dynamic Button">

<id>1b13529a-d91a-4e0f-b74c-d9b6df3d0b6a</id>

<type>Button</type>

<basetype>Button</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<description>Window Text can be: "Start" or "Stop"</description>

<attributes>

<attribute name="WindowText" comparisontype="dynamic" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Button"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="300"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="250"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="88"/>
```

```xml
    </attribute>
    <attribute name="Height">
    <ProcessValue datatype="number" value="27"/>
    </attribute>
    <attribute name="Visible">
    <ProcessValue datatype="flag" value="True"/>
    </attribute>
    <attribute name="ScreenVisible">
    <ProcessValue datatype="flag" value="True"/>
    </attribute>
    <attribute name="Enabled">
    <ProcessValue datatype="flag" value="True"/>
    </attribute>
    <attribute name="Active">
    <ProcessValue datatype="flag" value="False"/>
    </attribute>
    <attribute name="Ordinal">
    <ProcessValue datatype="number" value="9"/>
    </attribute>
    <attribute name="ChildCount">
    <ProcessValue datatype="number" value="0"/>
    </attribute>
    <attribute name="AncestorsText">
    <ProcessValue datatype="text" value="Cassini Personal Web Server &amp;lt;UNKNOWN&amp;gt; "/>
    </attribute>
    <attribute name="AncestorCount">
    <ProcessValue datatype="number" value="2"/>
```

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="WindowsForms10.BUTTON.app.0.33c0d9d"/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:346,432,458,433"/>

</attribute>

<attribute name="Style">

<ProcessValue datatype="number" value="1442906123"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Cassini Personal Web Server"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="WindowsForms10.Window"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="38"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="151"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="528"/>

```xml
      </attribute>

      <attribute name="pHeight">

      <ProcessValue datatype="number" value="365"/>

      </attribute>

      <attribute name="pVisible">

      <ProcessValue datatype="flag" value="True"/>

      </attribute>

      <attribute name="pScreenVisible">

      <ProcessValue datatype="flag" value="True"/>

      </attribute>

      <attribute name="pEnabled">

      <ProcessValue datatype="flag" value="True"/>

      </attribute>

      <attribute name="pActive">

      <ProcessValue datatype="flag" value="True"/>

      </attribute>

      <attribute name="pOrdinal">

      <ProcessValue datatype="number" value="1"/>

      </attribute>

      <attribute name="pChildCount">

      <ProcessValue datatype="number" value="10"/>

      </attribute>

      <attribute name="pStyle">

      <ProcessValue datatype="number" value="1442906123"/>

      </attribute>

      <attribute name="MatchIndex" inuse="True">

      <ProcessValue datatype="number" value="1"/>
```

```xml
</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

</attributes>

</element>

<element name="Dynamic Click to Browse Link">

<id>46b8a069-5c03-4634-9730-023f20f5dfff</id>

<type>AAElement</type>

<basetype>AAElement</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText">

<ProcessValue datatype="text" value="http://localhost:8089/"/>

</attribute>

<attribute name="ClassName">

<ProcessValue datatype="text" value="Static"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="168"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="212"/>
```

```
</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="282"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="29"/>

</attribute>

<attribute name="Visible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="ScreenVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="9"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Cassini Personal Web Server &amp;lt;UNKNOWN&amp;gt; "/>
```

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="System.Windows.Forms.LinkLabel"/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:181,438,466,462"/>

</attribute>

<attribute name="Style">

<ProcessValue datatype="number" value="1442906125"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Cassini Personal Web Server"/>

</attribute>

<attribute name="pClassName">

<ProcessValue datatype="text" value="WindowsForms10.Window"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="5"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="195"/>

```
</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="528"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="number" value="335"/>

</attribute>

<attribute name="pVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pScreenVisible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pEnabled">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="11"/>

</attribute>

<attribute name="pStyle">

<ProcessValue datatype="number" value="1442906125"/>
```

```xml
</attribute>

<attribute name="aX">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="aY">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="aWidth">

<ProcessValue datatype="number" value="105"/>

</attribute>

<attribute name="aHeight">

<ProcessValue datatype="number" value="13"/>

</attribute>

<attribute name="Name">

<ProcessValue datatype="text" value="http://localhost:8089/"/>

</attribute>

<attribute name="Description">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="Role" inuse="True">

<ProcessValue datatype="text" value="Link"/>

</attribute>

<attribute name="ID">

<ProcessValue datatype="text" value="Self"/>

</attribute>

<attribute name="State">

<ProcessValue datatype="text" value="focusable"/>
```

```xml
</attribute>

<attribute name="Value2" comparisontype="dynamic" inuse="True">

<ProcessValue datatype="text" value="http://localhost:8089/"/>

</attribute>

<attribute name="KeyboardShortcut">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="DefaultAction">

<ProcessValue datatype="text" value="Click"/>

</attribute>

<attribute name="ElementCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="aAncestorCount">

<ProcessValue datatype="number" value="6"/>

</attribute>

<attribute name="Unavailable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Selected">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Focused">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Pressed">

<ProcessValue datatype="flag" value="False"/>
```

```xml
    </attribute>

    <attribute name="aChecked">

    <ProcessValue datatype="flag" value="False"/>

    </attribute>

    <attribute name="Mixed">

    <ProcessValue datatype="flag" value="False"/>

    </attribute>

    <attribute name="ReadOnly">

    <ProcessValue datatype="flag" value="False"/>

    </attribute>

    <attribute name="Hottracked">

    <ProcessValue datatype="flag" value="False"/>

    </attribute>

    <attribute name="Default">

    <ProcessValue datatype="flag" value="False"/>

    </attribute>

    <attribute name="Expanded">

    <ProcessValue datatype="flag" value="False"/>

    </attribute>

    <attribute name="Collapsed">

    <ProcessValue datatype="flag" value="False"/>

    </attribute>

    <attribute name="Busy">

    <ProcessValue datatype="flag" value="False"/>

    </attribute>

    <attribute name="Floating">

    <ProcessValue datatype="flag" value="False"/>
```

```xml
</attribute>
<attribute name="Marqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Animated">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Invisible">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Offscreen">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Sizeable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Moveable">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="SelfVoicing">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Focusable">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Selectable">
<ProcessValue datatype="flag" value="False"/>
```

```xml
    </attribute>

    <attribute name="Linked">

    <ProcessValue datatype="flag" value="False"/>

    </attribute>

    <attribute name="Traversed">

    <ProcessValue datatype="flag" value="False"/>

    </attribute>

    <attribute name="Multiselectable">

    <ProcessValue datatype="flag" value="False"/>

    </attribute>

    <attribute name="Extselectable">

    <ProcessValue datatype="flag" value="False"/>

    </attribute>

    <attribute name="Alert_low">

    <ProcessValue datatype="flag" value="False"/>

    </attribute>

    <attribute name="Alert_medium">

    <ProcessValue datatype="flag" value="False"/>

    </attribute>

    <attribute name="Alert_high">

    <ProcessValue datatype="flag" value="False"/>

    </attribute>

    <attribute name="ScreenBounds">

    <ProcessValue datatype="text" value="RECT:183,438,451,288"/>

    </attribute>

    <attribute name="paX">

    <ProcessValue datatype="number" value="0"/>
```

```xml
    </attribute>
    <attribute name="paY">
    <ProcessValue datatype="number" value="0"/>
    </attribute>
    <attribute name="paWidth">
    <ProcessValue datatype="number" value="281"/>
    </attribute>
    <attribute name="paHeight">
    <ProcessValue datatype="number" value="28"/>
    </attribute>
    <attribute name="pName">
    <ProcessValue datatype="text" value="http://localhost:8089/"/>
    </attribute>
    <attribute name="pDescription">
    <ProcessValue datatype="text" value=""/>
    </attribute>
    <attribute name="pRole">
    <ProcessValue datatype="text" value="StaticText"/>
    </attribute>
    <attribute name="pID">
    <ProcessValue datatype="text" value="Self"/>
    </attribute>
    <attribute name="pState">
    <ProcessValue datatype="text" value="read only"/>
    </attribute>
    <attribute name="pValue2">
    <ProcessValue datatype="text" value=""/>
```

```
</attribute>

<attribute name="pKeyboardShortcut">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pDefaultAction">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="pElementCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="pUnavailable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSelected">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pFocused">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pPressed">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="paChecked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMixed">

<ProcessValue datatype="flag" value="False"/>
```

```xml
</attribute>
<attribute name="pReadOnly">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pHottracked">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pDefault">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pExpanded">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pCollapsed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pBusy">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pFloating">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pMarqueed">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="pAnimated">
<ProcessValue datatype="flag" value="False"/>
```

```xml
</attribute>

<attribute name="pInvisible">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pOffscreen">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSizeable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pMoveable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSelfVoicing">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pFocusable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pSelectable">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pLinked">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pTraversed">

<ProcessValue datatype="flag" value="False"/>
```

```xml
    </attribute>
    <attribute name="pMultiselectable">
    <ProcessValue datatype="flag" value="False"/>
    </attribute>
    <attribute name="pExtselectable">
    <ProcessValue datatype="flag" value="False"/>
    </attribute>
    <attribute name="pAlert_low">
    <ProcessValue datatype="flag" value="False"/>
    </attribute>
    <attribute name="pAlert_medium">
    <ProcessValue datatype="flag" value="False"/>
    </attribute>
    <attribute name="pAlert_high">
    <ProcessValue datatype="flag" value="False"/>
    </attribute>
    <attribute name="MatchIndex">
    <ProcessValue datatype="number" value="1"/>
    </attribute>
    <attribute name="MatchReverse">
    <ProcessValue datatype="flag" value="True"/>
    </attribute>
    </attributes>
    </element>
    <type>Window</type>
    <basetype>Window</basetype>
    <datatype>text</datatype>
```

```xml
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value="Cassini Personal Web Server"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="WindowsForms10.Window"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="130"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="130"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="528"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="335"/>
</attribute>
<attribute name="Visible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible">
```

```xml
<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="10"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="&amp;lt;UNKNOWN&amp;gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="WindowsForms10.Window.8.app.0.33c0d9d"/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:138,161,456,649"/>

</attribute>

<attribute name="Style">
```

```xml
<ProcessValue datatype="number" value="382599168"/>

</attribute>

<attribute name="MatchIndex" inuse="True">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

</attributes>

</element>

<element name="Error Message Window">

<id>364504ba-901a-4db9-8a3f-023d4ea146a3</id>

<element name="Error Message">

<id>058d9141-c5cc-4492-8138-4d8b7aeb92d3</id>

<type>Label</type>

<basetype>Label</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<description>Read Window Text to get the error message.</description>

<attributes>

<attribute name="WindowText" comparisontype="RegEx" inuse="True">

<ProcessValue datatype="text" value=".{1,2000}"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Static"/>

</attribute>

<attribute name="CtrlID">
```

```xml
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="65"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="34"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="103"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="18"/>
</attribute>
<attribute name="Visible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
```

<ProcessValue datatype="number" value="3"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="AncestorsText">

<ProcessValue datatype="text" value="Cassini Personal Web Server &lt;UNKNOWN&gt; "/>

</attribute>

<attribute name="AncestorCount">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="TypeName">

<ProcessValue datatype="text" value="Static"/>

</attribute>

<attribute name="ScreenBounds">

<ProcessValue datatype="text" value="RECT:310,458,475,412"/>

</attribute>

<attribute name="Style">

<ProcessValue datatype="number" value="1342316672"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Cassini Personal Web Server"/>

</attribute>

<attribute name="pClassName" inuse="True">

<ProcessValue datatype="text" value="#32770"/>

</attribute>

<attribute name="pCtrlID">

```xml
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="242"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="398"/>
</attribute>
<attribute name="pWidth">
<ProcessValue datatype="number" value="210"/>
</attribute>
<attribute name="pHeight">
<ProcessValue datatype="number" value="163"/>
</attribute>
<attribute name="pVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pEnabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pActive">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="pOrdinal">
```

```xml
<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="3"/>

</attribute>

<attribute name="pStyle">

<ProcessValue datatype="number" value="1342316672"/>

</attribute>

<attribute name="MatchIndex" inuse="True">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="MatchReverse">

<ProcessValue datatype="flag" value="True"/>

</attribute>

</attributes>

</element>

<type>Window</type>

<basetype>Window</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Cassini Personal Web Server"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="#32770"/>

</attribute>
```

```xml
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="195"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="374"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="210"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="163"/>
</attribute>
<attribute name="Visible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="3"/>
</attribute>
<attribute name="AncestorsText">
<ProcessValue datatype="text" value="&amp;lt;UNKNOWN&amp;gt; "/>
</attribute>
<attribute name="AncestorCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="TypeName">
<ProcessValue datatype="text" value="#32770"/>
</attribute>
<attribute name="ScreenBounds">
<ProcessValue datatype="text" value="RECT:198,400,533,401"/>
</attribute>
<attribute name="Style">
<ProcessValue datatype="number" value="-1798831675"/>
</attribute>
<attribute name="MatchIndex">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="MatchReverse">
<ProcessValue datatype="flag" value="True"/>
</attribute>
```

```xml
      </attributes>
    </element>
    <type>Application</type>
    <basetype>Application</basetype>
    <datatype>unknown</datatype>
    <diagnose>False</diagnose>
  </element>
  <apptypeinfo>
    <id>Win32Launch</id>
    <parameters>
      <parameter>
        <name>Path</name>
        <value>
        </value>
      </parameter>
      <parameter>
        <name>CommandLineParams</name>
        <value>
        </value>
      </parameter>
      <parameter>
        <name>WorkingDirectory</name>
        <value>
        </value>
      </parameter>
      <parameter>
        <name>NonInvasive</name>
```

```xml
            <value>True</value>

          </parameter>

          <parameter>

            <name>ProcessMode</name>

            <value>Internal</value>

          </parameter>

          <parameter>

            <name>ExternalProcessTimeout</name>

            <value>0</value>

          </parameter>

          <parameter>

            <name>Options</name>

            <value>

            </value>

          </parameter>

        </parameters>

      </apptypeinfo>

    </appdef>

    <view>

      <camerax>0</camerax>

      <cameray>0</cameray>

      <zoom version="2">1.25</zoom>

    </view>

    <preconditions/>

    <endpoint narrative=""/>

    <subsheet subsheetid="6ce84b75-53c4-4e18-bf6b-7c9a2d80bf4a" type="CleanUp" published="True">

      <name>Clean Up</name>
```

```xml
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="2e43b180-a59a-48c3-9bb5-e64b6d1665be" type="Normal" published="False">
<name>Connected?</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="88411255-de1b-4e74-b440-0b53871137a7" type="Normal" published="True">
<name>Launch Cassini</name>
<view>
<camerax>0</camerax>
<cameray>20</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="5e8c067f-8d81-487b-bb58-57cb9d7efe87" type="Normal" published="True">
<name>Input Cassini Parameters</name>
<view>
<camerax>201</camerax>
<cameray>435</cameray>
```

```xml
<zoom version="2">0.9375</zoom>

</view>

</subsheet>

<subsheet subsheetid="69094120-0426-4128-91de-98615ff24d86" type="Normal" published="True">

<name>Press Start</name>

<view>

<camerax>88</camerax>

<cameray>450</cameray>

<zoom version="2">0.9375</zoom>

</view>

</subsheet>

<subsheet subsheetid="9becf43b-3f6c-455f-b812-3f5c2c50b4d5" type="Normal" published="True">

<name>Press Stop</name>

<view>

<camerax>-100</camerax>

<cameray>-42</cameray>

<zoom version="2">0.9375</zoom>

</view>

</subsheet>

<stage stageid="55706585-747c-4302-bc5e-fa30fbc5d83f" name="Start" type="Start">

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>
```

```xml
<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>85a191e8-bd8b-471d-a708-d0ad5b49731b</onsuccess>

</stage>

<stage stageid="85a191e8-bd8b-471d-a708-d0ad5b49731b" name="End" type="End">

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="697bbb76-88eb-43e4-958b-9f13afc9da04" name="Stage1" type="ProcessInfo">

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<references>

<reference>System.dll</reference>

<reference>System.Data.dll</reference>

<reference>System.Xml.dll</reference>

<reference>System.Drawing.dll</reference>

</references>
```

```xml
<imports>

<import>System</import>

<import>System.Drawing</import>

<import>System.Data</import>

</imports>

<language>visualbasic</language>

<globalcode></globalcode>

<code></code>

</stage>

<stage stageid="658fcd6b-b177-4799-9dc2-ce470c91ca5b" name="Clean Up" type="SubSheetInfo">

<subsheetid>6ce84b75-53c4-4e18-bf6b-7c9a2d80bf4a</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="da50d416-8abb-4129-8dff-ce22f956384e" name="Start" type="Start">

<subsheetid>6ce84b75-53c4-4e18-bf6b-7c9a2d80bf4a</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>7a9524ea-0280-4534-bc91-29458ea6b681</onsuccess>

</stage>

<stage stageid="7a9524ea-0280-4534-bc91-29458ea6b681" name="End" type="End">

<subsheetid>6ce84b75-53c4-4e18-bf6b-7c9a2d80bf4a</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="b9d62a3d-8769-44d7-addc-42e017c7b8fe" name="Connected?" type="SubSheetInfo">

<subsheetid>2e43b180-a59a-48c3-9bb5-e64b6d1665be</subsheetid>

<narrative>Reads whether Cassini is already launched or attached.</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="ee506971-3b93-4359-bd56-026ec0561bc9" name="Start" type="Start">

<preconditions>

<condition narrative="None."/>

</preconditions>

<postconditions>

<condition narrative="None."/>

</postconditions>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>920072e6-471f-4751-a46c-ea8645145239</onsuccess>

</stage>

<stage stageid="07d6399e-b0a9-470a-a283-89a83c91f67d" name="End" type="End">

<subsheetid>2e43b180-a59a-48c3-9bb5-e64b6d1665be</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<outputs>

<output type="flag" name="Connected" narrative="True if Cassini is currently running, False otherwise" sta

</outputs>

</stage>

<stage stageid="2171d30a-1d84-48e3-837b-56c98255c276" name="Note1" type="Note">

<subsheetid>6ce84b75-53c4-4e18-bf6b-7c9a2d80bf4a</subsheetid>

<narrative>Clean Up Page

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically immediately after closing your business object at the end of

You will not be able to call this action from a business process, nor will it be called at any other time than b

<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="05b8f94f-cc0a-45fd-b6ac-7310a60d78c0" name="Note2" type="Note">

<narrative>Initialise Page

This is an optional page where you might choose to perform some initialisation tasks after your business ol

The initialise action will be called automatically immediately after loading your business object.

You will not be able to call this action from a business process, nor will it be called at any other time than a

<displayx>-180</displayx>

```xml
<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="920072e6-471f-4751-a46c-ea8645145239" name="Read Connection" type="Read">

<subsheetid>2e43b180-a59a-48c3-9bb5-e64b6d1665be</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-45</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>07d6399e-b0a9-470a-a283-89a83c91f67d</onsuccess>

<step stage="Connected">

<element id="ca645d77-42be-4b57-b2b3-a0c485f432f0"/>

<action>

<id>IsConnected</id>

</action>

</step>

</stage>

<stage stageid="7ce4dec2-4ac5-41f7-99c4-a100691bd1f2" name="Connected" type="Data">

<subsheetid>2e43b180-a59a-48c3-9bb5-e64b6d1665be</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

</stage>

<stage stageid="4571fb22-bffd-42f2-a5dc-6d6051694c38" name="Output Variables" type="Block">

<subsheetid>2e43b180-a59a-48c3-9bb5-e64b6d1665be</subsheetid>

<displayx>-270</displayx>

<displayy>-45</displayy>

<font family="Segoe UI" size="10" style="Regular" color="7FB2E5"/>

</stage>

<stage stageid="973a0b68-5104-482a-be38-0bb67c5dbf4f" name="Launch Cassini" type="SubSheetInfo">

<subsheetid>88411255-de1b-4e74-b440-0b53871137a7</subsheetid>

<narrative>Launches Cassini</narrative>

<displayx>-195</displayx>

```xml
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="09f35bc1-39f7-4ff9-ab46-a8336772d40b" name="Start" type="Start">
<subsheetid>88411255-de1b-4e74-b440-0b53871137a7</subsheetid>
<loginhibit/>
<preconditions>
<condition narrative="Cassini exists on the machine."/>
</preconditions>
<postconditions>
<condition narrative="Cassini will be launched."/>
</postconditions>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>2c7be70a-9b44-468c-87ee-26c61ca0816c</onsuccess>
</stage>
<stage stageid="bdfb0761-ff5a-4abe-a6b6-a1d45ab3e0f9" name="End" type="End">
<subsheetid>88411255-de1b-4e74-b440-0b53871137a7</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>135</displayy>
```

```xml
<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="2c7be70a-9b44-468c-87ee-26c61ca0816c" name="Connected?" type="SubSheet">

<subsheetid>88411255-de1b-4e74-b440-0b53871137a7</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-45</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<outputs>

<output type="flag" name="Connected" narrative="True if Cassini is currently running, False otherwise" sta

</outputs>

<onsuccess>97381553-06b4-4d29-a209-38f785d4ff4f</onsuccess>

<processid>2e43b180-a59a-48c3-9bb5-e64b6d1665be</processid>

</stage>

<stage stageid="96120440-053d-4e12-93dc-472f7cd5331a" name="Connected" type="Data">

<subsheetid>88411255-de1b-4e74-b440-0b53871137a7</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-15</displayy>

<displaywidth>120</displaywidth>
```

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="ceb7127f-2110-4a70-878c-a6b661e785e6" name="Local Variables" type="Block">

<subsheetid>88411255-de1b-4e74-b440-0b53871137a7</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-270</displayx>

<displayy>-45</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="7FB2E5"/>

</stage>

<stage stageid="97381553-06b4-4d29-a209-38f785d4ff4f" name="Connected?" type="Decision">

<subsheetid>88411255-de1b-4e74-b440-0b53871137a7</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>15</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

```xml
<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<decision expression="[Connected]"/>

<ontrue>4e275575-9794-4ffc-8f57-b63cabc856cc</ontrue>

<onfalse>193cf1da-8749-4b8d-b678-05e2ec87a67c</onfalse>

</stage>

<stage stageid="4e275575-9794-4ffc-8f57-b63cabc856cc" name="End1" type="End">

<subsheetid>88411255-de1b-4e74-b440-0b53871137a7</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>135</displayx>

<displayy>15</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="193cf1da-8749-4b8d-b678-05e2ec87a67c" name="Launch Cassini" type="Navigate">

<subsheetid>88411255-de1b-4e74-b440-0b53871137a7</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>75</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>bdfb0761-ff5a-4abe-a6b6-a1d45ab3e0f9</onsuccess>
```

```
<step>

<element id="ca645d77-42be-4b57-b2b3-a0c485f432f0"/>

<action>

<id>Launch</id>

<arguments>

<argument>

<id>Path</id>

<value>[QA Root] &amp;amp; "\Cassini\CassiniWebServer.exe"</value>

</argument>

<argument>

<id>CommandLineParams</id>

<value>

</value>

</argument>

<argument>

<id>WorkingDirectory</id>

<value>

</value>

</argument>

<argument>

<id>NonInvasive</id>

<value>

</value>

</argument>

<argument>

<id>ProcessMode</id>

<value>
```

```xml
            </value>

          </argument>

          <argument>

          <id>Options</id>

          <value>

          </value>

          </argument>

          </arguments>

          </action>

        </step>

      </stage>

      <stage stageid="69cf9dfa-766c-499a-8ecc-60c9ce842b58" name="Input Cassini Parameters" type="SubSh

        <subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>

        <narrative>Enters parameters into Cassini application.</narrative>

        <displayx>-165</displayx>

        <displayy>-75</displayy>

        <displaywidth>150</displaywidth>

        <displayheight>90</displayheight>

        <font family="Segoe UI" size="10" style="Regular" color="000000"/>

      </stage>

      <stage stageid="4655bf78-2630-4ce1-82e4-ac76b1683833" name="Start" type="Start">

        <subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>

        <loginhibit/>

        <preconditions>

        <condition narrative="Cassini is already launched and attached."/>

        </preconditions>

        <postconditions>
```

```xml
<condition narrative="Parameters are entered into Cassini"/>

</postconditions>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Application Dirtectory" narrative="Application Directory value, default to C:\BlueP

<input type="number" name="Server Port" narrative="Server port value, default to 8089" stage="Server Po

<input type="text" name="Virtual Root" narrative="Virtual Root value, default to /" stage="Virtual Root"/>

</inputs>

<onsuccess>7b07a50f-9dcb-41ee-9d2f-09c8a1d61fc5</onsuccess>

</stage>

<stage stageid="0ecc9493-e72c-405c-be1f-baddcb211cd7" name="End" type="End">

<subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>255</displayx>

<displayy>435</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>
```

```xml
<stage stageid="8ab9c5be-7f64-4aee-a26d-be2c5a11d4a2" name="Application Dirtectory" type="Data">
<subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>
<narrative>
</narrative>
<displayx>-165</displayx>
<displayy>15</displayy>
<displaywidth>120</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue xml:space="preserve">\Code\HTML</initialvalue>
<private/>
<alwaysinit/>
</stage>
<stage stageid="4a0c59ff-f68b-4049-9257-077eaa77c0b3" name="Server Port" type="Data">
<subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>
<narrative>
</narrative>
<displayx>-165</displayx>
<displayy>45</displayy>
<displaywidth>120</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<datatype>number</datatype>
<initialvalue>8089</initialvalue>
<private/>
<alwaysinit/>
```

```xml
</stage>

<stage stageid="299cbfa8-8107-497d-b97c-cf4cc0c5238d" name="Virtual Root" type="Data">

<subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>

<narrative>

</narrative>

<displayx>-165</displayx>

<displayy>75</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue xml:space="preserve"></initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="b0697847-f9c2-4631-b612-8063866d72bc" name="Include Variables" type="Block">

<subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-240</displayx>

<displayy>-15</displayy>

<displaywidth>150</displaywidth>

<displayheight>150</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="7FB2E5"/>

</stage>

<stage stageid="1fb1d2c0-ae9f-4d34-8357-4b0e29c36dc4" name="Time Out" type="WaitEnd">
```

```xml
<subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>135</displayx>

<displayy>-30</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>bd138411-e306-4711-a167-70828fc02d07</onsuccess>

<groupid>cc8b8ed8-f9f3-4802-a4f3-e7cfa0c06d7a</groupid>

</stage>

<stage stageid="7b07a50f-9dcb-41ee-9d2f-09c8a1d61fc5" name="Wait Cassini" type="WaitStart">

<subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-30</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>cc8b8ed8-f9f3-4802-a4f3-e7cfa0c06d7a</groupid>

<choices>

<choice reply="True">

<name>Cassini Main Window Check Exists</name>

<distance>60</distance>
```

<element id="a2222d7c-3ee9-49fb-92d6-e39d2c4380e0"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>[Wait 30]</timeout>

</stage>

<stage stageid="deed7efd-015e-4f51-8eb5-084acda8944c" name="Wait 1" type="Data">

<loginhibit/>

<narrative>

</narrative>

<displayx>180</displayx>

<displayy>-90</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

<initialvalue>1</initialvalue>

<alwaysinit/>

</stage>

<stage stageid="bebc7487-488c-47c1-8f47-24a14dd8256b" name="Wait 5" type="Data">

<loginhibit/>

<narrative>

</narrative>

```xml
<displayx>180</displayx>

<displayy>-60</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

<initialvalue>5</initialvalue>

<alwaysinit/>

</stage>

<stage stageid="eb43ede0-d169-4682-a651-4b1d5f275c43" name="Wait 15" type="Data">

<loginhibit/>

<narrative>

</narrative>

<displayx>180</displayx>

<displayy>0</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

<initialvalue>15</initialvalue>

<alwaysinit/>

</stage>

<stage stageid="3a56c730-7323-41c5-a781-4df4c48e54ea" name="Wait 30" type="Data">

<loginhibit/>

<narrative>

</narrative>

<displayx>180</displayx>
```

```xml
<displayy>30</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

<initialvalue>30</initialvalue>

<alwaysinit/>

</stage>

<stage stageid="08ddaa09-aa20-4373-a664-97bdc6e62c0e" name="Wait 60" type="Data">

<loginhibit/>

<narrative>

</narrative>

<displayx>180</displayx>

<displayy>60</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

<initialvalue>60</initialvalue>

<alwaysinit/>

</stage>

<stage stageid="09eb470d-5678-4feb-9e1e-4a8fc69c43df" name="Global Wait Stages" type="Block">

<loginhibit/>

<narrative>

</narrative>

<displayx>105</displayx>

<displayy>-120</displayy>
```

```xml
<displaywidth>150</displaywidth>

<displayheight>210</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="7FB2E5"/>

</stage>

<stage stageid="ae9a2c6d-88c1-4c5b-9bb6-1796218d5f90" name="Wait 10" type="Data">

<loginhibit/>

<narrative>

</narrative>

<displayx>180</displayx>

<displayy>-30</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

<initialvalue>10</initialvalue>

<alwaysinit/>

</stage>

<stage stageid="bd138411-e306-4711-a167-70828fc02d07" name="Cassini Window Not Found" type="Ex

<subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>

<narrative>

</narrative>

<displayx>240</displayx>

<displayy>-30</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="System Exception" detail="&amp;quot;Cassini window is not found.&amp;quot;"/>
```

```xml
</stage>
<stage stageid="5ca4a271-b667-43af-9b94-311cc134111c" name="Time Out" type="WaitEnd">
<subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>195</displayx>
<displayy>45</displayy>
<displaywidth>60</displaywidth>
<displayheight>60</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>1fbb1aad-cf8d-4593-b5d0-dd1e8b00ed90</onsuccess>
<groupid>e1bb66cb-c2d1-48e2-9a9d-5a1a86e6c491</groupid>
</stage>
<stage stageid="e54d0fbe-df64-4c37-9bdc-4235073815ee" name="Wait AppDirectory" type="WaitStart">
<subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>75</displayx>
<displayy>45</displayy>
<displaywidth>60</displaywidth>
<displayheight>60</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<groupid>e1bb66cb-c2d1-48e2-9a9d-5a1a86e6c491</groupid>
<choices>
<choice reply="True">
```

<name>Dynamic Textbox Check Exists</name>

<distance>60</distance>

<ontrue>abd5a5e4-7e3b-4c35-863e-1839e3117909</ontrue>

<element id="3eba1be0-011c-4ad9-899c-a205945c0d89">

<elementparameter>

<name>MatchIndex</name>

<expression>1</expression>

<datatype>number</datatype>

<comparisontype>Equal</comparisontype>

</elementparameter>

</element>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>[Wait 5]</timeout>

</stage>

<stage stageid="1fbb1aad-cf8d-4593-b5d0-dd1e8b00ed90" name="Application Directory Missing" type="E

<subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>

<narrative>

</narrative>

<displayx>300</displayx>

<displayy>45</displayy>

<displaywidth>90</displaywidth>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="System Exception" detail="&quot;Application Directory element was not found in Ca

</stage>

<stage stageid="907655cd-6211-4a4d-a7a4-3e906702e7a8" name="Time Out" type="WaitEnd">

<subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>d62627e7-3ff9-4bf2-8a65-7f59c0d0a2c0</onsuccess>

<groupid>9de9da19-9034-4973-b4ca-675859a6601b</groupid>

</stage>

<stage stageid="13cd2714-7d26-40fe-a92a-18a74cdf2ec4" name="Wait Server Port" type="WaitStart">

<subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

```xml
<choices>

<choice reply="True">

<name>Dynamic Textbox Check Exists</name>

<distance>60</distance>

<ontrue>d2375ce9-b237-4e6a-bc0f-fbfb32071856</ontrue>

<element id="3eba1be0-011c-4ad9-899c-a205945c0d89">

<elementparameter>

<name>MatchIndex</name>

<expression>2</expression>

<datatype>number</datatype>

<comparisontype>Equal</comparisontype>

</elementparameter>

</element>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>[Wait 5]</timeout>

</stage>

<stage stageid="abd5a5e4-7e3b-4c35-863e-1839e3117909" name="Enter App Directory" type="Write">

<subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>135</displayx>
```

<displayy>105</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>13cd2714-7d26-40fe-a92a-18a74cdf2ec4</onsuccess>

<step expr="[QA Root] &amp; [Application Dirtectory]">

<element id="3eba1be0-011c-4ad9-899c-a205945c0d89">

<elementparameter>

<name>MatchIndex</name>

<expression>1</expression>

<datatype>number</datatype>

<comparisontype>Equal</comparisontype>

</elementparameter>

</element>

</step>

</stage>

<stage stageid="d62627e7-3ff9-4bf2-8a65-7f59c0d0a2c0" name="Server Port Missing" type="Exception">

<subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>

<narrative>

</narrative>

<displayx>360</displayx>

<displayy>180</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="System Exception" detail="&quot;Server Port element was not found in Cassini.&an

</stage>

```xml
<stage stageid="d2375ce9-b237-4e6a-bc0f-fbfb32071856" name="Enter Server Port" type="Write">
<subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>195</displayx>
<displayy>240</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>c39c5aac-ab30-4085-993f-778040158fe9</onsuccess>
<step expr="[Server Port]">
<element id="3eba1be0-011c-4ad9-899c-a205945c0d89">
<elementparameter>
<name>MatchIndex</name>
<expression>2</expression>
<datatype>number</datatype>
<comparisontype>Equal</comparisontype>
</elementparameter>
</element>
</step>
</stage>
<stage stageid="62aea614-1d7b-45b2-a0d2-48cac0700bc0" name="Time Out" type="WaitEnd">
<subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>
<loginhibit/>
<narrative>
</narrative>
```

```xml
<displayx>315</displayx>

<displayy>315</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>738ac7e7-5942-4bf1-bc6f-0fecb24082e9</onsuccess>

<groupid>f049d594-092e-4ef0-8dd3-a45941aa21c8</groupid>

</stage>

<stage stageid="c39c5aac-ab30-4085-993f-778040158fe9" name="Wait Virtual Root" type="WaitStart">

<subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>195</displayx>

<displayy>315</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>f049d594-092e-4ef0-8dd3-a45941aa21c8</groupid>

<choices>

<choice reply="True">

<name>Dynamic Textbox Check Exists</name>

<distance>60</distance>

<ontrue>6a3cb32a-ff30-4fd2-a275-91464953afff</ontrue>

<element id="3eba1be0-011c-4ad9-899c-a205945c0d89">

<elementparameter>

<name>MatchIndex</name>
```

<datatype>number</datatype>

<comparisontype>Equal</comparisontype>

</elementparameter>

</element>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>[Wait 5]</timeout>

</stage>

<stage stageid="738ac7e7-5942-4bf1-bc6f-0fecb24082e9" name="Virtual Root Missing" type="Exception">

<subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>

<narrative>

</narrative>

<displayx>420</displayx>

<displayy>315</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="System Exception" detail="&quot;Virtual Root element was not found in Cassini.&

</stage>

<stage stageid="6a3cb32a-ff30-4fd2-a275-91464953afff" name="Enter Virtual Root" type="Write">

```xml
<narrative>
</narrative>
<displayx>255</displayx>
<displayy>375</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>0ecc9493-e72c-405c-be1f-baddcb211cd7</onsuccess>
<step expr="[Virtual Root]">
<element id="3eba1be0-011c-4ad9-899c-a205945c0d89">
<elementparameter>
<name>MatchIndex</name>
<expression>3</expression>
<datatype>number</datatype>
<comparisontype>Equal</comparisontype>
</elementparameter>
</element>
</step>
</stage>
<stage stageid="8c642b5f-f64d-48ef-be7d-51711e8ef97f" name="Press Start" type="SubSheetInfo">
<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>
<narrative>Presses Start Button</narrative>
<displayx>-180</displayx>
<displayy>-75</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
```

```xml
</stage>

<stage stageid="a955685e-ec2e-466f-9322-047e7f3c8831" name="Start" type="Start">

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<loginhibit/>

<preconditions>

<condition narrative="Cassini is launched and attached."/>

<condition narrative="Start Button Exists"/>

</preconditions>

<postconditions>

<condition narrative="Start Button will be pressed."/>

</postconditions>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Port" narrative="Value of the Port, default to 8089" stage="Port"/>

</inputs>

<onsuccess>1f32bc41-eae0-451d-9bcf-e5bc66f6e1a4</onsuccess>

</stage>

<stage stageid="e1e22690-ccef-489d-9cc8-b24e6c07ba3a" name="End" type="End">

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<loginhibit/>

<narrative>
```

```
</narrative>

<displayx>255</displayx>

<displayy>450</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="cf8cbfc1-b3b8-4d65-baf2-625b8cfd0958" name="Local Variables" type="Block">

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-255</displayx>

<displayy>60</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="7FB2E5"/>

</stage>

<stage stageid="6b540126-0cff-400a-bffc-43c92b0c5c1d" name="Time Out" type="WaitEnd">

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>135</displayx>

<displayy>-30</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>
```

```xml
<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>32789d41-174d-4f25-aaf9-0a02c2d178d6</onsuccess>

<groupid>b2ab1bfe-e585-4887-aba6-67e7b240c305</groupid>

</stage>

<stage stageid="1f32bc41-eae0-451d-9bcf-e5bc66f6e1a4" name="Wait Cassini" type="WaitStart">

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-30</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>b2ab1bfe-e585-4887-aba6-67e7b240c305</groupid>

<choices>

<choice reply="True">

<name>Cassini Main Window Check Exists</name>

<distance>60</distance>

<ontrue>890560a3-fc9c-495e-88f4-7375f54feb4f</ontrue>

<element id="a2222d7c-3ee9-49fb-92d6-e39d2c4380e0"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>
```

</stage>

<stage stageid="32789d41-174d-4f25-aaf9-0a02c2d178d6" name="Cassini Window Not Found" type="Exc

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="System Exception" detail="&quot;Cassini window is not found.&quot;"/>

</stage>

<stage stageid="61132041-af47-4333-b0fd-e46dec5a36be" name="Time Out" type="WaitEnd">

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>5af7232b-af6b-4b8c-b788-8235c30d11e5</onsuccess>

<groupid>8a739f4c-d7b5-4f70-a864-eaf31026e3fa</groupid>

</stage>

<stage stageid="a82d5b69-2d78-4559-abc4-2baba799534d" name="Wait Button" type="WaitStart">

<loginhibit/>

<narrative>

</narrative>

<displayx>135</displayx>

<displayy>240</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>8a739f4c-d7b5-4f70-a864-eaf31026e3fa</groupid>

<choices>

<choice reply="True">

<name>Dynamic Button Check Exists</name>

<distance>60</distance>

<ontrue>226acb8f-5782-42c2-9e82-adaeb83c1664</ontrue>

<element id="1b13529a-d91a-4e0f-b74c-d9b6df3d0b6a">

<elementparameter>

<name>WindowText</name>

<expression>[Button Name]</expression>

<datatype>text</datatype>

<comparisontype>Equal</comparisontype>

</elementparameter>

</element>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

```xml
</choice>

</choices>

<timeout>[Wait 5]</timeout>

</stage>

<stage stageid="0cccb4f1-4397-4f28-a1ca-e27428b9396a" name="Button Name" type="Data">

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<narrative>

</narrative>

<displayx>-180</displayx>

<displayy>90</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue xml:space="preserve">Start</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="5af7232b-af6b-4b8c-b788-8235c30d11e5" name="Button Missing" type="Exception">

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<narrative>

</narrative>

<displayx>360</displayx>

<displayy>240</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>
```

<exception type="System Exception" detail="&quot;Button '&quot; &amp; [Button Name] &a

</stage>

<stage stageid="226acb8f-5782-42c2-9e82-adaeb83c1664" name="Press Start" type="Navigate">

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>195</displayx>

<displayy>300</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<name>WindowText</name>

<expression>[Button Name]</expression>

<datatype>text</datatype>

<comparisontype>Equal</comparisontype>

<action>

<id>Press</id>

</action>

</stage>

```xml
<stage stageid="d7df052c-a983-4b17-8459-3ad4da497dd4" name="Port" type="Data">
<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>
<narrative>
</narrative>
<displayx>-180</displayx>
<displayy>15</displayy>
<displaywidth>120</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue xml:space="preserve">8089</initialvalue>
<private/>
<alwaysinit/>
</stage>
<stage stageid="bcd63641-cd48-4eef-8ee9-3f8a4f7041cf" name="Input Variables" type="Block">
<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-255</displayx>
<displayy>-15</displayy>
<displaywidth>150</displaywidth>
<displayheight>60</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="7FB2E5"/>
</stage>
<stage stageid="763f4552-d0f9-4c68-8865-95a3ba9a72c2" name="Time Out" type="WaitEnd">
<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>
```

```xml
<loginhibit/>

<narrative>

</narrative>

<displayx>195</displayx>

<displayy>45</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>d749f535-dc22-4e6d-b723-6f19ecebca2a</onsuccess>

<groupid>f35174a2-6fa3-49fb-97fd-65c849c5a9df</groupid>

</stage>

<stage stageid="890560a3-fc9c-495e-88f4-7375f54feb4f" name="Wait Server Port" type="WaitStart">

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>75</displayx>

<displayy>45</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>f35174a2-6fa3-49fb-97fd-65c849c5a9df</groupid>

<choices>

<choice reply="True">

<name>Dynamic Textbox Check Exists</name>

<distance>60</distance>

<ontrue>0f161076-fabf-4df3-b657-68929d5f55e5</ontrue>
```

```
<element id="3eba1be0-011c-4ad9-899c-a205945c0d89">

<elementparameter>

<name>MatchIndex</name>

<expression>2</expression>

<datatype>number</datatype>

<comparisontype>Equal</comparisontype>

</elementparameter>

</element>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>[Wait 5]</timeout>

</stage>

<stage stageid="d749f535-dc22-4e6d-b723-6f19ecebca2a" name="Server Port Missing" type="Exception":

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<narrative>

</narrative>

<displayx>300</displayx>

<displayy>45</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="System Exception" detail="&amp;quot;Server Port element was not found in Cassini.&an

</stage>
```

```xml
<stage stageid="0f161076-fabf-4df3-b657-68929d5f55e5" name="Read Server Port" type="Read">
<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>135</displayx>
<displayy>105</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>e127cf09-ec84-4ed4-aa63-55821c7106ba</onsuccess>
<step stage="Server Port">
<element id="3eba1be0-011c-4ad9-899c-a205945c0d89">
<elementparameter>
<name>MatchIndex</name>
<expression>2</expression>
<datatype>number</datatype>
<comparisontype>Equal</comparisontype>
</elementparameter>
</element>
<action>
<id>GetWindowText</id>
</action>
</step>
</stage>
<stage stageid="8d0c993e-55e1-4fff-81a8-469c11bfe35e" name="Server Port" type="Data">
<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>
```

<narrative>

</narrative>

<displayx>-180</displayx>

<displayy>120</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="e127cf09-ec84-4ed4-aa63-55821c7106ba" name="Valid Server Port?" type="Decision">

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>135</displayx>

<displayy>165</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<decision expression="[Server Port] = [Port]"/>

<ontrue>a82d5b69-2d78-4559-abc4-2baba799534d</ontrue>

<onfalse>b24126fe-87db-4df9-8eb5-638b10c74477</onfalse>

</stage>

<stage stageid="b24126fe-87db-4df9-8eb5-638b10c74477" name="Port Mismatch" type="Exception">

```xml
<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<narrative>

</narrative>

<displayx>255</displayx>

<displayy>165</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Business Exception" detail="&amp;quot;Port Mismatch. Port on Cassini: '&amp;quot; &a

</stage>

<stage stageid="2b3321e3-b610-4940-bf14-834d7d10553b" name="Time Out" type="WaitEnd">

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>480</displayx>

<displayy>375</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>e304086c-c61c-48ff-b179-40fb22cce88c</onsuccess>

<groupid>e9c9034d-be40-4028-989b-83c3051f7c6c</groupid>

</stage>

<stage stageid="d15e70e6-7cb2-4ff9-9453-73781b235200" name="Cassini Started?" type="WaitStart">

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<loginhibit/>

<narrative>
```

```xml
</narrative>
<displayx>195</displayx>
<displayy>375</displayy>
<displaywidth>60</displaywidth>
<displayheight>60</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<groupid>e9c9034d-be40-4028-989b-83c3051f7c6c</groupid>
<choices>
<choice reply="True">
<name>Dynamic Click to Browse Link Check Exists</name>
<distance>60</distance>
<ontrue>e1e22690-ccef-489d-9cc8-b24e6c07ba3a</ontrue>
<element id="46b8a069-5c03-4634-9730-023f20f5dfff">
<elementparameter>
<name>Value2</name>
<expression>"http://localhost:" &amp;amp; [Port] &amp;amp; "*"</expression>
<datatype>text</datatype>
<comparisontype>Wildcard</comparisontype>
</elementparameter>
</element>
<condition>
<id>CheckExists</id>
</condition>
<comparetype>Equal</comparetype>
</choice>
<choice reply="True">
<name>Error Message Window Check Exists</name>
```

<element id="364504ba-901a-4db9-8a3f-023d4ea146a3"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>[Wait 15]</timeout>

</stage>

<stage stageid="e304086c-c61c-48ff-b179-40fb22cce88c" name="Button Missing" type="Exception">

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<narrative>

</narrative>

<displayx>585</displayx>

<displayy>375</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="System Exception" detail="&quot;Button '&quot; &amp; [Button Name] &a

</stage>

<stage stageid="80800bb3-0f77-48d3-ae23-9ce9d45ce8f0" name="Read Error" type="Read">

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<loginhibit/>

<narrative>

</narrative>

```xml
<displayx>390</displayx>

<displayy>450</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>60fabe3e-8eca-4e08-8aeb-fab83d16544f</onsuccess>

<step stage="Error Message">

<element id="058d9141-c5cc-4492-8138-4d8b7aeb92d3"/>

<action>

<id>GetWindowText</id>

<arguments>

<argument>

<id>idname</id>

<value>

</value>

</argument>

</arguments>

</action>

</step>

</stage>

<stage stageid="d8b02e3e-372c-4436-b20c-e81e3b0c16f4" name="Error Message" type="Data">

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<narrative>

</narrative>

<displayx>105</displayx>

<displayy>525</displayy>

<displaywidth>150</displaywidth>
```

```xml
<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="60fabe3e-8eca-4e08-8aeb-fab83d16544f" name="Press OK" type="Navigate">

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>390</displayx>

<displayy>510</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>4724e422-456e-43fb-a08b-6370085e907f</onsuccess>

<step>

<element id="1b13529a-d91a-4e0f-b74c-d9b6df3d0b6a">

<elementparameter>

<name>WindowText</name>

<expression>"OK"</expression>

<datatype>text</datatype>

<comparisontype>Equal</comparisontype>

</elementparameter>

</element>
```

<action>

<id>Press</id>

</action>

</step>

</stage>

<stage stageid="60067c63-04b5-4ffd-824e-321f5576ebc7" name="Time Out - Error Gone?" type="WaitEn

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>570</displayx>

<displayy>585</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>32831a97-6fa8-4970-b47f-422fc7fb3c80</onsuccess>

<groupid>0629074f-b9ca-44b6-8997-0b08aa86b3d5</groupid>

</stage>

<stage stageid="4724e422-456e-43fb-a08b-6370085e907f" name="Error Gone?" type="WaitStart">

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>390</displayx>

<displayy>585</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>0629074f-b9ca-44b6-8997-0b08aa86b3d5</groupid>

<choices>

<choice reply="True">

<name>Error Message Window Check Exists</name>

<distance>90</distance>

<ontrue>1942ce56-7dc6-4d1a-a249-238233327aef</ontrue>

<element id="364504ba-901a-4db9-8a3f-023d4ea146a3"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>NotEqual</comparetype>

</choice>

</choices>

<timeout>[Wait 15]</timeout>

</stage>

<stage stageid="fad67a71-c0e4-43f9-b2b5-b97b34ee690e" name="Press Stop" type="SubSheetInfo">

<subsheetid>9becf43b-3f6c-455f-b812-3f5c2c50b4d5</subsheetid>

<narrative>Presses Stop button and Closes Cassini</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="f459eea4-2950-4fa1-8779-4c1492a64091" name="Start" type="Start">

```xml
<loginhibit/>

<preconditions>

<condition narrative="Cassini is launched and attached."/>

<condition narrative="Stop Button Exists."/>

</preconditions>

<postconditions>

<condition narrative="Start Button will be pressed."/>

<condition narrative="Cassini Gets Terminated."/>

</postconditions>

<narrative>

</narrative>

<displayx>0</displayx>

<displayy>-135</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>88a8f10f-d0d3-4a3f-ae43-c642cc5cb36d</onsuccess>

</stage>

<stage stageid="e8fce74f-0904-4967-9787-7e2d209dfdcb" name="Time Out" type="WaitEnd">

<subsheetid>9becf43b-3f6c-455f-b812-3f5c2c50b4d5</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>120</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>88349c5b-825e-49ee-8ced-454238018820</onsuccess>

<groupid>d98c2e15-e4e7-4552-9a85-2ed5a31779d8</groupid>

</stage>

<stage stageid="88a8f10f-d0d3-4a3f-ae43-c642cc5cb36d" name="Wait Cassini" type="WaitStart">

<subsheetid>9becf43b-3f6c-455f-b812-3f5c2c50b4d5</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>0</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>d98c2e15-e4e7-4552-9a85-2ed5a31779d8</groupid>

<choices>

<choice reply="True">

<name>Cassini Main Window Check Exists</name>

<distance>60</distance>

<ontrue>3a240371-bd0e-4304-8cf4-dadefba87ddc</ontrue>

<element id="a2222d7c-3ee9-49fb-92d6-e39d2c4380e0"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

</stage>

<stage stageid="88349c5b-825e-49ee-8ced-454238018820" name="Cassini Window Not Found" type="Ex

<subsheetid>9becf43b-3f6c-455f-b812-3f5c2c50b4d5</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="System Exception" detail="&quot;Cassini window is not found.&quot;"/>

</stage>

<stage stageid="7d7731bc-449b-4713-898d-68f294d621cc" name="Time Out" type="WaitEnd">

<subsheetid>9becf43b-3f6c-455f-b812-3f5c2c50b4d5</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>ad1d0c5d-49ea-415f-979b-51e3b8404855</onsuccess>

<groupid>80d73fc6-11c9-491b-8a5b-6a12e5554d4c</groupid>

</stage>

<stage stageid="3a240371-bd0e-4304-8cf4-dadefba87ddc" name="Wait Button" type="WaitStart">

<loginhibit/>

<narrative>

</narrative>

<displayx>60</displayx>

<displayy>15</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>80d73fc6-11c9-491b-8a5b-6a12e5554d4c</groupid>

<choices>

<choice reply="True">

<name>Dynamic Button Check Exists</name>

<distance>60</distance>

<ontrue>c6e7e1df-5c4e-4d0e-ac0b-550d66de21d8</ontrue>

<element id="1b13529a-d91a-4e0f-b74c-d9b6df3d0b6a">

<elementparameter>

<name>WindowText</name>

<expression>[Button Name]</expression>

<datatype>text</datatype>

<comparisontype>Equal</comparisontype>

</elementparameter>

</element>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

```xml
  </choice>
</choices>
<timeout>[Wait 5]</timeout>
</stage>
<stage stageid="ad1d0c5d-49ea-415f-979b-51e3b8404855" name="Button Missing" type="Exception">
<subsheetid>9becf43b-3f6c-455f-b812-3f5c2c50b4d5</subsheetid>
<narrative>
</narrative>
<displayx>285</displayx>
<displayy>15</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<exception type="System Exception" detail="&amp;quot;Button '&amp;quot; &amp;amp; [Button Name] &a
</stage>
<stage stageid="c6e7e1df-5c4e-4d0e-ac0b-550d66de21d8" name="Press Button" type="Navigate">
<subsheetid>9becf43b-3f6c-455f-b812-3f5c2c50b4d5</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>120</displayx>
<displayy>90</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>b0ad6864-9d3a-4ed2-a8e0-00c1d54178d8</onsuccess>
<step>
```

```xml
<element id="1b13529a-d91a-4e0f-b74c-d9b6df3d0b6a">

<elementparameter>

<name>WindowText</name>

<expression>[Button Name]</expression>

<datatype>text</datatype>

<comparisontype>Equal</comparisontype>

</elementparameter>

</element>

<action>

<id>Press</id>

</action>

</step>

</stage>

<stage stageid="f62a8efa-d407-45a2-8674-ff4dcdb0c570" name="Local Variables" type="Block">

<subsheetid>9becf43b-3f6c-455f-b812-3f5c2c50b4d5</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-270</displayx>

<displayy>-45</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="7FB2E5"/>

</stage>

<stage stageid="d39ad5f0-e354-42e4-b1c8-8dac22a42791" name="Button Name" type="Data">

<subsheetid>9becf43b-3f6c-455f-b812-3f5c2c50b4d5</subsheetid>

<narrative>
```

```xml
</narrative>

<displayx>-195</displayx>

<displayy>-15</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue xml:space="preserve">Stop</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="c9a3ba42-29de-4183-9aa2-5a5f384b56e4" name="Server Port" type="Data">

<subsheetid>9becf43b-3f6c-455f-b812-3f5c2c50b4d5</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>15</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="f9c61956-0193-456b-9e0a-e24b196f7c23" name="End2" type="End">

<subsheetid>9becf43b-3f6c-455f-b812-3f5c2c50b4d5</subsheetid>
```

```xml
<loginhibit/>
<narrative>
</narrative>
<displayx>120</displayx>
<displayy>420</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="1942ce56-7dc6-4d1a-a249-238233327aef" name="Press Stop" type="SubSheet">
<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>480</displayx>
<displayy>645</displayy>
<displaywidth>90</displaywidth>
<displayheight>60</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>8917dbc6-e520-48f1-98b4-e1a21ee63d48</onsuccess>
<processid>9becf43b-3f6c-455f-b812-3f5c2c50b4d5</processid>
</stage>
<stage stageid="8917dbc6-e520-48f1-98b4-e1a21ee63d48" name="Bubble Up" type="Exception">
<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>
<narrative>
</narrative>
<displayx>480</displayx>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Exception" detail="[Error Message]"/>

</stage>

<stage stageid="32831a97-6fa8-4970-b47f-422fc7fb3c80" name="Error Message Not Gone" type="Except

<subsheetid>69094120-0426-4128-91de-98615ff24d86</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="System Exception" detail="&quot;Error message did not disappear after pressing O

</stage>

<stage stageid="06102979-4d1e-4268-9be4-670aebe94b10" name="Connected?" type="SubSheet">

<subsheetid>9becf43b-3f6c-455f-b812-3f5c2c50b4d5</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

```xml
<outputs>
<output type="flag" name="Connected" narrative="True if Cassini is currently running, False otherwise" sta
</outputs>
<onsuccess>5ebf8df5-2c7e-405a-b34e-6dfeaa0dceef</onsuccess>
<processid>2e43b180-a59a-48c3-9bb5-e64b6d1665be</processid>
</stage>
<stage stageid="dc7ce2b9-f972-4885-a643-6cf47ea488dd" name="Connected" type="Data">
<subsheetid>9becf43b-3f6c-455f-b812-3f5c2c50b4d5</subsheetid>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>90</displayy>
<displaywidth>120</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<datatype>flag</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
<stage stageid="a9739b9d-6966-4bb1-939f-e63c57d31a10" name="Time Out" type="WaitEnd">
<subsheetid>9becf43b-3f6c-455f-b812-3f5c2c50b4d5</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>120</displayx>
<displayy>210</displayy>
```

```xml
<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>06102979-4d1e-4268-9be4-670aebe94b10</onsuccess>

<groupid>ad18e9be-7534-4df4-b684-de612dfdfc36</groupid>

</stage>

<stage stageid="b0ad6864-9d3a-4ed2-a8e0-00c1d54178d8" name="Wait 1 Sec" type="WaitStart">

<subsheetid>9becf43b-3f6c-455f-b812-3f5c2c50b4d5</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>120</displayx>

<displayy>150</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>ad18e9be-7534-4df4-b684-de612dfdfc36</groupid>

<choices/>

<timeout>[Wait 1]</timeout>

</stage>

<stage stageid="5ebf8df5-2c7e-405a-b34e-6dfeaa0dceef" name="Still Connected?" type="Decision">

<subsheetid>9becf43b-3f6c-455f-b812-3f5c2c50b4d5</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>120</displayx>

<displayy>360</displayy>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="System Exception" detail="&quot;Cassini did not stop after pressing Stop button.&a

</stage>

<stage stageid="f74d81e2-8ae2-42f8-a520-8d8e5cffafe7" name="Input Variables" type="Block">

<subsheetid>9becf43b-3f6c-455f-b812-3f5c2c50b4d5</subsheetid>

<displayx>-270</displayx>

```xml
<font family="Segoe UI" size="10" style="Regular" color="7FB2E5"/>
</stage>
<stage stageid="92ec4306-c922-4c6e-a287-5f0f8e85cf70" name="QA Root" type="Data">
<subsheetid>88411255-de1b-4e74-b440-0b53871137a7</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>30</displayy>
<displaywidth>120</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue xml:space="preserve">H:\automate\qa</initialvalue>
<exposure>Environment</exposure>
<private/>
<alwaysinit/>
</stage>
<stage stageid="f1a4bdd2-221e-4f04-8d97-6dfdb4096e30" name="QA Root" type="Data">
<subsheetid>5e8c067f-8d81-487b-bb58-57cb9d7efe87</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-165</displayx>
<displayy>105</displayy>
<displaywidth>120</displaywidth>
<displayheight>30</displayheight>
```

```xml
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue/>
<exposure>Environment</exposure>
<private/>
<alwaysinit/>
</stage>
</process>
<process name="Child-Notepad" version="1.0" bpversion="6.4.0.7753" narrative="" byrefcollection="true" t
<appdef/>
<parentobject>Parent-Notepad</parentobject>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
<preconditions/>
<endpoint narrative=""/>
<subsheet subsheetid="e3e02186-d468-4740-965b-0a3bc992edef" type="CleanUp" published="True">
<name>Clean Up</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="0eabe3a8-de4d-49a4-b9a2-93ae984de910" type="Normal" published="True">
```

```xml
<name>DoSomething</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<stage stageid="709c8255-3103-469e-a1d8-1eac3546c55c" name="Start" type="Start">
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>ff799bce-3b7b-478b-be1a-c3a0da011e3d</onsuccess>
</stage>
<stage stageid="ff799bce-3b7b-478b-be1a-c3a0da011e3d" name="End" type="End">
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>90</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
```

```xml
</stage>
<stage stageid="5867afe8-ea29-44b1-bd62-a99aef80cad1" name="Stage1" type="ProcessInfo">
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-105</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<references>
<reference>System.dll</reference>
<reference>System.Data.dll</reference>
<reference>System.Xml.dll</reference>
<reference>System.Drawing.dll</reference>
</references>
<imports>
<import>System</import>
<import>System.Drawing</import>
<import>System.Data</import>
</imports>
<language>visualbasic</language>
<globalcode></globalcode>
<code></code>
</stage>
<stage stageid="6c67ce33-5226-4a69-939f-da4cd85d3c90" name="Clean Up" type="SubSheetInfo">
<subsheetid>e3e02186-d468-4740-965b-0a3bc992edef</subsheetid>
<narrative>
```

```xml
</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="f8832318-3fba-41e5-80e0-1a392b1ddcaf" name="Start" type="Start">

<subsheetid>e3e02186-d468-4740-965b-0a3bc992edef</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>3c0750a8-70ee-4940-b720-f794adf3fe87</onsuccess>

</stage>

<stage stageid="3c0750a8-70ee-4940-b720-f794adf3fe87" name="End" type="End">

<subsheetid>e3e02186-d468-4740-965b-0a3bc992edef</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>
```

```
<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="6bbfe849-4bf2-440e-b407-ffeb6dabe094" name="DoSomething" type="SubSheetInfo">

<subsheetid>0eabe3a8-de4d-49a4-b9a2-93ae984de910</subsheetid>

<narrative>

</narrative>

<displayx>-120</displayx>

<displayy>-150</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="6e7e5fbe-253f-4d1b-bec3-1dd53abaf216" name="Start" type="Start">

<subsheetid>0eabe3a8-de4d-49a4-b9a2-93ae984de910</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-180</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>6283a30d-78f6-4d0f-8a77-69f156a65da7</onsuccess>

</stage>

<stage stageid="df96b3e7-2534-4d9d-a864-d1f9385f08ed" name="End" type="End">

<subsheetid>0eabe3a8-de4d-49a4-b9a2-93ae984de910</subsheetid>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="3502b675-d623-40c3-b5c6-67d44f83d456" name="Note1" type="Note">

<subsheetid>e3e02186-d468-4740-965b-0a3bc992edef</subsheetid>

<narrative>Clean Up Page

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically immediately after closing your business object at the end of

You will not be able to call this action from a business process, nor will it be called at any other time than be

<displayx>-180</displayx>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="89d61668-57a1-4a17-aeda-a563007712c8" name="Note2" type="Note">

<narrative>Initialise Page

This is an optional page where you might choose to perform some initialisation tasks after your business ol

The initialise action will be called automatically immediately after loading your business object.

You will not be able to call this action from a business process, nor will it be called at any other time than at

<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="a0a32f06-8c9d-47f7-a18b-eead4ff465c4" name="Launch" type="Action">

<subsheetid>0eabe3a8-de4d-49a4-b9a2-93ae984de910</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>25d0703f-48da-4e74-9f80-ae7296ff93e6</onsuccess>

<resource object="Parent-Notepad" action="Launch"/>

</stage>

<stage stageid="25d0703f-48da-4e74-9f80-ae7296ff93e6" name="Terminate" type="Action">

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>5a80e18a-677b-428c-b8c6-17eb7424f08d</onsuccess>

<resource object="Parent-Notepad" action="Terminate"/>

</stage>

<stage stageid="6283a30d-78f6-4d0f-8a77-69f156a65da7" name="Note3" type="Note">

<subsheetid>0eabe3a8-de4d-49a4-b9a2-93ae984de910</subsheetid>

<narrative>Here comes the broken bit, you ready?</narrative>

<displayy>-135</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>a0a32f06-8c9d-47f7-a18b-eead4ff465c4</onsuccess>

</stage>

<stage stageid="5a80e18a-677b-428c-b8c6-17eb7424f08d" name="Note3" type="Note">

<subsheetid>0eabe3a8-de4d-49a4-b9a2-93ae984de910</subsheetid>

<narrative>Few, it worked!</narrative>

<displayx>15</displayx>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>df96b3e7-2534-4d9d-a864-d1f9385f08ed</onsuccess>

</stage>

</process>

<process name="Chrome controls-lists" version="1.0" bpversion="6.5.0.11200" narrative="" byrefcollection

<appdef/>

<parentobject>Chrome App Model</parentobject>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

<preconditions/>

<endpoint narrative=""/>

<subsheet subsheetid="ff98541c-4f31-4170-83d8-cba31e77ffb3" type="CleanUp" published="True">

<name>Clean Up</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="0e5943fb-a196-4c62-b682-232bd5d8df52" type="Normal" published="True">

<name>Select List Item</name>

<view>

```xml
<camerax>-45</camerax>

<cameray>-168</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="9a8641c0-4c3a-424c-9d0d-6c2ee9a8ec7c" type="Normal" published="True">

<name>Get Selected Item</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="b06050e5-6559-4bb9-afd6-7d4317bb236c" type="Normal" published="True">

<name>Get Selected Items Text</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="07b4bb9b-2361-4eb6-8d53-8d5fb91e9adf" type="Normal" published="True">

<name>Verify Selected</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>
```

```xml
</view>

</subsheet>

<subsheet subsheetid="e1179985-2580-496d-b6ee-c701d27bf979" type="Normal" published="True">

<name>Verify Not Selected</name>

<view>

<camerax>0</camerax>

<cameray>-42</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="50d6b7dd-2bd7-4181-ab11-9b8b80341e71" type="Normal" published="True">

<name>ordered list</name>

<view>

<camerax>0</camerax>

<cameray>21</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="aa0c60fb-f903-45a3-86da-58d9e6c9fc29" type="Normal" published="True">

<name>unordered list</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<stage stageid="b9384935-5bf5-4371-8968-6636c1a4f543" name="Start" type="Start">
```

```
<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>26d90b62-f1de-4e1c-81ac-c52dd4be4bbc</onsuccess>

</stage>

<stage stageid="26d90b62-f1de-4e1c-81ac-c52dd4be4bbc" name="End" type="End">

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="8b8fe37e-7489-4e0c-bf85-521a7d2f7963" name="Stage1" type="ProcessInfo">

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<references>

<reference>System.dll</reference>

<reference>System.Data.dll</reference>

<reference>System.Xml.dll</reference>

<reference>System.Drawing.dll</reference>

</references>

<imports>

<import>System</import>

<import>System.Drawing</import>

<import>System.Data</import>

</imports>

<language>visualbasic</language>

<code></code>

</stage>

<stage stageid="3bc34a6e-bd4b-4ca6-a85a-8889b8d636c4" name="Clean Up" type="SubSheetInfo">

<subsheetid>ff98541c-4f31-4170-83d8-cba31e77ffb3</subsheetid>

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="68295faa-616f-415e-80d6-efd81d322536" name="Start" type="Start">

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>dadd32eb-6b7d-4b23-979b-df3ededd217e</onsuccess>

</stage>

<stage stageid="dadd32eb-6b7d-4b23-979b-df3ededd217e" name="End" type="End">

<subsheetid>ff98541c-4f31-4170-83d8-cba31e77ffb3</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="b35f0fe3-59a1-4a3c-a151-c7e4ad5a7fd8" name="Note1" type="Note">

<subsheetid>ff98541c-4f31-4170-83d8-cba31e77ffb3</subsheetid>

<narrative>Clean Up Page

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically immediately after closing your business object at the end of

You will not be able to call this action from a business process, nor will it be called at any other time than be

<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="9f726124-d607-4352-b367-48291f1e352e" name="Note2" type="Note">

<narrative>Initialise Page

This is an optional page where you might choose to perform some initialisation tasks after your business ol

The initialise action will be called automatically immediately after loading your business object.

You will not be able to call this action from a business process, nor will it be called at any other time than a

<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="0f8d14d0-334c-4065-9cb5-faba62953316" name="Select List Item" type="SubSheetInfo">

<subsheetid>0e5943fb-a196-4c62-b682-232bd5d8df52</subsheetid>

```
</narrative>

<displayx>-285</displayx>

<displayy>-285</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="ccc32549-f7e8-40d2-a940-248efa399236" name="Start" type="Start">

<subsheetid>0e5943fb-a196-4c62-b682-232bd5d8df52</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-75</displayx>

<displayy>-315</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<inputs>

<input type="number" name="Item No" stage="Item No"/>

</inputs>

<onsuccess>7658a5db-6a7e-4d75-b69c-3b218da16364</onsuccess>

</stage>

<stage stageid="62e32f80-31c2-4bc1-95d2-3fda2cfc7692" name="Time Out - wait for list to exist" type="W

<subsheetid>0e5943fb-a196-4c62-b682-232bd5d8df52</subsheetid>

<loginhibit/>

<narrative>

</narrative>
```

```
<displayx>-15</displayx>

<displayy>-270</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>df7bd21f-9cbf-46df-a05f-11c91974e0ce</onsuccess>

<groupid>69b5767d-5a38-4a51-88dd-54b41a3101ad</groupid>

</stage>

<stage stageid="7658a5db-6a7e-4d75-b69c-3b218da16364" name="wait for list to exist" type="WaitStart">

<subsheetid>0e5943fb-a196-4c62-b682-232bd5d8df52</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-75</displayx>

<displayy>-270</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>69b5767d-5a38-4a51-88dd-54b41a3101ad</groupid>

<choices>

<choice reply="True">

<name>LIst Check Exists</name>

<distance>30</distance>

<ontrue>5b744b0b-5f13-406a-8355-a9c14a47c9c4</ontrue>

<element id="60b12ca2-b552-43d3-9c0d-335b87aeea69"/>

<condition>

<id>CheckExists</id>
```

```xml
</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>15</timeout>

</stage>

<stage stageid="df7bd21f-9cbf-46df-a05f-11c91974e0ce" name="timeout occurred" type="Exception">

<subsheetid>0e5943fb-a196-4c62-b682-232bd5d8df52</subsheetid>

<narrative>

</narrative>

<displayx>60</displayx>

<displayy>-270</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&amp;quot;time out occurred waiting for list to exist&amp;quot;"/>

</stage>

<stage stageid="5b744b0b-5f13-406a-8355-a9c14a47c9c4" name="Select list item" type="Navigate">

<subsheetid>0e5943fb-a196-4c62-b682-232bd5d8df52</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>-225</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>
```

<onsuccess>66f013b0-1ab3-4b1d-bdf1-6f4865880e1b</onsuccess>

<step>

<element id="60b12ca2-b552-43d3-9c0d-335b87aeea69"/>

<action>

<id>WebSelectListItem</id>

<arguments>

<argument>

<id>itemindex</id>

<value>[Item No]</value>

</argument>

<argument>

<id>itemtext</id>

<value>

</value>

</argument>

</arguments>

</action>

</step>

</stage>

<stage stageid="d91cbf4d-673f-4d0e-9970-8ff5cee86df5" name="Get Selected Item" type="SubSheetInfo"

<subsheetid>9a8641c0-4c3a-424c-9d0d-6c2ee9a8ec7c</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

```
<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="a6b27a61-f951-4473-beac-de3e1ec01dc2" name="Start" type="Start">

<subsheetid>9a8641c0-4c3a-424c-9d0d-6c2ee9a8ec7c</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-15</displayx>

<displayy>-120</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>ef48f250-271a-497f-9beb-dad6cb2fb7e1</onsuccess>

</stage>

<stage stageid="f70d3b93-ac21-4fa9-8395-15080602bd68" name="End" type="End">

<subsheetid>9a8641c0-4c3a-424c-9d0d-6c2ee9a8ec7c</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<outputs>
<output type="collection" name="Value from List" stage="Value from LIst"/>
</outputs>
```

```
</stage>

<stage stageid="10c69ea2-c27c-4c2c-8d11-d52b3739ca39" name="get selected item" type="Read">

<subsheetid>9a8641c0-4c3a-424c-9d0d-6c2ee9a8ec7c</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-30</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>f70d3b93-ac21-4fa9-8395-15080602bd68</onsuccess>

<step stage="Value from LIst">

<element id="60b12ca2-b552-43d3-9c0d-335b87aeea69"/>

<action>

<id>WebGetSelectedItems</id>

</action>

</step>

</stage>

<stage stageid="8e3da8c9-91f3-44de-a656-b082e0146592" name="Value from LIst" type="Collection">

<subsheetid>9a8641c0-4c3a-424c-9d0d-6c2ee9a8ec7c</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>collection</datatype>

</stage>

<stage stageid="34840aa4-46c0-42f1-8e84-8ad57365afc3" name="Time Out - wait for list to exist" type="W

<subsheetid>9a8641c0-4c3a-424c-9d0d-6c2ee9a8ec7c</subsheetid>

<displayy>-75</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<displayx>-15</displayx>

```xml
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<groupid>07a48e19-ded9-471f-b982-fb01f49a80b2</groupid>
<choices>
<choice reply="True">
<name>LIst Check Exists</name>
<distance>30</distance>
<ontrue>10c69ea2-c27c-4c2c-8d11-d52b3739ca39</ontrue>
<element id="60b12ca2-b552-43d3-9c0d-335b87aeea69"/>
<condition>
<id>CheckExists</id>
</condition>
<comparetype>Equal</comparetype>
</choice>
</choices>
<timeout>15</timeout>
</stage>
<stage stageid="020f0ff4-44ad-41c7-bbda-84ab3722441c" name="timeout occurred" type="Exception">
<subsheetid>9a8641c0-4c3a-424c-9d0d-6c2ee9a8ec7c</subsheetid>
<narrative>
</narrative>
<displayx>120</displayx>
<displayy>-75</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<exception type="Failure" detail="&amp;quot;time out occurred waiting for list to exist&amp;quot;"/>
</stage>
```

<stage stageid="e5c1ee92-c25f-4f26-aca3-9b449e1f15b0" name="Get Selected Items Text" type="SubSh

<subsheetid>b06050e5-6559-4bb9-afd6-7d4317bb236c</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="e9ac4f69-1c5f-4fd6-a079-af2bb990e2cd" name="Start" type="Start">

<subsheetid>b06050e5-6559-4bb9-afd6-7d4317bb236c</subsheetid>

<displayy>-105</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>3a0e87ad-844b-42a1-bb20-dae7d1bc0b43</onsuccess>

</stage>

<stage stageid="08081068-8dbb-4e98-ac4d-5d021d3c75fc" name="End" type="End">

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="3d545637-04bb-4687-9b71-c2964d550fd7" name="get selected items text" type="Read">

<subsheetid>b06050e5-6559-4bb9-afd6-7d4317bb236c</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>45</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>08081068-8dbb-4e98-ac4d-5d021d3c75fc</onsuccess>

<step stage="selected items text">

<element id="60b12ca2-b552-43d3-9c0d-335b87aeea69"/>

<action>

<id>WebGetSelectedItemsText</id>

</action>

</step>

</stage>

```xml
<stage stageid="017e7a58-795d-4a8b-b1df-7fad9cc8c79e" name="selected items text" type="Collection">
<subsheetid>b06050e5-6559-4bb9-afd6-7d4317bb236c</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-180</displayx>
<displayy>-15</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<datatype>collection</datatype>
<private/>
<alwaysinit/>
</stage>
<stage stageid="f1a033c9-ec07-471c-8d59-9fdd9c7f9f2c" name="Time Out - wait for list to exist" type="W
<subsheetid>b06050e5-6559-4bb9-afd6-7d4317bb236c</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>75</displayx>
<displayy>-60</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>4421e496-f188-4ea6-8f65-4709a3420739</onsuccess>
<groupid>89ba1a67-9bc8-46f1-a24d-397d70ebc37e</groupid>
</stage>
```

```xml
<stage stageid="3a0e87ad-844b-42a1-bb20-dae7d1bc0b43" name="wait for list to exist" type="WaitStart">
<subsheetid>b06050e5-6559-4bb9-afd6-7d4317bb236c</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-60</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<groupid>89ba1a67-9bc8-46f1-a24d-397d70ebc37e</groupid>
<choices>
<choice reply="True">
<name>LIst Check Exists</name>
<distance>30</distance>
<ontrue>3d545637-04bb-4687-9b71-c2964d550fd7</ontrue>
<element id="60b12ca2-b552-43d3-9c0d-335b87aeea69"/>
<condition>
<id>CheckExists</id>
</condition>
<comparetype>Equal</comparetype>
</choice>
</choices>
<timeout>15</timeout>
</stage>
<stage stageid="4421e496-f188-4ea6-8f65-4709a3420739" name="timeout occurred" type="Exception">
<subsheetid>b06050e5-6559-4bb9-afd6-7d4317bb236c</subsheetid>
```

<narrative>

</narrative>

<displayx>135</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&quot;time out occurred waiting for list to exist&quot;"/>

</stage>

<stage stageid="0065dada-48df-4979-b6a2-b5eb1a982c4f" name="Verify Selected" type="SubSheetInfo">

<subsheetid>07b4bb9b-2361-4eb6-8d53-8d5fb91e9adf</subsheetid>

<narrative>Hardcoded checks for test purpose.</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="764186f1-2dfc-42d7-ab31-2691ff23585c" name="Start" type="Start">

<subsheetid>07b4bb9b-2361-4eb6-8d53-8d5fb91e9adf</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>1be1094b-d824-4493-b764-f1883d6af40f</onsuccess>

</stage>

<stage stageid="363c5a89-22d6-40c2-ae4f-ba7473cfb36c" name="End" type="End">

<subsheetid>07b4bb9b-2361-4eb6-8d53-8d5fb91e9adf</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="d6542e69-4b9f-4c8f-8d9a-ba4f3aa35a49" name="Verify Not Selected" type="SubSheetIn

<subsheetid>e1179985-2580-496d-b6ee-c701d27bf979</subsheetid>

<narrative>Hardcoded check for test purposes</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="aac54bcc-8486-453d-9ee1-4f7135155a68" name="Start" type="Start">

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>a3ebe6ef-4282-42b9-9b84-5ee270e4e5fc</onsuccess>

</stage>

<stage stageid="cde46400-cc49-4961-81e4-4bbc8d6ee6ba" name="verify item is selected" type="Read">

<subsheetid>07b4bb9b-2361-4eb6-8d53-8d5fb91e9adf</subsheetid>

<displayy>-15</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>363c5a89-22d6-40c2-ae4f-ba7473cfb36c</onsuccess>

<step stage="item is selected">

<element id="2eac7e08-bb70-43a9-8bb8-ab1c93dd32c3"/>

<action>

<id>WebGetIsSelected</id>

</action>

```xml
</step>

</stage>

<stage stageid="0b39fea6-fa1c-412d-9f4e-7266dd822e5f" name="item is selected" type="Data">

<subsheetid>07b4bb9b-2361-4eb6-8d53-8d5fb91e9adf</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-180</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

<initialvalue>False</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="60aec860-6867-42e9-88ce-c06af463c9e8" name="End" type="End">

<subsheetid>e1179985-2580-496d-b6ee-c701d27bf979</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>45</displayx>

<displayy>0</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>
```

</stage>

<stage stageid="600e0aa4-c1ae-4db1-88ba-e0d666391483" name="verify item is NOT selected" type="Re

<subsheetid>e1179985-2580-496d-b6ee-c701d27bf979</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>45</displayx>

<displayy>-45</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>60aec860-6867-42e9-88ce-c06af463c9e8</onsuccess>

<step stage="item is NOT selected">

<element id="39fbb3b7-4a13-48d6-b036-76179536c895"/>

<action>

<id>WebGetIsSelected</id>

</action>

</step>

</stage>

<stage stageid="47af79e2-4b29-4a5c-96a0-3ea272f7939e" name="item is NOT selected" type="Data">

<subsheetid>e1179985-2580-496d-b6ee-c701d27bf979</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

<initialvalue>False</initialvalue>

</stage>

<stage stageid="49841ddf-3725-4e91-97ed-4f8d5416d840" name="Time Out - wait for list to exist" type="\

<subsheetid>07b4bb9b-2361-4eb6-8d53-8d5fb91e9adf</subsheetid>

<displayy>-60</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>ae96b83f-06bf-411c-bead-79f5d4087253</onsuccess>

<groupid>829cf724-13c1-44b7-b703-51de83b0e074</groupid>

</stage>

<stage stageid="1be1094b-d824-4493-b764-f1883d6af40f" name="wait for list to exist" type="WaitStart">

```xml
</narrative>

<displayx>15</displayx>

<displayy>-60</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>829cf724-13c1-44b7-b703-51de83b0e074</groupid>

<choices>

<choice reply="True">

<name>LIst Check Exists</name>

<distance>30</distance>

<ontrue>cde46400-cc49-4961-81e4-4bbc8d6ee6ba</ontrue>

<element id="60b12ca2-b552-43d3-9c0d-335b87aeea69"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>15</timeout>

</stage>

<stage stageid="ae96b83f-06bf-411c-bead-79f5d4087253" name="timeout occurred" type="Exception">

<subsheetid>07b4bb9b-2361-4eb6-8d53-8d5fb91e9adf</subsheetid>

<narrative>

</narrative>

<displayx>135</displayx>

<displayy>-60</displayy>
```

```
<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&amp;quot;time out occurred waiting for list to exist&amp;quot;"/>

</stage>

<stage stageid="66f013b0-1ab3-4b1d-bdf1-6f4865880e1b" name="End1" type="End">

<subsheetid>0e5943fb-a196-4c62-b682-232bd5d8df52</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>-180</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="d91fa3d6-9d3a-4bba-932e-411952041302" name="Time Out - wait for list to exist" type="

<subsheetid>e1179985-2580-496d-b6ee-c701d27bf979</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>75</displayx>

<displayy>-90</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>16aedb33-d73d-47b2-8dcb-e356306219d3</onsuccess>
```

```xml
<groupid>df08b741-ed17-4b70-ab2b-7dacec2978a0</groupid>
</stage>
<stage stageid="a3ebe6ef-4282-42b9-9b84-5ee270e4e5fc" name="wait for list to exist" type="WaitStart">
<subsheetid>e1179985-2580-496d-b6ee-c701d27bf979</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-90</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<groupid>df08b741-ed17-4b70-ab2b-7dacec2978a0</groupid>
<choices>
<choice reply="True">
<name>LIst Check Exists</name>
<distance>30</distance>
<ontrue>600e0aa4-c1ae-4db1-88ba-e0d666391483</ontrue>
<element id="60b12ca2-b552-43d3-9c0d-335b87aeea69"/>
<condition>
<id>CheckExists</id>
</condition>
<comparetype>Equal</comparetype>
</choice>
</choices>
<timeout>15</timeout>
</stage>
```

<stage stageid="16aedb33-d73d-47b2-8dcb-e356306219d3" name="timeout occurred" type="Exception">

<subsheetid>e1179985-2580-496d-b6ee-c701d27bf979</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&quot;time out occurred waiting for list to exist&quot;"/>

</stage>

<stage stageid="b2f9c877-d3ba-4be3-92d0-3855d98c964e" name="Item No" type="Data">

<subsheetid>0e5943fb-a196-4c62-b682-232bd5d8df52</subsheetid>

<displayx>-255</displayx>

<displayy>-195</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

</stage>

<stage stageid="b260b7f9-961b-4622-808d-527e3dfbbb64" name="ordered list" type="SubSheetInfo">

<subsheetid>50d6b7dd-2bd7-4181-ab11-9b8b80341e71</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="d821a41a-800b-4d3c-91ad-944708f9d2b0" name="Start" type="Start">

<subsheetid>50d6b7dd-2bd7-4181-ab11-9b8b80341e71</subsheetid>

<displayx>-30</displayx>

<displayy>-180</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>bd58a34a-a1d8-440b-9148-f15c5a02299c</onsuccess>

</stage>

<stage stageid="23459472-9be2-46cf-8c60-f9b2c13debc8" name="End" type="End">

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<outputs>

<output type="collection" name="Value from ordered list (whole list)" stage="Value from ordered list (whole

</outputs>

</stage>

<stage stageid="218a8fb4-16d2-49cc-8634-54b6e39e25b5" name="Get items from ordered list (whole)" ty

<subsheetid>50d6b7dd-2bd7-4181-ab11-9b8b80341e71</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-75</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>23459472-9be2-46cf-8c60-f9b2c13debc8</onsuccess>

<step stage="Value from ordered list (whole list)">

<element id="e002bc53-91d2-463c-a9c4-d81cddfbce89"/>

<action>

<id>WebGetItems</id>

</action>

</step>

</stage>

<stage stageid="ca174434-894c-49b3-a8c2-5ed46c1a3dac" name="Value from ordered list (whole list)" ty

<subsheetid>50d6b7dd-2bd7-4181-ab11-9b8b80341e71</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>collection</datatype>

</stage>

<stage stageid="d614e935-ffdd-4f86-903d-fd14bf7ec50e" name="Time Out - wait for ordered list to exist" t

<subsheetid>50d6b7dd-2bd7-4181-ab11-9b8b80341e71</subsheetid>

<displayy>-120</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>6db13a1a-f752-4613-a36c-a6b09abdfe98</onsuccess>

<groupid>a3798c4b-d7d3-49c6-bbc5-fb161b1cc71d</groupid>

</stage>

<stage stageid="bd58a34a-a1d8-440b-9148-f15c5a02299c" name="wait for ordered list to exist" type="Wa

<loginhibit/>

<narrative>

</narrative>

<displayx>-30</displayx>

<displayy>-120</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>a3798c4b-d7d3-49c6-bbc5-fb161b1cc71d</groupid>

<choices>

<choice reply="True">

<name>ordered list (whole list) Check Exists</name>

<distance>45</distance>

<ontrue>218a8fb4-16d2-49cc-8634-54b6e39e25b5</ontrue>

<element id="e002bc53-91d2-463c-a9c4-d81cddfbce89"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>15</timeout>

</stage>

<stage stageid="6db13a1a-f752-4613-a36c-a6b09abdfe98" name="timeout ocurred" type="Exception">

<subsheetid>50d6b7dd-2bd7-4181-ab11-9b8b80341e71</subsheetid>

<narrative>

</narrative>

```
<displayx>120</displayx>

<displayy>-120</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&amp;quot;timeout ocurred waiting for the ordered list to exist&amp;quot

</stage>

<stage stageid="9acd7d18-ca4c-4fb2-a876-4940e8b9b5ee" name="unordered list" type="SubSheetInfo">

<subsheetid>aa0c60fb-f903-45a3-86da-58d9e6c9fc29</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="4e325c6d-c681-4297-b7ca-347e431dae96" name="Start" type="Start">

<subsheetid>aa0c60fb-f903-45a3-86da-58d9e6c9fc29</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>-150</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>
```

</stage>

<stage stageid="0e0752da-c1d8-42cc-b37e-8f2a256c8285" name="End" type="End">

<subsheetid>aa0c60fb-f903-45a3-86da-58d9e6c9fc29</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<outputs>

<output type="collection" name="Value from unordered list (whole list)" stage="Value from unordered list (v

</outputs>

</stage>

<stage stageid="e75ef14d-6a31-45e0-80e7-52b998070511" name="Get items from ordered list (whole)" ty

<subsheetid>aa0c60fb-f903-45a3-86da-58d9e6c9fc29</subsheetid>

<displayx>-15</displayx>

<displayy>-45</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

```xml
<step stage="Value from unordered list (whole list)">

<element id="152c427c-7c0a-4f50-8861-699064c20cd3"/>

<action>

<id>WebGetItems</id>

</action>

</step>

</stage>

<stage stageid="6f2014b3-85b9-4174-8e42-9ba48692e33f" name="Value from unordered list (whole list)"

<subsheetid>aa0c60fb-f903-45a3-86da-58d9e6c9fc29</subsheetid>

<narrative>

</narrative>

<displayx>-180</displayx>

<displayy>0</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>collection</datatype>

<private/>

<alwaysinit/>

</stage>

<stage stageid="8ef34637-5d1c-4288-8f86-08297f48f4df" name="Time Out2" type="WaitEnd">

<subsheetid>aa0c60fb-f903-45a3-86da-58d9e6c9fc29</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>30</displayx>

<displayy>-90</displayy>
```

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>4cd04584-cd23-4c10-afa4-ffd1445be8b7</onsuccess>

<groupid>4435006e-1bd8-4fba-a4b3-5cbad85b435e</groupid>

</stage>

<stage stageid="5684481d-a143-4d43-8e69-dcbc6b82042f" name="Wait2" type="WaitStart">

<subsheetid>aa0c60fb-f903-45a3-86da-58d9e6c9fc29</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>-90</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>4435006e-1bd8-4fba-a4b3-5cbad85b435e</groupid>

<choices>

<choice reply="True">

<name>Unordered list (whole list) Check Exists</name>

<distance>30</distance>

<ontrue>e75ef14d-6a31-45e0-80e7-52b998070511</ontrue>

<element id="152c427c-7c0a-4f50-8861-699064c20cd3"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

```
    </choice>

    </choices>

    <timeout>15</timeout>

    </stage>

    <stage stageid="4cd04584-cd23-4c10-afa4-ffd1445be8b7" name="Timeout occurred" type="Exception">

    <subsheetid>aa0c60fb-f903-45a3-86da-58d9e6c9fc29</subsheetid>

    <narrative>

    </narrative>

    <displayx>105</displayx>

    <displayy>-90</displayy>

    <displaywidth>60</displaywidth>

    <displayheight>30</displayheight>

    <font family="Segoe UI" size="10" style="Regular" color="000000"/>

    <exception type="Failure" detail="&amp;quot;timeout ocurred waiting for unordered list&amp;quot;"/>

    </stage>

    </process>

    <process name="Chrome controls-ProgressBar" version="1.0" bpversion="6.3.0.5754" narrative="" byrefco

    <appdef/>

    <parentobject>Chrome App Model</parentobject>

    <view>

    <camerax>0</camerax>

    <cameray>0</cameray>

    <zoom version="2">1.25</zoom>

    </view>

    <preconditions/>

    <endpoint narrative=""/>

    <subsheet subsheetid="da564290-b8be-42a2-b39f-2fe3b790f62e" type="CleanUp" published="True">
```

```xml
<name>Clean Up</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="34a8d2d0-a9c5-43f0-be6e-bcf0348c56f0" type="Normal" published="True">
<name>Get Max PB Value</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="4c51f679-610a-480a-9bb3-3145cda574ca" type="Normal" published="True">
<name>Get Current PB Value</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="ba0462da-a73e-495f-9ab8-793305df0a0e" type="Normal" published="True">
<name>Set PB Value</name>
<view>
<camerax>0</camerax>
```

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<stage stageid="eaf165c5-7cf4-49ad-9f59-89b569185b90" name="Start" type="Start">

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>c16400df-0030-4dc4-8e94-e970ca837f42</onsuccess>

</stage>

<stage stageid="c16400df-0030-4dc4-8e94-e970ca837f42" name="End" type="End">

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="535d73c5-f87a-4b4e-b87a-5947f9234d66" name="Stage1" type="ProcessInfo">

<narrative>

```xml
</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<references>

<reference>System.dll</reference>

<reference>System.Data.dll</reference>

<reference>System.Xml.dll</reference>

<reference>System.Drawing.dll</reference>

</references>

<imports>

<import>System</import>

<import>System.Drawing</import>

<import>System.Data</import>

</imports>

<language>visualbasic</language>

<globalcode></globalcode>

<code></code>

</stage>

<stage stageid="e53902e4-8d7f-4501-b7c6-70e116a416b8" name="Clean Up" type="SubSheetInfo">

<subsheetid>da564290-b8be-42a2-b39f-2fe3b790f62e</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>
```

```
<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="86869257-184f-4edb-a075-10b7d475caf8" name="Start" type="Start">

<subsheetid>da564290-b8be-42a2-b39f-2fe3b790f62e</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>a25e11ee-bb9d-4e6f-ac4b-525f4cc2e93c</onsuccess>

</stage>

<stage stageid="a25e11ee-bb9d-4e6f-ac4b-525f4cc2e93c" name="End" type="End">

<subsheetid>da564290-b8be-42a2-b39f-2fe3b790f62e</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>
```

<stage stageid="38482193-0590-45d2-adb6-b983aa60a5b9" name="Note1" type="Note">

<subsheetid>da564290-b8be-42a2-b39f-2fe3b790f62e</subsheetid>

<narrative>Clean Up Page

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically immediately after closing your business object at the end of

You will not be able to call this action from a business process, nor will it be called at any other time than b

<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="313c64e3-5883-4e1b-851f-92235919f7a8" name="Note2" type="Note">

<narrative>Initialise Page

This is an optional page where you might choose to perform some initialisation tasks after your business ob

The initialise action will be called automatically immediately after loading your business object.

You will not be able to call this action from a business process, nor will it be called at any other time than a

<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

```
<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="ad11fe45-6935-4ee4-9a71-5ff820fc55d3" name="Get Max PB Value" type="SubSheetInfo

<subsheetid>34a8d2d0-a9c5-43f0-be6e-bcf0348c56f0</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="10e13945-72cb-4e3c-bda8-ad00d4faf38c" name="Start" type="Start">

<subsheetid>34a8d2d0-a9c5-43f0-be6e-bcf0348c56f0</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>774e59c2-198a-4f31-a5ba-92247cf48be7</onsuccess>

</stage>

<stage stageid="0bf68fcf-18cc-49d2-acdb-f279e26ec392" name="End" type="End">

<subsheetid>34a8d2d0-a9c5-43f0-be6e-bcf0348c56f0</subsheetid>

<loginhibit/>
```

```
<narrative>

</narrative>

<displayx>45</displayx>

<displayy>30</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<outputs>

<output type="number" name="progress bar max value" stage="progress bar max value"/>

</outputs>

</stage>

<stage stageid="2249d381-7756-4fc6-a5b6-0b2bea7fa87a" name="Get Current PB Value" type="SubShee

<subsheetid>4c51f679-610a-480a-9bb3-3145cda574ca</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="686ba2b8-e39e-4d22-9431-116f769a4c07" name="Start" type="Start">

<subsheetid>4c51f679-610a-480a-9bb3-3145cda574ca</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-30</displayx>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>33b06bea-20e0-437e-aaad-5d6d2d1921a7</onsuccess>

</stage>

<stage stageid="0ece1589-ff98-448a-8515-003a998c0885" name="End" type="End">

<subsheetid>4c51f679-610a-480a-9bb3-3145cda574ca</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="cc98447b-a357-4d58-b099-3e5a66c1b9a7" name="Set PB Value" type="SubSheetInfo">

<subsheetid>ba0462da-a73e-495f-9ab8-793305df0a0e</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="d44d6ccc-2ba7-4d8d-81ad-2b10f632f31d" name="Start" type="Start">

<subsheetid>ba0462da-a73e-495f-9ab8-793305df0a0e</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<inputs>

<input type="number" name="set progress bar value" stage="set progress bar value"/>

</inputs>

<onsuccess>1e5fafcc-5a9f-4592-ac10-6aaa096e6688</onsuccess>

</stage>

<stage stageid="5a5b8948-50a8-4f32-be53-2f6939c7f926" name="End" type="End">

```xml
<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="89c65425-3344-49e9-a4d7-e40d0362c525" name="get max progress bar value" type="Re

<subsheetid>34a8d2d0-a9c5-43f0-be6e-bcf0348c56f0</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>45</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>0bf68fcf-18cc-49d2-acdb-f279e26ec392</onsuccess>

<step stage="progress bar max value">

<element id="d0509594-366b-43b5-b768-04826de62cc3"/>

<action>

<id>WebGetMaxValue</id>

</action>

</step>

</stage>

<stage stageid="f10ac730-e7f0-4b57-b72f-4e8b2322368a" name="progress bar max value" type="Data">

<subsheetid>34a8d2d0-a9c5-43f0-be6e-bcf0348c56f0</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-15</displayy>
```

```xml
<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

<initialvalue>0</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="a57d1943-ebbc-4c23-927e-88d3a3b425af" name="Time Out - waiting for progress bar to

<subsheetid>34a8d2d0-a9c5-43f0-be6e-bcf0348c56f0</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>75</displayx>

<displayy>-60</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>f28002bb-350d-4d65-984d-783d1914534a</onsuccess>

<groupid>b5b8d810-53ae-4009-a30b-20bdd543bdf2</groupid>

</stage>

<stage stageid="774e59c2-198a-4f31-a5ba-92247cf48be7" name="waiting for progress bar to exist" type=

<subsheetid>34a8d2d0-a9c5-43f0-be6e-bcf0348c56f0</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>
```

```xml
<displayy>-60</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>b5b8d810-53ae-4009-a30b-20bdd543bdf2</groupid>

<choices>

<choice reply="True">

<name>Progress Bar Check Exists</name>

<distance>30</distance>

<ontrue>89c65425-3344-49e9-a4d7-e40d0362c525</ontrue>

<element id="d0509594-366b-43b5-b768-04826de62cc3"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>5</timeout>

</stage>

<stage stageid="f28002bb-350d-4d65-984d-783d1914534a" name="Timeout ocurrs" type="Exception">

<subsheetid>34a8d2d0-a9c5-43f0-be6e-bcf0348c56f0</subsheetid>

<narrative>

</narrative>

<displayx>150</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&quot;Timeout occurred waiting for progress bar to exist&quot;

</stage>

<stage stageid="516e0405-2cea-480e-82ec-ff8f37dab982" name="Time Out - waiting for progress bar to e

<subsheetid>4c51f679-610a-480a-9bb3-3145cda574ca</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>30</displayx>

<displayy>-75</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>ff0fdc8b-ae44-42be-97b8-3700d3380d9c</onsuccess>

<groupid>09c2a527-ad22-49be-bf99-055b1e8b92b4</groupid>

</stage>

<stage stageid="33b06bea-20e0-437e-aaad-5d6d2d1921a7" name="waiting for progress bar to exist" type

<subsheetid>4c51f679-610a-480a-9bb3-3145cda574ca</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-30</displayx>

<displayy>-75</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>09c2a527-ad22-49be-bf99-055b1e8b92b4</groupid>

```xml
<choices>
<choice reply="True">
<name>Progress Bar Check Exists</name>
<distance>30</distance>
<ontrue>f5b9703c-7a7a-438d-adee-eeab4a55d910</ontrue>
<element id="d0509594-366b-43b5-b768-04826de62cc3"/>
<condition>
<id>CheckExists</id>
</condition>
<comparetype>Equal</comparetype>
</choice>
</choices>
<timeout>5</timeout>
</stage>
<stage stageid="ff0fdc8b-ae44-42be-97b8-3700d3380d9c" name="Timeout ocurrs" type="Exception">
<subsheetid>4c51f679-610a-480a-9bb3-3145cda574ca</subsheetid>
<narrative>
</narrative>
<displayx>105</displayx>
<displayy>-75</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<exception type="Failure" detail="&amp;quot;Timeout occurred waiting for progress bar to exist&amp;quot;
</stage>
<stage stageid="f5b9703c-7a7a-438d-adee-eeab4a55d910" name="get default current value" type="Read"
<subsheetid>4c51f679-610a-480a-9bb3-3145cda574ca</subsheetid>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>0ece1589-ff98-448a-8515-003a998c0885</onsuccess>

<step stage="progress bar current value">

<element id="d0509594-366b-43b5-b768-04826de62cc3"/>

<action>

<id>WebGetValue</id>

</action>

</step>

</stage>

<stage stageid="0f437f8e-4668-4ab1-99e0-5c64ef5d59d9" name="progress bar current value" type="Data

<subsheetid>4c51f679-610a-480a-9bb3-3145cda574ca</subsheetid>

<displayx>-180</displayx>

<displayy>-30</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="d9016c21-86ec-4122-9a49-75ccbb61dc47" name="Time Out - waiting for progress bar to

<subsheetid>ba0462da-a73e-495f-9ab8-793305df0a0e</subsheetid>

<displayy>-60</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>0d1ccde0-f0e9-41e1-ae4d-9826f2f5f303</onsuccess>

<groupid>5fdb557f-8e93-4340-b559-8311cac2cc0a</groupid>

</stage>

<stage stageid="1e5fafcc-5a9f-4592-ac10-6aaa096e6688" name="waiting for progress bar to exist" type="

<subsheetid>ba0462da-a73e-495f-9ab8-793305df0a0e</subsheetid>

<displayy>-60</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

```
<choices>

<choice reply="True">

<name>Progress Bar Check Exists</name>

<distance>30</distance>

<ontrue>4a0ef020-6437-47b1-a201-9a2573459c52</ontrue>

<element id="d0509594-366b-43b5-b768-04826de62cc3"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>5</timeout>

</stage>

<stage stageid="0d1ccde0-f0e9-41e1-ae4d-9826f2f5f303" name="Timeout ocurrs" type="Exception">

<subsheetid>ba0462da-a73e-495f-9ab8-793305df0a0e</subsheetid>

<narrative>

</narrative>

<displayx>150</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&amp;quot;Timeout occurred waiting for progress bar to exist&amp;quot;

</stage>

<stage stageid="4a0ef020-6437-47b1-a201-9a2573459c52" name="set new value for progress bar" type="

<subsheetid>ba0462da-a73e-495f-9ab8-793305df0a0e</subsheetid>
```

```xml
<loginhibit/>

<narrative>

</narrative>

<displayx>45</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>5a5b8948-50a8-4f32-be53-2f6939c7f926</onsuccess>

<step expr="[set progress bar value]">

<element id="d0509594-366b-43b5-b768-04826de62cc3"/>

</step>

</stage>

<stage stageid="31157250-24b9-4325-9ec6-e0304f53eb4e" name="set progress bar value" type="Data">

<subsheetid>ba0462da-a73e-495f-9ab8-793305df0a0e</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-180</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

<initialvalue>75</initialvalue>

<private/>

<alwaysinit/>
```

```xml
</stage>

</process>

<process name="Chrome controls-radio_checkbox" version="1.0" bpversion="6.4.0.6278" narrative="" byre

<appdef/>

<parentobject>Chrome App Model</parentobject>

<view>

<camerax>0</camerax>

<cameray>-21</cameray>

<zoom version="2">1.25</zoom>

</view>

<preconditions/>

<endpoint narrative=""/>

<subsheet subsheetid="2c3d559f-c225-4b39-a9ea-c618b8183b8b" type="CleanUp" published="True">

<name>Clean Up</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="72d9bcf6-8481-4d98-bd98-2cc67814bfba" type="Normal" published="True">

<name>Get Radio Button 1 Status</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>
```

```
</subsheet>

<subsheet subsheetid="caddcd27-2e3b-49b6-87e5-90c1accdaee3" type="Normal" published="True">

<name>Get Radio Button 2 Status</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="3809c87b-382a-424a-b477-5660e381a63d" type="Normal" published="True">

<name>Set Radio Button 1</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="f2a413ad-5043-4268-a7ca-05ca8bc975c2" type="Normal" published="True">

<name>Set Radio Button 2</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="1c8b1e5e-7da9-4209-904a-4c7269b7bba2" type="Normal" published="True">

<name>Get Checkbox Status</name>
```

```xml
<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="eec5e97f-27e2-4ea3-b209-766316be6fac" type="Normal" published="True">

<name>Set Checkbox Status</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<stage stageid="ddecf62e-120a-4ca7-9c85-01b12dc23f83" name="Start" type="Start">

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>201bc3b4-529a-4df1-bd75-bfa2324aac82</onsuccess>

</stage>

<stage stageid="201bc3b4-529a-4df1-bd75-bfa2324aac82" name="End" type="End">

<loginhibit/>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="7ac7ff05-b4b1-437c-bbae-0a638621e58f" name="Stage1" type="ProcessInfo">

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<references>

<reference>System.dll</reference>

<reference>System.Data.dll</reference>

<reference>System.Xml.dll</reference>

<reference>System.Drawing.dll</reference>

</references>

<imports>

<import>System</import>

<import>System.Drawing</import>

<import>System.Data</import>

</imports>

```xml
<language>visualbasic</language>

<globalcode></globalcode>

<code></code>

</stage>

<stage stageid="7f379e15-1f1e-448f-839d-f769c492700a" name="Clean Up" type="SubSheetInfo">

<subsheetid>2c3d559f-c225-4b39-a9ea-c618b8183b8b</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="4546110f-d13f-4c52-af2a-2fdcb271e4cb" name="Start" type="Start">

<subsheetid>2c3d559f-c225-4b39-a9ea-c618b8183b8b</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>a7e9f86c-52be-4ead-9193-7f9b591864dc</onsuccess>

</stage>

<stage stageid="a7e9f86c-52be-4ead-9193-7f9b591864dc" name="End" type="End">
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="e9ef8873-6e59-4224-9f0c-5f1bb6d6d7cc" name="Note1" type="Note">

<subsheetid>2c3d559f-c225-4b39-a9ea-c618b8183b8b</subsheetid>

<narrative>Clean Up Page

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically immediately after closing your business object at the end of

You will not be able to call this action from a business process, nor will it be called at any other time than be

<displayx>-180</displayx>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="b368945b-b439-4fb8-88c1-4182145abc5a" name="Note2" type="Note">

<narrative>Initialise Page

This is an optional page where you might choose to perform some initialisation tasks after your business ob

The initialise action will be called automatically immediately after loading your business object.

You will not be able to call this action from a business process, nor will it be called at any other time than a

```xml
<displayx>-180</displayx>
<displayy>60</displayy>
<displaywidth>180</displaywidth>
<displayheight>230</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="80cc4dbd-1032-4c10-b7e0-336379f34b31" name="Get Checkbox Status" type="SubShee
<subsheetid>1c8b1e5e-7da9-4209-904a-4c7269b7bba2</subsheetid>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-105</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="4260ff3c-4143-4bcd-8f12-f0c55e8207e9" name="Start" type="Start">
<subsheetid>1c8b1e5e-7da9-4209-904a-4c7269b7bba2</subsheetid>
<loginhibit/>
<narrative>
</narrative>
```

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>65c1aadf-e4b7-44c0-91a2-b2b4896c97a0</onsuccess>

</stage>

<stage stageid="138d916b-5590-41d8-8180-af70fdcbd6d9" name="End" type="End">

<subsheetid>1c8b1e5e-7da9-4209-904a-4c7269b7bba2</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>45</displayx>

<displayy>30</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<outputs>

</outputs>

</stage>

<stage stageid="5160b084-986a-4959-b2f0-4e865e60b452" name="Set Checkbox Status" type="SubShe

<subsheetid>eec5e97f-27e2-4ea3-b209-766316be6fac</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

```xml
<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="a7c238c7-fd45-484c-a0b6-4baac63c306d" name="Start" type="Start">

<subsheetid>eec5e97f-27e2-4ea3-b209-766316be6fac</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>9a892ef4-bfbf-4272-affe-211a8e49b0ab</onsuccess>

</stage>

<stage stageid="d54fd2c7-4bee-4e55-9a62-75303fd4f987" name="End" type="End">

<subsheetid>eec5e97f-27e2-4ea3-b209-766316be6fac</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>45</displayx>

<displayy>30</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>
```

```xml
<stage stageid="0b568b38-aef5-42b2-b8bb-0111d1e2fcd8" name="Time Out1" type="WaitEnd">
<subsheetid>1c8b1e5e-7da9-4209-904a-4c7269b7bba2</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>75</displayx>
<displayy>-60</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>16816ac3-7830-4c4f-8136-6f9765d32b22</onsuccess>
<groupid>ed3e1271-e691-4263-97d6-8884e7704f56</groupid>
</stage>
<stage stageid="65c1aadf-e4b7-44c0-91a2-b2b4896c97a0" name="Wait1" type="WaitStart">
<subsheetid>1c8b1e5e-7da9-4209-904a-4c7269b7bba2</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-60</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<groupid>ed3e1271-e691-4263-97d6-8884e7704f56</groupid>
<choices>
<choice reply="True">
<name>checkbox Check Exists</name>
```

```xml
<distance>30</distance>

<ontrue>a1cce094-ded3-46d8-a3b0-00ce8fd605e7</ontrue>

<element id="9afae234-6b65-42fc-980a-b2314a89e463"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>5</timeout>

</stage>

<stage stageid="16816ac3-7830-4c4f-8136-6f9765d32b22" name="timeout on loading page" type="Except

<subsheetid>1c8b1e5e-7da9-4209-904a-4c7269b7bba2</subsheetid>

<narrative>

</narrative>

<displayx>135</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&amp;quot;timeout occurred waiting for checkbox to exist&amp;quot;"/>

</stage>

<stage stageid="5a674ef3-c780-4c29-a784-9fe26848556b" name="Time Out1" type="WaitEnd">

<subsheetid>eec5e97f-27e2-4ea3-b209-766316be6fac</subsheetid>

<loginhibit/>

<narrative>

</narrative>
```

```
<displayx>75</displayx>

<displayy>-60</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>a79710c7-65e6-4a39-b01a-59fbbbd443da</onsuccess>

<groupid>548492c2-67ab-4da7-9244-9ace07ee4757</groupid>

</stage>

<stage stageid="9a892ef4-bfbf-4272-affe-211a8e49b0ab" name="Wait1" type="WaitStart">

<subsheetid>eec5e97f-27e2-4ea3-b209-766316be6fac</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-60</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>548492c2-67ab-4da7-9244-9ace07ee4757</groupid>

<choices>

<choice reply="True">

<name>checkbox Check Exists</name>

<distance>30</distance>

<ontrue>daa0c51a-5462-49ff-b718-add0f34763e8</ontrue>

<element id="9afae234-6b65-42fc-980a-b2314a89e463"/>

<condition>

<id>CheckExists</id>
```

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>5</timeout>

</stage>

<stage stageid="a79710c7-65e6-4a39-b01a-59fbbbd443da" name="timeout on loading page" type="Excep

<subsheetid>eec5e97f-27e2-4ea3-b209-766316be6fac</subsheetid>

<narrative>

</narrative>

<displayx>135</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&quot;timeout occurred waiting for checkbox to exist&quot;"/>

</stage>

<stage stageid="a1cce094-ded3-46d8-a3b0-00ce8fd605e7" name="Get inital state of checkbox" type="Re

<subsheetid>1c8b1e5e-7da9-4209-904a-4c7269b7bba2</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>45</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>138d916b-5590-41d8-8180-af70fdcbd6d9</onsuccess>

<step stage="Value from checkbox">

<element id="9afae234-6b65-42fc-980a-b2314a89e463"/>

<action>

<id>WebGetCheckState</id>

</action>

</step>

</stage>

<stage stageid="7302ba7f-caa0-4590-9b59-be126a9951a3" name="Value from checkbox" type="Data">

<subsheetid>1c8b1e5e-7da9-4209-904a-4c7269b7bba2</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

</stage>

<stage stageid="daa0c51a-5462-49ff-b718-add0f34763e8" name="check the checkbox" type="Navigate">

```xml
<displayx>45</displayx>
<displayy>-15</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>d54fd2c7-4bee-4e55-9a62-75303fd4f987</onsuccess>
<step>
<element id="9afae234-6b65-42fc-980a-b2314a89e463"/>
<action>
<id>WebClick</id>
</action>
</step>
</stage>
<stage stageid="84820760-1091-4bd7-b7b4-ec3679a80bf7" name="Get Radio Button 1 Status" type="Sub
<subsheetid>72d9bcf6-8481-4d98-bd98-2cc67814bfba</subsheetid>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-105</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="16f37c25-7162-45c7-bd84-42ebd0cf625e" name="Start" type="Start">
<subsheetid>72d9bcf6-8481-4d98-bd98-2cc67814bfba</subsheetid>
<loginhibit/>
<narrative>
```

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>27ddc781-e74d-4919-8480-ea40c652e70d</onsuccess>

</stage>

<stage stageid="ab11c624-a5ea-46be-a857-1262d782a15d" name="End" type="End">

<subsheetid>72d9bcf6-8481-4d98-bd98-2cc67814bfba</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>45</displayx>

<displayy>30</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<outputs>

</outputs>

</stage>

<stage stageid="a95bbd2f-aedd-4767-866f-c83002cc9d45" name="read status of radio button 1" type="Re

<subsheetid>72d9bcf6-8481-4d98-bd98-2cc67814bfba</subsheetid>

<loginhibit/>

<narrative>

</narrative>

```xml
<displayx>45</displayx>
<displayy>-15</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>ab11c624-a5ea-46be-a857-1262d782a15d</onsuccess>
<step stage="Value from Radio button 1">
<element id="a96d4a4b-1ebd-4b18-b6f0-47d3d34bfbb9"/>
<action>
<id>WebGetCheckState</id>
</action>
</step>
</stage>
<stage stageid="ab867f10-0947-4186-9204-f6b17f43067d" name="Time Out - Wait for Radio Button 1 to e
<subsheetid>72d9bcf6-8481-4d98-bd98-2cc67814bfba</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>75</displayx>
<displayy>-60</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>7236ad08-4677-4d4e-981b-b0bc2b5193b4</onsuccess>
<groupid>9b5139d3-7b7e-48ec-a9f9-63f43b401f21</groupid>
</stage>
<stage stageid="27ddc781-e74d-4919-8480-ea40c652e70d" name="Wait for Radio Button 1 to exist" type=
```

```xml
<subsheetid>72d9bcf6-8481-4d98-bd98-2cc67814bfba</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-60</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>9b5139d3-7b7e-48ec-a9f9-63f43b401f21</groupid>

<choices>

<choice reply="True">

<name>Radio button 1 Check Exists</name>

<distance>30</distance>

<ontrue>a95bbd2f-aedd-4767-866f-c83002cc9d45</ontrue>

<element id="a96d4a4b-1ebd-4b18-b6f0-47d3d34bfbb9"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>5</timeout>

</stage>

<stage stageid="7236ad08-4677-4d4e-981b-b0bc2b5193b4" name="Timeout Fail" type="Exception">

<subsheetid>72d9bcf6-8481-4d98-bd98-2cc67814bfba</subsheetid>

<narrative>
```

```
</narrative>

<displayx>135</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&amp;quot;Timeout occurred waiting for radio button to exist&amp;quot;'

</stage>

<stage stageid="a77b87db-8eae-4794-93f5-983e084869da" name="Value from Radio button 1" type="Dat

<subsheetid>72d9bcf6-8481-4d98-bd98-2cc67814bfba</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="b78aefbd-1070-4a93-a18f-adff4b8b5093" name="Set Radio Button 1" type="SubSheetInf

<subsheetid>3809c87b-382a-424a-b477-5660e381a63d</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>
```

```xml
<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="9252dfdf-27c8-45be-977b-8729b6dae935" name="Start" type="Start">

<subsheetid>3809c87b-382a-424a-b477-5660e381a63d</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>fcd9a973-70be-4bff-b387-8661dfb0e9f4</onsuccess>

</stage>

<stage stageid="3443176f-3077-48e8-aef0-bc5c434b3438" name="End" type="End">

<subsheetid>3809c87b-382a-424a-b477-5660e381a63d</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>45</displayx>

<displayy>30</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>
```

```xml
</stage>
<stage stageid="5ee3b11c-4b23-46bc-aacf-97b4e3e76ac6" name="Time Out - Wait for Radio Button 1 to
<subsheetid>3809c87b-382a-424a-b477-5660e381a63d</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>75</displayx>
<displayy>-60</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>5afb9602-00bf-4f06-a6c7-3c1dc97291c9</onsuccess>
<groupid>fa2525d2-2e2d-4afb-845a-94854569db0d</groupid>
</stage>
<stage stageid="fcd9a973-70be-4bff-b387-8661dfb0e9f4" name="Wait for Radio Button 1 to exist" type="W
<subsheetid>3809c87b-382a-424a-b477-5660e381a63d</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-60</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<groupid>fa2525d2-2e2d-4afb-845a-94854569db0d</groupid>
<choices>
<choice reply="True">
```

<name>Radio button 1 Check Exists</name>

<distance>30</distance>

<ontrue>52c8467e-8601-49f5-9d05-b04ac7e8a9df</ontrue>

<element id="a96d4a4b-1ebd-4b18-b6f0-47d3d34bfbb9"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>5</timeout>

</stage>

<stage stageid="5afb9602-00bf-4f06-a6c7-3c1dc97291c9" name="Timeout Fail" type="Exception">

<subsheetid>3809c87b-382a-424a-b477-5660e381a63d</subsheetid>

<narrative>

</narrative>

<displayx>135</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&quot;Timeout occurred waiting for radio button to exist&quot;'

</stage>

<stage stageid="52c8467e-8601-49f5-9d05-b04ac7e8a9df" name="check radio button 1" type="Navigate">

<subsheetid>3809c87b-382a-424a-b477-5660e381a63d</subsheetid>

<loginhibit/>

</narrative>

<displayx>45</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>3443176f-3077-48e8-aef0-bc5c434b3438</onsuccess>

<step>

<element id="a96d4a4b-1ebd-4b18-b6f0-47d3d34bfbb9"/>

<action>

<id>WebClick</id>

</action>

</step>

</stage>

<stage stageid="845d61ed-ee84-4f3f-b1ca-c0ac04417e85" name="Get Radio Button 1 Status" type="Sub

<subsheetid>caddcd27-2e3b-49b6-87e5-90c1accdaee3</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="45deb9c5-2ea5-4648-af42-67ab0bf49481" name="Start" type="Start">

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>7cf5f292-0e69-4656-860c-e791af5949a9</onsuccess>

</stage>

<stage stageid="369cfa6a-145a-4ee0-a810-1679cf77c08b" name="End" type="End">

<subsheetid>caddcd27-2e3b-49b6-87e5-90c1accdaee3</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>45</displayx>

<displayy>30</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<outputs>

</outputs>

</stage>

<stage stageid="a3edf361-9b98-43c7-afe8-047c8c5e8fa3" name="read status of radio button 2" type="Re

<subsheetid>caddcd27-2e3b-49b6-87e5-90c1accdaee3</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>45</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>369cfa6a-145a-4ee0-a810-1679cf77c08b</onsuccess>

<step stage="Value from Radio button 2">

<element id="55d3bc07-8d07-414f-a57f-728f6e69a4ac"/>

<action>

<id>WebGetCheckState</id>

</action>

</step>

</stage>

<stage stageid="e922b52e-e96f-451b-a14e-371d755bf83f" name="Time Out - Wait for Radio Button 1 to e

<subsheetid>caddcd27-2e3b-49b6-87e5-90c1accdaee3</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>75</displayx>

<displayy>-60</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>e492dd5c-ca15-4037-93cd-918cc0900c83</onsuccess>

<groupid>9ff8ef0c-2e61-47da-a4a7-614b9725f0a9</groupid>

</stage>

<stage stageid="7cf5f292-0e69-4656-860c-e791af5949a9" name="Wait for Radio Button 1 to exist" type="

<subsheetid>caddcd27-2e3b-49b6-87e5-90c1accdaee3</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-60</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>9ff8ef0c-2e61-47da-a4a7-614b9725f0a9</groupid>

<choices>

<choice reply="True">

<name>Radio button 1 Check Exists</name>

<distance>30</distance>

<ontrue>a3edf361-9b98-43c7-afe8-047c8c5e8fa3</ontrue>

<element id="a96d4a4b-1ebd-4b18-b6f0-47d3d34bfbb9"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>5</timeout>

</stage>

<stage stageid="e492dd5c-ca15-4037-93cd-918cc0900c83" name="Timeout Fail" type="Exception">

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&quot;Timeout occurred waiting for radio button to exist&quot;'

</stage>

<stage stageid="1c5819a0-706a-45fe-9f10-38caa11d8e50" name="Set Radio Button 1" type="SubSheetIn

<subsheetid>f2a413ad-5043-4268-a7ca-05ca8bc975c2</subsheetid>

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="84d3a239-e446-4226-8e0f-8eb0381c80df" name="Start" type="Start">

<subsheetid>f2a413ad-5043-4268-a7ca-05ca8bc975c2</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>4b829fda-c182-40d1-800b-af66ddacc9f8</onsuccess>

</stage>

<stage stageid="12d1ae8e-c72e-414a-b8d5-5e3b0dded88c" name="End" type="End">

<subsheetid>f2a413ad-5043-4268-a7ca-05ca8bc975c2</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="43c2a1e6-d0d3-4514-919c-828c5db53c78" name="Time Out - Wait for Radio Button 1 to

<subsheetid>f2a413ad-5043-4268-a7ca-05ca8bc975c2</subsheetid>

<displayy>-60</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

```xml
</stage>
<stage stageid="4b829fda-c182-40d1-800b-af66ddacc9f8" name="Wait for Radio Button 1 to exist" type="'
<subsheetid>f2a413ad-5043-4268-a7ca-05ca8bc975c2</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-60</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<groupid>5ea0d256-f8b8-4118-8b3a-f82d5f6ca6a5</groupid>
<choices>
<choice reply="True">
<name>Radio button 1 Check Exists</name>
<distance>30</distance>
<ontrue>65758e15-aebf-41c1-bd54-017858081ed1</ontrue>
<element id="a96d4a4b-1ebd-4b18-b6f0-47d3d34bfbb9"/>
<condition>
<id>CheckExists</id>
</condition>
<comparetype>Equal</comparetype>
</choice>
</choices>
<timeout>5</timeout>
</stage>
<stage stageid="0de9ecf1-0bc2-4ffc-b4db-11b1acaec205" name="Timeout Fail" type="Exception">
```

<subsheetid>f2a413ad-5043-4268-a7ca-05ca8bc975c2</subsheetid>

<narrative>

</narrative>

<displayx>135</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&quot;Timeout occurred waiting for radio button to exist&quot;'

</stage>

<stage stageid="65758e15-aebf-41c1-bd54-017858081ed1" name="check radio button 2" type="Navigate"

<subsheetid>f2a413ad-5043-4268-a7ca-05ca8bc975c2</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>45</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>12d1ae8e-c72e-414a-b8d5-5e3b0dded88c</onsuccess>

<step>

<element id="55d3bc07-8d07-414f-a57f-728f6e69a4ac"/>

<action>

<id>WebClick</id>

</action>

</step>

```xml
</stage>
<stage stageid="088cc43a-46c1-4a59-aef8-00d9005e93fd" name="Value from Radio button 2" type="Data
<subsheetid>caddcd27-2e3b-49b6-87e5-90c1accdaee3</subsheetid>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-30</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<datatype>flag</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
</process>
<process name="Chrome controls-slider" version="1.0" bpversion="6.3.0.5754" narrative="" byrefcollection
<appdef/>
<parentobject>Chrome App Model</parentobject>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
<preconditions/>
<endpoint narrative=""/>
<subsheet subsheetid="be8e2ca5-2e6f-46e0-91f6-e4ae9432f27e" type="CleanUp" published="True">
```

<name>Clean Up</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="44498de6-14e7-409f-89b5-dcb696d5caaf" type="Normal" published="True">

<name>Get Slider Min</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="3daa54cc-c6f4-4b1f-93f6-fd9ddaf14c41" type="Normal" published="True">

<name>Get Slider Max</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="fccd6112-5161-4467-ab79-7d407a26a743" type="Normal" published="True">

<name>Get Slider Current Value</name>

<view>

<camerax>0</camerax>

```xml
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="ffe09626-8528-4e51-a916-d128f3fce134" type="Normal" published="True">
<name>Set New Slider Value</name>
<view>
<camerax>0</camerax>
<cameray>21</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<stage stageid="86818364-9279-4d76-a95b-114d9fed6889" name="Start" type="Start">
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>5f4f9c0f-cf84-4bbb-9b13-be2f3148b51c</onsuccess>
</stage>
<stage stageid="5f4f9c0f-cf84-4bbb-9b13-be2f3148b51c" name="End" type="End">
<loginhibit/>
<narrative>
</narrative>
```

```
<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="4e9fc5b1-37b0-4a4b-a9a8-639aaf173b7f" name="Stage1" type="ProcessInfo">

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<references>

<reference>System.dll</reference>

<reference>System.Data.dll</reference>

<reference>System.Xml.dll</reference>

<reference>System.Drawing.dll</reference>

</references>

<imports>

<import>System</import>

<import>System.Drawing</import>

<import>System.Data</import>

</imports>

<language>visualbasic</language>

<globalcode></globalcode>
```

```
<code></code>

</stage>

<stage stageid="697948eb-fe0c-435b-82a2-2a1d53e2f9a5" name="Clean Up" type="SubSheetInfo">

<subsheetid>be8e2ca5-2e6f-46e0-91f6-e4ae9432f27e</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="e69550f0-30f8-4265-944b-042c9a0d79b9" name="Start" type="Start">

<subsheetid>be8e2ca5-2e6f-46e0-91f6-e4ae9432f27e</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>4494702d-b1d4-4a7d-9e59-815d42980021</onsuccess>

</stage>

<stage stageid="4494702d-b1d4-4a7d-9e59-815d42980021" name="End" type="End">

<subsheetid>be8e2ca5-2e6f-46e0-91f6-e4ae9432f27e</subsheetid>

<loginhibit/>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="b9559cd1-fc69-487f-8d1a-7e16e36c8435" name="Note1" type="Note">

<subsheetid>be8e2ca5-2e6f-46e0-91f6-e4ae9432f27e</subsheetid>

<narrative>Clean Up Page

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically immediately after closing your business object at the end of

You will not be able to call this action from a business process, nor will it be called at any other time than b

<displayx>-180</displayx>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="df9cc22c-1633-4dcc-96ae-eebeffa0516f" name="Note2" type="Note">

<narrative>Initialise Page

This is an optional page where you might choose to perform some initialisation tasks after your business ob

The initialise action will be called automatically immediately after loading your business object.

You will not be able to call this action from a business process, nor will it be called at any other time than a

<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="5931990a-2635-4bc5-8a99-4208a143cf67" name="Get Slider Min" type="SubSheetInfo">

<subsheetid>44498de6-14e7-409f-89b5-dcb696d5caaf</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="5f09d662-b97a-4c36-b238-a7147d1b9070" name="End" type="End">

<subsheetid>44498de6-14e7-409f-89b5-dcb696d5caaf</subsheetid>

<displayx>-15</displayx>

```xml
<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<outputs>

<output type="number" name="min value" stage="min value"/>

</outputs>

</stage>

<stage stageid="23d7e625-58b6-4fe3-9dfb-528dbaa57521" name="Get Slider Max" type="SubSheetInfo">

<subsheetid>3daa54cc-c6f4-4b1f-93f6-fd9ddaf14c41</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="529c2466-8337-4863-8d91-0cd7156731b8" name="Start" type="Start">

<subsheetid>3daa54cc-c6f4-4b1f-93f6-fd9ddaf14c41</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>-120</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>
```

```xml
<onsuccess>3718a477-b138-4553-80ac-c71b79e030c6</onsuccess>
</stage>
<stage stageid="05f94c86-36f4-4440-a359-c7ebc3f7db99" name="End" type="End">
<subsheetid>3daa54cc-c6f4-4b1f-93f6-fd9ddaf14c41</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-15</displayx>
<displayy>15</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<outputs>
<output type="number" name="max value" stage="max value"/>
</outputs>
</stage>
<stage stageid="5ac7cc3b-cf65-4670-bcbb-70795819c81b" name="Get Slider Current Value" type="SubSl
<subsheetid>fccd6112-5161-4467-ab79-7d407a26a743</subsheetid>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-105</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="bdcc94b9-64b8-4c36-8475-48cbe855e8e8" name="Start" type="Start">
```

<displayx>-45</displayx>

<displayy>-105</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>5bdcfa27-7964-43b1-91a6-e8eed08a78ad</onsuccess>

</stage>

<stage stageid="797d238d-8cbf-413a-9afa-3ec908457895" name="End" type="End">

<subsheetid>fccd6112-5161-4467-ab79-7d407a26a743</subsheetid>

<displayx>-15</displayx>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="1df17ed1-bbb6-405c-af49-36f34f781b0e" name="Set New Slider Value" type="SubSheetI

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="24590f46-d408-41b3-8041-1b9194658e22" name="Start" type="Start">

<subsheetid>ffe09626-8528-4e51-a916-d128f3fce134</subsheetid>

<displayx>-45</displayx>

<displayy>-120</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<inputs>

<input type="number" name="set slider value" stage="set slider value"/>

</inputs>

<onsuccess>efe4158e-8569-40f6-bc07-450f86c43806</onsuccess>

</stage>

<stage stageid="a690c565-c6f7-42dc-ade3-10723f2da20f" name="End" type="End">

<subsheetid>ffe09626-8528-4e51-a916-d128f3fce134</subsheetid>

```xml
</narrative>

<displayx>-15</displayx>

<displayy>15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="859f0c13-bc41-4413-9402-88348630c3e3" name="Start" type="Start">

<subsheetid>44498de6-14e7-409f-89b5-dcb696d5caaf</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>-120</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>84a4197d-06d9-485a-946f-f7cbf4ec7991</onsuccess>

</stage>

<stage stageid="6b3d4f6f-68b8-4aa9-a5a8-db0e27b067ca" name="Get slider min value" type="Read">

<subsheetid>44498de6-14e7-409f-89b5-dcb696d5caaf</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-15</displayx>

<displayy>-30</displayy>

<displaywidth>60</displaywidth>
```

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>5f09d662-b97a-4c36-b238-a7147d1b9070</onsuccess>

<step stage="min value">

<element id="6ff2fe25-b90d-417e-9886-a3933715e72c"/>

<action>

<id>WebGetMinValue</id>

</action>

</step>

</stage>

<stage stageid="0819b190-c5d9-4003-996a-cac179b0782e" name="Time Out - wait for slider exists" type=

<subsheetid>44498de6-14e7-409f-89b5-dcb696d5caaf</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>30</displayx>

<displayy>-75</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>41e83f66-5163-4979-9477-09fd6976564b</onsuccess>

<groupid>2dc5b706-077b-47e0-b9ea-f6ffe06e7022</groupid>

</stage>

<stage stageid="84a4197d-06d9-485a-946f-f7cbf4ec7991" name="wait for slider exists" type="WaitStart">

<subsheetid>44498de6-14e7-409f-89b5-dcb696d5caaf</subsheetid>

<loginhibit/>

<narrative>

```
</narrative>

<displayx>-45</displayx>

<displayy>-75</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>2dc5b706-077b-47e0-b9ea-f6ffe06e7022</groupid>

<choices>

<choice reply="True">

<name>Slider Check Exists</name>

<distance>30</distance>

<ontrue>6b3d4f6f-68b8-4aa9-a5a8-db0e27b067ca</ontrue>

<element id="6ff2fe25-b90d-417e-9886-a3933715e72c"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>5</timeout>

</stage>

<stage stageid="41e83f66-5163-4979-9477-09fd6976564b" name="Timeout waiting for slider" type="Excep

<subsheetid>44498de6-14e7-409f-89b5-dcb696d5caaf</subsheetid>

<narrative>

</narrative>

<displayx>105</displayx>

<displayy>-75</displayy>
```

```xml
<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&amp;quot;timeout wiating for slider to exist&amp;quot;"/>

</stage>

<stage stageid="69c7fcea-ddca-4f2d-a1c2-cb75401b6b17" name="min value" type="Data">

<subsheetid>44498de6-14e7-409f-89b5-dcb696d5caaf</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

<initialvalue>0</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="308b51b1-a718-4fdf-8367-07e3f8dde795" name="Get slider max value" type="Read">

<subsheetid>3daa54cc-c6f4-4b1f-93f6-fd9ddaf14c41</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-15</displayx>

<displayy>-30</displayy>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>05f94c86-36f4-4440-a359-c7ebc3f7db99</onsuccess>

<step stage="max value">

<element id="6ff2fe25-b90d-417e-9886-a3933715e72c"/>

<action>

<id>WebGetMaxValue</id>

</action>

</step>

</stage>

<stage stageid="a324b52b-ecc8-4e2a-bb1e-aa12188651f1" name="Time Out - wait for slider exists" type=

<subsheetid>3daa54cc-c6f4-4b1f-93f6-fd9ddaf14c41</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>b16da245-4fd1-404c-9795-88c4cb367322</onsuccess>

<groupid>7e155ee7-c49c-49a5-9718-9515f7f76299</groupid>

</stage>

<stage stageid="3718a477-b138-4553-80ac-c71b79e030c6" name="wait for slider exists" type="WaitStart"

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>-75</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>7e155ee7-c49c-49a5-9718-9515f7f76299</groupid>

<choices>

<choice reply="True">

<name>Slider Check Exists</name>

<distance>30</distance>

<ontrue>308b51b1-a718-4fdf-8367-07e3f8dde795</ontrue>

<element id="6ff2fe25-b90d-417e-9886-a3933715e72c"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>5</timeout>

</stage>

<stage stageid="b16da245-4fd1-404c-9795-88c4cb367322" name="Timeout waiting for slider" type="Exce

<subsheetid>3daa54cc-c6f4-4b1f-93f6-fd9ddaf14c41</subsheetid>

<narrative>

</narrative>

<displayx>105</displayx>

```
<displayy>-75</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&amp;quot;timeout wiating for slider to exist&amp;quot;"/>

</stage>

<stage stageid="ad149f80-19eb-47bf-975d-34968f30c87a" name="max value" type="Data">

<subsheetid>3daa54cc-c6f4-4b1f-93f6-fd9ddaf14c41</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-30</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

<initialvalue>0</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="1dc37a4a-4c31-43e7-9b9e-6c8e13e6e6b1" name="Get slider current value" type="Read"

<subsheetid>fccd6112-5161-4467-ab79-7d407a26a743</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-15</displayx>
```

```xml
<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>797d238d-8cbf-413a-9afa-3ec908457895</onsuccess>

<step stage="Current value">

<element id="6ff2fe25-b90d-417e-9886-a3933715e72c"/>

<action>

<id>WebGetValue</id>

</action>

</step>

</stage>

<stage stageid="3a259142-08f1-4d23-9c56-4ab2c61e71eb" name="Current value" type="Data">

<subsheetid>fccd6112-5161-4467-ab79-7d407a26a743</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-30</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>
```

```xml
<stage stageid="c6e82679-c66a-4994-9059-1412938ec325" name="Set new value" type="Write">
<subsheetid>ffe09626-8528-4e51-a916-d128f3fce134</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-15</displayx>
<displayy>-30</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>a690c565-c6f7-42dc-ade3-10723f2da20f</onsuccess>
<step expr="[set slider value]">
<element id="6ff2fe25-b90d-417e-9886-a3933715e72c"/>
</step>
</stage>
<stage stageid="d8245aa1-f530-41fe-9c7b-fe2ec29c403f" name="set slider value" type="Data">
<subsheetid>ffe09626-8528-4e51-a916-d128f3fce134</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-210</displayx>
<displayy>-30</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<datatype>number</datatype>
<initialvalue>0</initialvalue>
```

</stage>

<stage stageid="43f5ba90-2a85-44f6-b5e1-7d92e4156dcc" name="Time Out - wait for slider exists" type='

<subsheetid>fccd6112-5161-4467-ab79-7d407a26a743</subsheetid>

<displayy>-60</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>ff8404d4-7f83-42d4-a87e-7eb35af22ea6</onsuccess>

<groupid>69a2591f-5a1b-48da-94e0-162bfe01f553</groupid>

</stage>

<stage stageid="5bdcfa27-7964-43b1-91a6-e8eed08a78ad" name="wait for slider exists" type="WaitStart"

<subsheetid>fccd6112-5161-4467-ab79-7d407a26a743</subsheetid>

<displayx>-45</displayx>

<displayy>-60</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

```xml
<choices>

<choice reply="True">

<name>Slider Check Exists</name>

<distance>30</distance>

<ontrue>1dc37a4a-4c31-43e7-9b9e-6c8e13e6e6b1</ontrue>

<element id="6ff2fe25-b90d-417e-9886-a3933715e72c"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>5</timeout>

</stage>

<stage stageid="ff8404d4-7f83-42d4-a87e-7eb35af22ea6" name="Timeout waiting for slider" type="Except

<subsheetid>fccd6112-5161-4467-ab79-7d407a26a743</subsheetid>

<narrative>

</narrative>

<displayx>105</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&amp;quot;timeout wiating for slider to exist&amp;quot;"/>

</stage>

<stage stageid="b7d1e1bc-fcdb-4a15-8e52-44e6f0b61feb" name="Time Out - wait for slider exists" type="

<subsheetid>ffe09626-8528-4e51-a916-d128f3fce134</subsheetid>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<displayx>-45</displayx>

<displayy>-75</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>5149b9bc-a608-445a-96ed-e8722bdb8bb8</groupid>

<choices>

<choice reply="True">

<name>Slider Check Exists</name>

<distance>30</distance>

```xml
<element id="6ff2fe25-b90d-417e-9886-a3933715e72c"/>
<condition>
<id>CheckExists</id>
</condition>
<comparetype>Equal</comparetype>
</choice>
</choices>
<timeout>5</timeout>
</stage>
<stage stageid="ac5e22fb-8456-430a-ae8c-ee38bcd13260" name="Timeout waiting for slider" type="Exce
<subsheetid>ffe09626-8528-4e51-a916-d128f3fce134</subsheetid>
<narrative>
</narrative>
<displayx>90</displayx>
<displayy>-75</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<exception type="Failure" detail="&amp;quot;timeout wiating for slider to exist&amp;quot;"/>
</stage>
</process>
<process name="Chrome controls-table" version="1.0" bpversion="6.2.1.5568" narrative="" type="object" r
<appdef/>
<parentobject>Chrome App Model</parentobject>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
```

```xml
<zoom version="2">1.25</zoom>
</view>
<preconditions/>
<endpoint narrative=""/>
<subsheet subsheetid="9b512a1d-dc2b-41cf-bd81-31e548c4a2ea" type="CleanUp" published="True">
<name>Clean Up</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="ce1008db-fe08-4b2e-a94c-00c005f56a22" type="Normal" published="True">
<name>Table Get All Items</name>
<view>
<camerax>0</camerax>
<cameray>11</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="556a15a4-3490-4a08-b38b-ea6c1d136e6a" type="Normal" published="True">
<name>Table Get Column Count</name>
<view>
<camerax>0</camerax>
<cameray>21</cameray>
<zoom version="2">1.25</zoom>
</view>
```

```xml
</subsheet>

<subsheet subsheetid="63e4e7a4-f4ba-4ae3-afeb-2c6a5ef6b233" type="Normal" published="True">

<name>Table Get Row Count</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="5412f606-4972-4fee-9124-b5d8c2111a61" type="Normal" published="True">

<name>Table Get Single item</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<stage stageid="8224dd2f-20de-400f-8c1e-b7318717b617" name="Start" type="Start">

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>28685ef7-4fab-4aea-8a4e-3c8540521bf0</onsuccess>
```

```xml
</stage>

<stage stageid="28685ef7-4fab-4aea-8a4e-3c8540521bf0" name="End" type="End">

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="03b31ca4-e755-4625-b326-e1724359cbe0" name="Stage1" type="ProcessInfo">

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<references>

<reference>System.dll</reference>

<reference>System.Data.dll</reference>

<reference>System.Xml.dll</reference>

<reference>System.Drawing.dll</reference>

</references>

<imports>

<import>System</import>
```

```
<import>System.Drawing</import>

<import>System.Data</import>

</imports>

<language>visualbasic</language>

<globalcode></globalcode>

<code></code>

</stage>

<stage stageid="26616d67-1004-415b-9e1f-8736d5439089" name="Clean Up" type="SubSheetInfo">

<subsheetid>9b512a1d-dc2b-41cf-bd81-31e548c4a2ea</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="b817bc17-9a2a-4c33-8cd9-535286d019bb" name="Start" type="Start">

<subsheetid>9b512a1d-dc2b-41cf-bd81-31e548c4a2ea</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>
```

</stage>

<stage stageid="73d57215-4727-4e4e-960b-ba430693538d" name="End" type="End">

<subsheetid>9b512a1d-dc2b-41cf-bd81-31e548c4a2ea</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="6e1f9d74-dbad-402b-ba12-436cc7ede7fb" name="Note1" type="Note">

<subsheetid>9b512a1d-dc2b-41cf-bd81-31e548c4a2ea</subsheetid>

<narrative>Clean Up Page

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically immediately after closing your business object at the end of

You will not be able to call this action from a business process, nor will it be called at any other time than b

<displayx>-180</displayx>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

```xml
</stage>

<stage stageid="1c0d372c-e93b-4a56-a3af-9266f01206b6" name="Note2" type="Note">

<narrative>Initialise Page

This is an optional page where you might choose to perform some initialisation tasks after your business ob

The initialise action will be called automatically immediately after loading your business object.

You will not be able to call this action from a business process, nor will it be called at any other time than a

<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="0b880252-d608-4cda-8ad3-971a87d2e667" name="Table Get All Items" type="SubSheet

<subsheetid>ce1008db-fe08-4b2e-a94c-00c005f56a22</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="1cf87725-5153-4145-a728-f0c98c18f088" name="Start" type="Start">

<subsheetid>ce1008db-fe08-4b2e-a94c-00c005f56a22</subsheetid>
```

```xml
<loginhibit/>

<narrative>

</narrative>

<displayx>-60</displayx>

<displayy>-120</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>40fae64e-925d-4d21-a2ba-e5b3f6227eff</onsuccess>

</stage>

<stage stageid="355d020a-fbd5-420b-8f31-06281c9fba28" name="Get items (all)" type="Read">

<subsheetid>ce1008db-fe08-4b2e-a94c-00c005f56a22</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-15</displayx>

<displayy>-30</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>d60253e6-e46a-4e3d-95a4-6544a7a6b882</onsuccess>

<step stage="All table items">

<element id="f1a11222-c3f9-463e-ab36-4850d8b9892e"/>

<action>

<id>WebGetTableItems</id>

</action>

</step>
```

```xml
</stage>
<stage stageid="66ff28d1-efa7-4049-a1e5-5cb7f4365871" name="All table items" type="Collection">
<subsheetid>ce1008db-fe08-4b2e-a94c-00c005f56a22</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>90</displayx>
<displayy>-15</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<datatype>collection</datatype>
<private/>
<alwaysinit/>
</stage>
<stage stageid="6ea523f0-e7b5-4dc1-912c-2e8de245d539" name="Time Out - wait for table to exist" type=
<subsheetid>ce1008db-fe08-4b2e-a94c-00c005f56a22</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>30</displayx>
<displayy>-75</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>1b378489-bcc9-44af-be22-28b2b964fd24</onsuccess>
<groupid>6379fbb2-4769-4007-b92c-81a423cc7026</groupid>
```

```
</stage>

<stage stageid="40fae64e-925d-4d21-a2ba-e5b3f6227eff" name="wait for table to exist" type="WaitStart">

<subsheetid>ce1008db-fe08-4b2e-a94c-00c005f56a22</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-60</displayx>

<displayy>-75</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>6379fbb2-4769-4007-b92c-81a423cc7026</groupid>

<choices>

<choice reply="True">

<name>whole table Check Exists</name>

<distance>45</distance>

<ontrue>355d020a-fbd5-420b-8f31-06281c9fba28</ontrue>

<element id="f1a11222-c3f9-463e-ab36-4850d8b9892e"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>20</timeout>

</stage>

<stage stageid="1b378489-bcc9-44af-be22-28b2b964fd24" name="timeout occurred" type="Exception">
```

\<subsheetid\>ce1008db-fe08-4b2e-a94c-00c005f56a22\</subsheetid\>

\<narrative\>

\</narrative\>

\<displayx\>105\</displayx\>

\<displayy\>-75\</displayy\>

\<displaywidth\>60\</displaywidth\>

\<displayheight\>30\</displayheight\>

\<font family="Segoe UI" size="10" style="Regular" color="000000"/\>

\<exception type="Failure" detail="&quot;timeout occurred waiting for table to exist&quot;"/\>

\</stage\>

\<stage stageid="d60253e6-e46a-4e3d-95a4-6544a7a6b882" name="End1" type="End"\>

\<subsheetid\>ce1008db-fe08-4b2e-a94c-00c005f56a22\</subsheetid\>

\<loginhibit/\>

\<narrative\>

\</narrative\>

\<displayx\>-15\</displayx\>

\<displayy\>15\</displayy\>

\<displaywidth\>60\</displaywidth\>

\<displayheight\>30\</displayheight\>

\<font family="Segoe UI" size="10" style="Regular" color="000000"/\>

\<outputs\>

\<output type="collection" name="All table items" stage="All table items"/\>

\</outputs\>

\</stage\>

\<stage stageid="52be7b41-617b-413b-bccf-3d8fcb1f4e25" name="Table Get Column Count" type="SubSh

\<subsheetid\>556a15a4-3490-4a08-b38b-ea6c1d136e6a\</subsheetid\>

\<narrative\>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="bcdd80b0-6fff-400d-b033-c4fea5be7f92" name="Start" type="Start">

<subsheetid>556a15a4-3490-4a08-b38b-ea6c1d136e6a</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>d045383c-731b-40cd-8e99-5b713072d5d0</onsuccess>

</stage>

<stage stageid="34322087-6d0e-47ac-87f3-55970edbbcf9" name="End" type="End">

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="5f147e6f-62cf-409f-8707-685b54a869f7" name="get column count" type="Read">

<subsheetid>556a15a4-3490-4a08-b38b-ea6c1d136e6a</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>0</displayx>

<displayy>-30</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>34322087-6d0e-47ac-87f3-55970edbbcf9</onsuccess>

<step stage="column count">

<element id="f1a11222-c3f9-463e-ab36-4850d8b9892e"/>

<action>

<id>WebGetColumnCount</id>

</action>

</step>

</stage>

<stage stageid="8b89f30e-e416-4611-a9cf-fa5ebb7c7718" name="column count" type="Data">

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

</stage>

<stage stageid="968d6d12-6984-4b44-a798-7099e395a169" name="Time Out - wait for table to exist" type

<subsheetid>556a15a4-3490-4a08-b38b-ea6c1d136e6a</subsheetid>

<displayy>-75</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>d4a8adc7-4c2c-454b-b0c8-e1eb1759fa6c</onsuccess>

<groupid>52047f39-5f2c-4851-8238-19d4f331e81e</groupid>

</stage>

<stage stageid="d045383c-731b-40cd-8e99-5b713072d5d0" name="wait for table to exist" type="WaitStar

```xml
<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>-75</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>52047f39-5f2c-4851-8238-19d4f331e81e</groupid>

<choices>

<choice reply="True">

<name>whole table Check Exists</name>

<distance>45</distance>

<ontrue>5f147e6f-62cf-409f-8707-685b54a869f7</ontrue>

<element id="f1a11222-c3f9-463e-ab36-4850d8b9892e"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>20</timeout>

</stage>

<stage stageid="d4a8adc7-4c2c-454b-b0c8-e1eb1759fa6c" name="timeout occurred" type="Exception">

<subsheetid>556a15a4-3490-4a08-b38b-ea6c1d136e6a</subsheetid>

<narrative>

</narrative>
```

```xml
<displayx>120</displayx>
<displayy>-75</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<exception type="Failure" detail="&amp;quot;timeout occurred waiting for table to exist&amp;quot;"/>
</stage>
<stage stageid="6e0d33c1-21a3-4f49-9855-21509eb097ba" name="Table Get Row Count" type="SubShe
<subsheetid>63e4e7a4-f4ba-4ae3-afeb-2c6a5ef6b233</subsheetid>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-105</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="a39e220f-02a8-4e9f-93de-242c5c615964" name="Start" type="Start">
<subsheetid>63e4e7a4-f4ba-4ae3-afeb-2c6a5ef6b233</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-30</displayx>
<displayy>-120</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
```

```xml
<onsuccess>4e579347-3528-47a2-b14f-1ebae82f5781</onsuccess>

</stage>

<stage stageid="bccb5c12-baaa-416b-a02e-4e4f26f19b3c" name="End" type="End">

<subsheetid>63e4e7a4-f4ba-4ae3-afeb-2c6a5ef6b233</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<outputs>

<output type="number" name="row count" stage="row count"/>

</outputs>

</stage>

<stage stageid="0277093c-a83e-49c8-a6fb-671bf7c421b2" name="Get row count" type="Read">

<subsheetid>63e4e7a4-f4ba-4ae3-afeb-2c6a5ef6b233</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-30</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>bccb5c12-baaa-416b-a02e-4e4f26f19b3c</onsuccess>
```

```xml
<step stage="row count">

<element id="f1a11222-c3f9-463e-ab36-4850d8b9892e"/>

<action>

<id>WebGetRowCount</id>

</action>

</step>

</stage>

<stage stageid="aea82a8f-7cea-4cfb-ac8e-1ceeef74b30e" name="row count" type="Data">

<subsheetid>63e4e7a4-f4ba-4ae3-afeb-2c6a5ef6b233</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>105</displayx>

<displayy>-30</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

<initialvalue>0</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="637227b0-0fea-48d7-af35-5c70a5cb99ee" name="Time Out - wait for table to exist" type=

<subsheetid>63e4e7a4-f4ba-4ae3-afeb-2c6a5ef6b233</subsheetid>

<loginhibit/>

<narrative>

</narrative>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>5f0e486b-558e-4153-8978-fd2e2b3c19bc</onsuccess>

<groupid>049a7f4b-f6ae-492b-ae56-8b32d2f1546c</groupid>

</stage>

<stage stageid="4e579347-3528-47a2-b14f-1ebae82f5781" name="wait for table to exist" type="WaitStart"

<subsheetid>63e4e7a4-f4ba-4ae3-afeb-2c6a5ef6b233</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-30</displayx>

<displayy>-75</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>049a7f4b-f6ae-492b-ae56-8b32d2f1546c</groupid>

<choices>

<choice reply="True">

<name>whole table Check Exists</name>

<distance>45</distance>

<ontrue>0277093c-a83e-49c8-a6fb-671bf7c421b2</ontrue>

<element id="f1a11222-c3f9-463e-ab36-4850d8b9892e"/>

<condition>

<id>CheckExists</id>

```xml
        </condition>

      <comparetype>Equal</comparetype>

    </choice>

  </choices>

  <timeout>20</timeout>

</stage>

<stage stageid="5f0e486b-558e-4153-8978-fd2e2b3c19bc" name="timeout occurred" type="Exception">

  <subsheetid>63e4e7a4-f4ba-4ae3-afeb-2c6a5ef6b233</subsheetid>

  <narrative>

  </narrative>

  <displayx>135</displayx>

  <displayy>-75</displayy>

  <displaywidth>60</displaywidth>

  <displayheight>30</displayheight>

  <font family="Segoe UI" size="10" style="Regular" color="000000"/>

  <exception type="Failure" detail="&amp;quot;timeout occurred waiting for table to exist&amp;quot;"/>

</stage>

<stage stageid="b3e75648-8481-43b6-a83d-5d06ddc7ea38" name="Table Get Single item" type="SubShe

  <subsheetid>5412f606-4972-4fee-9124-b5d8c2111a61</subsheetid>

  <narrative>

  </narrative>

  <displayx>-195</displayx>

  <displayy>-105</displayy>

  <displaywidth>150</displaywidth>

  <displayheight>90</displayheight>

  <font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>
```

```xml
<stage stageid="54576dd6-e6aa-4341-af7e-10b84c8c9bdb" name="Start" type="Start">

<subsheetid>5412f606-4972-4fee-9124-b5d8c2111a61</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-30</displayx>

<displayy>-120</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<inputs>

<input type="number" name="Coulmn No." stage="Coulmn"/>

<input type="number" name="Row No." stage="Row"/>

</inputs>

<onsuccess>3d3c768d-1317-41d3-8670-945f3e60927b</onsuccess>

</stage>

<stage stageid="35a312b6-08bc-4f35-9873-40fccc2858e7" name="End" type="End">

<subsheetid>5412f606-4972-4fee-9124-b5d8c2111a61</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<outputs>
```

</outputs>

</stage>

<stage stageid="77ed9c79-e43b-4207-84d2-d1ce7d8c16a8" name="get single item" type="Read">

<subsheetid>5412f606-4972-4fee-9124-b5d8c2111a61</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-30</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>35a312b6-08bc-4f35-9873-40fccc2858e7</onsuccess>

<step stage="single item">

<element id="f1a11222-c3f9-463e-ab36-4850d8b9892e"/>

<action>

<id>WebGetTableItem</id>

<arguments>

<argument>

<id>columnnumber</id>

<value>[Coulmn]</value>

</argument>

<argument>

<id>rownumber</id>

<value>[Row]</value>

</argument>

```xml
</arguments>
</action>
</step>
</stage>
<stage stageid="62941082-bd68-4120-921d-ef36b453bd7d" name="single item" type="Data">
<subsheetid>5412f606-4972-4fee-9124-b5d8c2111a61</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>90</displayx>
<displayy>-30</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
<stage stageid="6829dcf9-49c1-41ca-83da-2e857dcbd6a2" name="Time Out - wait for table to exist" type=
<subsheetid>5412f606-4972-4fee-9124-b5d8c2111a61</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>60</displayx>
<displayy>-75</displayy>
<displaywidth>30</displaywidth>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>7811521d-b2b3-498e-968b-209e354ad750</onsuccess>

<groupid>a9adee6f-46a0-4a4b-9f25-ffddb36d1a21</groupid>

</stage>

<stage stageid="3d3c768d-1317-41d3-8670-945f3e60927b" name="wait for table to exist" type="WaitStart

<subsheetid>5412f606-4972-4fee-9124-b5d8c2111a61</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-30</displayx>

<displayy>-75</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>a9adee6f-46a0-4a4b-9f25-ffddb36d1a21</groupid>

<choices>

<choice reply="True">

<name>whole table Check Exists</name>

<distance>45</distance>

<ontrue>77ed9c79-e43b-4207-84d2-d1ce7d8c16a8</ontrue>

<element id="f1a11222-c3f9-463e-ab36-4850d8b9892e"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

\</choices>

\<timeout>20\</timeout>

\</stage>

\<stage stageid="7811521d-b2b3-498e-968b-209e354ad750" name="timeout occurred" type="Exception">

\<subsheetid>5412f606-4972-4fee-9124-b5d8c2111a61\</subsheetid>

\<narrative>

\</narrative>

\<displayx>135\</displayx>

\<displayy>-75\</displayy>

\<displaywidth>60\</displaywidth>

\<displayheight>30\</displayheight>

\<font family="Segoe UI" size="10" style="Regular" color="000000"/>

\<exception type="Failure" detail="&quot;timeout occurred waiting for table to exist&quot;"/>

\</stage>

\<stage stageid="bd892b4f-edb1-406d-a049-7892fdcc5f89" name="Data" type="Block">

\<subsheetid>5412f606-4972-4fee-9124-b5d8c2111a61\</subsheetid>

\<loginhibit/>

\<narrative>

\</narrative>

\<displayx>-240\</displayx>

\<displayy>-30\</displayy>

\<displaywidth>105\</displaywidth>

\<displayheight>90\</displayheight>

\<font family="Segoe UI" size="10" style="Regular" color="7FB2E5"/>

\</stage>

\<stage stageid="1f3d2c9c-22ce-4d77-9549-2e54b0d1fca6" name="Coulmn" type="Data">

\<subsheetid>5412f606-4972-4fee-9124-b5d8c2111a61\</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

</stage>

<stage stageid="6bddf737-f201-4e69-8161-c6d54391402b" name="Row" type="Data">

<subsheetid>5412f606-4972-4fee-9124-b5d8c2111a61</subsheetid>

<displayx>-195</displayx>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

</process>

<process name="Chrome controls-text_hyper" version="1.0" bpversion="6.5.0.8827" narrative="" byrefcolle

<appdef/>

<parentobject>Chrome App Model</parentobject>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

<preconditions/>

<endpoint narrative=""/>

<subsheet subsheetid="c9e827a3-c772-491a-ae16-6f739a66b911" type="CleanUp" published="True">

<name>Clean Up</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="ec2ef3e6-2690-49c6-ab7e-4c597a14e623" type="Normal" published="True">

<name>Hyperlink</name>

<view>

<camerax>0</camerax>

<cameray>-42</cameray>

<zoom version="2">1.25</zoom>

</view>

```
</subsheet>

<subsheet subsheetid="911094e4-76dc-4348-8373-3a0333af806d" type="Normal" published="True">

<name>editable text</name>

<view>

<camerax>0</camerax>

<cameray>-21</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="2cfebde8-01bf-416a-b729-66cee685ac2e" type="Normal" published="True">

<name>select text range</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="3cbd984c-9f7b-4573-b0b2-2731923284f6" type="Normal" published="True">

<name>Get selected text</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="336ec897-b819-46a3-aea7-5ca0def5d6af" type="Normal" published="True">

<name>Get label</name>
```

```xml
<view>
<camerax>116</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="f93c8513-f0d3-429a-a742-86d398e0b436" type="Normal" published="True">
<name>Get Path</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<stage stageid="a1471bc1-ee9d-4ecb-a626-3d3007440f75" name="Start" type="Start">
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>2114f9fb-85fb-4de8-8a6a-104fb18171db</onsuccess>
</stage>
<stage stageid="2114f9fb-85fb-4de8-8a6a-104fb18171db" name="End" type="End">
<loginhibit/>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="5c49886f-0215-4bc5-b5b4-5e60547a6659" name="Stage1" type="ProcessInfo">

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<references>

<reference>System.dll</reference>

<reference>System.Data.dll</reference>

<reference>System.Xml.dll</reference>

<reference>System.Drawing.dll</reference>

</references>

<imports>

<import>System</import>

<import>System.Drawing</import>

<import>System.Data</import>

</imports>

```xml
<language>visualbasic</language>

<globalcode></globalcode>

<code></code>

</stage>

<stage stageid="371c092f-601b-4119-a41a-467b367ae29b" name="Clean Up" type="SubSheetInfo">

<subsheetid>c9e827a3-c772-491a-ae16-6f739a66b911</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="bd6d1cbe-8358-4744-9723-0cd50a1a0358" name="Start" type="Start">

<subsheetid>c9e827a3-c772-491a-ae16-6f739a66b911</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>b61bcc6e-ea89-49f2-9692-7c46e8de8377</onsuccess>

</stage>

<stage stageid="b61bcc6e-ea89-49f2-9692-7c46e8de8377" name="End" type="End">
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="8cd9d018-78bd-4907-ba1a-6435a72cc1c2" name="Note1" type="Note">

<subsheetid>c9e827a3-c772-491a-ae16-6f739a66b911</subsheetid>

<narrative>Clean Up Page

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically immediately after closing your business object at the end of

You will not be able to call this action from a business process, nor will it be called at any other time than be

<displayx>-180</displayx>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="39522235-af8b-4be1-b367-fe01fa1d9dd7" name="Note2" type="Note">

<narrative>Initialise Page

This is an optional page where you might choose to perform some initialisation tasks after your business ob

The initialise action will be called automatically immediately after loading your business object.

You will not be able to call this action from a business process, nor will it be called at any other time than at

<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="b2f05178-b54e-40d9-b723-0c4ef94158c3" name="Hyperlink" type="SubSheetInfo">

<subsheetid>ec2ef3e6-2690-49c6-ab7e-4c597a14e623</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="b8fb20d8-15f8-459f-acbb-9166672d0854" name="Start" type="Start">

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>396aebc4-2338-46fa-804d-128d27a3ec28</onsuccess>

</stage>

<stage stageid="e8717bb8-06bc-47ad-a11b-0e539bca77b7" name="End" type="End">

<subsheetid>ec2ef3e6-2690-49c6-ab7e-4c597a14e623</subsheetid>

<displayy>-15</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="b2364323-097e-4257-94a9-44e865e5d5b4" name="Get link address" type="Read">

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>e8717bb8-06bc-47ad-a11b-0e539bca77b7</onsuccess>

<step stage="link Address">

<element id="f7d83d4e-03fe-4edf-aa6a-77485f0a9769"/>

<action>

<id>WebGetLinkAddress</id>

</action>

</step>

</stage>

<stage stageid="d194f2be-f7c2-492c-82dc-06479408a336" name="link Address" type="Data">

<subsheetid>ec2ef3e6-2690-49c6-ab7e-4c597a14e623</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

</stage>

```xml
<stage stageid="0bae0261-092d-477a-8958-8d618526cb2f" name="Time Out - wait for hyperlink" type="W
<subsheetid>ec2ef3e6-2690-49c6-ab7e-4c597a14e623</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>30</displayx>
<displayy>-105</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>8a5b8b8c-407c-437e-82db-a41a85661531</onsuccess>
<groupid>755e7c09-ea75-4eff-a9b0-3cbc96e4816b</groupid>
</stage>
<stage stageid="396aebc4-2338-46fa-804d-128d27a3ec28" name="wait for hyperlink" type="WaitStart">
<subsheetid>ec2ef3e6-2690-49c6-ab7e-4c597a14e623</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-30</displayx>
<displayy>-105</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<groupid>755e7c09-ea75-4eff-a9b0-3cbc96e4816b</groupid>
<choices>
<choice reply="True">
<name>My Link Label (hyperlink) Check Exists</name>
```

```xml
<distance>30</distance>

<ontrue>b2364323-097e-4257-94a9-44e865e5d5b4</ontrue>

<element id="f7d83d4e-03fe-4edf-aa6a-77485f0a9769"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>5</timeout>

</stage>

<stage stageid="8a5b8b8c-407c-437e-82db-a41a85661531" name="timeout ocurred" type="Exception">

<subsheetid>ec2ef3e6-2690-49c6-ab7e-4c597a14e623</subsheetid>

<narrative>

</narrative>

<displayx>90</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&amp;quot;timeout ocurred waiting for the hyper link to exist&amp;quot;"

</stage>

<stage stageid="03905ffe-b7e1-48fd-88d8-f9570cb20b13" name="editable text" type="SubSheetInfo">

<subsheetid>911094e4-76dc-4348-8373-3a0333af806d</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>
```

```xml
<displayy>-105</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="8d52fe17-9f52-4d7d-bd37-043dd7bc2fca" name="Start" type="Start">
<subsheetid>911094e4-76dc-4348-8373-3a0333af806d</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-45</displayx>
<displayy>-225</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>83253eb2-857e-4b85-8f0f-922b2bd33f82</onsuccess>
</stage>
<stage stageid="b60897fb-261c-42bd-b272-d05174272824" name="End" type="End">
<subsheetid>911094e4-76dc-4348-8373-3a0333af806d</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>0</displayx>
<displayy>165</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
```

```
</stage>

<stage stageid="dd4a5055-121a-4046-a843-94ab1d7edfbf" name="Selected text as expected?" type="Dec

<subsheetid>911094e4-76dc-4348-8373-3a0333af806d</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>0</displayx>

<displayy>-45</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<decision expression="[expected Get Selected Text Result]=[Value from Html textbox]"/>

<ontrue>dd97f161-f6a2-41f9-9bd8-7e89bfd5345c</ontrue>

<onfalse>26b48f25-40f4-47d6-bd79-386a4a2c50ac</onfalse>

</stage>

<stage stageid="c386c4b7-cfde-4814-bc6f-beb654be0ba6" name="expected Get Selected Text Result" typ

<subsheetid>911094e4-76dc-4348-8373-3a0333af806d</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-75</displayx>

<displayy>-45</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue xml:space="preserve">HTML</initialvalue>
```

```xml
<private/>

<alwaysinit/>

</stage>

<stage stageid="26b48f25-40f4-47d6-bd79-386a4a2c50ac" name="Get Selected Text Fail" type="Exceptio

<subsheetid>911094e4-76dc-4348-8373-3a0333af806d</subsheetid>

<narrative>

</narrative>

<displayx>165</displayx>

<displayy>-45</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="" detail="&amp;quot;The retrieved selected Text was not what was expected&amp;quot;"

</stage>

<stage stageid="75aa97d7-034b-4b9a-998f-5aa3960e1bf4" name="Expected Label value" type="Data">

<subsheetid>911094e4-76dc-4348-8373-3a0333af806d</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-75</displayx>

<displayy>60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue xml:space="preserve">Textbox label </initialvalue>

<private/>
```

</stage>

<stage stageid="dd97f161-f6a2-41f9-9bd8-7e89bfd5345c" name="retrieved label as expected?" type="Dec

<subsheetid>911094e4-76dc-4348-8373-3a0333af806d</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&quot;the results from the Get Label action were not as expected&a

</stage>

<stage stageid="d6a09ed1-1de2-4ba2-a4fb-c36b4cb218b9" name="Time Out - wait for editable text" type=

<subsheetid>911094e4-76dc-4348-8373-3a0333af806d</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<displayx>-45</displayx>

<displayy>-180</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>4268e8c1-6c3e-492b-b66d-e591161e8b03</groupid>

<choices>

<choice reply="True">

<name>Html textbox Check Exists</name>

<distance>45</distance>

<ontrue>dd4a5055-121a-4046-a843-94ab1d7edfbf</ontrue>

<element id="5d221074-af82-4543-9c16-d9df0c4bd0e8"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>5</timeout>

</stage>

<stage stageid="fce93c17-90f0-47bf-8624-df9c962314da" name="timeout" type="Exception">

<subsheetid>911094e4-76dc-4348-8373-3a0333af806d</subsheetid>

<narrative>

</narrative>

<displayx>165</displayx>

<displayy>-180</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&quot;timeout ocurred waiting for editable text&quot;"/>

</stage>

<stage stageid="1ee68356-bd71-47ad-824a-d2d7f0e369e5" name="select text range" type="SubSheetInfo

<subsheetid>2cfebde8-01bf-416a-b729-66cee685ac2e</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

```xml
<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="3a50b895-cd7e-47e1-ba18-f8116daa83c2" name="Start" type="Start">

<subsheetid>2cfebde8-01bf-416a-b729-66cee685ac2e</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<inputs>

<input type="number" name="Start Index" stage="Start Index"/>

<input type="number" name="Length" stage="Length"/>

</inputs>

<onsuccess>ff8ce5bc-8be9-43dd-9f13-a41f8e0a4430</onsuccess>

</stage>

<stage stageid="3ec5e468-43e4-4932-8c2f-3d89a6773424" name="End" type="End">

<subsheetid>2cfebde8-01bf-416a-b729-66cee685ac2e</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>45</displayx>
```

```
<displayy>30</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="4da4ac9c-4ccd-44b2-833b-b182009cae6c" name="Get selected text" type="SubSheetInfo

<subsheetid>3cbd984c-9f7b-4573-b0b2-2731923284f6</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="47280493-2169-420b-9428-6e24954ac14f" name="Start" type="Start">

<subsheetid>3cbd984c-9f7b-4573-b0b2-2731923284f6</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>52e27900-bac8-458b-8b9b-17b12ce29c62</onsuccess>

</stage>
```

<stage stageid="214b6ec2-153f-4a05-8ff4-6d6d98f95064" name="End" type="End">

<subsheetid>3cbd984c-9f7b-4573-b0b2-2731923284f6</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="4a03108d-8991-4c4c-a911-48242d64268a" name="Time Out - wait for editable text" type

<subsheetid>2cfebde8-01bf-416a-b729-66cee685ac2e</subsheetid>

<displayy>-60</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>ca39f162-ad84-492a-bf66-55dbb892dea4</onsuccess>

<groupid>947915ae-1287-4b32-9883-cfd9294d4026</groupid>

</stage>

```xml
<stage stageid="ff8ce5bc-8be9-43dd-9f13-a41f8e0a4430" name="wait for editable text" type="WaitStart">
<subsheetid>2cfebde8-01bf-416a-b729-66cee685ac2e</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-60</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<groupid>947915ae-1287-4b32-9883-cfd9294d4026</groupid>
<choices>
<choice reply="True">
<name>Html textbox Check Exists</name>
<distance>30</distance>
<ontrue>69db1bae-d549-4a32-9c19-4101aaefc034</ontrue>
<element id="5d221074-af82-4543-9c16-d9df0c4bd0e8"/>
<condition>
<id>CheckExists</id>
</condition>
<comparetype>Equal</comparetype>
</choice>
</choices>
<timeout>5</timeout>
</stage>
<stage stageid="ca39f162-ad84-492a-bf66-55dbb892dea4" name="timeout" type="Exception">
<subsheetid>2cfebde8-01bf-416a-b729-66cee685ac2e</subsheetid>
```

```xml
<narrative>

</narrative>

<displayx>135</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&amp;quot;timeout ocurred waiting for editable text&amp;quot;"/>

</stage>

<stage stageid="3359e15e-00be-4d25-ad9e-003125a2b1a5" name="Get selected text" type="Read">

<subsheetid>3cbd984c-9f7b-4573-b0b2-2731923284f6</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>45</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>214b6ec2-153f-4a05-8ff4-6d6d98f95064</onsuccess>

<step stage="Value from Html textbox">

<element id="5d221074-af82-4543-9c16-d9df0c4bd0e8"/>

<action>

<id>WebGetSelectedText</id>

</action>

</step>

</stage>
```

<stage stageid="4b253b27-9a3e-41e1-b956-e8c0e5297339" name="Time Out - wait for editable text" type

<subsheetid>3cbd984c-9f7b-4573-b0b2-2731923284f6</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>75</displayx>

<displayy>-60</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>c3e51095-7b3a-4f4c-a61c-908c4ce52d0a</onsuccess>

<groupid>3fbfbada-1854-4874-beff-933ccca9b457</groupid>

</stage>

<stage stageid="52e27900-bac8-458b-8b9b-17b12ce29c62" name="wait for editable text" type="WaitStart

<subsheetid>3cbd984c-9f7b-4573-b0b2-2731923284f6</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-60</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>3fbfbada-1854-4874-beff-933ccca9b457</groupid>

<choices>

<choice reply="True">

<name>Html textbox Check Exists</name>

```xml
<distance>30</distance>

<ontrue>3359e15e-00be-4d25-ad9e-003125a2b1a5</ontrue>

<element id="5d221074-af82-4543-9c16-d9df0c4bd0e8"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>5</timeout>

</stage>

<stage stageid="c3e51095-7b3a-4f4c-a61c-908c4ce52d0a" name="timeout" type="Exception">

<subsheetid>3cbd984c-9f7b-4573-b0b2-2731923284f6</subsheetid>

<narrative>

</narrative>

<displayx>135</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&amp;quot;timeout ocurred waiting for editable text&amp;quot;"/>

</stage>

<stage stageid="5ce8a066-7f62-4ceb-b221-8935ae299cb1" name="Value from Html textbox" type="Data":

<subsheetid>3cbd984c-9f7b-4573-b0b2-2731923284f6</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>
```

```xml
<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="69db1bae-d549-4a32-9c19-4101aaefc034" name="select text range" type="Navigate">

<subsheetid>2cfebde8-01bf-416a-b729-66cee685ac2e</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>45</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>3ec5e468-43e4-4932-8c2f-3d89a6773424</onsuccess>

<step>

<element id="5d221074-af82-4543-9c16-d9df0c4bd0e8"/>

<action>

<id>WebSelectTextRange</id>

<arguments>

<argument>

<id>index</id>
```

```xml
<value>[Start Index]</value>

</argument>

<argument>

<id>length</id>

<value>[Length]</value>

</argument>

</arguments>

</action>

</step>

</stage>

<stage stageid="ffa77e40-d51a-4262-84d1-8c41168cd88f" name="Start Index" type="Data">

<subsheetid>2cfebde8-01bf-416a-b729-66cee685ac2e</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-210</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

<initialvalue>4</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="5d19954a-3693-4e88-9146-c256ae9bd992" name="Length" type="Data">

<subsheetid>2cfebde8-01bf-416a-b729-66cee685ac2e</subsheetid>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

</stage>

<stage stageid="250f0964-049c-4e6d-b1a8-223ba9a54bc6" name="Get label" type="SubSheetInfo">

<subsheetid>336ec897-b819-46a3-aea7-5ca0def5d6af</subsheetid>

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="ef1ae0bd-32f3-46b0-8d77-3aebaf7343ef" name="Start" type="Start">

<subsheetid>336ec897-b819-46a3-aea7-5ca0def5d6af</subsheetid>

```xml
</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>8ba1f89a-49e6-4002-8ced-4a9ce5c2dded</onsuccess>

</stage>

<stage stageid="6b78ece9-55b6-417b-a04a-6cba356a08fd" name="End" type="End">

<subsheetid>336ec897-b819-46a3-aea7-5ca0def5d6af</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>45</displayx>

<displayy>30</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<outputs>

<output type="text" name="get label output" stage="get label output"/>

</outputs>

</stage>

<stage stageid="e023b12a-accd-4147-9722-9d10b4e734b6" name="Get label" type="Read">

<subsheetid>336ec897-b819-46a3-aea7-5ca0def5d6af</subsheetid>

<loginhibit/>

<narrative>

</narrative>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>6b78ece9-55b6-417b-a04a-6cba356a08fd</onsuccess>

<step stage="get label output">

<element id="5d221074-af82-4543-9c16-d9df0c4bd0e8"/>

<action>

<id>WebGetLabel</id>

</action>

</step>

</stage>

<stage stageid="b358461b-0f60-4044-834a-d5eab3ab5003" name="Time Out - wait for editable text" type=

<subsheetid>336ec897-b819-46a3-aea7-5ca0def5d6af</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>7d89e3b8-0fb7-4312-95ba-cc57a6ac3b84</onsuccess>

<groupid>8184122a-a848-42d9-93d1-bcf0ab4d97fe</groupid>

</stage>

<stage stageid="8ba1f89a-49e6-4002-8ced-4a9ce5c2dded" name="wait for editable text" type="WaitStart"

```xml
<subsheetid>336ec897-b819-46a3-aea7-5ca0def5d6af</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-60</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<groupid>8184122a-a848-42d9-93d1-bcf0ab4d97fe</groupid>

<choices>

<choice reply="True">

<name>Html textbox Check Exists</name>

<distance>30</distance>

<ontrue>e023b12a-accd-4147-9722-9d10b4e734b6</ontrue>

<element id="5d221074-af82-4543-9c16-d9df0c4bd0e8"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>5</timeout>

</stage>

<stage stageid="7d89e3b8-0fb7-4312-95ba-cc57a6ac3b84" name="timeout" type="Exception">

<subsheetid>336ec897-b819-46a3-aea7-5ca0def5d6af</subsheetid>

<narrative>
```

```xml
</narrative>

<displayx>135</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<exception type="Failure" detail="&amp;quot;timeout ocurred waiting for editable text&amp;quot;"/>

</stage>

<stage stageid="7fb8cfb4-58f0-4739-a1d1-4d5be162e32e" name="get label output" type="Data">

<subsheetid>336ec897-b819-46a3-aea7-5ca0def5d6af</subsheetid>

<narrative>

</narrative>

<displayx>-210</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="3cd07a42-a66e-4401-8835-3d2e8e6e728a" name="Get Path" type="SubSheetInfo">

<subsheetid>f93c8513-f0d3-429a-a742-86d398e0b436</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>
```

```xml
<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="93bf48ea-11cf-4654-a3a2-3c0d0706d599" name="Start" type="Start">

<subsheetid>f93c8513-f0d3-429a-a742-86d398e0b436</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>4b0164b0-9e7d-419f-aacc-5f2cae8b5f40</onsuccess>

</stage>

<stage stageid="4c7e65de-b373-43c3-815c-44f55c01542c" name="End" type="End">

<subsheetid>f93c8513-f0d3-429a-a742-86d398e0b436</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>
```

```xml
<outputs>
<output type="text" name="Get Path" stage="Get Path"/>
</outputs>
</stage>
<stage stageid="4b0164b0-9e7d-419f-aacc-5f2cae8b5f40" name="Get Path (My Label)" type="Read">
<subsheetid>f93c8513-f0d3-429a-a742-86d398e0b436</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-60</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>4c7e65de-b373-43c3-815c-44f55c01542c</onsuccess>
<step stage="Get Path">
<element id="37290185-bb5f-47ab-a5f2-e876a8b942e2"/>
<action>
<id>WebGetPath</id>
</action>
</step>
</stage>
<stage stageid="e605981e-d8e3-4d0d-bf6e-73201babb1c9" name="Get Path" type="Data">
<subsheetid>f93c8513-f0d3-429a-a742-86d398e0b436</subsheetid>
<narrative>
</narrative>
<displayx>-60</displayx>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

</process>

<process name="Citrix Test Harness Launcher" version="1.0" bpversion="6.0.0.0" narrative="" byrefcollect

<appdef>

<element name="Application Root">

<id>aa842825-b1de-4691-ae0c-6fa8e976deca</id>

<type>Application</type>

<basetype>Application</basetype>

<datatype>unknown</datatype>

<diagnose>False</diagnose>

</element>

</appdef>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

<preconditions/>

<endpoint narrative=""/>

```xml
<subsheet subsheetid="dd727582-bd79-4339-b14a-6edb4b75cb91" type="CleanUp" published="True">
<name>Clean Up</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="714048fd-3d70-449b-869a-452b938c0fcf" type="Normal" published="True">
<name>Launch</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="c4ebd1e5-5f97-41c7-ba1d-d9752af6ce3d" type="Normal" published="True">
<name>Copy file</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="dcbcc7ed-f195-416d-94ab-15b754b4b908" type="Normal" published="True">
<name>Get log values</name>
<view>
```

```
<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="73d71a89-b1ee-4ed1-bfb9-4cd91b75f418" type="Normal" published="True">

<name>Combine collections</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<stage stageid="5dbb336c-c3a7-40af-ad40-4c934c2db24a" name="Start" type="Start">

<loginhibit/>

<display x="15" y="-105"/>

<onsuccess>a3fd46d8-aa07-43bb-9604-a323aec0b344</onsuccess>

</stage>

<stage stageid="a3fd46d8-aa07-43bb-9604-a323aec0b344" name="End" type="End">

<loginhibit/>

<display x="15" y="90"/>

</stage>

<stage stageid="777b8299-c0a4-4fc2-a599-86db6c7ff41d" name="Stage1" type="ProcessInfo">

<display x="-225" y="-105" w="150" h="90"/>

<references>

<reference>System.dll</reference>

<reference>System.Data.dll</reference>
```

```xml
<reference>System.Xml.dll</reference>
<reference>System.Drawing.dll</reference>
<reference>System.Core.dll</reference>
</references>
<imports>
<import>System</import>
<import>System.Drawing</import>
<import>System.Data</import>
<import>System.Diagnostics</import>
<import>System.Reflection</import>
<import>System.IO</import>
<import>System.Collections.Generic</import>
<import>System.Linq</import>
</imports>
<language>csharp</language>
<globalcode></globalcode>
<code></code>
</stage>
<stage stageid="854529d6-9ea9-4b3b-bd61-8eec01809ea0" name="Clean Up" type="SubSheetInfo">
<subsheetid>dd727582-bd79-4339-b14a-6edb4b75cb91</subsheetid>
<display x="-195" y="-105" w="150" h="90"/>
</stage>
<stage stageid="f993d4d1-281b-40f7-be91-cadbb96a8df6" name="Start" type="Start">
<subsheetid>dd727582-bd79-4339-b14a-6edb4b75cb91</subsheetid>
<loginhibit/>
<display x="15" y="-105"/>
<onsuccess>17e0426f-1eeb-4afd-8f17-bf7a6c33feab</onsuccess>
```

```xml
  </stage>

  <stage stageid="17e0426f-1eeb-4afd-8f17-bf7a6c33feab" name="End" type="End">

  <subsheetid>dd727582-bd79-4339-b14a-6edb4b75cb91</subsheetid>

  <loginhibit/>

  <display x="15" y="90"/>

  </stage>

  <stage stageid="34db5a6d-c019-4ded-ad49-b89661ed55fb" name="Launch" type="SubSheetInfo">

  <subsheetid>714048fd-3d70-449b-869a-452b938c0fcf</subsheetid>

  <display x="-195" y="-105" w="150" h="90"/>

  </stage>

  <stage stageid="110e70e2-7081-4c5c-9dd4-996a686a8e83" name="Start" type="Start">

  <subsheetid>714048fd-3d70-449b-869a-452b938c0fcf</subsheetid>

  <loginhibit/>

  <display x="15" y="-105"/>

  <inputs>

  <input type="text" name="Arguments" stage="Arguments"/>

  </inputs>

  <onsuccess>e2c072d0-e95b-41ab-b7d7-00a077dc4c75</onsuccess>

  </stage>

  <stage stageid="aa857692-45c7-40a5-be72-44e390626f28" name="End" type="End">

  <subsheetid>714048fd-3d70-449b-869a-452b938c0fcf</subsheetid>

  <loginhibit/>

  <display x="15" y="15"/>

  </stage>

  <stage stageid="378bc6ae-1fd7-4b15-9278-44518f30d279" name="" type="Note">

  <subsheetid>dd727582-bd79-4339-b14a-6edb4b75cb91</subsheetid>

  <narrative>Clean Up Page
```

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically immediately after closing your business object at the end of

You will not be able to call this action from a business process, nor will it be called at any other time than be

```
<display x="-180" y="60" w="180" h="230"/>
</stage>
<stage stageid="864cff5d-5367-414f-bcaa-58c4d3adec7e" name="" type="Note">
<narrative>Initialise Page
```

This is an optional page where you might choose to perform some initialisation tasks after your business of

The initialise action will be called automatically immediately after loading your business object.

You will not be able to call this action from a business process, nor will it be called at any other time than a

```
<display x="-225" y="60" w="180" h="230"/>
</stage>
<stage stageid="e2c072d0-e95b-41ab-b7d7-00a077dc4c75" name="Launch Process" type="Code">
<subsheetid>714048fd-3d70-449b-869a-452b938c0fcf</subsheetid>
<loginhibit/>
<display x="15" y="-45"/>
<inputs>
<input type="text" name="Location" expr="[QA Root]&amp;amp;&amp;quot;\&amp;quot;&amp;amp;[Test h
<input type="text" name="Arguments" expr="[Arguments]"/>
</inputs>
<onsuccess>aa857692-45c7-40a5-be72-44e390626f28</onsuccess>
```

```
<code>Directory.SetCurrentDirectory(Location);

string command = Path.Combine(Location, "AppManCitrixTestHarness.exe");

ProcessStartInfo startInfo = new ProcessStartInfo(command,Arguments = Arguments);

startInfo.UseShellExecute = false;

startInfo.RedirectStandardError = true;


Process p=Process.Start(startInfo);

p.WaitForExit();

if(p.ExitCode != 0)

throw new ApplicationException(p.StandardError.ReadToEnd());</code>
</stage>
<stage stageid="78f13460-79ab-4286-a565-3ca2a6e17566" name="Arguments" type="Data">
<subsheetid>714048fd-3d70-449b-869a-452b938c0fcf</subsheetid>
<display x="90" y="-105"/>
<datatype>text</datatype>
<initialvalue xml:space="preserve">--target=Local --quiet</initialvalue>
<private/>
<alwaysinit/>
</stage>
<stage stageid="d26b2412-1d96-4017-ad14-8c3fbb8af8a4" name="QA Root" type="Data">
<subsheetid>714048fd-3d70-449b-869a-452b938c0fcf</subsheetid>
<loginhibit onsuccess="true"/>
<display x="90" y="-45"/>
<datatype>text</datatype>
<initialvalue/>
<exposure>Environment</exposure>
<private/>
```

```xml
<alwaysinit/>

</stage>

<stage stageid="37ff182a-0c7c-4164-b0f1-e0781620390c" name="Get log values" type="SubSheetInfo">

<subsheetid>dcbcc7ed-f195-416d-94ab-15b754b4b908</subsheetid>

<display x="-195" y="-105" w="150" h="90"/>

</stage>

<stage stageid="c041b248-57c7-4234-a808-7509ca1b0d89" name="Start" type="Start">

<subsheetid>dcbcc7ed-f195-416d-94ab-15b754b4b908</subsheetid>

<loginhibit/>

<display x="15" y="-105"/>

<inputs>

<input type="text" name="File path" stage="File path"/>

</inputs>

<onsuccess>ab5c715e-a924-4b98-816f-c5e9d1fe15b3</onsuccess>

</stage>

<stage stageid="65cc7eb4-5111-4b31-a6c7-359049505895" name="End" type="End">

<subsheetid>dcbcc7ed-f195-416d-94ab-15b754b4b908</subsheetid>

<loginhibit/>

<display x="15" y="15"/>

<outputs>

<output type="collection" name="Logs" stage="Lines"/>

</outputs>

</stage>

<stage stageid="3f213665-c606-4c88-af29-1015951764c9" name="File path" type="Data">

<subsheetid>dcbcc7ed-f195-416d-94ab-15b754b4b908</subsheetid>

<display x="90" y="-105"/>

<datatype>text</datatype>
```

```
<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="ab5c715e-a924-4b98-816f-c5e9d1fe15b3" name="Read collection from file" type="Code":

<subsheetid>dcbcc7ed-f195-416d-94ab-15b754b4b908</subsheetid>

<loginhibit/>

<display x="15" y="-45"/>

<inputs>

<input type="text" name="filePath" expr="[QA Root]&amp;amp;&amp;quot;\&amp;quot;&amp;amp;[Test ha

</inputs>

<outputs>

<output type="collection" name="Lines" stage="Lines"/>

</outputs>

<onsuccess>65cc7eb4-5111-4b31-a6c7-359049505895</onsuccess>

<code>Lines = new DataTable();

Lines.Columns.Add("Value", typeof(string));


using (var file = File.OpenRead(filePath))

using (var streamReader = new StreamReader(file))

{

while(!streamReader.EndOfStream)

{

Lines.Rows.Add(streamReader.ReadLine());

}

}</code>

</stage>
```

```xml
<stage stageid="555b35db-1945-4023-bc2c-3c8c4f54ab74" name="Lines" type="Collection">
<subsheetid>dcbcc7ed-f195-416d-94ab-15b754b4b908</subsheetid>
<display x="90" y="-45"/>
<datatype>collection</datatype>
<private/>
<alwaysinit/>
</stage>
<stage stageid="12cbaef2-0392-4277-86db-7a76f09fab29" name="Test harness folder" type="Data">
<loginhibit/>
<display x="-75" y="-105" w="120" h="30"/>
<datatype>text</datatype>
<initialvalue xml:space="preserve">Code\AppManCitrixTestHarness\bin\Debug\</initialvalue>
<alwaysinit/>
</stage>
<stage stageid="bf17b383-604b-4c0b-bc59-442c14db5771" name="QA Root" type="Data">
<subsheetid>dcbcc7ed-f195-416d-94ab-15b754b4b908</subsheetid>
<loginhibit onsuccess="true"/>
<display x="150" y="-105"/>
<datatype>text</datatype>
<initialvalue/>
<exposure>Environment</exposure>
<private/>
<alwaysinit/>
</stage>
<stage stageid="5f034e07-cd50-4d1f-b589-153aa5c947b6" name="Combine collections" type="SubSheetI
<subsheetid>73d71a89-b1ee-4ed1-bfb9-4cd91b75f418</subsheetid>
<display x="-195" y="-105" w="150" h="90"/>
```

```
</stage>

<stage stageid="48dc6fb2-d1ef-4e3e-b204-09dfaa2b5b3f" name="Start" type="Start">

<subsheetid>73d71a89-b1ee-4ed1-bfb9-4cd91b75f418</subsheetid>

<loginhibit/>

<display x="15" y="-105"/>

<inputs>

<input type="collection" name="Collection 1" stage="Collection 1"/>

<input type="collection" name="Collection 2" stage="Collection 2"/>

</inputs>

<onsuccess>dd702d85-46d3-4cf4-9d76-a2d9523d1bdb</onsuccess>

</stage>

<stage stageid="f7289f09-fd8d-4d67-8a55-93e91fad2e9b" name="End" type="End">

<subsheetid>73d71a89-b1ee-4ed1-bfb9-4cd91b75f418</subsheetid>

<loginhibit/>

<display x="15" y="15"/>

<outputs>

<output type="collection" name="Combined collection" stage="Combined Collection"/>

</outputs>

</stage>

<stage stageid="dd702d85-46d3-4cf4-9d76-a2d9523d1bdb" name="Combine" type="Code">

<subsheetid>73d71a89-b1ee-4ed1-bfb9-4cd91b75f418</subsheetid>

<loginhibit/>

<display x="15" y="-45"/>

<inputs>

<input type="collection" name="collection1" expr="[Collection 1]"/>

<input type="collection" name="collection2" expr="[Collection 2]"/>

</inputs>
```

```
<outputs>

<output type="collection" name="combinedCollection" stage="Combined Collection"/>

</outputs>

<onsuccess>f7289f09-fd8d-4d67-8a55-93e91fad2e9b</onsuccess>

<code>combinedCollection = new DataTable();

IEnumerable&lt;DataColumn&gt; GetColumns(DataTable table, Func&lt;string, string&gt; formatName) =&g

table.Columns.OfType&lt;DataColumn&gt;().Select(c =&gt; new DataColumn(formatName(c.ColumnName)


combinedCollection.Columns.AddRange(

GetColumns(collection1, n =&gt; $"Collection 1 {n}")

.Concat(GetColumns(collection2, n =&gt; $"Collection 2 {n}"))

.ToArray());


IEnumerable&lt;object[]&gt; GetRows(DataTable table) =&gt; table.Rows.Cast&lt;DataRow&gt;().Select(r =

var collection1Rows = GetRows(collection1);

var collection2Rows = GetRows(collection2);


var allRows = collection1Rows.Zip(collection2Rows, (l, r) =&gt; l.Concat(r).ToArray());


foreach(var rowValues in allRows)

{

var row = combinedCollection.NewRow();

for(var i = 0; i &lt; rowValues.Length; ++i)

{

row[i] = rowValues[i];

}

combinedCollection.Rows.Add(row);
```

}</code>

</stage>

<stage stageid="3d980d62-6ee0-41f4-ac70-6371824f6a46" name="Collection 1" type="Collection">

<display x="120" y="-45" w="120" h="30"/>

<datatype>collection</datatype>

</stage>

<stage stageid="055f758a-e94a-4768-8e67-3ec863ea07d4" name="Copy file" type="SubSheetInfo">

<subsheetid>c4ebd1e5-5f97-41c7-ba1d-d9752af6ce3d</subsheetid>

<display x="-195" y="-105" w="150" h="90"/>

</stage>

```xml
<stage stageid="48547d37-51ba-488f-8985-48d47f45b8e0" name="Start" type="Start">
<subsheetid>c4ebd1e5-5f97-41c7-ba1d-d9752af6ce3d</subsheetid>
<loginhibit/>
<display x="15" y="-105"/>
<inputs>
<input type="text" name="Source path" stage="Source path"/>
<input type="text" name="Destination path" stage="Destination path"/>
</inputs>
<onsuccess>30e31c98-dd1e-48dc-a9ae-076e19941e77</onsuccess>
</stage>
<stage stageid="45b9c4ab-4a82-4384-ad54-14d686711bad" name="End" type="End">
<subsheetid>c4ebd1e5-5f97-41c7-ba1d-d9752af6ce3d</subsheetid>
<loginhibit/>
<display x="15" y="15"/>
</stage>
<stage stageid="4f11af07-0b2f-49f6-9cb2-27366cc733bc" name="Source path" type="Data">
<subsheetid>c4ebd1e5-5f97-41c7-ba1d-d9752af6ce3d</subsheetid>
<display x="90" y="-105"/>
<datatype>text</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
<stage stageid="36dd6af3-c773-434d-ad08-7c4d04c9567d" name="Destination path" type="Data">
<subsheetid>c4ebd1e5-5f97-41c7-ba1d-d9752af6ce3d</subsheetid>
<display x="150" y="-105"/>
<datatype>text</datatype>
```

</stage>

<stage stageid="30e31c98-dd1e-48dc-a9ae-076e19941e77" name="Copy" type="Code">

<subsheetid>c4ebd1e5-5f97-41c7-ba1d-d9752af6ce3d</subsheetid>

<display x="15" y="-45"/>

<inputs>

<input type="text" name="sourcePath" expr="[QA Root]&amp;&quot;\&quot;&amp;[Tes

<input type="text" name="destinationPath" expr="[QA Root]&amp;&quot;\&quot;&amp;

</inputs>

<onsuccess>45b9c4ab-4a82-4384-ad54-14d686711bad</onsuccess>

<code>File.Copy(sourcePath, destinationPath, true);</code>

</stage>

<stage stageid="938695e5-28c2-4c65-87a7-61b0c86d6a37" name="QA Root" type="Data">

<subsheetid>c4ebd1e5-5f97-41c7-ba1d-d9752af6ce3d</subsheetid>

<loginhibit onsuccess="true"/>

<display x="210" y="-105"/>

<datatype>text</datatype>

<exposure>Environment</exposure>

</stage>

</process>

<process name="Code Coop" version="1.0" bpversion="6.2.0.2597" narrative="Tests the menu features in

```xml
<appdef>
<element name="Code Coop">
<id>4ea4c113-3b2a-4b8a-b37a-39e9e8da6f82</id>
<element name="Main Window">
<id>64925b67-9e87-410c-b155-a601d00a01fe</id>
<type>Window</type>
<basetype>Window</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText">
<ProcessValue datatype="text" value="BPA Terminal Emulation (c:\blueprism\BPA Terminal Emulation)"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="Reliable Software Code Co-op"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="-1141961984"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="898"/>
```

```xml
</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="606"/>

</attribute>

<attribute name="Visible">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="26"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="23"/>

</attribute>

</attributes>

</element>

<element name="&amp;quot;About&amp;quot; dialog">

<id>ca039e05-de28-4712-8af3-8d805bb0cba2</id>

<element name="Info Box">

<id>bd23329b-e50f-4f03-875a-a61478b058fc</id>

<type>Window</type>

<basetype>Window</basetype>
```

```xml
<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText">

<ProcessValue datatype="text" value="This is Code Co-op v. 5.0h.&amp;#xA;Server-less Version Control

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Static"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X" inuse="True">

<ProcessValue datatype="number" value="144"/>

</attribute>

<attribute name="Y" inuse="True">

<ProcessValue datatype="number" value="11"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="222"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="50"/>

</attribute>

<attribute name="Visible">

<ProcessValue datatype="flag" value="True"/>

</attribute>
```

```xml
<attribute name="Enabled">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="6"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Code Co-op Version Control System"/>

</attribute>

<attribute name="pCtrlID" inuse="True">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="4"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="42"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="382"/>

</attribute>
```

```xml
<attribute name="pHeight">

<ProcessValue datatype="number" value="432"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="15"/>

</attribute>

</attributes>

</element>

<element name="Element1">

<id>bf800ef0-457f-4f40-956e-c64556ae52a3</id>

<type>Button</type>

<basetype>Button</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="OK"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="Button"/>

</attribute>
```

```xml
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X" inuse="True">
<ProcessValue datatype="number" value="137"/>
</attribute>
<attribute name="Y" inuse="True">
<ProcessValue datatype="number" value="372"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="76"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="24"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
```

```xml
<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pWindowText" inuse="True">

<ProcessValue datatype="text" value="Code Co-op Version Control System"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="4"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="42"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="382"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="number" value="432"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="number" value="1"/>

</attribute>
```

```xml
<attribute name="pChildCount" inuse="True">
<ProcessValue datatype="number" value="15"/>
</attribute>
</attributes>
</element>
<type>Window</type>
<basetype>Window</basetype>
<datatype>text</datatype>
<diagnose>False</diagnose>
<attributes>
<attribute name="WindowText" inuse="True">
<ProcessValue datatype="text" value="Code Co-op Version Control System"/>
</attribute>
<attribute name="ClassName" inuse="True">
<ProcessValue datatype="text" value="#32770"/>
</attribute>
<attribute name="CtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="X">
<ProcessValue datatype="number" value="4"/>
</attribute>
<attribute name="Y">
<ProcessValue datatype="number" value="42"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="382"/>
```

```xml
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="432"/>
</attribute>
<attribute name="Visible">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="ChildCount" inuse="True">
<ProcessValue datatype="number" value="15"/>
</attribute>
</attributes>
</element>
<type>Application</type>
<basetype>Application</basetype>
<datatype>unknown</datatype>
<diagnose>False</diagnose>
</element>
<apptypeinfo>
```

```xml
<id>Win32Launch</id>

<parameters>

<parameter>

<name>Path</name>

<value>c:\program files\Reliable Software\Code Co-op\Co-op.exe</value>

</parameter>

<parameter>

<name>CommandLineParams</name>

<value>

</value>

</parameter>

<parameter>

<name>WorkingDirectory</name>

<value>

</value>

</parameter>

<parameter>

<name>NonInvasive</name>

<value>True</value>

</parameter>

<parameter>

<name>ProcessMode</name>

<value>Internal</value>

</parameter>

<parameter>

<name>ExternalProcessTimeout</name>

<value>0</value>
```

```xml
</parameter>

<parameter>

<name>Options</name>

<value>

</value>

</parameter>

</parameters>

</apptypeinfo>

</appdef>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

<preconditions/>

<endpoint narrative=""/>

<subsheet subsheetid="4f111465-e3d8-422a-bb0c-bc5d14f77cac" type="CleanUp" published="True">

<name>Clean Up</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="41c9b69b-1a30-4fca-8f4d-c9f081129cdb" type="Normal" published="True">

<name>Launch</name>

<view>
```

```xml
<camerax>0</camerax>

<cameray>66</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="e2be1cae-5431-4d3e-8201-a691b1650b94" type="Normal" published="True">

<name>Open "Program About" Dialog</name>

<view>

<camerax>-2</camerax>

<cameray>42</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="b1f35ec4-5b15-41c8-9bc7-bad70cc60229" type="Normal" published="True">

<name>Close "Program About" dialog</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="43c563df-d8e8-46d0-9f6e-fd5b5920424a" type="Normal" published="True">

<name>Read Program Version</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>
```

```
</view>

</subsheet>

<subsheet subsheetid="9e31899a-b566-4ff8-89de-929c26fc0cbe" type="Normal" published="True">

<name>Close Program</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<stage stageid="d884c96f-794e-4c3f-851a-53c25b9b1718" name="Start" type="Start">

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>7d523025-f454-4fcb-af04-f07ca973d661</onsuccess>

</stage>

<stage stageid="7d523025-f454-4fcb-af04-f07ca973d661" name="End" type="End">

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>90</displayy>
```

```xml
<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="07f9715b-2a15-4c29-b7f1-e6736a1d4260" name="Stage1" type="ProcessInfo">

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<references>

<reference>System.Data.dll</reference>

<reference>System.Xml.dll</reference>

<reference>System.Drawing.dll</reference>

</references>

<imports>

<import>System</import>

<import>System.Drawing</import>

<import>System.Diagnostics</import>

</imports>

<language>visualbasic</language>

<globalcode>


</globalcode>

<code>
```

```xml
    </code>

  </stage>

  <stage stageid="2acc534e-024c-4823-8ea8-366824981986" name="Clean Up" type="SubSheetInfo">

    <subsheetid>4f111465-e3d8-422a-bb0c-bc5d14f77cac</subsheetid>

    <narrative>

    </narrative>

    <displayx>-195</displayx>

    <displayy>-105</displayy>

    <displaywidth>150</displaywidth>

    <displayheight>90</displayheight>

    <font family="Tahoma" size="10" style="Regular" color="000000"/>

  </stage>

  <stage stageid="3743c46c-fa1a-4ce2-a738-776874914450" name="Start" type="Start">

    <subsheetid>4f111465-e3d8-422a-bb0c-bc5d14f77cac</subsheetid>

    <loginhibit/>

    <narrative>

    </narrative>

    <displayx>15</displayx>

    <displayy>-105</displayy>

    <displaywidth>60</displaywidth>

    <displayheight>30</displayheight>

    <font family="Tahoma" size="10" style="Regular" color="000000"/>

    <onsuccess>6df9375d-201c-4e29-9b38-679bfa8d40c0</onsuccess>

  </stage>

  <stage stageid="6df9375d-201c-4e29-9b38-679bfa8d40c0" name="End" type="End">

    <subsheetid>4f111465-e3d8-422a-bb0c-bc5d14f77cac</subsheetid>
```

```xml
<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="20f2d966-83b4-448a-ac09-60d5496de0fb" name="Launch" type="SubSheetInfo">

<subsheetid>41c9b69b-1a30-4fca-8f4d-c9f081129cdb</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="3d449230-64dd-4c88-8758-deaf9a78c3c9" name="Start" type="Start">

<subsheetid>41c9b69b-1a30-4fca-8f4d-c9f081129cdb</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>52e2704b-f67c-41f3-bf9d-0d3be9a924e8</onsuccess>

</stage>

<stage stageid="7d3c504e-48ee-4941-a022-bcd9d17d55c5" name="End" type="End">

<subsheetid>41c9b69b-1a30-4fca-8f4d-c9f081129cdb</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="f95df1cd-add7-474a-ab72-dce3a82aad8d" name="new" type="Note">

<subsheetid>4f111465-e3d8-422a-bb0c-bc5d14f77cac</subsheetid>

<narrative>Clean Up Page

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically immediately after closing your business object at the end of

You will not be able to call this action from a business process, nor will it be called at any other time than be

<displayx>-180</displayx>

```xml
<displayheight>230</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="c5f04bee-0aa5-4491-a9a3-229e0d3dd0e0" name="new" type="Note">
<narrative>Initialise Page

This is an optional page where you might choose to perform some initialisation tasks after your business ol

The initialise action will be called automatically immediately after loading your business object.

You will not be able to call this action from a business process, nor will it be called at any other time than a
<displayx>-180</displayx>
<displayy>60</displayy>
<displaywidth>180</displaywidth>
<displayheight>230</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="52e2704b-f67c-41f3-bf9d-0d3be9a924e8" name="Launch" type="Navigate">
<subsheetid>41c9b69b-1a30-4fca-8f4d-c9f081129cdb</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>0</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
```

```xml
<onsuccess>1fff4c53-1dc8-49ce-b80d-0f45db7e09b5</onsuccess>
<step>
<element id="4ea4c113-3b2a-4b8a-b37a-39e9e8da6f82"/>
<action>
<id>Launch</id>
<arguments>
<argument>
<id>Path</id>
<value>
</value>
</argument>
<argument>
<id>CommandLineParams</id>
<value>
</value>
</argument>
<argument>
<id>WorkingDirectory</id>
<value>
</value>
</argument>
<argument>
<id>NonInvasive</id>
<value>
</value>
</argument>
<argument>
```

<id>ProcessMode</id>

</argument>

<argument>

<id>Options</id>

</argument>

</arguments>

</action>

</step>

</stage>

<stage stageid="39252882-b815-4a7e-bf16-5af4f5722d86" name="Time Out1" type="WaitEnd">

<subsheetid>41c9b69b-1a30-4fca-8f4d-c9f081129cdb</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>9d957103-b29d-45aa-8c68-f51ee76d7abd</groupid>

</stage>

<stage stageid="1fff4c53-1dc8-49ce-b80d-0f45db7e09b5" name="Wait for Main Window" type="WaitStart"

```xml
<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>75</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>9d957103-b29d-45aa-8c68-f51ee76d7abd</groupid>

<choices>

<choice reply="True">

<name>Element1 Check Exists</name>

<distance>60</distance>

<ontrue>09370b3d-5f1e-4fc4-9af9-18083cc6d080</ontrue>

<element id="64925b67-9e87-410c-b155-a601d00a01fe"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>5</timeout>

</stage>

<stage stageid="525532a5-0775-4de9-b768-007c037131d7" name="Open &amp;quot;Program About&amp;am

<subsheetid>e2be1cae-5431-4d3e-8201-a691b1650b94</subsheetid>

<narrative>

</narrative>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="20172cd2-a6c9-4d55-8d20-30726c7d8d92" name="Start" type="Start">

<subsheetid>e2be1cae-5431-4d3e-8201-a691b1650b94</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>f8d56f95-2217-419c-b3a3-2e4b2b984855</onsuccess>

</stage>

<stage stageid="4b4e1c26-89e5-410d-84b4-9af864e58484" name="End" type="End">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="eb8cc8d1-0ea8-4188-a626-c25d45f3aaf7" name="Time Out2" type="WaitEnd">

<subsheetid>e2be1cae-5431-4d3e-8201-a691b1650b94</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>180</displayx>

<displayy>-45</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>933de151-8c00-46b5-a526-1af5dac272d4</groupid>

</stage>

<stage stageid="f8d56f95-2217-419c-b3a3-2e4b2b984855" name="Wait1" type="WaitStart">

<subsheetid>e2be1cae-5431-4d3e-8201-a691b1650b94</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-45</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>933de151-8c00-46b5-a526-1af5dac272d4</groupid>

<choices>

<choice reply="True">

<name>Element1 Check Exists</name>

<distance>90</distance>

<ontrue>8c2c375d-2d87-4344-b45e-39c60cfa23fb</ontrue>

<element id="64925b67-9e87-410c-b155-a601d00a01fe"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>0.5</timeout>

</stage>

<stage stageid="8c2c375d-2d87-4344-b45e-39c60cfa23fb" name="Select Appropriate Menu Option" type=

<subsheetid>e2be1cae-5431-4d3e-8201-a691b1650b94</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>75</displayx>

<displayy>30</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>b0575a2d-7774-42c7-8e76-97d441b057a3</onsuccess>

<step>

<element id="64925b67-9e87-410c-b155-a601d00a01fe"/>

<action>

<id>SelectMenuItem</id>

<arguments>

<argument>

<id>Value</id>

<value>"{Program}{About...}"</value>

</argument>

</arguments>

</action>

</step>

</stage>

<stage stageid="d0dc38cf-5993-4df9-b381-86b903c41d9c" name="Time Out3" type="WaitEnd">

<subsheetid>e2be1cae-5431-4d3e-8201-a691b1650b94</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>270</displayx>

<displayy>105</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>14edb5dc-b8eb-4390-99b2-aa9fe3834d60</groupid>

</stage>

<stage stageid="b0575a2d-7774-42c7-8e76-97d441b057a3" name="Wait for &quot;About&quot;

<subsheetid>e2be1cae-5431-4d3e-8201-a691b1650b94</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>75</displayx>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>14edb5dc-b8eb-4390-99b2-aa9fe3834d60</groupid>

<choices>

<choice reply="True">

<name>Element1 Check Exists</name>

<distance>90</distance>

<ontrue>4b4e1c26-89e5-410d-84b4-9af864e58484</ontrue>

<element id="ca039e05-de28-4712-8af3-8d805bb0cba2"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>5</timeout>

</stage>

<stage stageid="8d05c1c8-127b-48f7-8358-cbf6c320cdd5" name="Read Program Version" type="SubShe

<subsheetid>43c563df-d8e8-46d0-9f6e-fd5b5920424a</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

```xml
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="15d5580d-ddc7-4820-afd9-458e2b85c9ba" name="Start" type="Start">
<subsheetid>43c563df-d8e8-46d0-9f6e-fd5b5920424a</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>3624ba2a-879b-4b2c-8135-a653dad3c6ce</onsuccess>
</stage>
<stage stageid="ca61effe-04fa-465f-83bf-cec91c818408" name="End" type="End">
<subsheetid>43c563df-d8e8-46d0-9f6e-fd5b5920424a</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>105</displayx>
<displayy>180</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<outputs>
<output type="text" name="Version" stage="Version"/>
</outputs>
```

</stage>

<stage stageid="b4be6512-ec24-4213-8496-72f80f36e9c1" name="Version" type="Data">

<subsheetid>43c563df-d8e8-46d0-9f6e-fd5b5920424a</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

</stage>

<stage stageid="6fea6aac-81c6-4e6b-84b4-716f27ce8d3e" name="Time Out4" type="WaitEnd">

<subsheetid>43c563df-d8e8-46d0-9f6e-fd5b5920424a</subsheetid>

<displayy>-45</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>05ad22dd-4a67-4f48-9dfb-5c8f77bd8979</groupid>

</stage>

```xml
<stage stageid="3624ba2a-879b-4b2c-8135-a653dad3c6ce" name="Check About Dialog Exists" type="Wa
<subsheetid>43c563df-d8e8-46d0-9f6e-fd5b5920424a</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-45</displayy>
<displaywidth>60</displaywidth>
<displayheight>60</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<groupid>05ad22dd-4a67-4f48-9dfb-5c8f77bd8979</groupid>
<choices>
<choice reply="True">
<name>"About" dialog Check Exists</name>
<distance>90</distance>
<ontrue>83070505-76c3-4971-9f25-8ee676f41b3f</ontrue>
<element id="ca039e05-de28-4712-8af3-8d805bb0cba2"/>
<condition>
<id>CheckExists</id>
</condition>
<comparetype>Equal</comparetype>
</choice>
</choices>
<timeout>0.5</timeout>
</stage>
<stage stageid="83070505-76c3-4971-9f25-8ee676f41b3f" name="Read Info Box" type="Read">
<subsheetid>43c563df-d8e8-46d0-9f6e-fd5b5920424a</subsheetid>
```

```xml
<loginhibit/>

<narrative>

</narrative>

<displayx>105</displayx>

<displayy>0</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>e69a0e77-61fa-4844-9a2e-3bc8dc4b025b</onsuccess>

<step stage="Info Text">

<element id="bd23329b-e50f-4f03-875a-a61478b058fc"/>

<action>

<id>GetWindowText</id>

</action>

</step>

</stage>

<stage stageid="9781bf16-ff8c-400f-ae95-67aa38d6325c" name="Info Text" type="Data">

<subsheetid>43c563df-d8e8-46d0-9f6e-fd5b5920424a</subsheetid>

<narrative>

</narrative>

<displayx>180</displayx>

<displayy>0</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>
```

<private/>

<alwaysinit/>

</stage>

<stage stageid="e69a0e77-61fa-4844-9a2e-3bc8dc4b025b" name="Extract Version" type="Calculation">

<subsheetid>43c563df-d8e8-46d0-9f6e-fd5b5920424a</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>105</displayx>

<displayy>75</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>ca61effe-04fa-465f-83bf-cec91c818408</onsuccess>

<calculation expression="Trim(Mid([Info Text],Len(&quot;This is Code Co-op v. &quot;), Len([Info

</stage>

<stage stageid="cac2e1ba-0fde-409a-965c-324006cb6f3c" name="Close &quot;Program About&

<subsheetid>b1f35ec4-5b15-41c8-9bc7-bad70cc60229</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="cce16200-0db4-478c-b7c3-b993a00aa3ad" name="Start" type="Start">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>04700ebc-8ee9-4a12-bc29-fde0454e5578</onsuccess>

</stage>

<stage stageid="30556d62-5bd4-492c-b578-3659c423a150" name="End" type="End">

<subsheetid>b1f35ec4-5b15-41c8-9bc7-bad70cc60229</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="d4a96097-ec47-4ee1-ad8b-e02a1f400ace" name="Click &quot;OK&quot;" type=

```
<displayx>105</displayx>

<displayy>30</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>c74805d6-0336-4ae2-95b7-2af38c40082c</onsuccess>

<step>

<element id="bf800ef0-457f-4f40-956e-c64556ae52a3"/>

<action>

<id>Press</id>

</action>

</step>

</stage>

<stage stageid="53194ee2-b3d5-4140-8561-5f3d704413b1" name="Time Out4" type="WaitEnd">

<subsheetid>b1f35ec4-5b15-41c8-9bc7-bad70cc60229</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>240</displayx>

<displayy>-30</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>64619c70-3c8d-492d-9d66-1a115de4c6de</groupid>

</stage>

<stage stageid="04700ebc-8ee9-4a12-bc29-fde0454e5578" name="Check About Dialog Exists" type="Wa

<subsheetid>b1f35ec4-5b15-41c8-9bc7-bad70cc60229</subsheetid>
```

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-30</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>64619c70-3c8d-492d-9d66-1a115de4c6de</groupid>

<choices>

<choice reply="True">

<name>"About" dialog Check Exists</name>

<distance>90</distance>

<ontrue>d4a96097-ec47-4ee1-ad8b-e02a1f400ace</ontrue>

<element id="ca039e05-de28-4712-8af3-8d805bb0cba2"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>0.5</timeout>

</stage>

<stage stageid="e27c4fdd-afb2-4a1a-9672-322390cc769e" name="Time Out4" type="WaitEnd">

<subsheetid>b1f35ec4-5b15-41c8-9bc7-bad70cc60229</subsheetid>

<loginhibit/>

</narrative>

<displayx>330</displayx>

<displayy>105</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>36c4f136-910a-4b25-bbd4-710f18c96f5d</groupid>

</stage>

<stage stageid="c74805d6-0336-4ae2-95b7-2af38c40082c" name="Wait for Dialog to disappear" type="W

<subsheetid>b1f35ec4-5b15-41c8-9bc7-bad70cc60229</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>105</displayx>

<displayy>105</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<groupid>36c4f136-910a-4b25-bbd4-710f18c96f5d</groupid>

<choices>

<choice reply="False">

<name>"About" dialog Check Exists</name>

<distance>90</distance>

<ontrue>30556d62-5bd4-492c-b578-3659c423a150</ontrue>

<element id="ca039e05-de28-4712-8af3-8d805bb0cba2"/>

<condition>

<id>CheckExists</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>5</timeout>

</stage>

<stage stageid="a1fb14b6-b73d-45c0-b93f-6eb651611c4e" name="Close Program" type="SubSheetInfo">

<subsheetid>9e31899a-b566-4ff8-89de-929c26fc0cbe</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="29689d8e-038e-4adc-ad8a-725d5950b264" name="Start" type="Start">

<subsheetid>9e31899a-b566-4ff8-89de-929c26fc0cbe</subsheetid>

<displayy>-120</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

```xml
</stage>

<stage stageid="43604e61-5e1b-4d8c-89e4-cf37f54b3b51" name="End" type="End">

<subsheetid>9e31899a-b566-4ff8-89de-929c26fc0cbe</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>0</displayx>

<displayy>45</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="ae58d24f-8ffe-4a6b-8779-ac7e4a868a74" name="Select &amp;quot;Exit&amp;quot; men

<subsheetid>9e31899a-b566-4ff8-89de-929c26fc0cbe</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>0</displayx>

<displayy>-45</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>43604e61-5e1b-4d8c-89e4-cf37f54b3b51</onsuccess>

<step>

<element id="64925b67-9e87-410c-b155-a601d00a01fe"/>

<action>

<id>SelectMenuItem</id>
```

```xml
<arguments>
<argument>
<id>Value</id>
<value>"{Program}{Exit}"</value>
</argument>
</arguments>
</action>
</step>
</stage>
<stage stageid="09370b3d-5f1e-4fc4-9af9-18083cc6d080" name="Maximise" type="Navigate">
<subsheetid>41c9b69b-1a30-4fca-8f4d-c9f081129cdb</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>75</displayx>
<displayy>150</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>3682e36c-53e9-48d5-a4ef-f67a5631ec88</onsuccess>
<step>
<element id="64925b67-9e87-410c-b155-a601d00a01fe"/>
<action>
<id>MaximiseWindow</id>
</action>
</step>
</stage>
```

```xml
<stage stageid="467f9572-be5b-4240-9427-241be1524604" name="Time Out5" type="WaitEnd">
<subsheetid>41c9b69b-1a30-4fca-8f4d-c9f081129cdb</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-15</displayx>
<displayy>240</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>7d3c504e-48ee-4941-a022-bcd9d17d55c5</onsuccess>
<groupid>46e87056-344a-4037-b524-228460e30305</groupid>
</stage>
<stage stageid="3682e36c-53e9-48d5-a4ef-f67a5631ec88" name="Wait2" type="WaitStart">
<subsheetid>41c9b69b-1a30-4fca-8f4d-c9f081129cdb</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-15</displayx>
<displayy>150</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<groupid>46e87056-344a-4037-b524-228460e30305</groupid>
<choices/>
<timeout>5</timeout>
</stage>
```

```xml
</process>
<process name="Code Stage Tester" version="1.0" bpversion="6.2.0.2628" narrative="A set of tests for co
<appdef>
<element name="Application Root">
<id>c2ce4f3f-5c87-4f55-83c8-e63a710b76b2</id>
<type>Application</type>
<basetype>Application</basetype>
<datatype>unknown</datatype>
<diagnose>False</diagnose>
</element>
</appdef>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
<preconditions/>
<endpoint narrative=""/>
<subsheet subsheetid="3127d0c7-ca0d-4906-b58b-2ffeb6cf037e" type="CleanUp" published="True">
<name>Clean Up</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<subsheet subsheetid="463bed06-53fc-4ad1-9312-19a001aad5bb" type="Normal" published="True">
```

<name>Test DB Null Output</name>

<view>

<camerax>0</camerax>

<cameray>195</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="629ae649-49c0-4342-aed4-c05910fd3615" type="Normal" published="True">

<name>Test Null Output</name>

<view>

<camerax>23</camerax>

<cameray>147</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="47f95e3c-d31b-4898-a444-e2ce49276c95" type="Normal" published="True">

<name>Test Bad Output</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<stage stageid="db9b758c-f188-42bb-8849-af473f2abffe" name="Start" type="Start">

```
<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>c4760c8b-c5ea-4068-9c6a-f06e48d920c7</onsuccess>

</stage>

<stage stageid="c4760c8b-c5ea-4068-9c6a-f06e48d920c7" name="End" type="End">

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="f237e707-4727-4570-9d00-d365e4a04056" name="Stage1" type="ProcessInfo">

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<references>

<reference>System.Data.dll</reference>
```

```xml
<reference>System.Xml.dll</reference>
<reference>System.Drawing.dll</reference>
</references>
<imports>
<import>System</import>
<import>System.Drawing</import>
<import>System.Data</import>
</imports>
<language>visualbasic</language>
<globalcode></globalcode>
<code></code>
</stage>
<stage stageid="7503446c-696f-45ff-8cd1-ebe8cab731f1" name="Clean Up" type="SubSheetInfo">
<subsheetid>3127d0c7-ca0d-4906-b58b-2ffeb6cf037e</subsheetid>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-105</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="d2735bae-2767-4f95-a5a9-6aa77a099b21" name="Start" type="Start">
<subsheetid>3127d0c7-ca0d-4906-b58b-2ffeb6cf037e</subsheetid>
<loginhibit/>
<narrative>
</narrative>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>3cc0211e-b7d1-4f9a-9ca8-16406ecaabf5</onsuccess>

</stage>

<stage stageid="3cc0211e-b7d1-4f9a-9ca8-16406ecaabf5" name="End" type="End">

<subsheetid>3127d0c7-ca0d-4906-b58b-2ffeb6cf037e</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="685b52d3-474f-490a-8c1a-b2679284fe87" name="Test DB Null Output" type="SubSheetI

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="dc47ebb2-0c00-4434-8117-ef38f0a68633" name="Start" type="Start">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>19e82a97-16c7-428b-9cb0-26a8cb7f8c45</onsuccess>

</stage>

<stage stageid="666dace1-913f-4566-9be5-c969a38e0b24" name="End" type="End">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="73084a24-6ca3-40aa-b7f8-c1631e3cf865" name="new" type="Note">

<subsheetid>3127d0c7-ca0d-4906-b58b-2ffeb6cf037e</subsheetid>

<narrative>Clean Up Page

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically immediately after closing your business object at the end of

You will not be able to call this action from a business process, nor will it be called at any other time than b

<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="ac1615f7-ecdc-4153-a80e-38d6103ea5a4" name="new" type="Note">

<narrative>Initialise Page

This is an optional page where you might choose to perform some initialisation tasks after your business ob

The initialise action will be called automatically immediately after loading your business object.

You will not be able to call this action from a business process, nor will it be called at any other time than a

<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="19e82a97-16c7-428b-9cb0-26a8cb7f8c45" name="DBNull String to SingleRowTable" type

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>b1185871-6999-4d3e-b155-3a4875a5039f</onsuccess>

<code>Table = New System.Data.DataTable()

Table.Columns.Add("StringValue", GetType(String))

' Table.Rows.Add("Test One")

Table.Rows.Add(DBNull.Value)</code>

</stage>

<stage stageid="64d08df0-4e7c-416e-b89c-460188884d4b" name="String" type="Block">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<displayx>-45</displayx>

<font family="Tahoma" size="10" style="Regular" color="7FB2E5"/>

</stage>

<stage stageid="b1185871-6999-4d3e-b155-3a4875a5039f" name="Empty?" type="Decision">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<displayy>-240</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

```xml
</stage>

<stage stageid="03ec71bf-3209-4db2-ab3b-d66a1b006693" name="FAIL" type="Exception">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<narrative>

</narrative>

<displayx>255</displayx>

<displayy>-240</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="DBNullOutputFailed" detail="&amp;quot;Failed to output DBNull for a string value&amp;c

</stage>

<stage stageid="a464ab99-173f-4042-ae99-c577fd642f95" name="SingleRowTable" type="Collection">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-30</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>collection</datatype>

<private/>

<alwaysinit/>

<collectioninfo>

<singlerow/>
```

```xml
<field name="StringValue" type="text" namespace="" description="String output"/>

</collectioninfo>

<initialvalue>

<singlerow/>

<row>

<field name="StringValue" type="text" value=""/>

</row>

</initialvalue>

</stage>

<stage stageid="4c512892-9936-4a2f-8dec-5cd2aca0313b" name="FAIL" type="Exception">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<narrative>

</narrative>

<displayx>105</displayx>

<displayy>-180</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="DBNullOutputFailed" detail="&amp;quot;DBNull value was: '&amp;quot; &amp;amp; [Sin

</stage>

<stage stageid="f53b649a-34b8-42b7-b688-02e5bd8113f3" name="Resume" type="Resume">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<loginhibit/>

<narrative>Rolling my own error message</narrative>

<displayx>195</displayx>

<displayy>-240</displayy>

<displaywidth>60</displaywidth>
```

```xml
<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>03ec71bf-3209-4db2-ab3b-d66a1b006693</onsuccess>

</stage>

<stage stageid="074db8b0-7cd6-4e98-966c-863d6b71b3bb" name="Test Null Output" type="SubSheetInfo

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="82b4d58b-cff3-4e8d-ad00-538ec7e60410" name="Start" type="Start">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>-150</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>1b322516-1af3-429f-a2c7-42187fc5bd2a</onsuccess>

</stage>

<stage stageid="315967d1-4b72-4cd4-9d0a-f3e5563296e1" name="End" type="End">
```

```xml
<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>840</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="1b322516-1af3-429f-a2c7-42187fc5bd2a" name="String" type="Code">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>-90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="text" name="StringValue" stage="StringValue"/>

</outputs>

<onsuccess>60fcf58b-d040-4ab4-a945-0d29b3c701c6</onsuccess>

<code>StringValue = Nothing

</code>

</stage>
```

```xml
<stage stageid="3f529614-b86f-48cb-ac02-27d348c521e4" name="String" type="Block">
<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-90</displayx>
<displayy>-120</displayy>
<displaywidth>165</displaywidth>
<displayheight>60</displayheight>
<font family="Tahoma" size="10" style="Regular" color="7FB2E5"/>
</stage>
<stage stageid="60fcf58b-d040-4ab4-a945-0d29b3c701c6" name="Empty?" type="Decision">
<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-45</displayx>
<displayy>-30</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<decision expression="[StringValue] = &amp;quot;&amp;quot;"/>
<ontrue>4cf5650c-f9bf-4df8-81d5-626c6486c736</ontrue>
<onfalse>90be818b-c5cc-4466-bd8e-4f3af473e61c</onfalse>
</stage>
<stage stageid="8bc04407-d673-42a1-a3e9-7acec4d3c5d4" name="Recover" type="Recover">
<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>
```

```xml
<loginhibit/>
<narrative>
</narrative>
<displayx>30</displayx>
<displayy>-90</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>79381257-c097-4c27-9601-6ba2e97abf3d</onsuccess>
</stage>
<stage stageid="27993fdd-4f9b-4443-bff9-546c55bc96ab" name="FAIL" type="Exception">
<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>
<narrative>
</narrative>
<displayx>180</displayx>
<displayy>-90</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<exception type="NullOutputFailed" detail="&amp;quot;Failed to output Null for a string value&amp;quot;"/>
</stage>
<stage stageid="90be818b-c5cc-4466-bd8e-4f3af473e61c" name="FAIL" type="Exception">
<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>
<narrative>
</narrative>
<displayx>45</displayx>
<displayy>-30</displayy>
```

```
<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="NullOutputFailed" detail="&amp;quot;Null string value was: '&amp;quot; &amp;amp; [Stri

</stage>

<stage stageid="79381257-c097-4c27-9601-6ba2e97abf3d" name="Resume" type="Resume">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>

<narrative>Rolling my own error message</narrative>

<displayx>120</displayx>

<displayy>-90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>27993fdd-4f9b-4443-bff9-546c55bc96ab</onsuccess>

</stage>

<stage stageid="3b232fc7-550c-4872-a5fa-b9e6bb6b04fb" name="StringValue" type="Data">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-30</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>
```

</stage>

<stage stageid="4cf5650c-f9bf-4df8-81d5-626c6486c736" name="DateTime" type="Code">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<displayx>-45</displayx>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>ed8320c3-97ed-4e19-a53b-3a0061e18a66</onsuccess>

<code>DateTimeValue = Nothing

</code>

</stage>

<stage stageid="e0347fc1-bb9a-440a-9fdc-ceba248fdc1b" name="DateTime" type="Block">

```
<displayy>0</displayy>

<displaywidth>165</displaywidth>

<displayheight>60</displayheight>

<font family="Tahoma" size="10" style="Regular" color="7FB2E5"/>

</stage>

<stage stageid="ed8320c3-97ed-4e19-a53b-3a0061e18a66" name="Empty?" type="Decision">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>

<narrative>Note that MakeDateTime will error if you try and give it a year of 0001</narrative>

<displayx>-45</displayx>

<displayy>105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="[DateTimeValue] = ToDateTime(&amp;quot;0001-01-01 00:00:00&amp;quot;)"/>

<ontrue>baa24bcb-5a93-4c57-985b-55236e4b7d00</ontrue>

<onfalse>7d91bee5-f3cc-42c1-8056-b3ba53eac640</onfalse>

</stage>

<stage stageid="ab2f9ca7-c89c-40a6-96ad-cdb09f41cfdb" name="Recover" type="Recover">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>30</displayx>

<displayy>30</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>
```

```xml
<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>c49ab53e-cc9c-49b7-9294-586007b7d186</onsuccess>

</stage>

<stage stageid="18aa5d8b-60f6-4c63-99ad-f15f9d037cf8" name="FAIL" type="Exception">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<narrative>

</narrative>

<displayx>180</displayx>

<displayy>30</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="NullOutputFailed" detail="&amp;quot;Failed to output Null for a datetime value&amp;quo

</stage>

<stage stageid="7d91bee5-f3cc-42c1-8056-b3ba53eac640" name="FAIL" type="Exception">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<narrative>

</narrative>

<displayx>-120</displayx>

<displayy>105</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="NullOutputFailed" detail="&amp;quot;Null datetime value was: '&amp;quot; &amp;amp; [

</stage>

<stage stageid="c49ab53e-cc9c-49b7-9294-586007b7d186" name="Resume" type="Resume">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>
```

```xml
<loginhibit/>

<narrative>Rolling my own error message</narrative>

<displayx>120</displayx>

<displayy>30</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>18aa5d8b-60f6-4c63-99ad-f15f9d037cf8</onsuccess>

</stage>

<stage stageid="bdb80f7b-4b35-4f63-bdd1-9e314be42b57" name="DateTimeValue" type="Data">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>15</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>datetime</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="c04fba55-6ede-4b7d-b3b2-df00c676d283" name="Password" type="Code">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>

<narrative>
```

```xml
</narrative>

<displayx>-45</displayx>

<displayy>345</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="password" name="PasswordValue" stage="PasswordValue"/>

</outputs>

<onsuccess>d2dfc342-03f6-400a-9bf9-77307ace0ad4</onsuccess>

<code>PasswordValue = Nothing

</code>

</stage>

<stage stageid="eb0b57f9-b61a-4886-8622-a12171605809" name="Password" type="Block">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-90</displayx>

<displayy>315</displayy>

<displaywidth>165</displaywidth>

<displayheight>60</displayheight>

<font family="Tahoma" size="10" style="Regular" color="7FB2E5"/>

</stage>

<stage stageid="d2dfc342-03f6-400a-9bf9-77307ace0ad4" name="Empty?" type="Decision">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>
```

<narrative>Not ugly hack to test password against text - it's not a real test since 'converting' it in to text is re

<displayx>-45</displayx>

<displayy>405</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>0f070a8b-200a-4b6f-b59f-bb1e65a92fe7</onsuccess>

</stage>

<stage stageid="23d4982e-fae5-418a-bfc7-7617da6e4b75" name="FAIL" type="Exception">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

```xml
<displayy>345</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="NullOutputFailed" detail="&amp;quot;Failed to output Null for a password value&amp;qu

</stage>

<stage stageid="6c6e9f63-f6fc-4b79-81c7-9025daa172dd" name="FAIL" type="Exception">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<narrative>

</narrative>

<displayx>45</displayx>

<displayy>405</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="NullOutputFailed" detail="&amp;quot;Null password value was: '&amp;quot; &amp;amp;

</stage>

<stage stageid="0f070a8b-200a-4b6f-b59f-bb1e65a92fe7" name="Resume" type="Resume">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>

<narrative>Rolling my own error message</narrative>

<displayx>120</displayx>

<displayy>345</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>23d4982e-fae5-418a-bfc7-7617da6e4b75</onsuccess>
```

```
</stage>

<stage stageid="87be8954-eb52-4141-a29a-d184a7a5cfe1" name="Image" type="Code">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>465</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="image" name="ImageValue" stage="ImageValue"/>

</outputs>

<onsuccess>ec3c3be2-f3af-4db1-a50a-ae557026468f</onsuccess>

<code>ImageValue = Nothing

</code>

</stage>

<stage stageid="0c0fd5fc-c07f-4792-9c70-50dd40991cf6" name="Image" type="Block">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-90</displayx>

<displayy>435</displayy>

<displaywidth>165</displaywidth>

<displayheight>60</displayheight>
```

```xml
<font family="Tahoma" size="10" style="Regular" color="7FB2E5"/>
</stage>
<stage stageid="ec3c3be2-f3af-4db1-a50a-ae557026468f" name="Empty?" type="Decision">
<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>
<loginhibit/>
<narrative>Note that MakeDateTime will error if you try and give it a year of 0001</narrative>
<displayx>-45</displayx>
<displayy>540</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<decision expression="[ImageValue] = [EmptyImageValue]"/>
<ontrue>f0a4cd5e-2129-4f08-b712-1ac1cb242791</ontrue>
<onfalse>643eb73e-8301-480a-8381-3a04eeddd848</onfalse>
</stage>
<stage stageid="bef670f7-be1b-44d0-aac3-158e345b145b" name="Recover" type="Recover">
<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>30</displayx>
<displayy>465</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>b31fb725-23a5-403f-a45c-373ec0c196c5</onsuccess>
</stage>
```

```xml
<stage stageid="b1dbe042-6a28-4272-a8ef-655ba3bae97b" name="FAIL" type="Exception">
<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>
<narrative>
</narrative>
<displayx>180</displayx>
<displayy>465</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<exception type="NullOutputFailed" detail="&amp;quot;Failed to output Null for an image value&amp;quot;
</stage>
<stage stageid="643eb73e-8301-480a-8381-3a04eeddd848" name="FAIL" type="Exception">
<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>
<narrative>
</narrative>
<displayx>-135</displayx>
<displayy>540</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<exception type="NullOutputFailed" detail="&amp;quot;Null image value was not empty&amp;quot;"/>
</stage>
<stage stageid="b31fb725-23a5-403f-a45c-373ec0c196c5" name="Resume" type="Resume">
<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>
<loginhibit/>
<narrative>Rolling my own error message</narrative>
<displayx>120</displayx>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>b1dbe042-6a28-4272-a8ef-655ba3bae97b</onsuccess>

</stage>

<stage stageid="34d53839-6842-41e7-847d-83deb97c8279" name="PasswordValue" type="Data">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>password</datatype>

</stage>

<stage stageid="6a6a167c-6795-4e9c-942b-feb9ea09e299" name="ImageValue" type="Data">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>image</datatype>

</stage>

<stage stageid="83a29bbb-2928-4dc0-b21e-6e5a1c18e49f" name="EmptyPasswordValue" type="Data">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<displayx>-285</displayx>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>password</datatype>

</stage>

<stage stageid="00502de0-14fe-491c-b9d3-e8d4aaf1d594" name="EmptyImageValue" type="Data">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>image</datatype>

</stage>

<stage stageid="c53ba796-93eb-479d-940a-945f76c9e206" name="Oops" type="Block">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<narrative>Can't test for an empty image. At all</narrative>

<displayx>-90</displayx>

<font family="Tahoma" size="10" style="Regular" color="7FB2E5"/>

</stage>

<stage stageid="5fb019dc-2276-43b9-922d-800e7d138ca5" name="Recover" type="Recover">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>5891bdb6-b847-4769-ae01-bd8c364dc978</onsuccess>

</stage>

<stage stageid="768e5e86-acd0-4b73-a5d4-446ee144de45" name="Resume" type="Resume">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>f0a4cd5e-2129-4f08-b712-1ac1cb242791</onsuccess>

</stage>

<stage stageid="5891bdb6-b847-4769-ae01-bd8c364dc978" name="Is Empty Error?" type="Decision">

```
<displayy>540</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="ExceptionDetail() = &amp;quot;Cannot perform = operation when the left-hand valu

<ontrue>768e5e86-acd0-4b73-a5d4-446ee144de45</ontrue>

<onfalse>62567bdd-de7e-4fdd-b5af-48960d1fae5d</onfalse>

</stage>

<stage stageid="62567bdd-de7e-4fdd-b5af-48960d1fae5d" name="REFAIL" type="Exception">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<narrative>

</narrative>

<displayx>195</displayx>

<displayy>540</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="" detail="" usecurrent="yes"/>

</stage>

<stage stageid="a8a130eb-25f5-4926-aef7-e6933a63f5f8" name="Binary" type="Code">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>660</displayy>

<displaywidth>60</displaywidth>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>d0cccc98-a6b6-4c71-a2c9-349c09e50e0d</onsuccess>

<code>BinaryValue = Nothing

</code>

</stage>

<stage stageid="df84550f-e497-41bc-b28d-426736b319c9" name="Binary" type="Block">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<displayx>-90</displayx>

<font family="Tahoma" size="10" style="Regular" color="7FB2E5"/>

</stage>

<stage stageid="d0cccc98-a6b6-4c71-a2c9-349c09e50e0d" name="Empty?" type="Decision">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<narrative>Note that MakeDateTime will error if you try and give it a year of 0001</narrative>

<displayx>-45</displayx>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>d8ea8d3f-1d1c-452e-a0cf-3c8ae10facd3</onsuccess>

</stage>

<stage stageid="362cd38e-51a7-43bc-96fc-f913a071059f" name="FAIL" type="Exception">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="NullOutputFailed" detail="&quot;Failed to output Null for a binary value&quot;"/

</stage>

<stage stageid="74ccd432-269c-42ea-b382-96d09b0a5e40" name="FAIL" type="Exception">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="NullOutputFailed" detail="&quot;Null binary value was not empty&quot;"/>

</stage>

<stage stageid="d8ea8d3f-1d1c-452e-a0cf-3c8ae10facd3" name="Resume" type="Resume">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<narrative>Rolling my own error message</narrative>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>362cd38e-51a7-43bc-96fc-f913a071059f</onsuccess>

</stage>

<stage stageid="20ba5f92-27bf-4b1c-906c-e901b3d2518b" name="Oops" type="Block">

<narrative>Can't test for an empty binary. At all</narrative>

<displayx>-90</displayx>

<displayy>705</displayy>

<displaywidth>165</displaywidth>

<displayheight>60</displayheight>

<font family="Tahoma" size="10" style="Regular" color="7FB2E5"/>

</stage>

<stage stageid="05a64771-e5e6-4764-9045-6b8f3582e50c" name="Recover" type="Recover">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>08aba628-cb59-4949-aa25-eee074930bd2</onsuccess>

</stage>

<stage stageid="70a6c1b6-c206-4500-85d7-ae798e5d8878" name="Resume" type="Resume">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>9c019c3d-dd47-477a-8537-89b8ed397747</onsuccess>

</stage>

<stage stageid="08aba628-cb59-4949-aa25-eee074930bd2" name="Is Empty Error?" type="Decision">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="ExceptionDetail() = &quot;Cannot perform = operation when the left-hand valu

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="" detail="" usecurrent="yes"/>

</stage>

<stage stageid="7ff92ff3-41da-4e47-9a2f-764645c29f3e" name="BinaryValue" type="Data">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>binary</datatype>

</stage>

<stage stageid="f0a4cd5e-2129-4f08-b712-1ac1cb242791" name="anchor1" type="Anchor">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<displayx>-45</displayx>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

```xml
</stage>

<stage stageid="9c019c3d-dd47-477a-8537-89b8ed397747" name="anchor2" type="Anchor">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>795</displayy>

<displaywidth>10</displaywidth>

<displayheight>10</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>315967d1-4b72-4cd4-9d0a-f3e5563296e1</onsuccess>

</stage>

<stage stageid="17f548f2-176c-4985-a630-b0189e0af610" name="EmptyBinaryValue" type="Data">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<narrative>

</narrative>

<displayx>-285</displayx>

<displayy>150</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>binary</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>
```

```
<stage stageid="11ece92d-df2e-4546-a0b6-b971f26919aa" name="Note1" type="Note">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>

<narrative>Oddly, you can compare empty binary data items, but you can't compare empty image data iter

<displayx>-225</displayx>

<displayy>615</displayy>

<displaywidth>180</displaywidth>

<displayheight>60</displayheight>

<font family="Tahoma" size="10" style="Regular" color="008000"/>

<onsuccess>a8a130eb-25f5-4926-aef7-e6933a63f5f8</onsuccess>

</stage>

<stage stageid="ac920cee-98fc-47e4-931b-d3e96234670c" name="TimeSpan" type="Code">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>225</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="timespan" name="TimeSpanValue" stage="TimeSpanValue"/>

</outputs>

<onsuccess>130bb69c-c17f-433f-b6b0-02a4171f09e1</onsuccess>

<code>TimeSpanValue = Nothing

</code>
```

```
</stage>

<stage stageid="8c80ed3a-1c6f-4eb9-812b-0995c2b25b29" name="TimeSpan" type="Block">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-90</displayx>

<displayy>195</displayy>

<displaywidth>165</displaywidth>

<displayheight>60</displayheight>

<font family="Tahoma" size="10" style="Regular" color="7FB2E5"/>

</stage>

<stage stageid="130bb69c-c17f-433f-b6b0-02a4171f09e1" name="Empty?" type="Decision">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>

<narrative>Note that MakeDateTime will error if you try and give it a year of 0001</narrative>

<displayx>-45</displayx>

<displayy>285</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="ToSeconds([TimeSpanValue]) = 0"/>

<ontrue>c04fba55-6ede-4b7d-b3b2-df00c676d283</ontrue>

<onfalse>39adf4df-b730-4d7b-bebc-a5d958169ec4</onfalse>

</stage>

<stage stageid="f60346bc-e678-4db7-a977-e8e397c29bfe" name="Recover" type="Recover">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>
```

```xml
<loginhibit/>

<narrative>

</narrative>

<displayx>30</displayx>

<displayy>225</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>c53a54ca-160a-4772-b6d6-0c171b8260f5</onsuccess>

</stage>

<stage stageid="a36c6b05-a061-4fc7-83e6-4c4c62d7a9d8" name="FAIL" type="Exception">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<narrative>

</narrative>

<displayx>180</displayx>

<displayy>225</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="NullOutputFailed" detail="&amp;quot;Failed to output Null for a timespan value&amp;quo

</stage>

<stage stageid="39adf4df-b730-4d7b-bebc-a5d958169ec4" name="FAIL" type="Exception">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<narrative>

</narrative>

<displayx>45</displayx>

<displayy>285</displayy>
```

```xml
<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="NullOutputFailed" detail="&amp;quot;Null datetime value was: '&amp;quot; &amp;amp; [

</stage>

<stage stageid="c53a54ca-160a-4772-b6d6-0c171b8260f5" name="Resume" type="Resume">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>

<narrative>Rolling my own error message</narrative>

<displayx>120</displayx>

<displayy>225</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>a36c6b05-a061-4fc7-83e6-4c4c62d7a9d8</onsuccess>

</stage>

<stage stageid="9fcba583-c60b-407f-b595-cb9a80ba0b91" name="TimeSpanValue" type="Data">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>195</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>timespan</datatype>

<initialvalue>0.00:00:00</initialvalue>
```

```xml
<private/>

<alwaysinit/>

</stage>

<stage stageid="d1483426-a528-4b49-afae-8da6f605e713" name="StringValue" type="Data">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>30</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="7b498e37-adba-439e-bf8f-953951aefdfe" name="Set StringValue" type="Calculation">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>30</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>
```

```
<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>1e7ecb68-1622-491f-ada5-e772c9225ce2</onsuccess>

<calculation expression="[SimpleTable.StringValue]" stage="StringValue"/>

</stage>

<stage stageid="1e7ecb68-1622-491f-ada5-e772c9225ce2" name="Get Names" type="Code">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>75</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="collection" name="names" stage="names"/>

</outputs>

<onsuccess>de9511f0-9185-4b28-b7a0-d78477bc923d</onsuccess>

<code>

dim t as new System.Data.DataTable

dim r as System.Data.DataRow


t.columns.add("name", System.Type.GetType("System.String"))

t.columns.add("dob", System.Type.GetType("System.DateTime"))


r = t.NewRow()

r(0) = "tom"
```

```
r(1) = Microsoft.VisualBasic.Now()

t.Rows.Add(r)


r = t.NewRow()

r(0) = System.DBNull.Value

r(1) = Microsoft.VisualBasic.Now()

t.Rows.Add(r)


r = t.NewRow()

r(0) = "harry"

r(1) = System.DBNull.Value

t.Rows.Add(r)


names = t</code>
```

</stage>

<stage stageid="5c003d60-15b1-40b5-be95-b9f08e2745fd" name="names" type="Collection">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

```xml
</stage>
<stage stageid="de9511f0-9185-4b28-b7a0-d78477bc923d" name="For Each name" type="LoopStart">
<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>120</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Bold" color="0000FF"/>
<onsuccess>ce302111-e00b-4785-bd9d-6e6a445f017d</onsuccess>
<groupid>5431a7ad-fff3-41b9-bd47-20b5f5b99646</groupid>
<looptype>ForEach</looptype>
<loopdata>names</loopdata>
</stage>
<stage stageid="2224b2b0-afcd-4370-87c7-df556ea7d357" name="Next name" type="LoopEnd">
<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>285</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Bold" color="0000FF"/>
<onsuccess>666dace1-913f-4566-9be5-c969a38e0b24</onsuccess>
```

<groupid>5431a7ad-fff3-41b9-bd47-20b5f5b99646</groupid>

</stage>

<stage stageid="ce302111-e00b-4785-bd9d-6e6a445f017d" name="name := names.name" type="Calculat

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>165</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>a010955a-365f-4261-9b14-7e2b3325133b</onsuccess>

<calculation expression="[names.name]" stage="name"/>

</stage>

<stage stageid="3cfbfc1c-6ad1-4a33-9484-ec1e78b353a6" name="name" type="Data">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>120</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

```xml
<private/>

<alwaysinit/>

</stage>

<stage stageid="65c7a028-8b2a-4360-86d8-6c9393f22742" name="SimpleTable" type="Collection">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>0</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>collection</datatype>

<private/>

<alwaysinit/>

<collectioninfo>

<field name="StringValue" type="text" namespace="" description="String output"/>

</collectioninfo>

</stage>

<stage stageid="be8e20bb-baa5-46af-ab13-5e61be72a95a" name="DBNull String to SimpleTable" type="(

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-75</displayy>
```

```
<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="collection" name="Table" stage="SimpleTable"/>

</outputs>

<onsuccess>4c24ee0d-ee85-4d08-bea0-0713b48b918b</onsuccess>

<code>Table = New System.Data.DataTable()

Table.Columns.Add("StringValue", GetType(String))

Table.Rows.Add(DBNull.Value)</code>

</stage>

<stage stageid="0efc0490-626b-494a-aa70-83318d9a887b" name="String" type="Block">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>-105</displayy>

<displaywidth>195</displaywidth>

<displayheight>60</displayheight>

<font family="Tahoma" size="10" style="Regular" color="7FB2E5"/>

</stage>

<stage stageid="4c24ee0d-ee85-4d08-bea0-0713b48b918b" name="Empty?" type="Decision">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<loginhibit/>

<narrative>

</narrative>
```

```
<displayx>15</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="[SimpleTable.StringValue] = &amp;quot;&amp;quot;"/>

<ontrue>7b498e37-adba-439e-bf8f-953951aefdfe</ontrue>

<onfalse>e1ce968e-de0d-4184-8ad6-50e4de51eccf</onfalse>

</stage>

<stage stageid="00c673a3-6fda-4dbd-8ea8-51ae645695cf" name="Recover" type="Recover">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>105</displayx>

<displayy>-75</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>57ef6dd2-e73f-4a6e-b78d-14ce751ef2aa</onsuccess>

</stage>

<stage stageid="ac932fa0-a63e-46cd-9d27-50c8f607b58e" name="FAIL" type="Exception">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<narrative>

</narrative>

<displayx>255</displayx>

<displayy>-75</displayy>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="DBNullOutputFailed" detail="&quot;Failed to output DBNull for a string value&q

</stage>

<stage stageid="e1ce968e-de0d-4184-8ad6-50e4de51eccf" name="FAIL" type="Exception">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="DBNullOutputFailed" detail="&quot;DBNull value was: '&quot; &amp; [Sim

</stage>

<stage stageid="57ef6dd2-e73f-4a6e-b78d-14ce751ef2aa" name="Resume" type="Resume">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<narrative>Rolling my own error message</narrative>

<displayy>-75</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>ac932fa0-a63e-46cd-9d27-50c8f607b58e</onsuccess>

</stage>

```xml
<stage stageid="e21d34a4-1b23-4a53-9dda-af4b313aaedf" name="Set StringValue" type="Calculation">
<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-135</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>be8e20bb-baa5-46af-ab13-5e61be72a95a</onsuccess>
<calculation expression="[SingleRowTable.StringValue]" stage="StringValue"/>
</stage>
<stage stageid="6bf0135f-b48d-49f9-b050-fc6917171eca" name="dob" type="Data">
<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>150</displayy>
<displaywidth>120</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>date</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
```

```xml
</stage>
<stage stageid="a010955a-365f-4261-9b14-7e2b3325133b" name="dob := names.dob" type="Calculation"
<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>225</displayy>
<displaywidth>120</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>2224b2b0-afcd-4370-87c7-df556ea7d357</onsuccess>
<calculation expression="[names.dob]" stage="dob"/>
</stage>
<stage stageid="57b46683-9c53-4e11-9d9b-4ccd7eb7a0ea" name="." type="Block">
<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-60</displayx>
<displayy>195</displayy>
<displaywidth>300</displaywidth>
<displayheight>60</displayheight>
<font family="Tahoma" size="10" style="Regular" color="7FB2E5"/>
</stage>
<stage stageid="3f4b41d9-4fc2-4450-9048-f7fbced63606" name="Recover" type="Recover">
<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>
```

<loginhibit/>

<narrative>

</narrative>

<displayx>120</displayx>

<displayy>225</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>1ff04976-55f7-4537-9267-e909b92e65d1</onsuccess>

</stage>

<stage stageid="1ff04976-55f7-4537-9267-e909b92e65d1" name="Can't handle null?" type="Decision">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>195</displayx>

<displayy>225</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="InStr(ExceptionDetail(), &quot;String was not recognized as a valid DateTime&

<ontrue>420d9ecc-da87-4edf-ab4f-07a447a37227</ontrue>

<onfalse>7ee09d32-187d-4ab9-bc88-0d1339dc557b</onfalse>

</stage>

<stage stageid="420d9ecc-da87-4edf-ab4f-07a447a37227" name="Ignore" type="Resume">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<loginhibit/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>2224b2b0-afcd-4370-87c7-df556ea7d357</onsuccess>

</stage>

<stage stageid="7ee09d32-187d-4ab9-bc88-0d1339dc557b" name="REFAIL" type="Exception">

<subsheetid>463bed06-53fc-4ad1-9312-19a001aad5bb</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="" detail="" usecurrent="yes"/>

</stage>

<stage stageid="a76906d8-1e63-4b96-bda9-47873fb6ca78" name="Oops" type="Block">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<narrative>Can't test for an empty datetime. At all</narrative>

<displayx>-90</displayx>

<displayy>75</displayy>

<font family="Tahoma" size="10" style="Regular" color="7FB2E5"/>

</stage>

<stage stageid="2cd5f912-8c46-4140-a076-b61e456073e7" name="Recover" type="Recover">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>c51405bf-d571-4e68-9cfe-2c73a8d9ec21</onsuccess>

</stage>

<stage stageid="27bbe618-a605-4aa4-b726-6b8d0772430e" name="Resume" type="Resume">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>baa24bcb-5a93-4c57-985b-55236e4b7d00</onsuccess>

</stage>

```xml
<stage stageid="c51405bf-d571-4e68-9cfe-2c73a8d9ec21" name="Is Empty Error?" type="Decision">
<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>120</displayx>
<displayy>105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<decision expression="ExceptionDetail() = &amp;quot;Cannot perform = operation when the left-hand valu
<ontrue>27bbe618-a605-4aa4-b726-6b8d0772430e</ontrue>
<onfalse>c7a5d513-3d00-4aa2-bfe5-df82316c8c7c</onfalse>
</stage>
<stage stageid="2d4c1b23-ac59-48b2-ab14-a6f8502f46d0" name="REFAIL" type="Exception">
<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>
<narrative>
</narrative>
<displayx>345</displayx>
<displayy>105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<exception type="" detail="" usecurrent="yes"/>
</stage>
<stage stageid="baa24bcb-5a93-4c57-985b-55236e4b7d00" name="anchor1" type="Anchor">
<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>
```

```xml
<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>165</displayy>

<displaywidth>10</displaywidth>

<displayheight>10</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>ac920cee-98fc-47e4-931b-d3e96234670c</onsuccess>

</stage>

<stage stageid="d8420771-10d0-443b-8c35-514c0f89f5e2" name="Test Bad Output" type="SubSheetInfo"

<subsheetid>47f95e3c-d31b-4898-a444-e2ce49276c95</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="a1ff4758-2d31-4c66-94e8-fbaf59ff7b3a" name="Start" type="Start">

<subsheetid>47f95e3c-d31b-4898-a444-e2ce49276c95</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-135</displayy>
```

```xml
<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>9dd3e5b4-273e-4700-89c8-167f545d73eb</onsuccess>

</stage>

<stage stageid="4b2c16c6-dc3b-41f3-a854-b37538f0fec6" name="End" type="End">

<subsheetid>47f95e3c-d31b-4898-a444-e2ce49276c95</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="9dd3e5b4-273e-4700-89c8-167f545d73eb" name="Set Bad Collection" type="Code">

<subsheetid>47f95e3c-d31b-4898-a444-e2ce49276c95</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-45</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>
```

```
<output type="collection" name="MyColl" stage="DefinedColl"/>

</outputs>

<onsuccess>7c786c02-98a2-4829-9e08-fcb2127d392e</onsuccess>

<code>MyColl = New DataTable()


' The target stage has 'Field1' and 'Field3'

MyColl.Columns.Add("Field1", GetType(String))

MyColl.Columns.Add("Field2", GetType(Integer))


MyColl.Rows.Add(New Object() {"Value 1", 1})

MyColl.Rows.Add(New Object() {"Value 2", 2})</code>

</stage>

<stage stageid="e4912752-945f-409d-8f08-df67c272f349" name="DefinedColl" type="Collection">

<subsheetid>47f95e3c-d31b-4898-a444-e2ce49276c95</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-30</displayy>

<displaywidth>150</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>collection</datatype>

<private/>

<alwaysinit/>

<collectioninfo>

<field name="Field1" type="text" namespace=""/>

<field name="Field3" type="number" namespace=""/>
```

</collectioninfo>

</stage>

<stage stageid="7c786c02-98a2-4829-9e08-fcb2127d392e" name="FAIL" type="Exception">

<subsheetid>47f95e3c-d31b-4898-a444-e2ce49276c95</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="BadOutputSucceeded" detail="&quot;The code stage output (Field1,Field2) to a col

</stage>

<stage stageid="a76d401c-bf9d-4349-b685-4f1af5c73def" name="." type="Block">

<subsheetid>47f95e3c-d31b-4898-a444-e2ce49276c95</subsheetid>

<displayx>-105</displayx>

<displayy>-75</displayy>

<font family="Tahoma" size="10" style="Regular" color="7FB2E5"/>

</stage>

<stage stageid="882d70f2-91f2-434a-a7ac-55f384bd6dac" name="Recover1" type="Recover">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>7bddeff5-04da-4cb2-a822-84285c634a13</onsuccess>

</stage>

<stage stageid="7bddeff5-04da-4cb2-a822-84285c634a13" name="Resume1" type="Resume">

<subsheetid>47f95e3c-d31b-4898-a444-e2ce49276c95</subsheetid>

<displayx>-60</displayx>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>4b2c16c6-dc3b-41f3-a854-b37538f0fec6</onsuccess>

</stage>

<stage stageid="200d9658-02f2-4d18-9687-cccf9ed6f0d5" name="Time Diff from UTC" type="Data">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

```
<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>timespan</datatype>

<initialvalue>0.00:00:00</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="ecf9349a-398a-4ec3-8d9a-2f8af9c1fb27" name="Non-UTC Env?" type="Decision">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>270</displayx>

<displayy>105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<decision expression="[Time Diff from UTC]=[UTC Check]"/>

<ontrue>2d4c1b23-ac59-48b2-ab14-a6f8502f46d0</ontrue>

<onfalse>9119f360-7094-4223-a04e-ff210fc6731d</onfalse>

</stage>

<stage stageid="c7a5d513-3d00-4aa2-bfe5-df82316c8c7c" name="Calc if UTC Env" type="Calculation">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<loginhibit/>

<narrative>

</narrative>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>ecf9349a-398a-4ec3-8d9a-2f8af9c1fb27</onsuccess>

<calculation expression="LocalTime()-UTCTime()" stage="Time Diff from UTC"/>

</stage>

<stage stageid="2f3fb2f0-072f-4ee1-85af-9f11f0d9d43e" name="UTC Check" type="Data">

<subsheetid>629ae649-49c0-4342-aed4-c05910fd3615</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<datatype>timespan</datatype>

<initialvalue>0.00:00:00</initialvalue>

</stage>

<stage stageid="9119f360-7094-4223-a04e-ff210fc6731d" name="Anchor1" type="Anchor">

</narrative>

<displayx>270</displayx>

<displayy>165</displayy>

<displaywidth>10</displaywidth>

<displayheight>10</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>27bbe618-a605-4aa4-b726-6b8d0772430e</onsuccess>

</stage>

</process>

<process name="Code Stage Timespans" version="1.0" bpversion="6.3.0.3866" narrative="Passing of time

<appdef>

<element name="Application Root">

<id>4ecc45da-98b3-4034-80cf-397b2457a666</id>

<type>Application</type>

<basetype>Application</basetype>

<datatype>unknown</datatype>

<diagnose>False</diagnose>

</element>

</appdef>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

<preconditions/>

<endpoint narrative=""/>

<subsheet subsheetid="7876af96-f7d3-479d-a766-92b6dd0ea166" type="CleanUp" published="True">

```xml
<name>Clean Up</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="511f1d83-65f0-4fbb-9577-b2802ab3f2ff" type="Normal" published="True">

<name>Test</name>

<view>

<camerax>0</camerax>

<cameray>81</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<stage stageid="27aa6404-e511-4fd5-9433-89098281657d" name="Start" type="Start">

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>fa155bde-d010-4e17-bb60-be71914229db</onsuccess>

</stage>

<stage stageid="fa155bde-d010-4e17-bb60-be71914229db" name="End" type="End">
```

```
<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="d7c3fcd5-5d59-4cd5-933c-e9c84cdc3978" name="Stage1" type="ProcessInfo">

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<references>

<reference>System.Data.dll</reference>

<reference>System.Xml.dll</reference>

<reference>System.Drawing.dll</reference>

</references>

<imports>

<import>System</import>

<import>System.Drawing</import>

</imports>

<language>visualbasic</language>
```

```xml
<globalcode></globalcode>

<code></code>

</stage>

<stage stageid="815aa4f2-eba4-49e2-b96c-274a6e1a5e8e" name="Clean Up" type="SubSheetInfo">

<subsheetid>7876af96-f7d3-479d-a766-92b6dd0ea166</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="0c011c4f-c541-4be7-b61b-4a1b4da34d2c" name="Start" type="Start">

<subsheetid>7876af96-f7d3-479d-a766-92b6dd0ea166</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>40970d3b-09ed-44d7-b89c-f6b8107edca5</onsuccess>

</stage>

<stage stageid="40970d3b-09ed-44d7-b89c-f6b8107edca5" name="End" type="End">

<subsheetid>7876af96-f7d3-479d-a766-92b6dd0ea166</subsheetid>
```

```xml
<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="c358bf4b-32dc-4ad3-bb0a-1854b9366091" name="Test" type="SubSheetInfo">

<subsheetid>511f1d83-65f0-4fbb-9577-b2802ab3f2ff</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="d7e24980-da1d-4a79-83af-7a7beaa94194" name="Start" type="Start">

<subsheetid>511f1d83-65f0-4fbb-9577-b2802ab3f2ff</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>a03c197a-5738-42a9-80f3-b27c81c20431</onsuccess>

</stage>

<stage stageid="e37ee6b7-c246-491d-ae1c-5b7346d81988" name="End" type="End">

<subsheetid>511f1d83-65f0-4fbb-9577-b2802ab3f2ff</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="a6df99fb-2317-4518-9171-f2ff1885885c" name="new" type="Note">

<subsheetid>7876af96-f7d3-479d-a766-92b6dd0ea166</subsheetid>

<narrative>Clean Up Page

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically immediately after closing your business object at the end of

You will not be able to call this action from a business process, nor will it be called at any other time than b

<displayx>-180</displayx>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="c7b754db-36d5-4101-8b75-bf28b2ee2a0f" name="new" type="Note">

<narrative>Initialise Page

This is an optional page where you might choose to perform some initialisation tasks after your business ol

The initialise action will be called automatically immediately after loading your business object.

You will not be able to call this action from a business process, nor will it be called at any other time than a

<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="254447ec-daac-4f56-abd8-2f16986cd9c5" name="Coll1" type="Collection">

<subsheetid>511f1d83-65f0-4fbb-9577-b2802ab3f2ff</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

```
<datatype>collection</datatype>

<private/>

<alwaysinit/>

<collectioninfo>

<field name="Field1" type="timespan"/>

<field name="Field2" type="date"/>

<field name="Field3" type="datetime"/>

</collectioninfo>

<initialvalue>

<row>

<field name="Field1" type="timespan" value="5.06:07:08"/>

<field name="Field2" type="date" value="2003/02/01"/>

<field name="Field3" type="datetime" value="2003-02-01 01:05:06Z"/>

</row>

</initialvalue>

</stage>

<stage stageid="c27f2b5c-dde4-4a2c-aecf-d35b92d01a40" name="Coll2" type="Collection">

<subsheetid>511f1d83-65f0-4fbb-9577-b2802ab3f2ff</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-240</displayx>

<displayy>75</displayy>

<displaywidth>90</displaywidth>

<displayheight>60</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>collection</datatype>
```

</stage>

<stage stageid="096b4736-d81e-4585-b73c-0138e1dfe387" name="Data1" type="Data">

<subsheetid>511f1d83-65f0-4fbb-9577-b2802ab3f2ff</subsheetid>

<displayx>-135</displayx>

<displayy>-15</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>timespan</datatype>

<initialvalue>1.02:03:04</initialvalue>

</stage>

<stage stageid="94c94f63-9f72-45fe-a1ee-e5586722c0f8" name="Data2" type="Data">

<subsheetid>511f1d83-65f0-4fbb-9577-b2802ab3f2ff</subsheetid>

<displayx>-135</displayx>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>timespan</datatype>

<initialvalue>0.00:00:00</initialvalue>

</stage>

<stage stageid="a03c197a-5738-42a9-80f3-b27c81c20431" name="Code1" type="Code">

<subsheetid>511f1d83-65f0-4fbb-9577-b2802ab3f2ff</subsheetid>

<displayy>-60</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="collection" name="Colin" expr="[Coll1]"/>

<input type="timespan" name="Tsin" expr="[Data1]"/>

</inputs>

<onsuccess>7ebeacf8-efa4-4eb0-a989-c9de7984f8a4</onsuccess>

<code>InputsOk = True

```vbnet
If TsIn.Days <> 1 OrElse TsIn.Hours <> 2 OrElse TsIn.Minutes <> 3 OrElse TsIn.Seconds &l

InputsOk = False

End If


Dim cts As Timespan

cts = Colin.Rows(0)("Field1")

If cts.Days <> 5 OrElse cts.Hours <> 6 OrElse cts.Minutes <> 7 OrElse cts.Seconds <>

InputsOk = False

End If


Dim cd As Date

cd = Colin.Rows(0)("Field2")

If cd.Day <> 1 OrElse cd.Month <> 2 OrElse cd.Year <> 2003 Then

InputsOk = False

End If


Dim cdatetime As DateTime

cdatetime = Colin.Rows(0)("Field3")

If cdatetime.Day <> 1 OrElse cdatetime.Month <> 2 OrElse cdatetime.Year <> 2003 OrElse

InputsOk = False

End If



Tsout = New Timespan(1,2,3,4)


Colout = New System.Data.DataTable()
```

```
Colout.Columns.Add("Field1", System.Type.GetType("System.TimeSpan"))

Colout.Columns.Add("Field2", System.Type.GetType("System.DateTime"))

Colout.Columns.Add("Field3", System.Type.GetType("System.DateTime"))

Dim row As System.Data.DataRow = Colout.NewRow

row("Field1") = New Timespan(5,6,7,8)

row("Field2") = cd

row("Field3") = cdatetime

Colout.Rows.Add(row)
```

</code>

</stage>

<stage stageid="2e3a4f38-3c9c-49aa-9964-322dadf1ed8e" name="Inputs Ok?" type="Data">

<subsheetid>511f1d83-65f0-4fbb-9577-b2802ab3f2ff</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

```
</stage>

<stage stageid="7ebeacf8-efa4-4eb0-a989-c9de7984f8a4" name="Decision1" type="Decision">

<subsheetid>511f1d83-65f0-4fbb-9577-b2802ab3f2ff</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="[Inputs Ok?] = True"/>

<ontrue>2d1b4320-031b-4a72-9763-615a3992d1be</ontrue>

<onfalse>1f383acf-a36c-4f89-b990-ca9014f54844</onfalse>

</stage>

<stage stageid="1f383acf-a36c-4f89-b990-ca9014f54844" name="Inputs Incorrect" type="Exception">

<subsheetid>511f1d83-65f0-4fbb-9577-b2802ab3f2ff</subsheetid>

<narrative>

</narrative>

<displayx>165</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="TestFailure" detail="&amp;quot;The inputs were not correct&amp;quot;"/>

</stage>

<stage stageid="2d1b4320-031b-4a72-9763-615a3992d1be" name="Decision2" type="Decision">
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="TestFailure" detail="&quot;The output timespan was not correct&quot;"/>

</stage>

<stage stageid="66c30b2b-1120-4e74-93a3-df5f9d2a9ef9" name="Decision3" type="Decision">

```
<narrative>

</narrative>

<displayx>15</displayx>

<displayy>75</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="[Coll1.Field1] = [Coll2.Field1] AND [Coll1.Field2] = ToDate([Coll2.Field2]) AND [Col

<ontrue>e37ee6b7-c246-491d-ae1c-5b7346d81988</ontrue>

<onfalse>fccd1af2-cb00-48db-b20f-d5c15631d05f</onfalse>

</stage>

<stage stageid="fccd1af2-cb00-48db-b20f-d5c15631d05f" name="Collection field incorrect" type="Exceptio

<subsheetid>511f1d83-65f0-4fbb-9577-b2802ab3f2ff</subsheetid>

<narrative>

</narrative>

<displayx>165</displayx>

<displayy>75</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="TestFailure" detail="&amp;quot;The output collection field was incorrect&amp;quot;"/>

</stage>

</process>

<process name="Collections Test Bits" version="1.0" narrative="Need this for the collections tests, becaus

<appdef>

<element name="Application Root">

<type>Application</type>
```

```xml
<basetype>Application</basetype>

<id>af70ad7d-45b4-4dc4-8ca2-a829c0689da2</id>

<datatype>unknown</datatype>

<diagnose>False</diagnose>

</element>

</appdef>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom>1</zoom>

</view>

<preconditions/>

<endpoint narrative=""/>

<subsheet subsheetid="e6ab93e7-f9db-4480-9f1e-58cdf37cb15a" type="CleanUp" published="True">

<name>Clean Up</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom>1</zoom>

</view>

</subsheet>

<subsheet subsheetid="4f3c4269-8619-464d-9f25-af3829a177d4" type="Normal" published="True">

<name>Generate Nested Collection</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom>1</zoom>
```

```xml
</view>

</subsheet>

<subsheet subsheetid="8d88e192-f8c0-43b7-aefd-147f7d33c5bd" type="Normal" published="True">

<name>Recycle Collection</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom>1</zoom>

</view>

</subsheet>

<stage stageid="2f876e3c-8739-4f29-88eb-bc5a6e98868d" name="Start" type="Start">

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>af84f7f7-421c-44b0-8c44-d781f3e0365f</onsuccess>

</stage>

<stage stageid="af84f7f7-421c-44b0-8c44-d781f3e0365f" name="End" type="End">

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>90</displayy>
```

```xml
<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="fe2d516e-842b-485e-8a17-265152f475d5" name="Stage1" type="ProcessInfo">

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<references>

<reference>System.Data.dll</reference>

<reference>System.Xml.dll</reference>

<reference>System.Drawing.dll</reference>

<reference>System.dll</reference>

</references>

<imports>

<import>System</import>

<import>System.Drawing</import>

</imports>

<language>csharp</language>

<globalcode></globalcode>

<code></code>

</stage>

<stage stageid="d0549c03-1ae9-4d0e-b819-220440d514ef" name="Clean Up" type="SubSheetInfo">
```

<subsheetid>e6ab93e7-f9db-4480-9f1e-58cdf37cb15a</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="2f5c52ef-7cba-4cd4-b982-0b8d5aa733b8" name="Start" type="Start">

<subsheetid>e6ab93e7-f9db-4480-9f1e-58cdf37cb15a</subsheetid>

<displayy>-105</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>cb6c27df-7728-4e7b-b716-246d6ba93a9b</onsuccess>

</stage>

<stage stageid="cb6c27df-7728-4e7b-b716-246d6ba93a9b" name="End" type="End">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="6992c1d3-1c62-4916-98a6-936b8489c767" name="Generate Nested Collection" type="S

<subsheetid>4f3c4269-8619-464d-9f25-af3829a177d4</subsheetid>

<narrative>Use a code stage to generate a nested collection</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="d61af97d-e085-41fd-92f3-86353242c286" name="Start" type="Start">

<subsheetid>4f3c4269-8619-464d-9f25-af3829a177d4</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>749c0f92-2cfd-4f2c-85d5-cbf555612e01</onsuccess>

</stage>

<stage stageid="4373c004-530f-431c-b1ed-007d0712b5a7" name="End" type="End">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="a8655389-3af6-41ed-bbfa-20a8b4940391" name="new" type="Note">

<subsheetid>e6ab93e7-f9db-4480-9f1e-58cdf37cb15a</subsheetid>

<narrative>Clean Up Page

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically immediately after closing your business object at the end of

You will not be able to call this action from a business process, nor will it be called at any other time than b

<displayx>-180</displayx>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

```
</stage>

<stage stageid="b0091e44-ad41-45a4-b683-4b46ee0f0e6b" name="new" type="Note">

<narrative>Initialise Page

This is an optional page where you might choose to perform some initialisation tasks after your business ol

The initialise action will be called automatically immediately after loading your business object.

You will not be able to call this action from a business process, nor will it be called at any other time than a

<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="749c0f92-2cfd-4f2c-85d5-cbf555612e01" name="Code1" type="Code">

<subsheetid>4f3c4269-8619-464d-9f25-af3829a177d4</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="collection" name="Generated" stage="Generated"/>
```

</outputs>

<onsuccess>4373c004-530f-431c-b1ed-007d0712b5a7</onsuccess>

<code>

```
System.Data.DataTable MainTable = new System.Data.DataTable();


System.Data.DataTable InnerTable = new System.Data.DataTable();


MainTable.Columns.Add(new System.Data.DataColumn("MainTableCol1", typeof(System.Data.DataTable)
MainTable.Columns.Add(new System.Data.DataColumn("MainTableCol2", typeof(string)));


InnerTable.Columns.Add("InnerTableCol1", typeof(string));
System.Data.DataRow row1 = InnerTable.Rows.Add();


row1["InnerTableCol1"] = "User1";


System.Data.DataRow row = MainTable.Rows.Add();
row["MainTableCol1"] = InnerTable;
row["MainTableCol2"] = "StringData";


Generated = MainTable;
```

</code>

</stage>

<stage stageid="6bac2c90-7316-4586-9460-db66e844f8a5" name="Generated" type="Collection">

```xml
<displayx>120</displayx>
<displayy>-15</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>collection</datatype>
<private/>
<alwaysinit/>
</stage>
<stage stageid="3f25feef-f78a-40eb-849f-7b954f3a8639" name="Recycle Collection" type="SubSheetInfo"
<subsheetid>8d88e192-f8c0-43b7-aefd-147f7d33c5bd</subsheetid>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-105</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="0b30c597-7f8e-4863-9ffe-6221808518eb" name="Start" type="Start">
<subsheetid>8d88e192-f8c0-43b7-aefd-147f7d33c5bd</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
```

```xml
<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="collection" name="Garbage In" stage="Generated"/>

</inputs>

<onsuccess>8f794c4a-ca11-42c4-878e-7922b578e2fd</onsuccess>

</stage>

<stage stageid="9f8ac63f-4da1-4776-be71-97c581d13350" name="End" type="End">

<subsheetid>8d88e192-f8c0-43b7-aefd-147f7d33c5bd</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="collection" name="Garbage Out" stage="Generated"/>

</outputs>

</stage>

<stage stageid="8f794c4a-ca11-42c4-878e-7922b578e2fd" name="Code2" type="Code">

<subsheetid>8d88e192-f8c0-43b7-aefd-147f7d33c5bd</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>
```

```xml
<displayy>-15</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<inputs>
<input type="collection" name="GarbageIn" expr="[Generated]"/>
</inputs>
<outputs>
<output type="collection" name="GarbageOut" stage="Generated"/>
</outputs>
<onsuccess>9f8ac63f-4da1-4776-be71-97c581d13350</onsuccess>
<code>
GarbageOut = GarbageIn;</code>
</stage>
<stage stageid="7e3c06ff-fa5d-401c-abc4-1c5c7ca57937" name="Generated" type="Collection">
<subsheetid>8d88e192-f8c0-43b7-aefd-147f7d33c5bd</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>120</displayx>
<displayy>-15</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>collection</datatype>
<private/>
<alwaysinit/>
```

```xml
</stage>

</process>

<process name="Component" version="1.0" bpversion="6.4.0.7753" narrative="" byrefcollection="true" typ

<appdef>

<element name="Application Root">

<id>b5e4c7cc-28c3-4011-b129-5bdcfc453b5c</id>

<type>Application</type>

<basetype>Application</basetype>

<datatype>unknown</datatype>

<diagnose>False</diagnose>

</element>

</appdef>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

<preconditions/>

<endpoint narrative=""/>

<subsheet subsheetid="c12bae05-084a-491e-8edc-bd5e2b539283" type="CleanUp" published="True">

<name>Clean Up</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>
```

```xml
<subsheet subsheetid="1493ee16-f8df-4f83-9a4c-5a20e46f20b2" type="Normal" published="True">
<name>Submit</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
</subsheet>
<stage stageid="9ef1e7bd-14bb-40b2-8af8-bcd4878966d1" name="Start" type="Start">
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Segoe UI" size="10" style="Regular" color="000000"/>
<onsuccess>8f9993ac-92ca-4e01-85dd-f389a68b0ac4</onsuccess>
</stage>
<stage stageid="8f9993ac-92ca-4e01-85dd-f389a68b0ac4" name="End" type="End">
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>90</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
```

```xml
<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="3004083b-dd31-4423-aff2-42c39b9644fc" name="Stage1" type="ProcessInfo">

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<references>

<reference>System.dll</reference>

<reference>System.Data.dll</reference>

<reference>System.Xml.dll</reference>

<reference>System.Drawing.dll</reference>

</references>

<imports>

<import>System</import>

<import>System.Drawing</import>

<import>System.Data</import>

</imports>

<language>visualbasic</language>

<globalcode></globalcode>

<code></code>

</stage>

<stage stageid="d67c485d-6aab-4d8a-949d-dc809070f547" name="Clean Up" type="SubSheetInfo">

<subsheetid>c12bae05-084a-491e-8edc-bd5e2b539283</subsheetid>
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="096d5b85-a65e-42e2-9c64-b33872e1574b" name="Start" type="Start">

<subsheetid>c12bae05-084a-491e-8edc-bd5e2b539283</subsheetid>

<displayy>-105</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>c67b764b-ee8f-437c-a4f1-873538029c9c</onsuccess>

</stage>

<stage stageid="c67b764b-ee8f-437c-a4f1-873538029c9c" name="End" type="End">

```xml
<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="69333515-2df6-465b-b4e3-edbdf52a23a0" name="Submit" type="SubSheetInfo">

<subsheetid>1493ee16-f8df-4f83-9a4c-5a20e46f20b2</subsheetid>

<narrative>

</narrative>

<displayx>-105</displayx>

<displayy>-75</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="856519c9-a037-4a37-b50c-5dfbd7955a1c" name="Start" type="Start">

<subsheetid>1493ee16-f8df-4f83-9a4c-5a20e46f20b2</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>ff0fcf02-a604-43de-9ff0-8da0b126c671</onsuccess>

</stage>

<stage stageid="1a45e87a-bf63-4934-ba88-7a68a80070a2" name="End" type="End">
```

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="874a74b2-ae8c-41a7-9066-96cf827f396e" name="Note1" type="Note">

<subsheetid>c12bae05-084a-491e-8edc-bd5e2b539283</subsheetid>

<narrative>Clean Up Page

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically immediately after closing your business object at the end of

You will not be able to call this action from a business process, nor will it be called at any other time than b

<displayx>-180</displayx>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="16cb493a-00b6-4d54-8b54-33ea0efb8bfc" name="Note2" type="Note">

<narrative>Initialise Page

This is an optional page where you might choose to perform some initialisation tasks after your business ol

The initialise action will be called automatically immediately after loading your business object.

You will not be able to call this action from a business process, nor will it be called at any other time than a

<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="ff0fcf02-a604-43de-9ff0-8da0b126c671" name="Do Something" type="Action">

<subsheetid>1493ee16-f8df-4f83-9a4c-5a20e46f20b2</subsheetid>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<onsuccess>1a45e87a-bf63-4934-ba88-7a68a80070a2</onsuccess>

<resource object="Child-Notepad" action="DoSomething"/>

</stage>

</process>

<process name="Coop2BZR" version="1.0" bpversion="6.7.0.16843" narrative="fdsfa" byrefcollection="tru

```xml
<appdef>

<element name="Coop2BZR">

<id>4a4cd74b-583e-47db-94d8-deefd31a75e5</id>

<element name="Cancel Button">

<id>87abf0c6-8eec-4f97-9e50-308d029b52be</id>

<type>Button</type>

<basetype>Button</basetype>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Cancel"/>

</attribute>

<attribute name="ClassName">

<ProcessValue datatype="text" value="WindowsForms10.BUTTON"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="387"/>

</attribute>

<attribute name="Y">

<ProcessValue datatype="number" value="117"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="76"/>
```

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="24"/>

</attribute>

<attribute name="Visible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="3"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pWindowText">

<ProcessValue datatype="text" value="Coop2BZR 1.0"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">

<ProcessValue datatype="number" value="66"/>

        </attribute>

        <attribute name="pY">

        <ProcessValue datatype="number" value="66"/>

        </attribute>

        <attribute name="pWidth">

        <ProcessValue datatype="number" value="564"/>

        </attribute>

        <attribute name="pHeight">

        <ProcessValue datatype="number" value="372"/>

        </attribute>

        <attribute name="pActive">

        <ProcessValue datatype="flag" value="True"/>

        </attribute>

        <attribute name="pOrdinal">

        <ProcessValue datatype="number" value="2"/>

        </attribute>

        <attribute name="pChildCount">

        <ProcessValue datatype="number" value="9"/>

        </attribute>

        </attributes>

        </element>

        <type>Application</type>

        <basetype>Application</basetype>

        <datatype>unknown</datatype>

        <diagnose>False</diagnose>

        </element>

        <apptypeinfo>

```xml
<id>Win32Launch</id>

<parameters>

<parameter>

<name>Path</name>

<value>c:\blueprism\qa\code\Coop2BZR\Coop2BZR.exe</value>

</parameter>

<parameter>

<name>CommandLineParams</name>

<value>

</value>

</parameter>

<parameter>

<name>WorkingDirectory</name>

<value>

</value>

</parameter>

<parameter>

<name>NonInvasive</name>

<value>False</value>

</parameter>

<parameter>

<name>ProcessMode</name>

<value>Internal</value>

</parameter>

<parameter>

<name>ExternalProcessTimeout</name>

<value>0</value>
```

```xml
        </parameter>
        <parameter>
        <name>Options</name>
        <value>
        </value>
        </parameter>
        </parameters>
        </apptypeinfo>
        </appdef>
        <view>
        <camerax>0</camerax>
        <cameray>0</cameray>
        <zoom version="2">1.25</zoom>
        </view>
        <preconditions/>
        <endpoint narrative=""/>
        <subsheet subsheetid="f88fda98-ea0e-4be2-857a-f38f99b4999a" type="CleanUp" published="True">
        <name>Clean Up</name>
        <view>
        <camerax>0</camerax>
        <cameray>0</cameray>
        <zoom version="2">1.25</zoom>
        </view>
        </subsheet>
        <subsheet subsheetid="6de3b55c-e734-421c-a80a-ddf5683824f6" type="Normal" published="True">
        <name>Launch</name>
        <view>
```

```xml
<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="1295d982-1136-4226-9a95-5397c9ec2493" type="Normal" published="True">

<name>Terminate</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="cd97b666-3a20-4956-aa5a-a508df879186" type="Normal" published="True">

<name>Was Cancel Pressed?</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<stage stageid="2ac2264e-dc12-43df-9ad6-4e2e4caaa53a" name="Start" type="Start">

<loginhibit/>

<display x="15" y="-105"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>19cf5bb8-8795-4b98-85ce-0e8baae65b8a</onsuccess>

</stage>
```

```xml
<stage stageid="19cf5bb8-8795-4b98-85ce-0e8baae65b8a" name="End" type="End">
<loginhibit/>
<display x="15" y="90"/>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="b68c7113-f185-476c-9a60-06777161be5f" name="Stage1" type="ProcessInfo">
<display x="-195" y="-105" w="150" h="90"/>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<references>
<reference>System.Data.dll</reference>
<reference>System.Xml.dll</reference>
<reference>System.Drawing.dll</reference>
</references>
<imports>
<import>System</import>
<import>System.Drawing</import>
</imports>
<language>visualbasic</language>
<globalcode>

</globalcode>
<code>

</code>
</stage>
<stage stageid="23630821-5881-4338-99a7-00f76a91dde9" name="Clean Up" type="SubSheetInfo">
<subsheetid>f88fda98-ea0e-4be2-857a-f38f99b4999a</subsheetid>
```

```xml
<display x="-195" y="-105" w="150" h="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="be3b4c9b-f506-42c2-af5a-8ef0f7ac97f0" name="Start" type="Start">

<subsheetid>f88fda98-ea0e-4be2-857a-f38f99b4999a</subsheetid>

<loginhibit/>

<display x="15" y="-105"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>6f63ff75-3ddb-4f41-80c0-3ba9b79a6b2b</onsuccess>

</stage>

<stage stageid="6f63ff75-3ddb-4f41-80c0-3ba9b79a6b2b" name="End" type="End">

<subsheetid>f88fda98-ea0e-4be2-857a-f38f99b4999a</subsheetid>

<loginhibit/>

<display x="15" y="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="32614b7f-f405-4236-854c-693db8833122" name="Launch" type="SubSheetInfo">

<subsheetid>6de3b55c-e734-421c-a80a-ddf5683824f6</subsheetid>

<display x="-195" y="-105" w="150" h="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="395ada87-10a8-4a26-91dc-7f9d6ce167e3" name="Start" type="Start">

<subsheetid>6de3b55c-e734-421c-a80a-ddf5683824f6</subsheetid>

<loginhibit/>

<display x="15" y="-105"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>62ead549-ff65-4098-a6d1-da48b064c44b</onsuccess>
```

</stage>

<stage stageid="167b908c-2378-434c-922f-6e2e9027c9b7" name="End" type="End">

<subsheetid>6de3b55c-e734-421c-a80a-ddf5683824f6</subsheetid>

<display x="15" y="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="72caca63-e189-4b2e-9286-72aa2c95fb0a" name="new" type="Note">

<subsheetid>f88fda98-ea0e-4be2-857a-f38f99b4999a</subsheetid>

<narrative>Clean Up Page

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically immediately after closing your business object at the end of

You will not be able to call this action from a business process, nor will it be called at any other time than be

<display x="-180" y="60" w="180" h="230"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="eeb84622-62bb-4688-9b9e-5525d14a2488" name="new" type="Note">

<narrative>Initialise Page

This is an optional page where you might choose to perform some initialisation tasks after your business ol

The initialise action will be called automatically immediately after loading your business object.

You will not be able to call this action from a business process, nor will it be called at any other time than a

```
<display x="-180" y="60" w="180" h="230"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="62ead549-ff65-4098-a6d1-da48b064c44b" name="Launch" type="Navigate">

<subsheetid>6de3b55c-e734-421c-a80a-ddf5683824f6</subsheetid>

<loginhibit/>

<display x="15" y="-15"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>167b908c-2378-434c-922f-6e2e9027c9b7</onsuccess>

<step>

<element id="4a4cd74b-583e-47db-94d8-deefd31a75e5"/>

<action>

<id>Launch</id>

<arguments>

<argument>

<id>Path</id>

<value>[QA Root]&amp;amp;"\code\Coop2BZR\Coop2BZR.exe"</value>

</argument>

<argument>

<id>CommandLineParams</id>

<value>

</value>

</argument>

<argument>

<id>WorkingDirectory</id>

<value>

</value>
```

```xml
      </argument>

      <argument>

      <id>NonInvasive</id>

      <value>

      </value>

      </argument>

      <argument>

      <id>ProcessMode</id>

      <value>

      </value>

      </argument>

      <argument>

      <id>Options</id>

      <value>

      </value>

      </argument>

      </arguments>

      </action>

      </step>

      </stage>

      <stage stageid="52c6a2ba-0b94-406c-a834-006494f3a613" name="Was Cancel Pressed?" type="SubShe

      <subsheetid>cd97b666-3a20-4956-aa5a-a508df879186</subsheetid>

      <display x="-225" y="-60" w="180" h="120"/>

      <font family="Tahoma" size="10" style="Regular" color="000000"/>

      </stage>

      <stage stageid="f9591a67-b045-4b85-b5dd-b29881441033" name="Start" type="Start">

      <subsheetid>cd97b666-3a20-4956-aa5a-a508df879186</subsheetid>
```

```xml
<loginhibit/>

<display x="-75" y="-105"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>2c788cff-1662-478e-9c83-32be45094bdc</onsuccess>

</stage>

<stage stageid="b43c8906-f40d-45df-b01f-9f63a53e0f83" name="End" type="End">

<subsheetid>cd97b666-3a20-4956-aa5a-a508df879186</subsheetid>

<loginhibit/>

<display x="60" y="135"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="flag" name="Pressed?" stage="Pressed?"/>

</outputs>

</stage>

<stage stageid="38eef115-74c2-4c88-a8f7-c2f71c128bf5" name="Time Out1" type="WaitEnd">

<subsheetid>cd97b666-3a20-4956-aa5a-a508df879186</subsheetid>

<loginhibit/>

<display x="135" y="-30" w="30" h="30"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>48ff479c-012e-4d0f-973e-a311f6b38d35</onsuccess>

<groupid>9130af88-de0d-4a17-a7e2-ca53bd6d88d5</groupid>

</stage>

<stage stageid="2c788cff-1662-478e-9c83-32be45094bdc" name="Wait1" type="WaitStart">

<subsheetid>cd97b666-3a20-4956-aa5a-a508df879186</subsheetid>

<loginhibit/>

<display x="-75" y="-30" w="30" h="30"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>
```

```xml
<groupid>9130af88-de0d-4a17-a7e2-ca53bd6d88d5</groupid>

<choices>

<choice reply="True">

<name>Cancel Button MouseLeftDown</name>

<distance>75</distance>

<ontrue>f7eb5f00-d38e-41ed-9fc5-1e414d5f8879</ontrue>

<element id="87abf0c6-8eec-4f97-9e50-308d029b52be"/>

<condition>

<id>MouseLeftDown</id>

</condition>

<comparetype>Equal</comparetype>

</choice>

</choices>

<timeout>1</timeout>

</stage>

<stage stageid="4cb82fd5-1c8e-4552-b8c2-d93a0cc90a8a" name="Pressed?" type="Data">

<subsheetid>cd97b666-3a20-4956-aa5a-a508df879186</subsheetid>

<display x="135" y="135"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="f7eb5f00-d38e-41ed-9fc5-1e414d5f8879" name="Was Pressed" type="Calculation">

<subsheetid>cd97b666-3a20-4956-aa5a-a508df879186</subsheetid>

<loginhibit/>
```

<display x="0" y="30"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>b43c8906-f40d-45df-b01f-9f63a53e0f83</onsuccess>

<calculation expression="True" stage="Pressed?"/>

</stage>

<stage stageid="48ff479c-012e-4d0f-973e-a311f6b38d35" name="Was Not Pressed" type="Calculation">

<subsheetid>cd97b666-3a20-4956-aa5a-a508df879186</subsheetid>

<display x="135" y="30"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>b43c8906-f40d-45df-b01f-9f63a53e0f83</onsuccess>

<calculation expression="False" stage="Pressed?"/>

</stage>

<stage stageid="644f7005-4079-4844-8c8d-15bc0bd6bd10" name="Terminate" type="SubSheetInfo">

<subsheetid>1295d982-1136-4226-9a95-5397c9ec2493</subsheetid>

<display x="-195" y="-105" w="150" h="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="6b51f1fd-6fb6-4ec7-9e44-45cfd3fef1f1" name="Start" type="Start">

<subsheetid>1295d982-1136-4226-9a95-5397c9ec2493</subsheetid>

<display x="15" y="-105"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>a5db31fa-d4f1-4c67-b1b8-14f637c94c65</onsuccess>

</stage>

<stage stageid="73640d84-e8b3-4244-8622-16a61a8b876f" name="End" type="End">

```xml
<loginhibit/>

<display x="15" y="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="a5db31fa-d4f1-4c67-b1b8-14f637c94c65" name="Terminate App" type="Navigate">

<subsheetid>1295d982-1136-4226-9a95-5397c9ec2493</subsheetid>

<loginhibit/>

<display x="15" y="-15"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>73640d84-e8b3-4244-8622-16a61a8b876f</onsuccess>

<step>

<element id="4a4cd74b-583e-47db-94d8-deefd31a75e5"/>

<action>

<id>Terminate</id>

</action>

</step>

</stage>

<stage stageid="0eba2e2e-d5bb-4707-b5d6-705614f59586" name="QA Root" type="Data">

<subsheetid>6de3b55c-e734-421c-a80a-ddf5683824f6</subsheetid>

<loginhibit/>

<display x="-195" y="-30" w="120" h="30"/>

<datatype>text</datatype>

<initialvalue/>

<exposure>Environment</exposure>

<private/>

<alwaysinit/>

</stage>
```

```xml
</process>
<process name="Data - OLEDB" version="6.7.0.0" bpversion="5.0.23.0" narrative="A SQL interface for inte
<appdef>
<element name="Application Root">
<type>Application</type>
<basetype>Application</basetype>
<id>ed09581b-7493-46ed-8dfa-8f00d46356b0</id>
<datatype>unknown</datatype>
<diagnose>False</diagnose>
</element>
</appdef>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom>1</zoom>
</view>
<preconditions>
<condition narrative=""/>
<condition narrative=""/>
<condition narrative=""/>
</preconditions>
<endpoint narrative="&amp;#xD;&amp;#xA;&amp;#xD;&amp;#xA;&amp;#xD;&amp;#xA;&amp;#xD;&amp;
<subsheet subsheetid="cfb6da91-518b-40a3-8e0e-115ff0252ea7" type="CleanUp" published="True">
<name>Clean Up</name>
<view>
<camerax>-161</camerax>
<cameray>0</cameray>
```

```xml
<zoom>1</zoom>

</view>

</subsheet>

<subsheet subsheetid="90429413-7792-4513-8bc0-d6d079aa08b9" type="Normal" published="True">

<name>Set Connection</name>

<view>

<camerax>20</camerax>

<cameray>63</cameray>

<zoom>1</zoom>

</view>

</subsheet>

<subsheet subsheetid="459569f2-c792-4948-8884-5c2a0917cc16" type="Normal" published="True">

<name>Open</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom>1</zoom>

</view>

</subsheet>

<subsheet subsheetid="7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5" type="Normal" published="True">

<name>Close</name>

<view>

<camerax>86</camerax>

<cameray>0</cameray>

<zoom>1</zoom>

</view>

</subsheet>
```

```xml
<subsheet subsheetid="780529b8-393d-4d1d-bc5f-34f383fe53ec" type="Normal" published="True">
<name>Get Collection</name>
<view>
<camerax>-42</camerax>
<cameray>-21</cameray>
<zoom>1</zoom>
</view>
</subsheet>
<subsheet subsheetid="9ad00c3c-8615-4f62-9595-9081a2523133" type="Normal" published="True">
<name>Execute</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom>1</zoom>
</view>
</subsheet>
<stage stageid="f3bf5e12-d2cf-4c5d-bda5-0deae3c26316" name="Start" type="Start">
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>d16cc64f-d5d1-4aaf-bea5-f814e1f2657b</onsuccess>
</stage>
```

```xml
<stage stageid="d16cc64f-d5d1-4aaf-bea5-f814e1f2657b" name="End" type="End">
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>90</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="0efcc61e-6916-4463-ae94-c24edb2adc75" name="Stage1" type="ProcessInfo">
<loginhibit/>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-105</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<references>
<reference>System.Data.dll</reference>
<reference>System.XML.dll</reference>
</references>
<imports>
<import>System</import>
<import>System.Data</import>
<import>System.Data.OLEDB</import>
```

```xml
</imports>

<language>visualbasic</language>

<globalcode>


</globalcode>

<code>Private moConnection As OLEDBConnection</code>

</stage>

<stage stageid="fd95e8ae-614b-4bae-a0f9-cbd04cef37ce" name="Clean Up" type="SubSheetInfo">

<subsheetid>cfb6da91-518b-40a3-8e0e-115ff0252ea7</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="e91da0c2-e60f-4eae-a108-bd99aaff046f" name="Start" type="Start">

<subsheetid>cfb6da91-518b-40a3-8e0e-115ff0252ea7</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>88b89098-8bb2-42fc-8e43-bad5b1e4f400</onsuccess>

</stage>

<stage stageid="91836284-14a0-4c0f-b9d5-8cd74b4d1632" name="End" type="End">

<subsheetid>cfb6da91-518b-40a3-8e0e-115ff0252ea7</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="cf7a7a0d-0c2b-4a9e-8a52-19bdf46ef4cc" name="Set Connection" type="SubSheetInfo">

<subsheetid>90429413-7792-4513-8bc0-d6d079aa08b9</subsheetid>

<narrative>Sets the connection details for the database.</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="5395eb12-61a3-4005-88a3-ceda307cf9b1" name="Start" type="Start">

```xml
<preconditions>
<condition narrative=""/>
</preconditions>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<inputs>
<input type="text" name="Database" narrative="Optional. The path to the oledb database file" stage="Data
<input type="password" name="Password" narrative="Optional. The password if required to open the oledb
<input type="text" name="Provider" narrative="Optional. Allows the database provider to be overridden." st
<input type="text" name="Connection String" narrative="Optional. Allows the full connection string to be pro
</inputs>
<onsuccess>935af892-73c5-4d1a-871f-536b70e44a8f</onsuccess>
</stage>
<stage stageid="823a5018-5ad8-483c-a6c1-8c527bf7bc00" name="End" type="End">
<subsheetid>90429413-7792-4513-8bc0-d6d079aa08b9</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>210</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="78309214-2fb3-4bd9-8433-ca0f0fc31bd4" name="new" type="Note">

<subsheetid>cfb6da91-518b-40a3-8e0e-115ff0252ea7</subsheetid>

<narrative>Clean Up Page

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically by Automate immediately after closing your business object

You will not be able to call this action from a business process, nor will it be called at any other time than b

<displayx>-180</displayx>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="7bb7dcd7-acf2-4a7a-a96d-756830b2e54f" name="new" type="Note">

<narrative>Initialise Page

This is an optional page where you might choose to perform some initialisation tasks after your business ol

The initialise action will be called automatically by Automate immediately after loading your business objec

You will not be able to call this action from a business process, nor will it be called at any other time than a

```xml
<displayx>-180</displayx>
<displayy>60</displayy>
<displaywidth>180</displaywidth>
<displayheight>230</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="b9720411-39cf-4e79-8fe9-af8e7581970a" name="Database" type="Data">
<loginhibit/>
<narrative>
</narrative>
<displayx>180</displayx>
<displayy>-60</displayy>
<displaywidth>180</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue/>
</stage>
<stage stageid="d1d97b89-18c2-40ab-8f43-0cd0ce45f5b7" name="User" type="Data">
<loginhibit/>
<narrative>
</narrative>
<displayx>180</displayx>
<displayy>-15</displayy>
<displaywidth>180</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
```

</stage>

<stage stageid="1c8bc019-fa8a-4593-b435-81216f908452" name="Password" type="Data">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>password</datatype>

</stage>

<stage stageid="c9568fbf-1fca-4ce7-aa27-2309731df7f5" name="Connection String" type="Data">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

```xml
</stage>

<stage stageid="db11541e-1f1d-48f5-a64e-e1d44d23ecf6" name="Set connection" type="Calculation">

<subsheetid>90429413-7792-4513-8bc0-d6d079aa08b9</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-30</displayx>

<displayy>150</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>823a5018-5ad8-483c-a6c1-8c527bf7bc00</onsuccess>

<calculation expression="&amp;quot;Provider=&amp;quot; &amp;amp; [Provider] &amp;amp; &amp;quot;;

</stage>

<stage stageid="8ed153e9-383f-4acf-9e86-3d058f27a895" name="Open" type="SubSheetInfo">

<subsheetid>459569f2-c792-4948-8884-5c2a0917cc16</subsheetid>

<loginhibit/>

<narrative>Opens a connection to the OLEDB database.</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="3c501978-f53e-419d-ab66-c3cbef5cf598" name="Start" type="Start">

<subsheetid>459569f2-c792-4948-8884-5c2a0917cc16</subsheetid>

<loginhibit/>
```

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>c57babb2-f4b2-42dd-95c7-a8155b854975</onsuccess>

</stage>

<stage stageid="7295054b-4d97-4891-ab69-23416df80d09" name="End" type="End">

<subsheetid>459569f2-c792-4948-8884-5c2a0917cc16</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="c57babb2-f4b2-42dd-95c7-a8155b854975" name="Open" type="Code">

<subsheetid>459569f2-c792-4948-8884-5c2a0917cc16</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-15</displayy>

```xml
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<inputs>
<input type="text" name="ConnectionString" expr="[Connection String]"/>
</inputs>
<onsuccess>7295054b-4d97-4891-ab69-23416df80d09</onsuccess>
<code>If moConnection Is Nothing Then
moConnection = New OLEDBConnection(ConnectionString)
moConnection.Open()
End If</code>
</stage>
<stage stageid="22e10c68-07d1-4cc4-9072-7c9b0b0c97cf" name="SQL" type="Data">
<loginhibit/>
<narrative>
</narrative>
<displayx>180</displayx>
<displayy>120</displayy>
<displaywidth>180</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue/>
</stage>
<stage stageid="4a78a3ea-35e5-4496-bfe0-509900dc5137" name="Close" type="SubSheetInfo">
<subsheetid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</subsheetid>
<loginhibit/>
```

<narrative>Closes the connection to the OLEDB database.</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="6bd7feeb-d610-4f7b-9646-df99afade77a" name="Start" type="Start">

<subsheetid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>f5aab680-3f4a-4cb2-9873-7c2aa718133f</onsuccess>

</stage>

<stage stageid="b9924b3b-5eea-41f5-9d73-8f4624ba22fe" name="End" type="End">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="f5aab680-3f4a-4cb2-9873-7c2aa718133f" name="Close" type="Code">

<subsheetid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>b9924b3b-5eea-41f5-9d73-8f4624ba22fe</onsuccess>

<code>moConnection.Close()

moConnection.Dispose()

moConnection = Nothing</code>

</stage>

<stage stageid="88b89098-8bb2-42fc-8e43-bad5b1e4f400" name="Close" type="SubSheet">

```xml
<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>91836284-14a0-4c0f-b9d5-8cd74b4d1632</onsuccess>

<processid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</processid>

</stage>

<stage stageid="221cc4f2-f3b6-4a62-985a-350066ad7c79" name="Get Collection" type="SubSheetInfo">

<subsheetid>780529b8-393d-4d1d-bc5f-34f383fe53ec</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="76ba8075-200c-47f3-a5b0-81d2a545b93b" name="Start" type="Start">

<subsheetid>780529b8-393d-4d1d-bc5f-34f383fe53ec</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>-135</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="SQL" narrative="An SQL query to fetch the data. In most cases this will be a 'sel
```

</inputs>

<onsuccess>98267e1e-20b7-4ce9-a0b8-847c18c1976f</onsuccess>

</stage>

<stage stageid="469b68e3-523f-4723-ab11-b47348bbdf33" name="End" type="End">

<subsheetid>780529b8-393d-4d1d-bc5f-34f383fe53ec</subsheetid>

<displayx>-45</displayx>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="897f736f-bc15-4938-9d97-b4c1065dd5e1" name="Get Data Table" type="Code">

<subsheetid>780529b8-393d-4d1d-bc5f-34f383fe53ec</subsheetid>

<displayx>-45</displayx>

<displayy>-15</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

```xml
<inputs>
<input type="text" name="SQL" expr="[SQL]"/>
</inputs>
<outputs>
<output type="collection" name="Results" stage="Results"/>
</outputs>
<onsuccess>469b68e3-523f-4723-ab11-b47348bbdf33</onsuccess>
<code>Dim oDataAdapter As New OLEDBDataAdapter(SQL,moConnection)

Dim oDataSet As New DataSet

oDataAdapter.Fill(oDataset)

Results = oDataSet.Tables(0)</code>
</stage>
<stage stageid="98267e1e-20b7-4ce9-a0b8-847c18c1976f" name="Open" type="SubSheet">
<subsheetid>780529b8-393d-4d1d-bc5f-34f383fe53ec</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-45</displayx>
<displayy>-75</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>897f736f-bc15-4938-9d97-b4c1065dd5e1</onsuccess>
<processid>459569f2-c792-4948-8884-5c2a0917cc16</processid>
</stage>
```

```xml
<stage stageid="71604ec6-dbf3-40c1-b400-8a5eea8eda3f" name="Results" type="Collection">
<subsheetid>780529b8-393d-4d1d-bc5f-34f383fe53ec</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-180</displayx>
<displayy>30</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>collection</datatype>
<private/>
<alwaysinit/>
</stage>
<stage stageid="3f4ca0da-93ad-492e-af65-ff637c54b37a" name="Password Set?" type="Decision">
<subsheetid>90429413-7792-4513-8bc0-d6d079aa08b9</subsheetid>
<loginhibit/>
<narrative>If the password is set use password in connection string.</narrative>
<displayx>15</displayx>
<displayy>90</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<decision expression="[PasswordText]&amp;lt;&amp;gt;&amp;quot;&amp;quot;"/>
<ontrue>db11541e-1f1d-48f5-a64e-e1d44d23ecf6</ontrue>
<onfalse>fbf4d6d4-763b-41f2-926a-ce6745964763</onfalse>
</stage>
```

```xml
<stage stageid="fbf4d6d4-763b-41f2-926a-ce6745964763" name="Set connection" type="Calculation">
<subsheetid>90429413-7792-4513-8bc0-d6d079aa08b9</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>60</displayx>
<displayy>150</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>823a5018-5ad8-483c-a6c1-8c527bf7bc00</onsuccess>
<calculation expression="&amp;quot;Provider=&amp;quot; &amp;amp; [Provider] &amp;amp; &amp;quot;;
</stage>
<stage stageid="b0dbeba0-75c2-479b-9d5d-bde261b4db20" name="Provider" type="Data">
<narrative>
</narrative>
<displayx>180</displayx>
<displayy>165</displayy>
<displaywidth>180</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue/>
<alwaysinit/>
</stage>
<stage stageid="16cd8677-ab9b-4269-9a0b-1e4956f4d103" name="Provider Set?" type="Decision">
<subsheetid>90429413-7792-4513-8bc0-d6d079aa08b9</subsheetid>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>4eb62611-4eee-4ad8-9ffd-bf789ac796ad</onsuccess>

<calculation expression="&quot;Microsoft.Jet.OLEDB.4.0&quot;" stage="Provider"/>

</stage>

<stage stageid="4eb62611-4eee-4ad8-9ffd-bf789ac796ad" name="anchor1" type="Anchor">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>35e769d9-71b0-43da-8bda-6e4cbd3d0e55</onsuccess>

</stage>

<stage stageid="35e769d9-71b0-43da-8bda-6e4cbd3d0e55" name="Get Password Text" type="Calculatio

<subsheetid>90429413-7792-4513-8bc0-d6d079aa08b9</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>3f4ca0da-93ad-492e-af65-ff637c54b37a</onsuccess>

<calculation expression="[Password]" stage="PasswordText"/>

</stage>

<stage stageid="8cc8ad2a-2fa6-41ee-abc4-def727b8035c" name="PasswordText" type="Data">

<subsheetid>90429413-7792-4513-8bc0-d6d079aa08b9</subsheetid>

<displayx>-60</displayx>

<displayy>45</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="935af892-73c5-4d1a-871f-536b70e44a8f" name="Connection String Provided" type="Dec

<subsheetid>90429413-7792-4513-8bc0-d6d079aa08b9</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<decision expression="Len([Connection String])&gt;0"/>

<ontrue>59f15fcb-a597-4b07-9bf2-27c46f27b6c6</ontrue>

<onfalse>16cd8677-ab9b-4269-9a0b-1e4956f4d103</onfalse>

</stage>

<stage stageid="59f15fcb-a597-4b07-9bf2-27c46f27b6c6" name="End1" type="End">

<subsheetid>90429413-7792-4513-8bc0-d6d079aa08b9</subsheetid>

<loginhibit/>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="867d0e4f-77f9-4ce5-98fe-24936bd70fef" name="Execute" type="SubSheetInfo">

<subsheetid>9ad00c3c-8615-4f62-9595-9081a2523133</subsheetid>

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="f3759797-b7e7-4c69-abe5-9eef2b589950" name="Start" type="Start">

<subsheetid>9ad00c3c-8615-4f62-9595-9081a2523133</subsheetid>

```
<font family="Segoe UI" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="SQL" stage="SQL"/>

</inputs>

<onsuccess>e5eaf88d-54e6-4dc2-a219-327908c231f1</onsuccess>

</stage>

<stage stageid="39a5fcd1-fd83-4b7b-a7c1-988b88708eb6" name="End" type="End">

<subsheetid>9ad00c3c-8615-4f62-9595-9081a2523133</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="e5eaf88d-54e6-4dc2-a219-327908c231f1" name="Execute" type="Code">

<subsheetid>9ad00c3c-8615-4f62-9595-9081a2523133</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Segoe UI" size="10" style="Regular" color="000000"/>
```

```
<inputs>

<input type="text" name="SQL" expr="[SQL]"/>

</inputs>

<onsuccess>39a5fcd1-fd83-4b7b-a7c1-988b88708eb6</onsuccess>

<code>Dim oCommand As New OleDbCommand(SQL,moConnection)

oCommand.ExecuteNonQuery()

</code>

</stage>

</process>

<process name="Data - SQL Server" version="6.7.0.0" narrative="SQL Server interaction object." type="ob

<appdef>

<element name="Application Root">

<id>86c30a1c-12a4-44c4-9674-b287d0dfa70d</id>

<type>Application</type>

<basetype>Application</basetype>

<datatype>unknown</datatype>

<diagnose>False</diagnose>

</element>

</appdef>

<view>

<camerax>50</camerax>

<cameray>25</cameray>

<zoom>1</zoom>

</view>

<preconditions/>

<endpoint narrative=""/>

<subsheet subsheetid="cfb6da91-518b-40a3-8e0e-115ff0252ea7" type="CleanUp" published="True">
```

```xml
<name>Clean Up</name>

<view>

<camerax>-49.5</camerax>

<cameray>0</cameray>

<zoom>1</zoom>

</view>

</subsheet>

<subsheet subsheetid="3eacbbb6-d03e-4df7-9904-a3b1ac67c882" type="Normal" published="True">

<name>Configure</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom>1</zoom>

</view>

</subsheet>

<subsheet subsheetid="88d8d9e5-f97e-40d6-b049-bb643eb06852" type="Normal" published="False">

<name>Raise Exception If Appropriate</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom>1</zoom>

</view>

</subsheet>

<subsheet subsheetid="90429413-7792-4513-8bc0-d6d079aa08b9" type="Normal" published="True">

<name>Set Connection</name>

<view>

<camerax>0</camerax>
```

```
<cameray>0</cameray>

<zoom>1</zoom>

</view>

</subsheet>

<subsheet subsheetid="459569f2-c792-4948-8884-5c2a0917cc16" type="Normal" published="True">

<name>Open</name>

<view>

<camerax>-41</camerax>

<cameray>-57</cameray>

<zoom>1</zoom>

</view>

</subsheet>

<subsheet subsheetid="109afac8-f6b2-467f-971c-c6141124b87a" type="Normal" published="True">

<name>Close</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom>1</zoom>

</view>

</subsheet>

<subsheet subsheetid="3842f7c4-4df2-4e6a-bedd-6dacf01a6db4" type="Normal" published="False">

<name>Is Open</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom>1</zoom>

</view>
```

```xml
</subsheet>
<subsheet subsheetid="7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5" type="Normal" published="False">
<name>Internal Close</name>
<view>
<camerax>-40</camerax>
<cameray>-90</cameray>
<zoom>1</zoom>
</view>
</subsheet>
<subsheet subsheetid="3ee937ec-012f-445c-9b2b-ebbcb6d3614d" type="Normal" published="True">
<name>Begin Transaction</name>
<view>
<camerax>50</camerax>
<cameray>0</cameray>
<zoom>1</zoom>
</view>
</subsheet>
<subsheet subsheetid="ba712d56-697c-48af-bc96-85e49eb968fc" type="Normal" published="True">
<name>Commit Transaction</name>
<view>
<camerax>43</camerax>
<cameray>0</cameray>
<zoom>1</zoom>
</view>
</subsheet>
<subsheet subsheetid="4b6e35c6-8ec4-4fbe-b9d7-d43c48492695" type="Normal" published="True">
<name>Rollback Transaction</name>
```

```xml
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom>1</zoom>
</view>
</subsheet>
<subsheet subsheetid="c07ae8a2-a04f-46f2-8919-ec4da73d5b25" type="Normal" published="True">
<name>Execute</name>
<view>
<camerax>-26</camerax>
<cameray>12</cameray>
<zoom>1</zoom>
</view>
</subsheet>
<subsheet subsheetid="a45f6098-73e2-4639-a002-31592645bfa5" type="Normal" published="True">
<name>Get Records Affected</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom>1</zoom>
</view>
</subsheet>
<subsheet subsheetid="12d7c91f-29ac-4711-9614-7ab992dc4b1f" type="Normal" published="True">
<name>Get Number</name>
<view>
<camerax>26</camerax>
<cameray>48</cameray>
```

```xml
<zoom>1</zoom>

</view>

</subsheet>

<subsheet subsheetid="18349d7d-79b1-4397-a8a0-490ab27f459f" type="Normal" published="True">

<name>Get Text</name>

<view>

<camerax>0</camerax>

<cameray>24</cameray>

<zoom>1</zoom>

</view>

</subsheet>

<subsheet subsheetid="780529b8-393d-4d1d-bc5f-34f383fe53ec" type="Normal" published="True">

<name>Get Collection</name>

<view>

<camerax>-49.5</camerax>

<cameray>0</cameray>

<zoom>1</zoom>

</view>

</subsheet>

<subsheet subsheetid="13b6c91d-68e8-46e9-bcab-9261446dc0af" type="Normal" published="True">

<name>Get CSV File</name>

<view>

<camerax>-49.5</camerax>

<cameray>0</cameray>

<zoom>1</zoom>

</view>

</subsheet>
```

```xml
<subsheet subsheetid="e50a93aa-11fe-4457-a16d-0237560fff18" type="Normal" published="True">
<name>Get CSV</name>
<view>
<camerax>20</camerax>
<cameray>-38</cameray>
<zoom>1</zoom>
</view>
</subsheet>
<stage stageid="f3bf5e12-d2cf-4c5d-bda5-0deae3c26316" name="Start" type="Start">
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>d16cc64f-d5d1-4aaf-bea5-f814e1f2657b</onsuccess>
</stage>
<stage stageid="d16cc64f-d5d1-4aaf-bea5-f814e1f2657b" name="End" type="End">
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>90</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
```

```xml
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="0efcc61e-6916-4463-ae94-c24edb2adc75" name="Stage1" type="ProcessInfo">
<loginhibit/>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-105</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<references>
<reference>System.Data.dll</reference>
<reference>System.XML.dll</reference>
</references>
<imports>
<import>System</import>
<import>System.Data</import>
<import>System.Data.SqlClient</import>
<import>System.IO</import>
</imports>
<language>visualbasic</language>
<globalcode>

</globalcode>
<code>
Private moConnection As SqlConnection
```

```vbnet
Private moTransaction As SqlTransaction


Private Sub WriteCsv(ByVal sql As String, ByVal out As TextWriter)


' The target data set

Dim ds As New DataSet()


' Build and execute the command, dumping the data into the above set

Using cmd As New SqlCommand()

cmd.Connection = moConnection

cmd.Transaction = moTransaction

cmd.CommandText = sql


Using da As New SqlDataAdapter()

da.SelectCommand = cmd

da.Fill(ds)

End Using

End Using


' Go through the data, escaping and outputting to the writer

Dim quotesRequiredChars() As Char = {","c, """"c}

For Each tab As DataTable In ds.Tables

' Column headers first

Dim first As Boolean = True

For Each col As DataColumn In tab.Columns

If first Then first = False Else out.Write(",")

Dim val As String = col.ColumnName
```

```vbnet
If val.IndexOfAny(quotesRequiredChars) >= 0 Then _

val = """" & val.Replace("""", """""") & """"

out.Write(val)

Next

out.WriteLine()

' Then a line for each row

For Each row As DataRow in tab.Rows

first = True

For Each col As DataColumn in tab.Columns

If first Then first = False Else out.Write(",")

If row.IsNull(col) Then Continue For

Dim val As String = row(col).ToString()

If val.IndexOfAny(quotesRequiredChars) >= 0 Then _

val = """" & val.Replace("""", """""") & """"

out.Write(val)

Next

out.WriteLine()

Next

' Separate each table with a couple of blank lines

out.WriteLine()

out.WriteLine()

Next


out.Flush()


End Sub
```

```vbnet
Private Function GetScalar(Of T)(ByVal sql As String, _

ByRef success As Boolean, ByRef msg As String) As T


' Assume Success

success = True

msg = ""


Try

Using cmd As New SqlCommand()

cmd.Connection = moConnection

cmd.CommandText = SQL

cmd.Transaction = moTransaction

Return CType(cmd.ExecuteScalar(), T)

End Using

Catch ex As Exception

success = False

msg = ex.Message

Return Nothing

End Try


End Function
```
</code>
</stage>
<stage stageid="fd95e8ae-614b-4bae-a0f9-cbd04cef37ce" name="Clean Up" type="SubSheetInfo">
<subsheetid>cfb6da91-518b-40a3-8e0e-115ff0252ea7</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="e91da0c2-e60f-4eae-a108-bd99aaff046f" name="Start" type="Start">

<subsheetid>cfb6da91-518b-40a3-8e0e-115ff0252ea7</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>88b89098-8bb2-42fc-8e43-bad5b1e4f400</onsuccess>

</stage>

<stage stageid="91836284-14a0-4c0f-b9d5-8cd74b4d1632" name="End" type="End">

```xml
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="cf7a7a0d-0c2b-4a9e-8a52-19bdf46ef4cc" name="Set Connection" type="SubSheetInfo">
<subsheetid>90429413-7792-4513-8bc0-d6d079aa08b9</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-105</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="5395eb12-61a3-4005-88a3-ceda307cf9b1" name="Start" type="Start">
<subsheetid>90429413-7792-4513-8bc0-d6d079aa08b9</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-165</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<inputs>
<input type="text" name="Server" narrative="The name of the server and, if necessary, instance name of tl
<input type="text" name="Database" narrative="The name of the database to connect to" stage="Database
<input type="text" name="User" narrative="If appropriate, the login name to use to connect to SQL Server.
```

<input type="password" name="Password" narrative="If appropriate, the password to use with the above lo

</inputs>

<onsuccess>66c19ef6-3007-4fa0-af27-b52892a9671c</onsuccess>

</stage>

<stage stageid="823a5018-5ad8-483c-a6c1-8c527bf7bc00" name="End" type="End">

<subsheetid>90429413-7792-4513-8bc0-d6d079aa08b9</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="78309214-2fb3-4bd9-8433-ca0f0fc31bd4" name="new" type="Note">

<subsheetid>cfb6da91-518b-40a3-8e0e-115ff0252ea7</subsheetid>

<narrative>Clean Up Page

This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your

The cleanup action will be called automatically by Automate immediately after closing your business objec

You will not be able to call this action from a business process, nor will it be called at any other time than b

<displayx>-180</displayx>

```
<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="7bb7dcd7-acf2-4a7a-a96d-756830b2e54f" name="new" type="Note">

<loginhibit/>

<narrative>Initialise Page
```

This is an optional page where you might choose to perform some initialisation tasks after your business ol

The initialise action will be called automatically by Automate immediately after loading your business object

You will not be able to call this action from a business process, nor will it be called at any other time than a

```
<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="d666ce88-be59-4711-8698-025945395207" name="Server" type="Data">

<loginhibit/>

<narrative>

</narrative>

<displayx>180</displayx>

<displayy>-105</displayy>

<displaywidth>180</displaywidth>

<displayheight>30</displayheight>
```

```xml
<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

</stage>

<stage stageid="b9720411-39cf-4e79-8fe9-af8e7581970a" name="Database" type="Data">

<loginhibit/>

<narrative>

</narrative>

<displayx>180</displayx>

<displayy>-60</displayy>

<displaywidth>180</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

</stage>

<stage stageid="d1d97b89-18c2-40ab-8f43-0cd0ce45f5b7" name="User" type="Data">

<loginhibit/>

<narrative>

</narrative>

<displayx>180</displayx>

<displayy>-15</displayy>

<displaywidth>180</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>
```

```xml
</stage>
<stage stageid="1c8bc019-fa8a-4593-b435-81216f908452" name="Password" type="Data">
<loginhibit/>
<narrative>
</narrative>
<displayx>180</displayx>
<displayy>30</displayy>
<displaywidth>180</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>password</datatype>
<initialvalue/>
</stage>
<stage stageid="c9568fbf-1fca-4ce7-aa27-2309731df7f5" name="Connection String" type="Data">
<loginhibit/>
<narrative>
</narrative>
<displayx>180</displayx>
<displayy>75</displayy>
<displaywidth>180</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue/>
</stage>
<stage stageid="db11541e-1f1d-48f5-a64e-e1d44d23ecf6" name="Set connection" type="Calculation">
<subsheetid>90429413-7792-4513-8bc0-d6d079aa08b9</subsheetid>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>823a5018-5ad8-483c-a6c1-8c527bf7bc00</onsuccess>

<calculation expression="&quot;database=&quot; &amp; [Database] &amp; &quo

</stage>

<stage stageid="8ed153e9-383f-4acf-9e86-3d058f27a895" name="Open" type="SubSheetInfo">

<subsheetid>459569f2-c792-4948-8884-5c2a0917cc16</subsheetid>

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="3c501978-f53e-419d-ab66-c3cbef5cf598" name="Start" type="Start">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>c57babb2-f4b2-42dd-95c7-a8155b854975</onsuccess>

</stage>

<stage stageid="7295054b-4d97-4891-ab69-23416df80d09" name="End" type="End">

<subsheetid>459569f2-c792-4948-8884-5c2a0917cc16</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="flag" name="Success" narrative="Flag indicating success (True) or failure (False)" stage="S

<output type="text" name="Message" narrative="Error message giving detail regarding why this action faile

</outputs>

</stage>

<stage stageid="c57babb2-f4b2-42dd-95c7-a8155b854975" name="Open" type="Code">

```
<displayx>-60</displayx>

<displayy>-90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="ConnectionString" expr="[Connection String]"/>

</inputs>

<outputs>

<output type="flag" name="Success" stage="Success"/>

<output type="text" name="Message" stage="Message"/>

</outputs>

<onsuccess>1c7fc106-01f3-4a2a-aa7e-44c44875fb04</onsuccess>

<code>Success = True

Message = ""


If moConnection IsNot Nothing Then Return

Try

moConnection = New SqlConnection(ConnectionString)

moConnection.Open()


Catch ex As Exception

Success = False

Message = ex.Message


End Try

</code>
```

```
</stage>

<stage stageid="24f2742e-2541-4680-a355-1783c4e2f2f2" name="Execute" type="SubSheetInfo">

<subsheetid>c07ae8a2-a04f-46f2-8919-ec4da73d5b25</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="05448135-b8ce-4a88-9d5c-eb85fea9d352" name="Start" type="Start">

<subsheetid>c07ae8a2-a04f-46f2-8919-ec4da73d5b25</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-15</displayx>

<displayy>-135</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Query" narrative="The SQL query to use to perform this action" stage="SQL"/>

</inputs>

<onsuccess>3753873b-7231-4b1f-947e-e6b87deac3d8</onsuccess>

</stage>
```

```
<stage stageid="3810933f-d93a-482c-a0d8-20796ecd3049" name="Execute" type="Code">

<subsheetid>c07ae8a2-a04f-46f2-8919-ec4da73d5b25</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-15</displayx>

<displayy>-45</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="SQL" expr="[SQL]"/>

</inputs>

<outputs>

<output type="flag" name="Success" stage="Success"/>

<output type="text" name="Message" stage="Message"/>

<output type="number" name="Records Affected" stage="Records Affected"/>

</outputs>

<onsuccess>2631d241-e7fb-4a03-87f8-846c6443206f</onsuccess>

<code>

Success = True

Message = ""


Try

Using cmd As New SqlCommand()

cmd.Connection = moConnection

cmd.CommandText = SQL
```

```
cmd.Transaction = moTransaction

Records_Affected = cmd.ExecuteNonQuery()

End Using


Catch ex As Exception

Success = False

Message = ex.Message


End Try
</code>
</stage>
<stage stageid="3753873b-7231-4b1f-947e-e6b87deac3d8" name="Open" type="SubSheet">
<subsheetid>c07ae8a2-a04f-46f2-8919-ec4da73d5b25</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-15</displayx>
<displayy>-90</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<outputs>
<output type="flag" name="Success" stage="Success"/>
<output type="text" name="Message" stage="Message"/>
</outputs>
<onsuccess>1ac9d798-c898-4a5a-8b07-f435dc0500d4</onsuccess>
<processid>459569f2-c792-4948-8884-5c2a0917cc16</processid>
```

```xml
</stage>
<stage stageid="1ac9d798-c898-4a5a-8b07-f435dc0500d4" name="Success?" type="Decision">
<subsheetid>c07ae8a2-a04f-46f2-8919-ec4da73d5b25</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>75</displayx>
<displayy>-90</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<decision expression="[Success]"/>
<ontrue>3810933f-d93a-482c-a0d8-20796ecd3049</ontrue>
<onfalse>dbe6faa5-9cd8-4ead-a98d-1880a84975af</onfalse>
</stage>
<stage stageid="4a78a3ea-35e5-4496-bfe0-509900dc5137" name="Internal Close" type="SubSheetInfo">
<subsheetid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-180</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="f5aab680-3f4a-4cb2-9873-7c2aa718133f" name="Close" type="Code">
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="clearPool" expr="[Clear Pool]"/>

<input type="text" name="connString" expr="[Connection String]"/>

</inputs>

<onsuccess>274a1082-2d15-4bf8-84f2-043aae4e60e7</onsuccess>

<code>

```
Success = True

Message = ""


Try

' If we're clearing the pool, we need a

' connection so that we can specify the pool

' we want to clear, so, somewhat obscenely,

' we must create a connection if one does not
```

```
' currently exist. Then close it immediately

If clearPool Then

If moConnection Is Nothing Then _

moConnection = New SqlConnection(connString)

SqlConnection.ClearPool(moConnection)

End If

If moConnection IsNot Nothing Then

moConnection.Close()

moConnection.Dispose()

moConnection = Nothing

End If


Catch ex As Exception

Success = False

Message = ex.Message

End Try
```

</code>

</stage>

<stage stageid="b0d71d51-0e09-4333-a7e8-e16c11d5cc2c" name="Internal Close" type="SubSheet">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="Clear Pool" narrative="True to clear the connection pool when closing the conne

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="f2d1ef6c-115c-4900-9a62-d8bac04b0b09" name="Start" type="Start">

```xml
<displayx>0</displayx>

<displayy>-75</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Query" narrative="The SQL query to use to perform this action" stage="SQL"/>

</inputs>

<onsuccess>05b0b107-7095-4e9d-bc37-924f6b11869d</onsuccess>

</stage>

<stage stageid="3098273a-9d5f-43bd-8f67-dd5fa306c621" name="End" type="End">

<subsheetid>12d7c91f-29ac-4711-9614-7ab992dc4b1f</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>0</displayx>

<displayy>150</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="number" name="Result" narrative="The numeric result from the SQL query provided - if mult

<output type="flag" name="Success" narrative="Flag indicating success (True) or failure (False)" stage="S

<output type="text" name="Message" narrative="Error message giving detail regarding why this action faile

</outputs>

</stage>

<stage stageid="17da1b91-9f66-4fe1-b2e3-ff423f3f827a" name="Execute Return Number" type="Code">
```

```xml
<subsheetid>12d7c91f-29ac-4711-9614-7ab992dc4b1f</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>0</displayx>

<displayy>15</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="SQL" expr="[SQL]"/>

</inputs>

<outputs>

<output type="flag" name="Success" stage="Success"/>

<output type="text" name="Message" stage="Message"/>

<output type="number" name="Result" stage="Number Result"/>

</outputs>

<onsuccess>12f14b00-5eb3-4995-afa2-e3eeeadcb5c0</onsuccess>

<code>

Result = GetScalar(Of Decimal)( _

SQL, Success, Message)

</code>

</stage>

<stage stageid="05b0b107-7095-4e9d-bc37-924f6b11869d" name="Open" type="SubSheet">

<subsheetid>12d7c91f-29ac-4711-9614-7ab992dc4b1f</subsheetid>

<loginhibit/>

<narrative>
```

</narrative>

<displayy>-30</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<displayy>-30</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="[Success]"/>

<ontrue>17da1b91-9f66-4fe1-b2e3-ff423f3f827a</ontrue>

<onfalse>0da291c6-e906-4852-b112-79384aafeb77</onfalse>

</stage>

<stage stageid="06bce91a-1f23-4c23-acdf-19564c453382" name="Number Result" type="Data">

<subsheetid>12d7c91f-29ac-4711-9614-7ab992dc4b1f</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

<initialvalue>0</initialvalue>

</stage>

<stage stageid="1e9d4de5-9638-4bec-a23c-dda3f743abd2" name="Get Records Affected" type="SubShee

<subsheetid>a45f6098-73e2-4639-a002-31592645bfa5</subsheetid>

<displayx>-195</displayx>

<displayy>-105</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="1bc1e722-9f5a-4ca8-becb-07c73ba5427b" name="Start" type="Start">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Query" narrative="The SQL query to use to perform this action" stage="SQL"/>

</inputs>

<onsuccess>ec1e523c-2d7f-49ab-bdbf-97c9629d4f0b</onsuccess>

</stage>

<stage stageid="5c3b4cc9-288d-4fae-b9d3-dca1f01d452c" name="End" type="End">

<subsheetid>a45f6098-73e2-4639-a002-31592645bfa5</subsheetid>

<displayy>-45</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="number" name="Records Affected" narrative="The number of records which matched the co

<output type="flag" name="Success" narrative="Flag indicating success (True) or failure (False)" stage="S

<output type="text" name="Message" narrative="Error message giving detail regarding why this action faile

```
</outputs>

</stage>

<stage stageid="98ced6bf-c219-4b6f-8788-428ae730dffa" name="Records Affected" type="Data">

<loginhibit/>

<narrative>

</narrative>

<displayx>180</displayx>

<displayy>165</displayy>

<displaywidth>180</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

<initialvalue>0</initialvalue>

</stage>

<stage stageid="ec1e523c-2d7f-49ab-bdbf-97c9629d4f0b" name="Execute" type="SubSheet">

<subsheetid>a45f6098-73e2-4639-a002-31592645bfa5</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>0</displayx>

<displayy>-90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="Query" expr="[SQL]"/>

</inputs>
```

```xml
<outputs>
<output type="flag" name="Success" stage="Success"/>
<output type="text" name="Message" stage="Message"/>
</outputs>
<onsuccess>5c3b4cc9-288d-4fae-b9d3-dca1f01d452c</onsuccess>
<processid>c07ae8a2-a04f-46f2-8919-ec4da73d5b25</processid>
</stage>
<stage stageid="b302f1fb-5a49-4ea5-a4f3-1dadc0ab9051" name="Get Text" type="SubSheetInfo">
<subsheetid>18349d7d-79b1-4397-a8a0-490ab27f459f</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-105</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="1841a582-8544-4daa-ace7-1e0e40837056" name="Start" type="Start">
<subsheetid>18349d7d-79b1-4397-a8a0-490ab27f459f</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-15</displayx>
<displayy>-75</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
```

```xml
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<inputs>
<input type="text" name="Query" narrative="The SQL query to use to perform this action" stage="SQL"/>
</inputs>
<onsuccess>eb060128-54bc-417e-9d48-71beda3e0d4d</onsuccess>
</stage>
<stage stageid="281eca77-1f39-4ace-8815-a8145727a1e3" name="End" type="End">
<subsheetid>18349d7d-79b1-4397-a8a0-490ab27f459f</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-15</displayx>
<displayy>150</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<outputs>
<output type="text" name="Result" narrative="The text result from the SQL query provided - if multiple resu
<output type="flag" name="Success" narrative="Flag indicating success (True) or failure (False)" stage="S
<output type="text" name="Message" narrative="Error message giving detail regarding why this action faile
</outputs>
</stage>
<stage stageid="9f94c434-d4c4-43a6-9393-df126ab0c0ca" name="Execute Return Text" type="Code">
<subsheetid>18349d7d-79b1-4397-a8a0-490ab27f459f</subsheetid>
<loginhibit/>
<narrative>
</narrative>
```

```
<displayx>-15</displayx>

<displayy>15</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="SQL" expr="[SQL]"/>

</inputs>

<outputs>

<output type="flag" name="Success" stage="Success"/>

<output type="text" name="Message" stage="Message"/>

<output type="text" name="Result" stage="Text Result"/>

</outputs>

<onsuccess>d689a9ea-0ae1-4208-b0ca-ece39ddd838f</onsuccess>

<code>

Result = GetScalar(Of String)( _

SQL, Success, Message)

</code>

</stage>

<stage stageid="eb060128-54bc-417e-9d48-71beda3e0d4d" name="Open" type="SubSheet">

<subsheetid>18349d7d-79b1-4397-a8a0-490ab27f459f</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-15</displayx>

<displayy>-30</displayy>

<displaywidth>60</displaywidth>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<displayy>-30</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="[Success]"/>

<ontrue>9f94c434-d4c4-43a6-9393-df126ab0c0ca</ontrue>

<onfalse>8e6271bb-9473-4b6c-b90d-6832537a8075</onfalse>

</stage>

<stage stageid="8fa93518-b432-4252-bf80-0a9c96171faa" name="Text Result" type="Data">

```xml
</narrative>

<displayx>-195</displayx>

<displayy>60</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

</stage>

<stage stageid="88b89098-8bb2-42fc-8e43-bad5b1e4f400" name="Internal Close" type="SubSheet">

<subsheetid>cfb6da91-518b-40a3-8e0e-115ff0252ea7</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>60</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="Clear Pool" narrative="True to clear the connection pool when closing the conne

</inputs>

<outputs>

<output type="flag" name="Success" stage="Close Success"/>

<output type="text" name="Message" stage="Close Message"/>

</outputs>
```

```xml
<onsuccess>91836284-14a0-4c0f-b9d5-8cd74b4d1632</onsuccess>

<processid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</processid>

</stage>

<stage stageid="8eebcae5-eab4-4d0d-98ac-60bb9a4f645c" name="Begin Transaction" type="SubSheetInf

<subsheetid>3ee937ec-012f-445c-9b2b-ebbcb6d3614d</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="110c04fd-0f65-422a-ad21-bdb7db8a4a96" name="Start" type="Start">

<subsheetid>3ee937ec-012f-445c-9b2b-ebbcb6d3614d</subsheetid>

<loginhibit/>

<preconditions>

<condition narrative="None"/>

</preconditions>

<postconditions>

<condition narrative="A transaction will be started on the currently open connection"/>

</postconditions>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-180</displayy>
```

```
<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>6a763136-0514-4c6d-9dff-0a0c4a1d10e7</onsuccess>

</stage>

<stage stageid="eac4efa0-7168-4dee-a333-0923f422d458" name="Begin Transaction" type="Code">

<subsheetid>3ee937ec-012f-445c-9b2b-ebbcb6d3614d</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>45</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="flag" name="Success" stage="Success"/>

<output type="text" name="Message" stage="Message"/>

</outputs>

<onsuccess>a0610c45-e0f3-48ce-86be-2d9fe00d5faf</onsuccess>

<code>' Assume Success

Success = True

Message = ""


Try

moTransaction = moConnection.BeginTransaction()

Catch ex As Exception
```

```
Success = False

Message = ex.Message

End Try

</code>

</stage>

<stage stageid="faff14a4-e148-47ec-8e4d-fc4e4bc1519d" name="Commit Transaction" type="SubSheetIn

<subsheetid>ba712d56-697c-48af-bc96-85e49eb968fc</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-285</displayx>

<displayy>-120</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="dcca40c4-f5b7-4875-b4b4-1c8c50a4be99" name="Start" type="Start">

<subsheetid>ba712d56-697c-48af-bc96-85e49eb968fc</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-135</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>175695ba-0b55-4490-b99a-7c5fa1e95899</onsuccess>
```

```
</stage>

<stage stageid="01c9256c-c4e8-47d0-8bce-cbb4f916399d" name="Commit Transaction" type="Code">

<subsheetid>ba712d56-697c-48af-bc96-85e49eb968fc</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-45</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="flag" name="Success" stage="Success"/>

<output type="text" name="Message" stage="Message"/>

</outputs>

<onsuccess>f26aaae6-36b1-4739-9465-1e208144a8bf</onsuccess>

<code>
' Assume success

Success = True

Message = ""


Try

moTransaction.Commit()

moTransaction = Nothing

Catch ex As Exception

Success = False

Message = ex.Message
```

End Try

</code>

</stage>

<stage stageid="e2cc64c2-12bd-4614-bca3-0650718ccfee" name="Rollback Transaction" type="SubShee

<subsheetid>4b6e35c6-8ec4-4fbe-b9d7-d43c48492695</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="245c9f37-0f51-4fd3-aaa9-480630d4ac3f" name="Start" type="Start">

<subsheetid>4b6e35c6-8ec4-4fbe-b9d7-d43c48492695</subsheetid>

<displayy>-150</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>093c958e-ad24-4cb8-bfd6-e9f7dba49311</onsuccess>

</stage>

<stage stageid="921f479a-2714-4314-b394-c5c941b281e8" name="Rollback Transaction" type="Code">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>7c11fab5-28c4-48fd-b752-cbeac0598534</onsuccess>

<code>

```
Success = True

Message = ""


Try

moTransaction.Rollback()

moTransaction = Nothing

Catch ex As Exception

Success = False

Message = ex.Message

End Try
```

</code>

</stage>

```xml
<stage stageid="2631d241-e7fb-4a03-87f8-846c6443206f" name="In Transaction?" type="Decision">
<subsheetid>c07ae8a2-a04f-46f2-8919-ec4da73d5b25</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-15</displayx>
<displayy>0</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<decision expression="[In Transaction]"/>
<ontrue>ac70463c-d9f4-44cc-8427-004224405a91</ontrue>
<onfalse>b0d71d51-0e09-4333-a7e8-e16c11d5cc2c</onfalse>
</stage>
<stage stageid="f3d61e3c-3094-4c38-9370-3d142d7448c1" name="In Transaction" type="Data">
<loginhibit/>
<narrative>
</narrative>
<displayx>180</displayx>
<displayy>210</displayy>
<displaywidth>180</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>flag</datatype>
<initialvalue>False</initialvalue>
</stage>
<stage stageid="0441a51b-0a7c-49e6-8305-4a877c32cc8a" name="In Transaction" type="Calculation">
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>5705d9af-28ea-4c05-832b-4f40d34a3511</onsuccess>

<calculation expression="True" stage="In Transaction"/>

</stage>

<stage stageid="f26aaae6-36b1-4739-9465-1e208144a8bf" name="Not In Transaction" type="Calculation"

<subsheetid>ba712d56-697c-48af-bc96-85e49eb968fc</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>6cc92a8f-1561-462a-8eaf-bbd32e32a936</onsuccess>

<calculation expression="False" stage="In Transaction"/>

</stage>

<stage stageid="7c11fab5-28c4-48fd-b752-cbeac0598534" name="Not In Transaction" type="Calculation":

<subsheetid>4b6e35c6-8ec4-4fbe-b9d7-d43c48492695</subsheetid>

```xml
<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-15</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>876d7128-a56d-4c53-8fde-3713a1c173f5</onsuccess>

<calculation expression="False" stage="In Transaction"/>

</stage>

<stage stageid="28719a2d-9d55-4414-8a91-4f3c8ce10cba" name="anchor1" type="Anchor">

<subsheetid>c07ae8a2-a04f-46f2-8919-ec4da73d5b25</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>135</displayx>

<displayy>0</displayy>

<displaywidth>10</displaywidth>

<displayheight>10</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>63e4c694-de67-4b39-a04c-5af3186af635</onsuccess>

</stage>

<stage stageid="269b8cc6-856b-426a-ba48-b362a98fc752" name="Internal Close" type="SubSheet">

<subsheetid>12d7c91f-29ac-4711-9614-7ab992dc4b1f</subsheetid>

<loginhibit/>

<narrative>
```

</narrative>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="Clear Pool" narrative="True to clear the connection pool when closing the conne

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="[In Transaction]"/>

<ontrue>8173e4d5-0932-4184-b3e8-01a761341966</ontrue>

<onfalse>269b8cc6-856b-426a-ba48-b362a98fc752</onfalse>

</stage>

<stage stageid="ffd23eb7-b1b9-4f82-ad2f-05d4db50bcd2" name="Internal Close" type="SubSheet">

<subsheetid>18349d7d-79b1-4397-a8a0-490ab27f459f</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>75</displayx>

<displayy>60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="Clear Pool" narrative="True to clear the connection pool when closing the conne

</inputs>

<outputs>

</outputs>

<onsuccess>61bf908d-c640-41f1-921e-fbac0bc44b57</onsuccess>

<processid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</processid>

</stage>

<stage stageid="d689a9ea-0ae1-4208-b0ca-ece39ddd838f" name="In Transaction?" type="Decision">

<subsheetid>18349d7d-79b1-4397-a8a0-490ab27f459f</subsheetid>

<loginhibit/>

<narrative>

```xml
</narrative>

<displayx>-15</displayx>

<displayy>60</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="[In Transaction]"/>

<ontrue>8ecc58ce-889b-4d69-8dbd-43f4c4cb11aa</ontrue>

<onfalse>ffd23eb7-b1b9-4f82-ad2f-05d4db50bcd2</onfalse>

</stage>

<stage stageid="221cc4f2-f3b6-4a62-985a-350066ad7c79" name="Get Collection" type="SubSheetInfo">

<subsheetid>780529b8-393d-4d1d-bc5f-34f383fe53ec</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="76ba8075-200c-47f3-a5b0-81d2a545b93b" name="Start" type="Start">

<subsheetid>780529b8-393d-4d1d-bc5f-34f383fe53ec</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>
```

<displayy>-135</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="SQL" narrative="The SQL query to use to perform this action" stage="SQL"/>

</inputs>

<onsuccess>98267e1e-20b7-4ce9-a0b8-847c18c1976f</onsuccess>

</stage>

<stage stageid="469b68e3-523f-4723-ab11-b47348bbdf33" name="End" type="End">

<subsheetid>780529b8-393d-4d1d-bc5f-34f383fe53ec</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>45</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="flag" name="Success" narrative="Flag indicating success (True) or failure (False)" stage="S

<output type="text" name="Message" narrative="Error message giving detail regarding why this action faile

<output type="collection" name="Results" narrative="The collection of results from the query" stage="Resu

</outputs>

</stage>

<stage stageid="897f736f-bc15-4938-9d97-b4c1065dd5e1" name="Get Data Table" type="Code">

<subsheetid>780529b8-393d-4d1d-bc5f-34f383fe53ec</subsheetid>

```
<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>-45</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="SQL" expr="[SQL]"/>

</inputs>

<outputs>

<output type="flag" name="Success" stage="Success"/>

<output type="text" name="Message" stage="Message"/>

<output type="collection" name="Results" stage="Results"/>

</outputs>

<onsuccess>d5771181-59a5-4bfd-b8f1-01bd7b7dbb3d</onsuccess>

<code>

' Assume success

Success = True

Message = ""


Try

Using cmd As New SqlCommand()

cmd.Connection = moConnection

cmd.Transaction = moTransaction

cmd.CommandText = SQL
```

```
Using adapter As New SqlDataAdapter()

adapter.SelectCommand = cmd

Dim ds As New DataSet()

adapter.Fill(ds)

Results = ds.Tables(0)

End Using

End Using


Catch ex As Exception

Success = False

Message = ex.Message


End Try</code>
```
</stage>

<stage stageid="98267e1e-20b7-4ce9-a0b8-847c18c1976f" name="Open" type="SubSheet">

<subsheetid>780529b8-393d-4d1d-bc5f-34f383fe53ec</subsheetid>

<displayx>-45</displayx>

<displayy>-90</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

```xml
<output type="text" name="Message" stage="Message"/>

</outputs>

<onsuccess>1c0c847f-0d0a-4f0d-9c66-25a64b4c477f</onsuccess>

<processid>459569f2-c792-4948-8884-5c2a0917cc16</processid>

</stage>

<stage stageid="1c0c847f-0d0a-4f0d-9c66-25a64b4c477f" name="Success?" type="Decision">

<subsheetid>780529b8-393d-4d1d-bc5f-34f383fe53ec</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>30</displayx>

<displayy>-90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="[Success]"/>

<ontrue>897f736f-bc15-4938-9d97-b4c1065dd5e1</ontrue>

<onfalse>6247786f-c914-40c2-9acb-156178f5b62d</onfalse>

</stage>

<stage stageid="71604ec6-dbf3-40c1-b400-8a5eea8eda3f" name="Results" type="Collection">

<subsheetid>780529b8-393d-4d1d-bc5f-34f383fe53ec</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>30</displayy>

<displaywidth>150</displaywidth>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>collection</datatype>

</stage>

<stage stageid="6247786f-c914-40c2-9acb-156178f5b62d" name="anchor2" type="Anchor">

<subsheetid>780529b8-393d-4d1d-bc5f-34f383fe53ec</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>d5771181-59a5-4bfd-b8f1-01bd7b7dbb3d</onsuccess>

</stage>

<stage stageid="99f0a166-b905-44ab-ba9d-1fa79b71f6f6" name="Success" type="Data">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

<initialvalue>False</initialvalue>

</stage>

<stage stageid="e981674b-56d4-4624-8c36-d156009e2a52" name="Message" type="Data">

<subsheetid>459569f2-c792-4948-8884-5c2a0917cc16</subsheetid>

<displayy>-90</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

</stage>

<stage stageid="f81f3fe8-65f8-4b08-928d-1e9b3a2d8db1" name="Success" type="Data">

<displayy>-105</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

<initialvalue>False</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="728d45f7-0717-4872-ab22-b9ae8a142957" name="Message" type="Data">

<subsheetid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-75</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="67c3cea7-7915-4e88-9e86-a1355e251b7d" name="Success" type="Data">

<subsheetid>3ee937ec-012f-445c-9b2b-ebbcb6d3614d</subsheetid>

<loginhibit/>

```xml
<narrative>
</narrative>
<displayx>345</displayx>
<displayy>-135</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>flag</datatype>
<initialvalue>False</initialvalue>
<private/>
<alwaysinit/>
</stage>
<stage stageid="71de5830-7d23-4ba9-8354-30f54dacdff4" name="Message" type="Data">
<subsheetid>3ee937ec-012f-445c-9b2b-ebbcb6d3614d</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>345</displayx>
<displayy>-90</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
```

```xml
<stage stageid="d5b51384-618c-4c4a-8510-baa7b99b6e20" name="Success" type="Data">
<subsheetid>ba712d56-697c-48af-bc96-85e49eb968fc</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>150</displayx>
<displayy>-90</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>flag</datatype>
<initialvalue>False</initialvalue>
<private/>
<alwaysinit/>
</stage>
<stage stageid="29a89d90-a1e6-4a7d-8586-d40cb4c63a97" name="Message" type="Data">
<subsheetid>ba712d56-697c-48af-bc96-85e49eb968fc</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>150</displayx>
<displayy>-45</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue/>
```

```xml
<private/>

<alwaysinit/>

</stage>

<stage stageid="235b42fd-91d3-4351-bef7-4e7407a29ffe" name="Success" type="Data">

<subsheetid>4b6e35c6-8ec4-4fbe-b9d7-d43c48492695</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>150</displayx>

<displayy>-90</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

<initialvalue>False</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="92878142-4175-4d93-90d4-7ea4dd84f1da" name="Message" type="Data">

<subsheetid>4b6e35c6-8ec4-4fbe-b9d7-d43c48492695</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>150</displayx>

<displayy>-45</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

</stage>

<stage stageid="b50d625f-a5cd-464b-bc26-3a94288c485e" name="Success" type="Data">

<subsheetid>c07ae8a2-a04f-46f2-8919-ec4da73d5b25</subsheetid>

<displayx>-195</displayx>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

</stage>

<stage stageid="8eeb44dd-6e76-4f9d-9988-c3638cc5916c" name="Message" type="Data">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

</stage>

<stage stageid="a1938177-269a-461e-b3fa-7cb2714659a8" name="Success" type="Data">

<subsheetid>a45f6098-73e2-4639-a002-31592645bfa5</subsheetid>

<displayx>-195</displayx>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

</stage>

<stage stageid="079adbce-1d95-4720-b83f-0567741a0749" name="Message" type="Data">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

</stage>

<stage stageid="8ac84956-cd26-456e-a622-6b3426601f4a" name="Success" type="Data">

<subsheetid>12d7c91f-29ac-4711-9614-7ab992dc4b1f</subsheetid>

<displayx>-195</displayx>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

</stage>

```xml
<stage stageid="c40edd8e-a34c-49ad-ad39-9025a0f9b946" name="Message" type="Data">
<subsheetid>12d7c91f-29ac-4711-9614-7ab992dc4b1f</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>30</displayy>
<displaywidth>120</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
<stage stageid="34a8e2f0-1a6b-4bdc-b2d2-46fed237de50" name="Success" type="Data">
<subsheetid>18349d7d-79b1-4397-a8a0-490ab27f459f</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>0</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>flag</datatype>
<initialvalue>False</initialvalue>
```

<private/>

<alwaysinit/>

</stage>

<stage stageid="f2ebc91f-7722-42d3-907c-6bf37b0cd1e7" name="Message" type="Data">

<subsheetid>18349d7d-79b1-4397-a8a0-490ab27f459f</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>30</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="20e595a2-0799-4731-b244-c3cf6be8d791" name="Success" type="Data">

<subsheetid>780529b8-393d-4d1d-bc5f-34f383fe53ec</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>90</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

<initialvalue>False</initialvalue>

</stage>

<stage stageid="97efd2f3-8f58-454f-b7ef-db9e6bef8aea" name="Message" type="Data">

<subsheetid>780529b8-393d-4d1d-bc5f-34f383fe53ec</subsheetid>

<displayx>-195</displayx>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

</stage>

<stage stageid="95a4ec5c-e0ae-43f8-958e-c44907def3f0" name="Get CSV File" type="SubSheetInfo">

<subsheetid>13b6c91d-68e8-46e9-bcab-9261446dc0af</subsheetid>

```xml
<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="518048a9-d28c-48bd-889f-30dab7f502e0" name="Start" type="Start">

<subsheetid>13b6c91d-68e8-46e9-bcab-9261446dc0af</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>-135</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="SQL" narrative="The SQL query to use to perform this action" stage="SQL"/>

<input type="text" name="File" narrative="The full path of the file to which the CSV result should be written

</inputs>

<onsuccess>8d11deee-1ae6-42be-8726-53fb6cc7e117</onsuccess>

</stage>

<stage stageid="f82dbcac-aaf6-4e85-ada7-e7f28d96bb97" name="End" type="End">

<subsheetid>13b6c91d-68e8-46e9-bcab-9261446dc0af</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>60</displayy>
```

```xml
<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="flag" name="Success" narrative="Flag indicating success (True) or failure (False)" stage="S

<output type="text" name="Message" narrative="Error message giving detail regarding why this action faile

</outputs>

</stage>

<stage stageid="9af3a6f4-53d9-4e14-9e1e-9c161160fec6" name="Get File" type="Code">

<subsheetid>13b6c91d-68e8-46e9-bcab-9261446dc0af</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-45</displayx>

<displayy>-45</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="SQL" expr="[SQL]"/>

<input type="text" name="File" expr="[File]"/>

</inputs>

<outputs>

<output type="flag" name="Success" stage="Success"/>

<output type="text" name="Message" stage="Message"/>

</outputs>

<onsuccess>7dc1a88f-716e-4f2b-80dd-dd6306d6db07</onsuccess>
```

```
<code>

' Assume success

Success = True

Message = ""


Try

' Write it out using the method in Global Code

Using sw As New StreamWriter(File, False)

WriteCsv(SQL, sw)

End Using

Catch ex As Exception

Success = False

Message = ex.Message

End Try

</code>
</stage>
<stage stageid="8d11deee-1ae6-42be-8726-53fb6cc7e117" name="Open" type="SubSheet">
<subsheetid>13b6c91d-68e8-46e9-bcab-9261446dc0af</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-45</displayx>
<displayy>-90</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<outputs>
```

<displayy>-90</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="[Success]"/>

<ontrue>9af3a6f4-53d9-4e14-9e1e-9c161160fec6</ontrue>

<onfalse>8ee4a00c-f248-4c89-8c4b-4b86cb50ad50</onfalse>

</stage>

<stage stageid="8ee4a00c-f248-4c89-8c4b-4b86cb50ad50" name="anchor2" type="Anchor">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>7dc1a88f-716e-4f2b-80dd-dd6306d6db07</onsuccess>

</stage>

<stage stageid="47d47b05-34f0-49f6-b703-f594ecee8108" name="Success" type="Data">

<subsheetid>13b6c91d-68e8-46e9-bcab-9261446dc0af</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

</stage>

<stage stageid="c26f4e3a-832a-4e80-a4b5-cf864ee7abb4" name="Message" type="Data">

<subsheetid>13b6c91d-68e8-46e9-bcab-9261446dc0af</subsheetid>

<displayx>-195</displayx>

```xml
<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="6bb45052-f59c-4af2-866e-d7973096bc2a" name="File" type="Data">

<subsheetid>13b6c91d-68e8-46e9-bcab-9261446dc0af</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>0</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="7d3515fc-4af8-451d-96e6-cc2d4c6808c7" name="Get CSV" type="SubSheetInfo">

<subsheetid>e50a93aa-11fe-4457-a16d-0237560fff18</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>
```

```xml
<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="70f8039e-4af2-4364-b7d2-483c6d3260a4" name="Start" type="Start">

<subsheetid>e50a93aa-11fe-4457-a16d-0237560fff18</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="SQL" narrative="The SQL query to use to perform this action" stage="SQL"/>

</inputs>

<onsuccess>e1bfc556-cb0c-49cf-8cfd-2767e9516e59</onsuccess>

</stage>

<stage stageid="029dc82b-e289-4579-8a43-d8b9c93158be" name="End" type="End">

<subsheetid>e50a93aa-11fe-4457-a16d-0237560fff18</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>75</displayy>
```

```
<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="flag" name="Success" narrative="Flag indicating success (True) or failure (False)" stage="S

<output type="text" name="Message" narrative="Error message giving detail regarding why this action faile

<output type="text" name="CSV" narrative="The CSV output from the query" stage="CSV"/>

</outputs>

</stage>

<stage stageid="584fab2b-6e03-4169-8b6f-2032ad3893b3" name="Get CSV" type="Code">

<subsheetid>e50a93aa-11fe-4457-a16d-0237560fff18</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="text" name="SQL" expr="[SQL]"/>

</inputs>

<outputs>

<output type="flag" name="Success" stage="Success"/>

<output type="text" name="Message" stage="Message"/>

<output type="text" name="CSV" stage="CSV"/>

</outputs>
```

```
<onsuccess>69fcc128-f010-4628-a2ca-291756ca05b9</onsuccess>

<code>

' Assume success

Success = True

Message = ""


Try

' Write it out using the method in Global Code

Using sw As New StringWriter()

WriteCsv(SQL, sw)

CSV = sw.ToString()

End Using

Catch ex As Exception

Success = False

Message = ex.Message

End Try

</code>

</stage>

<stage stageid="e1bfc556-cb0c-49cf-8cfd-2767e9516e59" name="Open" type="SubSheet">

<subsheetid>e50a93aa-11fe-4457-a16d-0237560fff18</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<displayy>-60</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="[Success]"/>

<ontrue>584fab2b-6e03-4169-8b6f-2032ad3893b3</ontrue>

<onfalse>1303eb98-48c5-438c-aa5a-54fe90868c4f</onfalse>

</stage>

<stage stageid="1303eb98-48c5-438c-aa5a-54fe90868c4f" name="anchor2" type="Anchor">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>69fcc128-f010-4628-a2ca-291756ca05b9</onsuccess>

</stage>

<stage stageid="233b888b-7601-4969-8205-7513d73f088d" name="Success" type="Data">

<subsheetid>e50a93aa-11fe-4457-a16d-0237560fff18</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

</stage>

<stage stageid="5723f6bf-aa06-451d-a08a-e92cdfdf9013" name="Message" type="Data">

```xml
<displayx>-195</displayx>

<displayy>15</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="d1458d90-c2cf-4c78-879a-d30165d35480" name="CSV" type="Data">

<subsheetid>e50a93aa-11fe-4457-a16d-0237560fff18</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>45</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="3f4ca0da-93ad-492e-af65-ff637c54b37a" name="User Set?" type="Decision">

<subsheetid>90429413-7792-4513-8bc0-d6d079aa08b9</subsheetid>

<loginhibit/>
```

<narrative>If the user is not set than this must be LAN connection</narrative>

<displayx>15</displayx>

<displayy>-30</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>823a5018-5ad8-483c-a6c1-8c527bf7bc00</onsuccess>

<calculation expression="&quot;database=&quot; &amp; [Database] &amp; &quo

</stage>

<stage stageid="68cc3f0e-e762-450c-921f-2cfbccedfead" name="Close Success" type="Data">

<subsheetid>c07ae8a2-a04f-46f2-8919-ec4da73d5b25</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

</stage>

<stage stageid="5b2f24bf-84b2-4292-8cb3-df7286ec6cee" name="Close Message" type="Data">

<subsheetid>c07ae8a2-a04f-46f2-8919-ec4da73d5b25</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

</stage>

<stage stageid="8365b22c-f9dd-44ac-9bdf-968ef941b1b7" name="Close Success" type="Data">

<subsheetid>12d7c91f-29ac-4711-9614-7ab992dc4b1f</subsheetid>

```xml
</narrative>

<displayx>-195</displayx>

<displayy>90</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="a546aa36-ad70-4a81-9648-1de977e52ea0" name="Close Message" type="Data">

<subsheetid>12d7c91f-29ac-4711-9614-7ab992dc4b1f</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>120</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="e75dc2f8-ea07-48f4-b2a7-245ca2da63bd" name="Close Success" type="Data">

<subsheetid>18349d7d-79b1-4397-a8a0-490ab27f459f</subsheetid>
```

```xml
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>90</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>flag</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
<stage stageid="4049cd6d-bffc-4414-abba-d9c2c426354a" name="Close Message" type="Data">
<subsheetid>18349d7d-79b1-4397-a8a0-490ab27f459f</subsheetid>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>120</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
<stage stageid="c16520e0-e8d3-41c0-ae96-6254e954bc1a" name="In A Transaction?" type="Decision">
```

<subsheetid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>0</displayx>

<displayy>-105</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="[In Transaction]"/>

<ontrue>e52851c8-abcd-46d9-b76a-921773c5cbb4</ontrue>

<onfalse>f185afb3-9c52-4c13-81d3-55a11480cf64</onfalse>

</stage>

<stage stageid="e52851c8-abcd-46d9-b76a-921773c5cbb4" name="Rollback Transaction" type="SubShee

<subsheetid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>0</displayx>

<displayy>-45</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

</outputs>

```xml
<onsuccess>f5aab680-3f4a-4cb2-9873-7c2aa718133f</onsuccess>

<processid>4b6e35c6-8ec4-4fbe-b9d7-d43c48492695</processid>

</stage>

<stage stageid="f185afb3-9c52-4c13-81d3-55a11480cf64" name="anchor3" type="Anchor">

<subsheetid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-75</displayx>

<displayy>-105</displayy>

<displaywidth>10</displaywidth>

<displayheight>10</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>384bb280-cd20-4a3c-b8b0-9a97e61f7010</onsuccess>

</stage>

<stage stageid="384bb280-cd20-4a3c-b8b0-9a97e61f7010" name="anchor4" type="Anchor">

<subsheetid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-75</displayx>

<displayy>15</displayy>

<displaywidth>10</displaywidth>

<displayheight>10</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>f5aab680-3f4a-4cb2-9873-7c2aa718133f</onsuccess>

</stage>
```

<stage stageid="20f109d0-a273-44a5-b964-b45248511186" name="Is Open" type="SubSheetInfo">

<subsheetid>3842f7c4-4df2-4e6a-bedd-6dacf01a6db4</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="cc3b1970-2275-44bb-8cfd-176166531993" name="Start" type="Start">

<subsheetid>3842f7c4-4df2-4e6a-bedd-6dacf01a6db4</subsheetid>

<displayy>-135</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>42ae3b51-badc-419e-9609-b0ce24dc7fe3</onsuccess>

</stage>

<stage stageid="8992da0e-f17e-401d-81a4-cf0dbeaf3af1" name="End" type="End">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="flag" name="Is Open" narrative="Flag indicating if a connection is currently open in this VBC

</outputs>

</stage>

<stage stageid="42ae3b51-badc-419e-9609-b0ce24dc7fe3" name="Check Connection" type="Code">

<subsheetid>3842f7c4-4df2-4e6a-bedd-6dacf01a6db4</subsheetid>

<displayy>-90</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>8992da0e-f17e-401d-81a4-cf0dbeaf3af1</onsuccess>

<code>IsOpen = (_

moConnection IsNot Nothing AndAlso _

moConnection.State = ConnectionState.Open _

)</code>

```xml
</stage>
<stage stageid="aafe4270-a6b3-4607-878e-86975da9c5cf" name="IsOpen" type="Data">
<subsheetid>3842f7c4-4df2-4e6a-bedd-6dacf01a6db4</subsheetid>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-30</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>flag</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
<stage stageid="0a7585ee-e2b5-4c76-893e-f1c483a97130" name="Is Open?" type="Decision">
<subsheetid>3ee937ec-012f-445c-9b2b-ebbcb6d3614d</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-45</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<decision expression="[Is Open]"/>
<ontrue>a06c1db3-79bd-492a-8c88-aca6b858c053</ontrue>
```

</stage>

<stage stageid="330a716e-6d2d-495c-9921-2660dfeb6210" name="Is Open" type="SubSheet">

<subsheetid>3ee937ec-012f-445c-9b2b-ebbcb6d3614d</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="flag" name="Is Open" narrative="Flag indicating if a connection is currently open in this VBC

<displayx>-195</displayx>

<displayy>-30</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

```xml
<datatype>flag</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="a06c1db3-79bd-492a-8c88-aca6b858c053" name="anchor5" type="Anchor">

<subsheetid>3ee937ec-012f-445c-9b2b-ebbcb6d3614d</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-60</displayx>

<displayy>-45</displayy>

<displaywidth>10</displaywidth>

<displayheight>10</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>6ff75f66-de9a-4114-98e6-f985272a313b</onsuccess>

</stage>

<stage stageid="6ff75f66-de9a-4114-98e6-f985272a313b" name="anchor6" type="Anchor">

<subsheetid>3ee937ec-012f-445c-9b2b-ebbcb6d3614d</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-60</displayx>

<displayy>45</displayy>

<displaywidth>10</displaywidth>

<displayheight>10</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>
```

</stage>

<stage stageid="9eb59433-0a23-4cdd-bd25-7ae10e31947e" name="Open" type="SubSheet">

<subsheetid>3ee937ec-012f-445c-9b2b-ebbcb6d3614d</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>9a9f6e74-7cd8-4580-af73-041602ccba94</onsuccess>

<processid>459569f2-c792-4948-8884-5c2a0917cc16</processid>

</stage>

<stage stageid="9a9f6e74-7cd8-4580-af73-041602ccba94" name="Success?" type="Decision">

```xml
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<decision expression="[Success]"/>
<ontrue>eac4efa0-7168-4dee-a333-0923f422d458</ontrue>
<onfalse>62fbd57b-30bc-4365-9fcb-62860030332f</onfalse>
</stage>
<stage stageid="62fbd57b-30bc-4365-9fcb-62860030332f" name="anchor5" type="Anchor">
<subsheetid>3ee937ec-012f-445c-9b2b-ebbcb6d3614d</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>180</displayx>
<displayy>0</displayy>
<displaywidth>10</displaywidth>
<displayheight>10</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>52f9aedd-8666-495d-a007-ef3c02028ee7</onsuccess>
</stage>
<stage stageid="c0d90f91-927f-45e0-84a0-0d6b4e823f6c" name="anchor6" type="Anchor">
<subsheetid>3ee937ec-012f-445c-9b2b-ebbcb6d3614d</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>180</displayx>
<displayy>135</displayy>
<displaywidth>10</displaywidth>
<displayheight>10</displayheight>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>5705d9af-28ea-4c05-832b-4f40d34a3511</onsuccess>

</stage>

<stage stageid="175695ba-0b55-4490-b99a-7c5fa1e95899" name="In Transaction?" type="Decision">

<subsheetid>ba712d56-697c-48af-bc96-85e49eb968fc</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<displayx>-105</displayx>

<displayy>-90</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<calculation expression="&quot;There is no open transaction to commit&quot;" stage="Message

</stage>

<stage stageid="c20b6f48-8689-4164-9435-7d9f6f5f2aa7" name="anchor7" type="Anchor">

<subsheetid>ba712d56-697c-48af-bc96-85e49eb968fc</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>6cc92a8f-1561-462a-8eaf-bbd32e32a936</onsuccess>

</stage>

<stage stageid="093c958e-ad24-4cb8-bfd6-e9f7dba49311" name="In Transaction?" type="Decision">

<subsheetid>4b6e35c6-8ec4-4fbe-b9d7-d43c48492695</subsheetid>

<displayy>-105</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="[In Transaction]"/>

<onfalse>d5c94e05-a642-4107-b7b6-15ce461428e7</onfalse>

</stage>

<stage stageid="d5c94e05-a642-4107-b7b6-15ce461428e7" name="Error Message" type="Calculation">

<subsheetid>4b6e35c6-8ec4-4fbe-b9d7-d43c48492695</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-105</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>ae90029d-81d2-4ae3-b27a-f7a302533401</onsuccess>

<calculation expression="&quot;There is no open transaction to rollback&quot;" stage="Message

</stage>

<stage stageid="6cc92a8f-1561-462a-8eaf-bbd32e32a936" name="Internal Close" type="SubSheet">

<subsheetid>ba712d56-697c-48af-bc96-85e49eb968fc</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>45</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="Clear Pool" narrative="True to clear the connection pool when closing the conne

```xml
</inputs>

<outputs>

<output type="flag" name="Success" stage="Close Success"/>

<output type="text" name="Message" stage="Close Message"/>

</outputs>

<onsuccess>63aeb2d7-aeb8-41f2-9ea1-0fd0cea0da8d</onsuccess>

<processid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</processid>

</stage>

<stage stageid="10757947-9682-4dcb-b789-93777cb333b1" name="Close Success" type="Data">

<subsheetid>ba712d56-697c-48af-bc96-85e49eb968fc</subsheetid>

<narrative>

</narrative>

<displayx>150</displayx>

<displayy>15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="18b41ab6-a52b-45ff-874e-ffece3292e4b" name="Close Message" type="Data">

<subsheetid>ba712d56-697c-48af-bc96-85e49eb968fc</subsheetid>

<narrative>

</narrative>

<displayx>150</displayx>
```

```xml
<displayy>60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="ae90029d-81d2-4ae3-b27a-f7a302533401" name="anchor7" type="Anchor">

<subsheetid>4b6e35c6-8ec4-4fbe-b9d7-d43c48492695</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-105</displayx>

<displayy>30</displayy>

<displaywidth>10</displaywidth>

<displayheight>10</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>876d7128-a56d-4c53-8fde-3713a1c173f5</onsuccess>

</stage>

<stage stageid="876d7128-a56d-4c53-8fde-3713a1c173f5" name="Internal Close" type="SubSheet">

<subsheetid>4b6e35c6-8ec4-4fbe-b9d7-d43c48492695</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="Clear Pool" narrative="True to clear the connection pool when closing the conne

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="4e5cc1d8-b2a7-45b7-a8eb-7dbedcfb4f2b" name="Close Message" type="Data">

<subsheetid>4b6e35c6-8ec4-4fbe-b9d7-d43c48492695</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

</stage>

<stage stageid="e652ce3f-f9fc-414a-9006-2616854cb925" name="Start" type="Start">

<subsheetid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</subsheetid>

<displayy>-240</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="Clear Pool" narrative="True to clear the connection pool when closing the conne

```xml
</inputs>

<onsuccess>8c118cde-3b9a-4ed9-861d-f48b007e1200</onsuccess>

</stage>

<stage stageid="382d3006-4861-4bfe-a57e-3f65fbce6c2c" name="Clear Pool" type="Data">

<subsheetid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-45</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

<initialvalue>True</initialvalue>

<private/>

<alwaysinit/>

</stage>

<stage stageid="96ed6cdf-d202-4b37-b3e4-ae598756fb96" name="Close" type="SubSheetInfo">

<subsheetid>109afac8-f6b2-467f-971c-c6141124b87a</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>
```

<stage stageid="30b5ba60-22d3-4fe6-9e92-9269372d1a6c" name="Start" type="Start">

<subsheetid>109afac8-f6b2-467f-971c-c6141124b87a</subsheetid>

<displayx>-45</displayx>

<displayy>-135</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>25dfab67-8902-4f2a-8a18-a776aead1331</onsuccess>

</stage>

<stage stageid="25dfab67-8902-4f2a-8a18-a776aead1331" name="Internal Close" type="SubSheet">

<subsheetid>109afac8-f6b2-467f-971c-c6141124b87a</subsheetid>

<displayx>-45</displayx>

<displayy>-90</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="Clear Pool" narrative="True to clear the connection pool when closing the conne

</inputs>

<outputs>

```xml
<output type="text" name="Message" stage="Message"/>

</outputs>

<onsuccess>042dd86c-3c68-4015-83b1-dcf5b036fc90</onsuccess>

<processid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</processid>

</stage>

<stage stageid="6c042b25-556f-4563-9663-c41aecc77a31" name="Success" type="Data">

<subsheetid>109afac8-f6b2-467f-971c-c6141124b87a</subsheetid>

<narrative>

</narrative>

<displayx>75</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="d1d7e2ef-771a-4001-922b-fd1f3881328f" name="Message" type="Data">

<subsheetid>109afac8-f6b2-467f-971c-c6141124b87a</subsheetid>

<narrative>

</narrative>

<displayx>75</displayx>

<displayy>-60</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>
```

```xml
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
<stage stageid="6a763136-0514-4c6d-9dff-0a0c4a1d10e7" name="In Transaction?" type="Decision">
<subsheetid>3ee937ec-012f-445c-9b2b-ebbcb6d3614d</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-135</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<decision expression="[In Transaction]"/>
<ontrue>32130444-6454-4780-80fd-2b005ed696a4</ontrue>
<onfalse>330a716e-6d2d-495c-9921-2660dfeb6210</onfalse>
</stage>
<stage stageid="32130444-6454-4780-80fd-2b005ed696a4" name="Transaction Already Open Error" type
<subsheetid>3ee937ec-012f-445c-9b2b-ebbcb6d3614d</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>180</displayx>
<displayy>-135</displayy>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>62fbd57b-30bc-4365-9fcb-62860030332f</onsuccess>

<calculation expression="&quot;A transaction is already open in this connection&quot;" stage="M

</stage>

<stage stageid="c8303f15-a646-4677-8a63-2f0904ef1815" name="Close Success" type="Data">

<subsheetid>cfb6da91-518b-40a3-8e0e-115ff0252ea7</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

</stage>

<stage stageid="17c8449f-6f6b-4cba-a705-ce95ef3e49e0" name="Close Message" type="Data">

```xml
<displayy>0</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="ba273a3e-4b65-4f6b-8ec6-6676a2bede70" name="Configure" type="SubSheetInfo">

<subsheetid>3eacbbb6-d03e-4df7-9904-a3b1ac67c882</subsheetid>

<narrative>Configures this instance of the utility VBO. Calling it with no parameters will cause the configura

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="b1167043-5e4b-4cbf-bfdc-347fcdc34981" name="End" type="End">

<subsheetid>3eacbbb6-d03e-4df7-9904-a3b1ac67c882</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>
```

```
<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="ce5d2c13-15b8-4abc-99e1-0c32e44cc795" name="Raise exception on any failure" type='

<subsheetid>3eacbbb6-d03e-4df7-9904-a3b1ac67c882</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-30</displayy>

<displaywidth>180</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

<initialvalue>False</initialvalue>

<alwaysinit/>

</stage>

<stage stageid="23fa0822-2b63-4407-87f4-9b37ce869e58" name="Start" type="Start">

<subsheetid>3eacbbb6-d03e-4df7-9904-a3b1ac67c882</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-135</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="Raise exception on any failure" narrative="Flag indicating if failure should cause
```

    </inputs>

    <onsuccess>b1167043-5e4b-4cbf-bfdc-347fcdc34981</onsuccess>

    </stage>

    <stage stageid="0b2ebe92-b578-4aa3-b255-b75a73c135d8" name="Raise Exception If Appropriate" type=

    <subsheetid>88d8d9e5-f97e-40d6-b049-bb643eb06852</subsheetid>

    <narrative>

    </narrative>

    <displayx>-195</displayx>

    <displayy>-105</displayy>

    <displaywidth>150</displaywidth>

    <displayheight>90</displayheight>

    <font family="Tahoma" size="10" style="Regular" color="000000"/>

    </stage>

    <stage stageid="0ef42cb2-e5a9-47c2-9845-2471b9f41643" name="Start" type="Start">

    <subsheetid>88d8d9e5-f97e-40d6-b049-bb643eb06852</subsheetid>

    <loginhibit/>

    <narrative>

    </narrative>

    <displayx>-45</displayx>

    <displayy>-135</displayy>

    <displaywidth>60</displaywidth>

    <displayheight>30</displayheight>

    <font family="Tahoma" size="10" style="Regular" color="000000"/>

    <inputs>

    <input type="flag" name="Success" narrative="Flag indicating success or otherwise" stage="Success"/>

    <input type="text" name="Error Message" narrative="The message detailing the lack of success, empty if t

    </inputs>

</stage>

<stage stageid="5e8228c7-ac43-4b93-986b-e5fb23a3e572" name="End" type="End">

<subsheetid>88d8d9e5-f97e-40d6-b049-bb643eb06852</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="9a7620f2-75fe-4415-a778-45b839268e52" name="Should Raise Exception?" type="Decis

<subsheetid>88d8d9e5-f97e-40d6-b049-bb643eb06852</subsheetid>

<displayx>-45</displayx>

<displayy>-90</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="[Success] = False AND [Raise exception on any failure]"/>

<ontrue>c161d6a7-6f02-4f29-8c41-2d93471ae952</ontrue>

<onfalse>5e8228c7-ac43-4b93-986b-e5fb23a3e572</onfalse>

</stage>

<stage stageid="c161d6a7-6f02-4f29-8c41-2d93471ae952" name="FAIL" type="Exception">

<subsheetid>88d8d9e5-f97e-40d6-b049-bb643eb06852</subsheetid>

<narrative>

</narrative>

<displayx>30</displayx>

<displayy>-90</displayy>

<displaywidth>30</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<exception type="Action Failed" detail="[Error Message]"/>

</stage>

<stage stageid="1c7fc106-01f3-4a2a-aa7e-44c44875fb04" name="Raise Exception If Appropriate" type="S

<subsheetid>459569f2-c792-4948-8884-5c2a0917cc16</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-60</displayx>

<displayy>-45</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="Success" narrative="Flag indicating success or otherwise" expr="[Success]"/>

<input type="text" name="Error Message" narrative="The message detailing the lack of success, empty if t

</inputs>

<onsuccess>7295054b-4d97-4891-ab69-23416df80d09</onsuccess>

<processid>88d8d9e5-f97e-40d6-b049-bb643eb06852</processid>

</stage>

<stage stageid="5705d9af-28ea-4c05-832b-4f40d34a3511" name="Raise Exception If Appropriate" type="

<subsheetid>3ee937ec-012f-445c-9b2b-ebbcb6d3614d</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="Success" narrative="Flag indicating success or otherwise" expr="[Success]"/>

<input type="text" name="Error Message" narrative="The message detailing the lack of success, empty if t

</inputs>

<onsuccess>dd554ab9-61de-4d37-bee5-c25e1a5c74f1</onsuccess>

<processid>88d8d9e5-f97e-40d6-b049-bb643eb06852</processid>

</stage>

<stage stageid="a0610c45-e0f3-48ce-86be-2d9fe00d5faf" name="Success?" type="Decision">

```xml
<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="[Success]"/>

<ontrue>0441a51b-0a7c-49e6-8305-4a877c32cc8a</ontrue>

<onfalse>52f9aedd-8666-495d-a007-ef3c02028ee7</onfalse>

</stage>

<stage stageid="52f9aedd-8666-495d-a007-ef3c02028ee7" name="anchor5" type="Anchor">

<subsheetid>3ee937ec-012f-445c-9b2b-ebbcb6d3614d</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>180</displayx>

<displayy>45</displayy>

<displaywidth>10</displaywidth>

<displayheight>10</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>c0d90f91-927f-45e0-84a0-0d6b4e823f6c</onsuccess>

</stage>

<stage stageid="63aeb2d7-aeb8-41f2-9ea1-0fd0cea0da8d" name="Raise Exception If Appropriate" type="

<subsheetid>ba712d56-697c-48af-bc96-85e49eb968fc</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>
```

<inputs>

<input type="flag" name="Success" narrative="Flag indicating success or otherwise" expr="[Success]"/>

<input type="text" name="Error Message" narrative="The message detailing the lack of success, empty if t

</inputs>

<onsuccess>9ccac2c0-2efd-4399-8d02-c71ac4d7e812</onsuccess>

<processid>88d8d9e5-f97e-40d6-b049-bb643eb06852</processid>

</stage>

<stage stageid="375d6173-3de9-4f72-bee6-b4ff132e1287" name="Raise Exception If Appropriate" type="S

<subsheetid>4b6e35c6-8ec4-4fbe-b9d7-d43c48492695</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="Success" narrative="Flag indicating success or otherwise" expr="[Success]"/>

<input type="text" name="Error Message" narrative="The message detailing the lack of success, empty if t

</inputs>

<onsuccess>b17027f1-8559-430b-9f36-724b3097e487</onsuccess>

<processid>88d8d9e5-f97e-40d6-b049-bb643eb06852</processid>

</stage>

<stage stageid="dbe6faa5-9cd8-4ead-a98d-1880a84975af" name="anchor8" type="Anchor">

<narrative>

</narrative>

<displayx>135</displayx>

<displayy>-90</displayy>

<displaywidth>10</displaywidth>

<displayheight>10</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>28719a2d-9d55-4414-8a91-4f3c8ce10cba</onsuccess>

</stage>

<stage stageid="ac70463c-d9f4-44cc-8427-004224405a91" name="Raise Exception If Appropriate" type="

<subsheetid>c07ae8a2-a04f-46f2-8919-ec4da73d5b25</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-15</displayx>

<displayy>45</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="Success" narrative="Flag indicating success or otherwise" expr="[Success]"/>

<input type="text" name="Error Message" narrative="The message detailing the lack of success, empty if t

</inputs>

<onsuccess>7906b7ac-88bd-4971-991d-46bf74ab7207</onsuccess>

<processid>88d8d9e5-f97e-40d6-b049-bb643eb06852</processid>

</stage>

<stage stageid="63e4c694-de67-4b39-a04c-5af3186af635" name="anchor9" type="Anchor">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>ac70463c-d9f4-44cc-8427-004224405a91</onsuccess>

</stage>

<stage stageid="8173e4d5-0932-4184-b3e8-01a761341966" name="Raise Exception If Appropriate" type=

<subsheetid>12d7c91f-29ac-4711-9614-7ab992dc4b1f</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="Success" narrative="Flag indicating success or otherwise" expr="[Success]"/>

<input type="text" name="Error Message" narrative="The message detailing the lack of success, empty if t

</inputs>

<onsuccess>3098273a-9d5f-43bd-8f67-dd5fa306c621</onsuccess>

```xml
</stage>
<stage stageid="0da291c6-e906-4852-b112-79384aafeb77" name="anchor10" type="Anchor">
<subsheetid>12d7c91f-29ac-4711-9614-7ab992dc4b1f</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>135</displayx>
<displayy>-30</displayy>
<displaywidth>10</displaywidth>
<displayheight>10</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>047bee83-bd7d-43b1-aeb3-6f4183c42c63</onsuccess>
</stage>
<stage stageid="047bee83-bd7d-43b1-aeb3-6f4183c42c63" name="anchor11" type="Anchor">
<subsheetid>12d7c91f-29ac-4711-9614-7ab992dc4b1f</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>135</displayx>
<displayy>60</displayy>
<displaywidth>10</displaywidth>
<displayheight>10</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>b565deea-e08d-4195-b081-ab4f2eaad4ad</onsuccess>
</stage>
<stage stageid="b565deea-e08d-4195-b081-ab4f2eaad4ad" name="anchor12" type="Anchor">
<subsheetid>12d7c91f-29ac-4711-9614-7ab992dc4b1f</subsheetid>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>8173e4d5-0932-4184-b3e8-01a761341966</onsuccess>

</stage>

<stage stageid="8e6271bb-9473-4b6c-b90d-6832537a8075" name="anchor13" type="Anchor">

<subsheetid>18349d7d-79b1-4397-a8a0-490ab27f459f</subsheetid>

<displayy>-30</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>61bf908d-c640-41f1-921e-fbac0bc44b57</onsuccess>

</stage>

<stage stageid="61bf908d-c640-41f1-921e-fbac0bc44b57" name="anchor14" type="Anchor">

<displayx>120</displayx>

<displayy>60</displayy>

<displaywidth>10</displaywidth>

<displayheight>10</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>63cca0a5-90a1-4eb5-9daa-65633aa5c6d3</onsuccess>

</stage>

<stage stageid="63cca0a5-90a1-4eb5-9daa-65633aa5c6d3" name="anchor15" type="Anchor">

<subsheetid>18349d7d-79b1-4397-a8a0-490ab27f459f</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>120</displayx>

<displayy>105</displayy>

<displaywidth>10</displaywidth>

<displayheight>10</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>8ecc58ce-889b-4d69-8dbd-43f4c4cb11aa</onsuccess>

</stage>

<stage stageid="8ecc58ce-889b-4d69-8dbd-43f4c4cb11aa" name="Raise Exception If Appropriate" type="

<subsheetid>18349d7d-79b1-4397-a8a0-490ab27f459f</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-15</displayx>

<displayy>105</displayy>

<displaywidth>90</displaywidth>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="Success" narrative="Flag indicating success or otherwise" expr="[Success]"/>

<input type="text" name="Error Message" narrative="The message detailing the lack of success, empty if t

<narrative>Note that we don't throw an exception here even if a failure is encountered - this is probably bei

<displayx>-195</displayx>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>8fcd4c90-9846-476a-a7f4-05a7edc6e62b</onsuccess>

</stage>

<stage stageid="d5771181-59a5-4bfd-b8f1-01bd7b7dbb3d" name="Raise Exception If Appropriate" type="

<subsheetid>780529b8-393d-4d1d-bc5f-34f383fe53ec</subsheetid>

<displayx>-45</displayx>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="Success" narrative="Flag indicating success or otherwise" expr="[Success]"/>

<input type="text" name="Error Message" narrative="The message detailing the lack of success, empty if t

</inputs>

<onsuccess>469b68e3-523f-4723-ab11-b47348bbdf33</onsuccess>

<processid>88d8d9e5-f97e-40d6-b049-bb643eb06852</processid>

</stage>

<stage stageid="7dc1a88f-716e-4f2b-80dd-dd6306d6db07" name="Raise Exception If Appropriate" type="

<subsheetid>13b6c91d-68e8-46e9-bcab-9261446dc0af</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="Success" narrative="Flag indicating success or otherwise" expr="[Success]"/>

<input type="text" name="Error Message" narrative="The message detailing the lack of success, empty if t

</inputs>

<onsuccess>f82dbcac-aaf6-4e85-ada7-e7f28d96bb97</onsuccess>

<processid>88d8d9e5-f97e-40d6-b049-bb643eb06852</processid>

</stage>

<stage stageid="69fcc128-f010-4628-a2ca-291756ca05b9" name="Raise Exception If Appropriate" type="

<subsheetid>e50a93aa-11fe-4457-a16d-0237560fff18</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="Success" narrative="Flag indicating success or otherwise" expr="[Success]"/>

<input type="text" name="Error Message" narrative="The message detailing the lack of success, empty if t

<displayx>-195</displayx>

<displayy>-30</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="4576bffa-323c-45f4-9233-9905d56e85ee" name="Error Message" type="Data">

<subsheetid>88d8d9e5-f97e-40d6-b049-bb643eb06852</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>0</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="95b31d93-f94b-416b-84da-6fe8337d8feb" name="Closing" type="Data">

<loginhibit/>

<narrative>Flag indicating that the connection wrapped by this VBO is currently in the process of closing</n

<displayx>180</displayx>

<displayy>255</displayy>

<displaywidth>180</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

</stage>

<stage stageid="e85c42a3-de4b-461c-8b38-c5f6f44cd4ce" name="Closing:=True" type="Calculation">

<subsheetid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</subsheetid>

<displayy>-150</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>c16520e0-e8d3-41c0-ae96-6254e954bc1a</onsuccess>

<calculation expression="True" stage="Closing"/>

</stage>

<stage stageid="8c118cde-3b9a-4ed9-861d-f48b007e1200" name="Already Closing?" type="Decision">

<subsheetid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</subsheetid>

<displayy>-195</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<decision expression="[Closing]"/>

</stage>

<stage stageid="34659a52-f242-427f-988d-763542f1f33f" name="Note2" type="Note">

<subsheetid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</subsheetid>

<narrative>Ensure that we're not being called by 'Rollback' which was called by this action - infinite loops a

<displayy>-195</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>adf47186-7a7b-4396-b1cb-e994400f72c9</onsuccess>

</stage>

<stage stageid="adf47186-7a7b-4396-b1cb-e994400f72c9" name="anchor16" type="Anchor">

<subsheetid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>8fcd4c90-9846-476a-a7f4-05a7edc6e62b</onsuccess>

</stage>

<stage stageid="274a1082-2d15-4bf8-84f2-043aae4e60e7" name="Closing:=False" type="Calculation">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>8fcd4c90-9846-476a-a7f4-05a7edc6e62b</onsuccess>

<calculation expression="False" stage="Closing"/>

</stage>

<stage stageid="56def720-71ec-4d7b-9e58-17b4f23dc6fc" name=" " type="Block">

<subsheetid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</subsheetid>

<displayx>-60</displayx>

<displayy>-75</displayy>

<font family="Tahoma" size="10" style="Regular" color="7FB2E5"/>

</stage>

<stage stageid="aa70afba-b9df-48a6-a0c2-beb7fa5cdc82" name="Ignore" type="Recover">

```xml
</narrative>

<displayx>90</displayx>

<displayy>-45</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>92889732-12eb-4041-ac27-8a9a20af1cf5</onsuccess>

</stage>

<stage stageid="92889732-12eb-4041-ac27-8a9a20af1cf5" name=" " type="Resume">

<subsheetid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>90</displayx>

<displayy>15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>f5aab680-3f4a-4cb2-9873-7c2aa718133f</onsuccess>

</stage>

<stage stageid="22e10c68-07d1-4cc4-9072-7c9b0b0c97cf" name="SQL" type="Data">

<subsheetid>c07ae8a2-a04f-46f2-8919-ec4da73d5b25</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-30</displayy>
```

```xml
<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="47ca5361-bb0f-4f18-9c74-7d5d09f239dd" name="SQL" type="Data">

<subsheetid>a45f6098-73e2-4639-a002-31592645bfa5</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-30</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="3616b67e-fe87-422b-b9ea-6180525fddc3" name="SQL" type="Data">

<subsheetid>12d7c91f-29ac-4711-9614-7ab992dc4b1f</subsheetid>

<loginhibit/>

<narrative>
```

```xml
</narrative>

<displayx>-195</displayx>

<displayy>-30</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="46a7daee-e5e4-441f-92fc-39a696518e79" name="SQL" type="Data">

<subsheetid>18349d7d-79b1-4397-a8a0-490ab27f459f</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-30</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="d1d6948f-3783-4b3f-afa7-bef3378cafc3" name="SQL" type="Data">
```

```xml
<subsheetid>e50a93aa-11fe-4457-a16d-0237560fff18</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-45</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="ae6e30b2-099e-4fd8-9481-75eeccea424a" name="SQL" type="Data">

<subsheetid>780529b8-393d-4d1d-bc5f-34f383fe53ec</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-30</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>
```

```xml
<alwaysinit/>
</stage>
<stage stageid="540222b0-7793-476e-a330-59f84b93108c" name="SQL" type="Data">
<subsheetid>13b6c91d-68e8-46e9-bcab-9261446dc0af</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-30</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
<stage stageid="66c19ef6-3007-4fa0-af27-b52892a9671c" name="Connection String already set?" type="[
<subsheetid>90429413-7792-4513-8bc0-d6d079aa08b9</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-120</displayy>
<displaywidth>90</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
```

<decision expression="[Connection String] &lt;&gt; &quot;&quot;"/>

<ontrue>5d9aed4f-c61b-40dc-9104-e0720a324d22</ontrue>

<onfalse>cb1901f1-02a7-4e86-8618-cef7a98b283f</onfalse>

</stage>

<stage stageid="90d7c944-c618-41dd-bfe2-5da022f3353a" name="Internal Close" type="SubSheet">

<subsheetid>90429413-7792-4513-8bc0-d6d079aa08b9</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>150</displayx>

<displayy>-75</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<inputs>

<input type="flag" name="Clear Pool" narrative="True to clear the connection pool when closing the conne

</inputs>

<outputs>

</outputs>

<onsuccess>cb1901f1-02a7-4e86-8618-cef7a98b283f</onsuccess>

<processid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</processid>

</stage>

<stage stageid="5d9aed4f-c61b-40dc-9104-e0720a324d22" name="Note3" type="Note">

<subsheetid>90429413-7792-4513-8bc0-d6d079aa08b9</subsheetid>

<loginhibit/>

```xml
<narrative>Close and clear the connection pool</narrative>

<displayx>150</displayx>

<displayy>-120</displayy>

<displaywidth>120</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>90d7c944-c618-41dd-bfe2-5da022f3353a</onsuccess>

</stage>

<stage stageid="fbf49160-dd35-4922-a2f3-6b17985bfb74" name="Close Success" type="Data">

<subsheetid>90429413-7792-4513-8bc0-d6d079aa08b9</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-30</displayy>

<displaywidth>90</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>flag</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="f81af5a5-7d4a-4f5d-b914-0b008c1273ec" name="Close Message" type="Data">

<subsheetid>90429413-7792-4513-8bc0-d6d079aa08b9</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

</stage>

<stage stageid="cb1901f1-02a7-4e86-8618-cef7a98b283f" name="anchor17" type="Anchor">

<subsheetid>90429413-7792-4513-8bc0-d6d079aa08b9</subsheetid>

<displayy>-75</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>3f4ca0da-93ad-492e-af65-ff637c54b37a</onsuccess>

</stage>

<stage stageid="042dd86c-3c68-4015-83b1-dcf5b036fc90" name="End" type="End">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="flag" name="Success" narrative="Flag indicating success (True) or failure (False)" stage="S

<output type="text" name="Message" narrative="Error message giving detail regarding why this action faile

</outputs>

</stage>

<stage stageid="8fcd4c90-9846-476a-a7f4-05a7edc6e62b" name="End" type="End">

<subsheetid>7ee7ad42-e017-40ff-92aa-3cfc5c6dd0e5</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="flag" name="Success" narrative="Flag indicating success (True) or failure (False)" stage="S

<output type="text" name="Message" narrative="Error message giving detail regarding why this action faile

</outputs>

</stage>

<stage stageid="dd554ab9-61de-4d37-bee5-c25e1a5c74f1" name="End" type="End">

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="flag" name="Success" narrative="Flag indicating success (True) or failure (False)" stage="S

<output type="text" name="Message" narrative="Error message giving detail regarding why this action faile

</outputs>

</stage>

<stage stageid="9ccac2c0-2efd-4399-8d02-c71ac4d7e812" name="End" type="End">

<subsheetid>ba712d56-697c-48af-bc96-85e49eb968fc</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="flag" name="Success" narrative="Flag indicating success (True) or failure (False)" stage="S

<output type="text" name="Message" narrative="Error message giving detail regarding why this action faile

</outputs>

</stage>

```xml
<stage stageid="b17027f1-8559-430b-9f36-724b3097e487" name="End" type="End">

<subsheetid>4b6e35c6-8ec4-4fbe-b9d7-d43c48492695</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>120</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="flag" name="Success" narrative="Flag indicating success (True) or failure (False)" stage="S

<output type="text" name="Message" narrative="Error message giving detail regarding why this action faile

</outputs>

</stage>

<stage stageid="7906b7ac-88bd-4971-991d-46bf74ab7207" name="End" type="End">

<subsheetid>c07ae8a2-a04f-46f2-8919-ec4da73d5b25</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>-15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="flag" name="Success" narrative="Flag indicating success (True) or failure (False)" stage="S
```

```xml
<output type="text" name="Message" narrative="Error message giving detail regarding why this action faile
</outputs>
</stage>
</process>
<process name="Data Type Casting Utilities" version="1.0" bpversion="7.2.0.5139" narrative="asdf" byrefc
<appdef>
<element name="Application Root">
<id>cbec92c5-ee19-4dea-abe5-0a6500bba57c</id>
<type>Application</type>
<basetype>Application</basetype>
<datatype>unknown</datatype>
<diagnose>False</diagnose>
</element>
</appdef>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
</view>
<preconditions/>
<endpoint narrative=""/>
<subsheet subsheetid="d06dc048-5d1e-4be3-ad33-596ee2a7479a" type="CleanUp" published="True">
<name>Clean Up</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom version="2">1.25</zoom>
```

</view>

</subsheet>

<subsheet subsheetid="b22d18f5-9b50-4bd9-873f-c1616fa0642b" type="Normal" published="True">

<name>Get Text Output</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="907afcdd-3a70-4498-9de3-49f10d45fa59" type="Normal" published="True">

<name>Get Number Output</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="a8ca5469-a7d0-4988-934b-e984b317ef77" type="Normal" published="True">

<name>Get Flag Output</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="61198e61-ca40-4639-8e8e-2ce9a23f775c" type="Normal" published="True">

```xml
<name>Get Password Output</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="13d5d862-34b1-47ed-9858-a9b98671f40b" type="Normal" published="True">

<name>Get Date Output</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="9c45ffbb-baa8-480c-949f-3c80b13a530d" type="Normal" published="True">

<name>Get DateTime Output</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="0c2c0fcb-ef91-4fae-b2e9-403cf749d76b" type="Normal" published="True">

<name>Get Time Output</name>

<view>

<camerax>0</camerax>
```

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<subsheet subsheetid="465fc657-7e1f-4405-9469-ded2b7030a57" type="Normal" published="True">

<name>Get Timespan Output</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom version="2">1.25</zoom>

</view>

</subsheet>

<stage stageid="8f352e9e-b337-4096-b072-2d49239be3c8" name="Start" type="Start">

<loginhibit/>

<display x="15" y="-105"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>367cac45-6c9b-4960-848d-a9dbf7c7463c</onsuccess>

</stage>

<stage stageid="367cac45-6c9b-4960-848d-a9dbf7c7463c" name="End" type="End">

<loginhibit/>

<display x="15" y="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="2776d394-a6fc-491a-bc3b-3f8799a08565" name="Stage1" type="ProcessInfo">

<display x="-195" y="-105" w="150" h="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<references>

<reference>System.Data.dll</reference>

<reference>System.Xml.dll</reference>

<reference>System.Drawing.dll</reference>

</references>

<imports>

<import>System</import>

<import>System.Drawing</import>

</imports>

<language>visualbasic</language>

<code></code>

</stage>

<stage stageid="4427533e-1300-4266-8ed9-ff3aeb2ad39a" name="Clean Up" type="SubSheetInfo">

<subsheetid>d06dc048-5d1e-4be3-ad33-596ee2a7479a</subsheetid>

<display x="-195" y="-105" w="150" h="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="4a31bd9c-72a1-46bb-8a5f-db6e5e9d5446" name="Start" type="Start">

<subsheetid>d06dc048-5d1e-4be3-ad33-596ee2a7479a</subsheetid>

<display x="15" y="-105"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>715a1ec4-2963-4837-966b-51254f9a2b99</onsuccess>

</stage>

<stage stageid="715a1ec4-2963-4837-966b-51254f9a2b99" name="End" type="End">

<display x="15" y="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="f073bf94-1bee-42f4-94d6-239a30267587" name="Get Text Output" type="SubSheetInfo">

<subsheetid>b22d18f5-9b50-4bd9-873f-c1616fa0642b</subsheetid>

<display x="-195" y="-105" w="150" h="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="e8de6792-909b-4ea5-a516-9465c1592e91" name="Start" type="Start">

<subsheetid>b22d18f5-9b50-4bd9-873f-c1616fa0642b</subsheetid>

<loginhibit/>

<display x="15" y="-105"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>d27a6d34-221e-434f-b42f-362ffeabc0f8</onsuccess>

</stage>

<stage stageid="191a5cc5-5640-412f-8b52-840bf2cbb747" name="End" type="End">

<subsheetid>b22d18f5-9b50-4bd9-873f-c1616fa0642b</subsheetid>

<loginhibit/>

<display x="15" y="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

```
<output type="text" name="Text Flag" stage="Text Flag"/>

<output type="text" name="Text Password" stage="Text Password"/>

</outputs>

</stage>

<stage stageid="e90523fb-4bbf-49dc-9995-8cf2190430bf" name="new" type="Note">

<subsheetid>d06dc048-5d1e-4be3-ad33-596ee2a7479a</subsheetid>

<narrative>Clean Up Page


This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your


The cleanup action will be called automatically immediately after closing your business object at the end of


You will not be able to call this action from a business process, nor will it be called at any other time than be

<display x="-180" y="60" w="180" h="230"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="a32442f4-e123-4bd5-986a-6167e3897612" name="new" type="Note">

<narrative>Initialise Page


This is an optional page where you might choose to perform some initialisation tasks after your business ob


The initialise action will be called automatically immediately after loading your business object.


You will not be able to call this action from a business process, nor will it be called at any other time than a

<display x="-180" y="60" w="180" h="230"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>
```

```xml
<stage stageid="d27a6d34-221e-434f-b42f-362ffeabc0f8" name="Multi1" type="MultipleCalculation">
<subsheetid>b22d18f5-9b50-4bd9-873f-c1616fa0642b</subsheetid>
<loginhibit/>
<display x="15" y="0"/>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>191a5cc5-5640-412f-8b52-840bf2cbb747</onsuccess>
<steps>
<calculation expression="&amp;quot;hello&amp;quot;" stage="Text Text"/>
<calculation expression="&amp;quot;56&amp;quot;" stage="Text Number"/>
<calculation expression="&amp;quot;13:57&amp;quot;" stage="Text Time"/>
<calculation expression="&amp;quot;0.1:2:34&amp;quot;" stage="Text TimeSpan"/>
<calculation expression="&amp;quot;2010-12-25&amp;quot;" stage="Text Date"/>
<calculation expression="&amp;quot;2010-12-25T12:34Z&amp;quot;" stage="Text DateTime"/>
<calculation expression="&amp;quot;False&amp;quot;" stage="Text Flag"/>
<calculation expression="&amp;quot;secret&amp;quot;" stage="Text Password"/>
</steps>
</stage>
<stage stageid="baa5d198-f297-49ea-a4d1-240de9982b71" name="Text Password" type="Data">
<subsheetid>b22d18f5-9b50-4bd9-873f-c1616fa0642b</subsheetid>
<display x="90" y="0"/>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>text</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
<stage stageid="b0cd50f8-0a51-4005-982c-209ef8703415" name="Text Flag" type="Data">
```

```xml
<subsheetid>b22d18f5-9b50-4bd9-873f-c1616fa0642b</subsheetid>

<display x="90" y="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="3c5b683e-6cfe-4633-ba00-12c13b403e06" name="Text DateTime" type="Data">

<subsheetid>b22d18f5-9b50-4bd9-873f-c1616fa0642b</subsheetid>

<display x="165" y="0"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="3af09f84-6d4a-44d2-8faf-20f8661b9984" name="Text Date" type="Data">

<subsheetid>b22d18f5-9b50-4bd9-873f-c1616fa0642b</subsheetid>

<display x="90" y="45"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="0ab8c126-d03c-4762-8f7a-b895e7e41786" name="Text TimeSpan" type="Data">
```

<subsheetid>b22d18f5-9b50-4bd9-873f-c1616fa0642b</subsheetid>

<display x="90" y="-45"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="b1ac203d-8ae8-42ad-857a-0bee2fcadc97" name="Text Time" type="Data">

<subsheetid>b22d18f5-9b50-4bd9-873f-c1616fa0642b</subsheetid>

<display x="240" y="0"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="db6ac8a9-90ee-4236-81c3-151021e20185" name="Text Number" type="Data">

<subsheetid>b22d18f5-9b50-4bd9-873f-c1616fa0642b</subsheetid>

<display x="165" y="45"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="779341fc-1204-436c-b3d2-79940c1b98d7" name="Text Text" type="Data">

```xml
<subsheetid>b22d18f5-9b50-4bd9-873f-c1616fa0642b</subsheetid>

<display x="165" y="-45"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="ffedd9f2-16be-49f7-ae58-8360a937538f" name="Get Number Output" type="SubSheetInf

<subsheetid>907afcdd-3a70-4498-9de3-49f10d45fa59</subsheetid>

<display x="-195" y="-105" w="150" h="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="857ac7fd-3735-4b58-9c00-673c566cdbf3" name="Start" type="Start">

<subsheetid>907afcdd-3a70-4498-9de3-49f10d45fa59</subsheetid>

<loginhibit/>

<display x="15" y="-105"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>93c1f554-b046-48cf-8df8-178398c58223</onsuccess>

</stage>

<stage stageid="db7937b2-ec55-4f47-9070-3bf13d778270" name="End" type="End">

<subsheetid>907afcdd-3a70-4498-9de3-49f10d45fa59</subsheetid>

<loginhibit/>

<display x="15" y="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="number" name="Number Text" stage="Number Text"/>
```

</outputs>

</stage>

<stage stageid="b3c5cace-a7e3-4f15-8d93-85b8f2a9df6c" name="Get Flag Output" type="SubSheetInfo">

<subsheetid>a8ca5469-a7d0-4988-934b-e984b317ef77</subsheetid>

<display x="-195" y="-105" w="150" h="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="8596926c-c74b-47a6-9cda-119aad273e87" name="Start" type="Start">

<subsheetid>a8ca5469-a7d0-4988-934b-e984b317ef77</subsheetid>

<display x="15" y="-105"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>39c64a8e-6a4e-490e-b3d1-98b689e37729</onsuccess>

</stage>

<stage stageid="9cf45523-25d7-4f50-8e0d-c6c8483f13f3" name="End" type="End">

<subsheetid>a8ca5469-a7d0-4988-934b-e984b317ef77</subsheetid>

<display x="15" y="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="93c1f554-b046-48cf-8df8-178398c58223" name="Multi2" type="MultipleCalculation">

```xml
<loginhibit/>

<display x="15" y="-15"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>db7937b2-ec55-4f47-9070-3bf13d778270</onsuccess>

<steps>

<calculation expression="23" stage="Number Number"/>

<calculation expression="12" stage="Number Text"/>

</steps>

</stage>

<stage stageid="afa6b396-1fb8-4688-89a6-502ca22123ec" name="Number Number" type="Data">

<subsheetid>907afcdd-3a70-4498-9de3-49f10d45fa59</subsheetid>

<display x="90" y="-15"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="7e933065-c6e2-4cfc-9362-45e8bb0eb66e" name="Number Text" type="Data">

<subsheetid>907afcdd-3a70-4498-9de3-49f10d45fa59</subsheetid>

<display x="150" y="-15"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>number</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>
```

```xml
<stage stageid="39c64a8e-6a4e-490e-b3d1-98b689e37729" name="Multi3" type="MultipleCalculation">
<subsheetid>a8ca5469-a7d0-4988-934b-e984b317ef77</subsheetid>
<loginhibit/>
<display x="15" y="-15"/>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>9cf45523-25d7-4f50-8e0d-c6c8483f13f3</onsuccess>
<steps>
<calculation expression="True" stage="Flag Flag"/>
<calculation expression="False" stage="Flag Text"/>
</steps>
</stage>
<stage stageid="d1de10bf-a027-4693-90b5-a420b70664f7" name="Flag Flag" type="Data">
<subsheetid>a8ca5469-a7d0-4988-934b-e984b317ef77</subsheetid>
<display x="90" y="-15"/>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>flag</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
<stage stageid="35b31c70-a4fc-46c2-a253-0632a5bccc27" name="Flag Text" type="Data">
<subsheetid>a8ca5469-a7d0-4988-934b-e984b317ef77</subsheetid>
<display x="165" y="-15"/>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>flag</datatype>
<initialvalue/>
<private/>
```

</stage>

<stage stageid="0bf2d4fb-411d-4bff-bfb8-0400cfe184e8" name="Get Password Output" type="SubSheetIr

<subsheetid>61198e61-ca40-4639-8e8e-2ce9a23f775c</subsheetid>

<display x="-195" y="-105" w="150" h="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="fb8dc416-29d6-43a0-9f31-97eceba0a9c3" name="Start" type="Start">

<subsheetid>61198e61-ca40-4639-8e8e-2ce9a23f775c</subsheetid>

<display x="15" y="-105"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>1aed3785-a4fe-4670-a0d6-1f54a6c804ae</onsuccess>

</stage>

<stage stageid="6a56f2ce-9351-428a-a5e6-01e486e60d76" name="End" type="End">

<subsheetid>61198e61-ca40-4639-8e8e-2ce9a23f775c</subsheetid>

<display x="15" y="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="1aed3785-a4fe-4670-a0d6-1f54a6c804ae" name="Multi4" type="MultipleCalculation">

<subsheetid>61198e61-ca40-4639-8e8e-2ce9a23f775c</subsheetid>

<display x="15" y="-15"/>

```xml
<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>6a56f2ce-9351-428a-a5e6-01e486e60d76</onsuccess>

<steps>

<calculation expression="&amp;quot;secret&amp;quot;" stage="Password Password"/>

</steps>

</stage>

<stage stageid="6c431c44-ce43-48ac-8550-53c6f2c38ad2" name="Password Password" type="Data">

<subsheetid>61198e61-ca40-4639-8e8e-2ce9a23f775c</subsheetid>

<display x="90" y="-15"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>password</datatype>

<initialvalueenc>

</initialvalueenc>

<private/>

<alwaysinit/>

</stage>

<stage stageid="0f1c42f4-0003-4db9-b14a-9ecdc791583d" name="Get Date Output" type="SubSheetInfo"

<subsheetid>13d5d862-34b1-47ed-9858-a9b98671f40b</subsheetid>

<display x="-195" y="-105" w="150" h="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="007777b5-f148-488e-aec9-858559e14e9f" name="Start" type="Start">

<subsheetid>13d5d862-34b1-47ed-9858-a9b98671f40b</subsheetid>

<loginhibit/>

<display x="15" y="-105"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>c302b0b7-a5ee-4ffe-9d2b-8625ad59bc36</onsuccess>
```

```xml
</stage>

<stage stageid="3b2066c0-3b58-4969-b100-db52776c8d1e" name="End" type="End">

<subsheetid>13d5d862-34b1-47ed-9858-a9b98671f40b</subsheetid>

<loginhibit/>

<display x="15" y="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="date" name="Date Date" stage="Date Date"/>

<output type="date" name="Date Text" stage="Date Text"/>

<output type="date" name="Date DateTime" stage="Date DateTime"/>

</outputs>

</stage>

<stage stageid="c302b0b7-a5ee-4ffe-9d2b-8625ad59bc36" name="Multi5" type="MultipleCalculation">

<subsheetid>13d5d862-34b1-47ed-9858-a9b98671f40b</subsheetid>

<loginhibit/>

<display x="15" y="-15"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>3b2066c0-3b58-4969-b100-db52776c8d1e</onsuccess>

<steps>

<calculation expression="MakeDate(1,2,2003)" stage="Date Date"/>

<calculation expression="MakeDate(1,2,2003)" stage="Date Text"/>

<calculation expression="MakeDate(1,2,2003)" stage="Date DateTime"/>

</steps>

</stage>

<stage stageid="1f1bbd32-f4c6-4bed-81ed-0caeb6539131" name="Date Date" type="Data">

<subsheetid>13d5d862-34b1-47ed-9858-a9b98671f40b</subsheetid>

<display x="90" y="-15"/>
```

```
<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>date</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="d8b2e853-0eaa-4122-88fb-aaa312a54a69" name="Date Text" type="Data">

<subsheetid>13d5d862-34b1-47ed-9858-a9b98671f40b</subsheetid>

<display x="150" y="-15"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>date</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="00a75871-25dd-4c85-92b5-3dc4dc666246" name="Date DateTime" type="Data">

<subsheetid>13d5d862-34b1-47ed-9858-a9b98671f40b</subsheetid>

<display x="210" y="-15"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>date</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="56671b97-9c55-447a-b2ed-a8814caf4542" name="Get DateTime Output" type="SubShe

<subsheetid>9c45ffbb-baa8-480c-949f-3c80b13a530d</subsheetid>

<display x="-195" y="-105" w="150" h="90"/>
```

```xml
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="5551cce1-b68a-4c21-af32-a6e6e209aae8" name="Start" type="Start">
<subsheetid>9c45ffbb-baa8-480c-949f-3c80b13a530d</subsheetid>
<loginhibit/>
<display x="15" y="-105"/>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>9227309a-54b9-4ed9-a72a-a9ddce03e680</onsuccess>
</stage>
<stage stageid="481ee9e5-231b-4d3d-802b-eb3a85c2cd87" name="End" type="End">
<subsheetid>9c45ffbb-baa8-480c-949f-3c80b13a530d</subsheetid>
<loginhibit/>
<display x="15" y="90"/>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<outputs>
<output type="datetime" name="DateTime DateTime" stage="DateTime DateTime"/>
<output type="datetime" name="DateTime Date" stage="DateTime Date"/>
<output type="datetime" name="DateTime Text" stage="DateTime Text"/>
</outputs>
</stage>
<stage stageid="9227309a-54b9-4ed9-a72a-a9ddce03e680" name="Multi6" type="MultipleCalculation">
<subsheetid>9c45ffbb-baa8-480c-949f-3c80b13a530d</subsheetid>
<loginhibit/>
<display x="15" y="-15"/>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>481ee9e5-231b-4d3d-802b-eb3a85c2cd87</onsuccess>
<steps>
```

```xml
<calculation expression="MakeDateTime(1,2,2003,4,5,6, False)" stage="DateTime DateTime"/>

<calculation expression="MakeDateTime(1,2,2003,4,5,6, False)" stage="DateTime Date"/>

<calculation expression="MakeDateTime(1,2,2003,4,5,6, False)" stage="DateTime Text"/>

</steps>

</stage>

<stage stageid="c3c4a6ba-f714-4ccd-bf9a-fa3692305d1b" name="DateTime Text" type="Data">

<subsheetid>9c45ffbb-baa8-480c-949f-3c80b13a530d</subsheetid>

<display x="90" y="-15"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>datetime</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="4b574969-c231-4f58-aac8-f00f5978d5ee" name="DateTime Date" type="Data">

<subsheetid>9c45ffbb-baa8-480c-949f-3c80b13a530d</subsheetid>

<display x="150" y="-15"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>datetime</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="a0946340-924d-41a5-aab9-16d0eedca1fe" name="DateTime DateTime" type="Data">

<subsheetid>9c45ffbb-baa8-480c-949f-3c80b13a530d</subsheetid>

<display x="210" y="-15"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>
```

<datatype>datetime</datatype>

<initialvalue/>

<private/>

<alwaysinit/>

</stage>

<stage stageid="051ad139-16da-436d-bdca-5511b827eb78" name="Get Time Output" type="SubSheetInf

<subsheetid>0c2c0fcb-ef91-4fae-b2e9-403cf749d76b</subsheetid>

<display x="-195" y="-105" w="150" h="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="81ab891c-2338-4307-92e8-e2725f7ca6fb" name="Start" type="Start">

<subsheetid>0c2c0fcb-ef91-4fae-b2e9-403cf749d76b</subsheetid>

<loginhibit/>

<display x="15" y="-105"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>d6925ac4-99a6-4f4b-b230-0c838a03f4e4</onsuccess>

</stage>

<stage stageid="82bcccab-5bfb-4bf9-ad8a-be6162175515" name="End" type="End">

<subsheetid>0c2c0fcb-ef91-4fae-b2e9-403cf749d76b</subsheetid>

<loginhibit/>

<display x="15" y="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

</outputs>

</stage>

```xml
<stage stageid="d6925ac4-99a6-4f4b-b230-0c838a03f4e4" name="Multi7" type="MultipleCalculation">
<subsheetid>0c2c0fcb-ef91-4fae-b2e9-403cf749d76b</subsheetid>
<loginhibit/>
<display x="15" y="-15"/>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>82bcccab-5bfb-4bf9-ad8a-be6162175515</onsuccess>
<steps>
<calculation expression="LocalTime()" stage="Time Time"/>
<calculation expression="LocalTime()" stage="Time Text"/>
</steps>
</stage>
<stage stageid="7286ca02-a1b9-4b44-9967-b32b1d83b8f1" name="Time Time" type="Data">
<subsheetid>0c2c0fcb-ef91-4fae-b2e9-403cf749d76b</subsheetid>
<display x="90" y="-15"/>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>time</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
<stage stageid="76ad99f9-c4a6-484d-92c3-3f5cf0671582" name="Time Text" type="Data">
<subsheetid>0c2c0fcb-ef91-4fae-b2e9-403cf749d76b</subsheetid>
<display x="150" y="-15"/>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>time</datatype>
<initialvalue/>
<private/>
```

</stage>

<stage stageid="e1e4e96a-63ac-4689-af00-d1e32546defb" name="Get Timespan Output" type="SubShee

<subsheetid>465fc657-7e1f-4405-9469-ded2b7030a57</subsheetid>

<display x="-195" y="-105" w="150" h="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="6471e968-913e-44fd-9cb0-e264ad2d2be8" name="Start" type="Start">

<subsheetid>465fc657-7e1f-4405-9469-ded2b7030a57</subsheetid>

<display x="15" y="-105"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>0cb1c9d3-6d77-4780-84f1-d43bd7700abc</onsuccess>

</stage>

<stage stageid="9a3d85ed-e82b-43b2-8a57-05f0d56892e2" name="End" type="End">

<subsheetid>465fc657-7e1f-4405-9469-ded2b7030a57</subsheetid>

<display x="15" y="90"/>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="0cb1c9d3-6d77-4780-84f1-d43bd7700abc" name="Multi8" type="MultipleCalculation">

```xml
<display x="15" y="-15"/>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>9a3d85ed-e82b-43b2-8a57-05f0d56892e2</onsuccess>
<steps>
<calculation expression="MakeTimeSpan(1,2,3,4,5)" stage="TimeSpan TimeSpan"/>
<calculation expression="MakeTimeSpan(1,2,3,4,5)" stage="TimeSpan Text"/>
</steps>
</stage>
<stage stageid="2dfef2a2-261b-4560-9b18-38cc648c64c2" name="TimeSpan TimeSpan" type="Data">
<subsheetid>465fc657-7e1f-4405-9469-ded2b7030a57</subsheetid>
<display x="90" y="-15"/>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>timespan</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
<stage stageid="8cec09bd-6f2a-46d7-917c-2139b91437f0" name="TimeSpan Text" type="Data">
<subsheetid>465fc657-7e1f-4405-9469-ded2b7030a57</subsheetid>
<display x="150" y="-15"/>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>timespan</datatype>
<initialvalue/>
<private/>
<alwaysinit/>
</stage>
</process>
```

<process name="DataGrid Test App" version="1.0" narrative="Business object for the DataGrid test app" ty

<appdef>

<element name="DataGrid Test App">

<type>Application</type>

<basetype>Application</basetype>

<id>8fa30d91-fcbd-4879-907b-94cfe9744560</id>

<datatype>unknown</datatype>

<diagnose>False</diagnose>

<element name="Main Window">

<type>Window</type>

<basetype>Window</basetype>

<id>a63329ce-84d7-4fde-925d-93a0eeda76bb</id>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value="Datagrid"/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="WindowsForms10.Window"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X">

<ProcessValue datatype="number" value="44"/>

</attribute>

```xml
<attribute name="Y">
<ProcessValue datatype="number" value="44"/>
</attribute>
<attribute name="Width">
<ProcessValue datatype="number" value="599"/>
</attribute>
<attribute name="Height">
<ProcessValue datatype="number" value="397"/>
</attribute>
<attribute name="Visible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="ScreenVisible" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="2"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="4"/>
</attribute>
```

```xml
</attributes>

<element name="DataGrid">

<type>DataGrid</type>

<basetype>Window</basetype>

<id>0d6075c1-6d9b-43ca-aef5-3e484f3e2561</id>

<datatype>text</datatype>

<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="WindowsForms10.Window"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X" inuse="True">

<ProcessValue datatype="number" value="12"/>

</attribute>

<attribute name="Y" inuse="True">

<ProcessValue datatype="number" value="32"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="269"/>

</attribute>

<attribute name="Height">
```
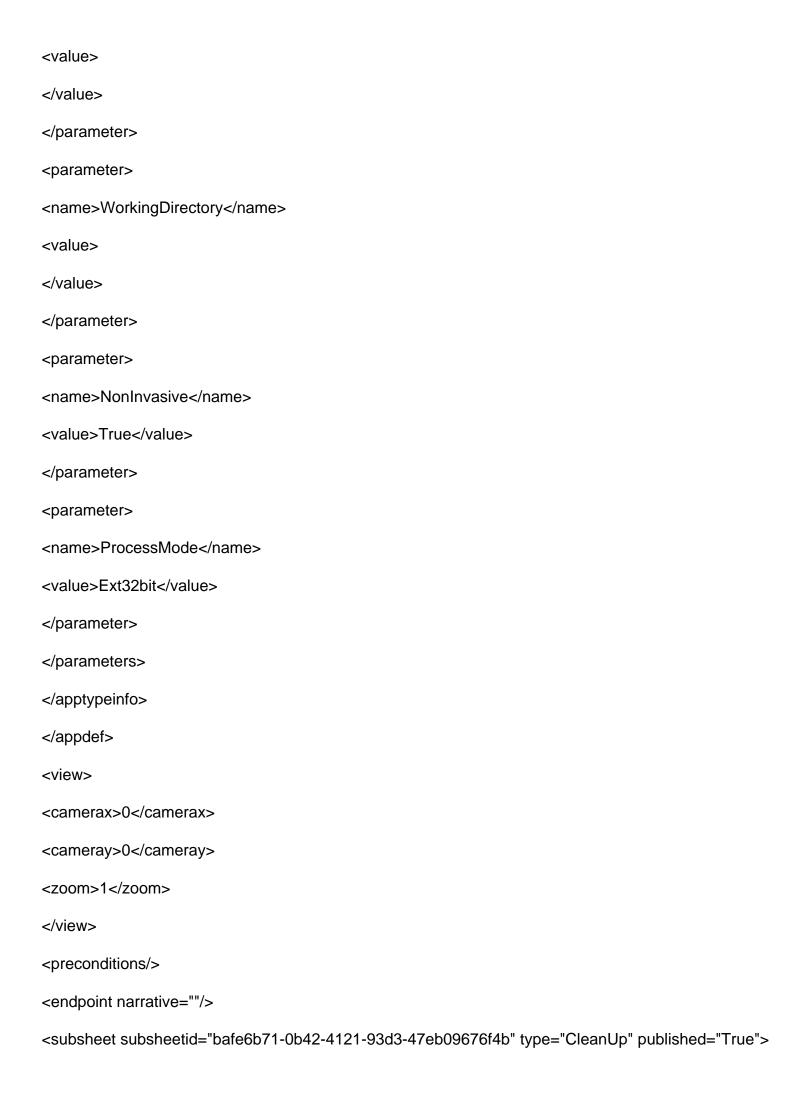
```xml
<ProcessValue datatype="number" value="250"/>

</attribute>

<attribute name="Visible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="ScreenVisible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Enabled" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="Active">

<ProcessValue datatype="flag" value="False"/>

</attribute>

<attribute name="Ordinal">

<ProcessValue datatype="number" value="4"/>

</attribute>

<attribute name="ChildCount">

<ProcessValue datatype="number" value="1"/>

</attribute>

<attribute name="pWindowText" inuse="True">

<ProcessValue datatype="text" value="Datagrid"/>

</attribute>

<attribute name="pCtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="pX">
```

```xml
<ProcessValue datatype="number" value="44"/>

</attribute>

<attribute name="pY">

<ProcessValue datatype="number" value="44"/>

</attribute>

<attribute name="pWidth">

<ProcessValue datatype="number" value="599"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="number" value="397"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="4"/>

</attribute>

</attributes>

</element>

<element name="DataGridView">

<type>DataGridView</type>

<basetype>Window</basetype>

<id>9bac62c6-5166-417d-a6db-717ddbe64ade</id>

<datatype>text</datatype>
```

```xml
<diagnose>False</diagnose>

<attributes>

<attribute name="WindowText" inuse="True">

<ProcessValue datatype="text" value=""/>

</attribute>

<attribute name="ClassName" inuse="True">

<ProcessValue datatype="text" value="WindowsForms10.Window"/>

</attribute>

<attribute name="CtrlID">

<ProcessValue datatype="number" value="0"/>

</attribute>

<attribute name="X" inuse="True">

<ProcessValue datatype="number" value="296"/>

</attribute>

<attribute name="Y" inuse="True">

<ProcessValue datatype="number" value="32"/>

</attribute>

<attribute name="Width">

<ProcessValue datatype="number" value="283"/>

</attribute>

<attribute name="Height">

<ProcessValue datatype="number" value="250"/>

</attribute>

<attribute name="Visible" inuse="True">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="ScreenVisible" inuse="True">
```

```xml
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Enabled" inuse="True">
<ProcessValue datatype="flag" value="True"/>
</attribute>
<attribute name="Active">
<ProcessValue datatype="flag" value="False"/>
</attribute>
<attribute name="Ordinal">
<ProcessValue datatype="number" value="3"/>
</attribute>
<attribute name="ChildCount">
<ProcessValue datatype="number" value="1"/>
</attribute>
<attribute name="pWindowText" inuse="True">
<ProcessValue datatype="text" value="Datagrid"/>
</attribute>
<attribute name="pCtrlID">
<ProcessValue datatype="number" value="0"/>
</attribute>
<attribute name="pX">
<ProcessValue datatype="number" value="44"/>
</attribute>
<attribute name="pY">
<ProcessValue datatype="number" value="44"/>
</attribute>
<attribute name="pWidth">
```

```xml
<ProcessValue datatype="number" value="599"/>

</attribute>

<attribute name="pHeight">

<ProcessValue datatype="number" value="397"/>

</attribute>

<attribute name="pActive">

<ProcessValue datatype="flag" value="True"/>

</attribute>

<attribute name="pOrdinal">

<ProcessValue datatype="number" value="2"/>

</attribute>

<attribute name="pChildCount">

<ProcessValue datatype="number" value="4"/>

</attribute>

</attributes>

</element>

</element>

</element>

<apptypeinfo>

<id>Win32Launch</id>

<parameters>

<parameter>

<name>Path</name>

<value>C:\BluePrism\QA\Code\Datagrid\bin\Debug\Datagrid.exe</value>

</parameter>

<parameter>

<name>CommandLineParams</name>
```

```xml
<value>

</value>

</parameter>

<parameter>

<name>WorkingDirectory</name>

<value>

</value>

</parameter>

<parameter>

<name>NonInvasive</name>

<value>True</value>

</parameter>

<parameter>

<name>ProcessMode</name>

<value>Ext32bit</value>

</parameter>

</parameters>

</apptypeinfo>

</appdef>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom>1</zoom>

</view>

<preconditions/>

<endpoint narrative=""/>

<subsheet subsheetid="bafe6b71-0b42-4121-93d3-47eb09676f4b" type="CleanUp" published="True">
```

```xml
<name>Clean Up</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom>1</zoom>
</view>
</subsheet>
<subsheet subsheetid="55de81b1-d238-44b9-9ee3-54592b5c5a0f" type="Normal" published="True">
<name>Launch</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom>1</zoom>
</view>
</subsheet>
<subsheet subsheetid="9a18539a-3a8a-4402-933c-85f1c820a27a" type="Normal" published="True">
<name>Read DataGrid</name>
<view>
<camerax>0</camerax>
<cameray>0</cameray>
<zoom>1</zoom>
</view>
</subsheet>
<subsheet subsheetid="28d86360-077e-4d36-9cc7-748113147a76" type="Normal" published="True">
<name>Read DataGridView</name>
<view>
<camerax>0</camerax>
```

```xml
<cameray>0</cameray>

<zoom>1</zoom>

</view>

</subsheet>

<subsheet subsheetid="4bf4c265-1323-49c8-b67d-46376ed6b80a" type="Normal" published="True">

<name>Exit</name>

<view>

<camerax>0</camerax>

<cameray>0</cameray>

<zoom>1</zoom>

</view>

</subsheet>

<stage stageid="f367cb20-aa43-4de2-986a-4044893addb9" name="Start" type="Start">

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-105</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>ba585972-9a2e-4ddf-9a06-3b2d2cf23665</onsuccess>

</stage>

<stage stageid="ba585972-9a2e-4ddf-9a06-3b2d2cf23665" name="End" type="End">

<loginhibit/>

<narrative>

</narrative>
```

```xml
<displayx>15</displayx>
<displayy>90</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="b24b6a9c-65a6-4e25-917d-bb472c7efc27" name="Stage1" type="ProcessInfo">
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-105</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<references>
<reference>System.Data.dll</reference>
<reference>System.Xml.dll</reference>
<reference>System.Drawing.dll</reference>
</references>
<imports>
<import>System</import>
<import>System.Drawing</import>
</imports>
<language>visualbasic</language>
<globalcode></globalcode>
<code></code>
</stage>
```

```xml
<stage stageid="c995fb6f-3b73-40de-a91d-31aee43f9f6e" name="Clean Up" type="SubSheetInfo">
<subsheetid>bafe6b71-0b42-4121-93d3-47eb09676f4b</subsheetid>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-105</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="3736f6f5-08e4-4267-8c24-d575d76112ec" name="Start" type="Start">
<subsheetid>bafe6b71-0b42-4121-93d3-47eb09676f4b</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>473f59c7-01ee-4a2d-9fc3-2be88ead3d71</onsuccess>
</stage>
<stage stageid="473f59c7-01ee-4a2d-9fc3-2be88ead3d71" name="End" type="End">
<subsheetid>bafe6b71-0b42-4121-93d3-47eb09676f4b</subsheetid>
<loginhibit/>
<narrative>
</narrative>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="db7e98ac-4eb7-4211-88be-4659446a20c1" name="Launch" type="SubSheetInfo">

<subsheetid>55de81b1-d238-44b9-9ee3-54592b5c5a0f</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="7f7d37f9-b591-4820-bc97-9db80016caec" name="Start" type="Start">

<subsheetid>55de81b1-d238-44b9-9ee3-54592b5c5a0f</subsheetid>

<displayy>-105</displayy>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

```
</stage>

<stage stageid="0a4df6c8-6f26-49f6-a600-602ccdd5afc7" name="End" type="End">

<subsheetid>55de81b1-d238-44b9-9ee3-54592b5c5a0f</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="08ef96be-bd81-4cbe-aab8-40ddd2477928" name="new" type="Note">

<subsheetid>bafe6b71-0b42-4121-93d3-47eb09676f4b</subsheetid>

<narrative>Clean Up Page


This is an optional page where you might choose to perform some finalisation (or "cleanup") tasks as your


The cleanup action will be called automatically immediately after closing your business object at the end of


You will not be able to call this action from a business process, nor will it be called at any other time than be

<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>
```

```
<stage stageid="908a0b8e-6daf-4a7e-8b73-036e21b28e73" name="new" type="Note">

<narrative>Initialise Page


This is an optional page where you might choose to perform some initialisation tasks after your business of


The initialise action will be called automatically immediately after loading your business object.


You will not be able to call this action from a business process, nor will it be called at any other time than a

<displayx>-180</displayx>

<displayy>60</displayy>

<displaywidth>180</displaywidth>

<displayheight>230</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="62449360-8a41-4a8b-97c4-0f8a673ee302" name="Launch" type="Navigate">

<subsheetid>55de81b1-d238-44b9-9ee3-54592b5c5a0f</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-45</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>112287ed-6ef2-44b8-92e0-013da01baa17</onsuccess>

<step>

<element id="8fa30d91-fcbd-4879-907b-94cfe9744560"/>
```

```xml
<action>
<id>Launch</id>
<arguments>
<argument>
<id>Path</id>
<value>[QA Root] &amp;amp; "\Code\Datagrid\bin\Debug\Datagrid.exe"</value>
</argument>
<argument>
<id>CommandLineParams</id>
<value>
</value>
</argument>
<argument>
<id>WorkingDirectory</id>
<value>
</value>
</argument>
<argument>
<id>NonInvasive</id>
<value>
</value>
</argument>
<argument>
<id>ProcessMode</id>
<value>
</value>
</argument>
```

```xml
</arguments>
</action>
</step>
</stage>
<stage stageid="47cbe005-89cb-4687-8b27-51ee7f582bbe" name="Time Out1" type="WaitEnd">
<subsheetid>55de81b1-d238-44b9-9ee3-54592b5c5a0f</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>135</displayx>
<displayy>30</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<groupid>0764a517-84ba-4068-adce-4934cd18b776</groupid>
</stage>
<stage stageid="112287ed-6ef2-44b8-92e0-013da01baa17" name="Wait1" type="WaitStart">
<subsheetid>55de81b1-d238-44b9-9ee3-54592b5c5a0f</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>0</displayx>
<displayy>30</displayy>
<displaywidth>30</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<groupid>0764a517-84ba-4068-adce-4934cd18b776</groupid>
```

```xml
<choices>
<choice reply="True">
<name>Main Window Check Exists</name>
<distance>55</distance>
<ontrue>0a4df6c8-6f26-49f6-a600-602ccdd5afc7</ontrue>
<element id="a63329ce-84d7-4fde-925d-93a0eeda76bb"/>
<condition>
<id>CheckExists</id>
</condition>
<comparetype>Equal</comparetype>
</choice>
</choices>
<timeout>45</timeout>
</stage>
<stage stageid="3cf11b30-271f-4660-90db-187f86b07c96" name="Read DataGrid" type="SubSheetInfo">
<subsheetid>9a18539a-3a8a-4402-933c-85f1c820a27a</subsheetid>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-105</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="1d1c26b2-5ce1-462f-ba26-5db5cf5173cc" name="Start" type="Start">
<subsheetid>9a18539a-3a8a-4402-933c-85f1c820a27a</subsheetid>
<loginhibit/>
```

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>1cff7c02-cee6-46a1-9b80-5831f97eb3ba</onsuccess>

</stage>

<stage stageid="6a71d754-f951-48cc-bf4b-53ac771bcedc" name="End" type="End">

<subsheetid>9a18539a-3a8a-4402-933c-85f1c820a27a</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="43d987e6-dfcc-4803-9a16-4226d5f37237" name="Coll1" type="Collection">

```xml
</narrative>
<displayx>180</displayx>
<displayy>30</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<datatype>collection</datatype>
<private/>
<alwaysinit/>
</stage>
<stage stageid="1cff7c02-cee6-46a1-9b80-5831f97eb3ba" name="Reader1" type="Read">
<subsheetid>9a18539a-3a8a-4402-933c-85f1c820a27a</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-30</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>6a71d754-f951-48cc-bf4b-53ac771bcedc</onsuccess>
<step stage="Coll1">
<element id="0d6075c1-6d9b-43ca-aef5-3e484f3e2561"/>
<action>
<id>GetAllItems</id>
</action>
</step>
```

```xml
</stage>
<stage stageid="605b158c-1d49-4817-8bde-66e8c855efaa" name="Read DataGridView" type="SubSheet
<subsheetid>28d86360-077e-4d36-9cc7-748113147a76</subsheetid>
<narrative>
</narrative>
<displayx>-195</displayx>
<displayy>-105</displayy>
<displaywidth>150</displaywidth>
<displayheight>90</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
</stage>
<stage stageid="47bf85e7-cbaf-44e6-b9dd-d6674898a0c7" name="Start" type="Start">
<subsheetid>28d86360-077e-4d36-9cc7-748113147a76</subsheetid>
<loginhibit/>
<narrative>
</narrative>
<displayx>15</displayx>
<displayy>-105</displayy>
<displaywidth>60</displaywidth>
<displayheight>30</displayheight>
<font family="Tahoma" size="10" style="Regular" color="000000"/>
<onsuccess>209e72c9-776a-49c8-9e19-eb0a6f01039d</onsuccess>
</stage>
<stage stageid="107bea61-c1c8-4404-bc2e-aced58aea04f" name="End" type="End">
<subsheetid>28d86360-077e-4d36-9cc7-748113147a76</subsheetid>
<loginhibit/>
<narrative>
```

```xml
</narrative>

<displayx>15</displayx>

<displayy>90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<outputs>

<output type="collection" name="Data" stage="Coll2"/>

</outputs>

</stage>

<stage stageid="b662258c-6226-4efc-a056-56c3127bb6fe" name="Coll2" type="Collection">

<subsheetid>28d86360-077e-4d36-9cc7-748113147a76</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>135</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>collection</datatype>

<private/>

<alwaysinit/>

</stage>

<stage stageid="209e72c9-776a-49c8-9e19-eb0a6f01039d" name="Reader2" type="Read">

<subsheetid>28d86360-077e-4d36-9cc7-748113147a76</subsheetid>

<loginhibit/>
```

<narrative>

</narrative>

<displayx>15</displayx>

<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>107bea61-c1c8-4404-bc2e-aced58aea04f</onsuccess>

<step stage="Coll2">

<element id="9bac62c6-5166-417d-a6db-717ddbe64ade"/>

<action>

<id>GetAllItems</id>

</action>

</step>

</stage>

<stage stageid="7b68f984-0b46-4c7d-84ad-17dfd41f46d4" name="Exit" type="SubSheetInfo">

<subsheetid>4bf4c265-1323-49c8-b67d-46376ed6b80a</subsheetid>

<narrative>

</narrative>

<displayx>-195</displayx>

<displayy>-105</displayy>

<displaywidth>150</displaywidth>

<displayheight>90</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="c24fbd15-0eeb-4eb8-b057-5caecd91e4cc" name="Start" type="Start">

<subsheetid>4bf4c265-1323-49c8-b67d-46376ed6b80a</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>2151887c-ef74-4feb-b4de-2e9f9a41301b</onsuccess>

</stage>

<stage stageid="2743a929-0a79-4c64-83ab-5151c8c7d0ca" name="End" type="End">

<subsheetid>4bf4c265-1323-49c8-b67d-46376ed6b80a</subsheetid>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

</stage>

<stage stageid="2151887c-ef74-4feb-b4de-2e9f9a41301b" name="Terminate" type="Navigate">

```
<displayy>-15</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<onsuccess>2743a929-0a79-4c64-83ab-5151c8c7d0ca</onsuccess>

<step>

<element id="8fa30d91-fcbd-4879-907b-94cfe9744560"/>

<action>

<id>Terminate</id>

</action>

</step>

</stage>

<stage stageid="207a6e82-ba00-4f7a-8496-00c622c44351" name="QA Root" type="Data">

<subsheetid>55de81b1-d238-44b9-9ee3-54592b5c5a0f</subsheetid>

<loginhibit/>

<narrative>

</narrative>

<displayx>165</displayx>

<displayy>-90</displayy>

<displaywidth>60</displaywidth>

<displayheight>30</displayheight>

<font family="Tahoma" size="10" style="Regular" color="000000"/>

<datatype>text</datatype>

<initialvalue xml:space="preserve">H:\automate\qa</initialvalue>

<exposure>Environment</exposure>

<private/>

<alwaysinit/>
```

```
    </stage>

  </process>

</Root>
```