


Used directly, Signal and SignalReceiver provide a simple publication / subscription interface.  
Classes can aggregate signals to declare the events they publish  
PrivateSignal provides elevated access for signal owners  
A Signal authority is generally whatever sent the signal, but may be anything useful, or nothing at all



The SignalController provides a notifier / observer approach to delegation.  
Senders broadcast signals to zero or more receivers.  
A SignalReceiver may be thought of as a Command, with the receive() method functioning as execute()

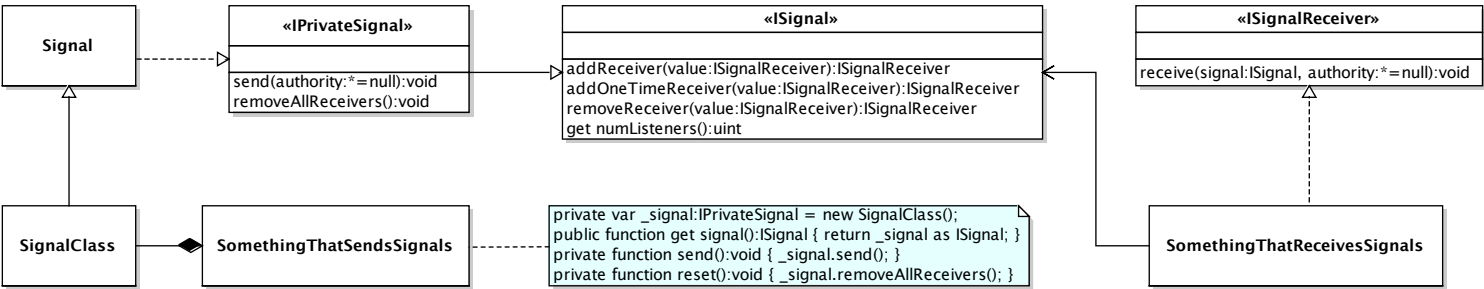