Fibonacci Heaps

Outline for Today

Recap from Last Time

 Quick refresher on binomial heaps and lazy binomial heaps.

The Need for decrease-key

An important operation in many graph algorithms.

Fibonacci Heaps

 A data structure efficiently supporting decreasekey.


Representational Issues


Some of the challenges in Fibonacci heaps.

Recap from Last Time

(Lazy) Binomial Heaps

- Last time, we covered the **binomial heap** and a variant called the **lazy binomial heap**.
- These are priority queue structures designed to support efficient *meld*ing.
- Elements are stored in a collection of **binomial trees**.

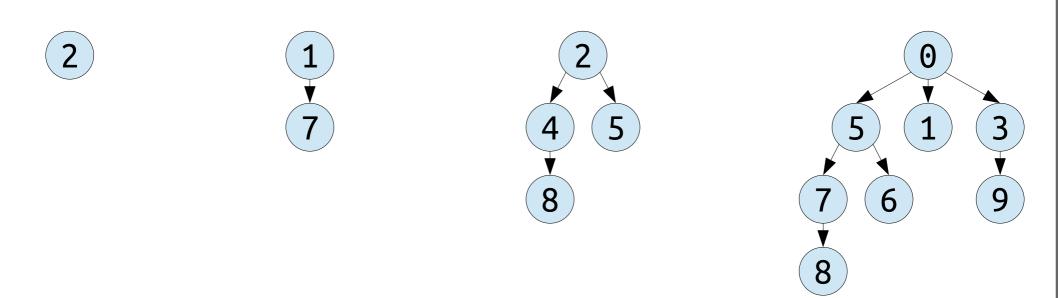

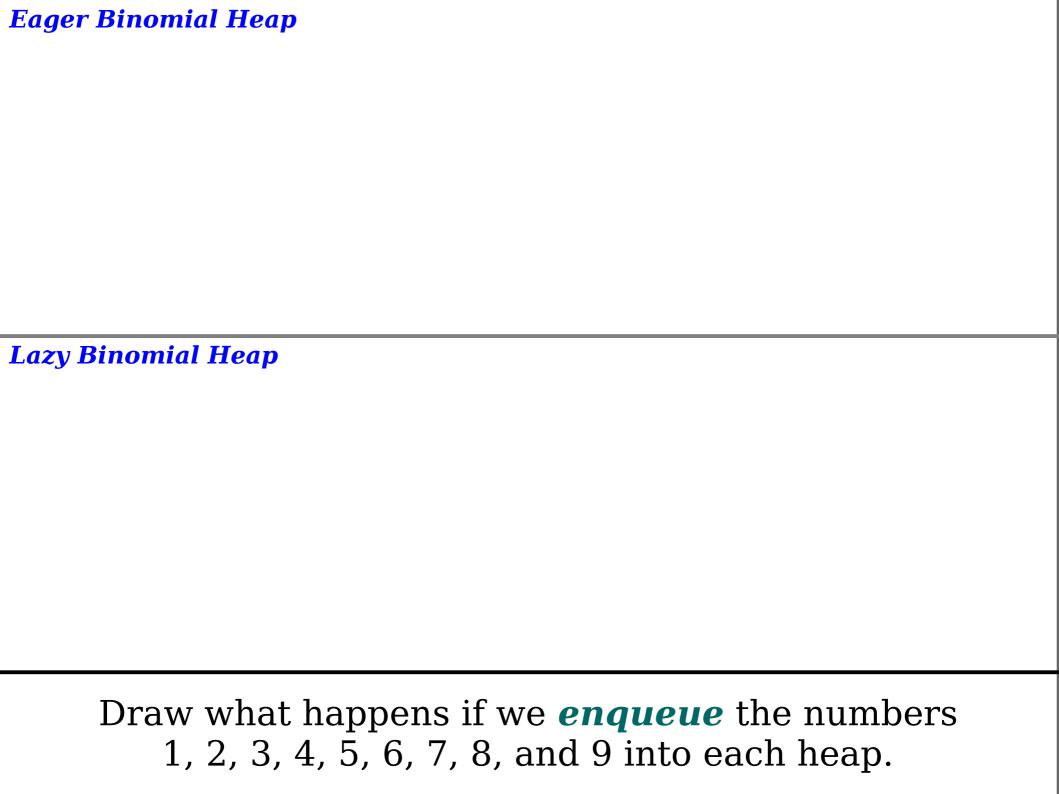

Lazy Binomial Heap

Eager Binomial Heap Lazy Binomial Heap

1 7 2

Lazy Binomial Heap

1 3

Lazy Binomial Heap

1 3

Lazy Binomial Heap


1 3 v 4

Lazy Binomial Heap


1 3

Lazy Binomial Heap


Lazy Binomial Heap




Lazy Binomial Heap




Lazy Binomial Heap




Lazy Binomial Heap




Lazy Binomial Heap




Lazy Binomial Heap




Lazy Binomial Heap




Lazy Binomial Heap




Lazy Binomial Heap




Lazy Binomial Heap




Lazy Binomial Heap




Lazy Binomial Heap



Lazy Binomial Heap




Lazy Binomial Heap




Lazy Binomial Heap

Eager Binomial Heap

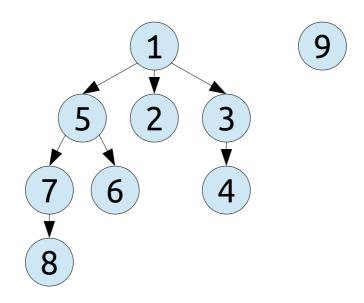


Lazy Binomial Heap

1 2 3 4 5 6 7 8 9

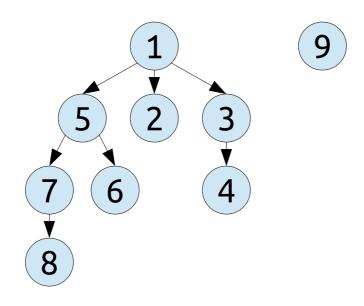


Lazy Binomial Heap

1 2 3 4 5 6 7 8 9

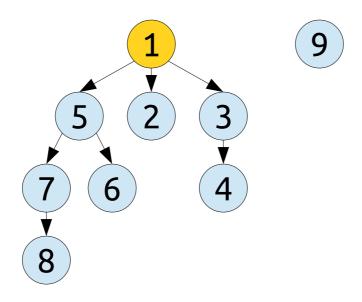


Lazy Binomial Heap

1 2 3 4 5 6 7 8 9




Lazy Binomial Heap

1 2 3 4 5 6 7 8 9

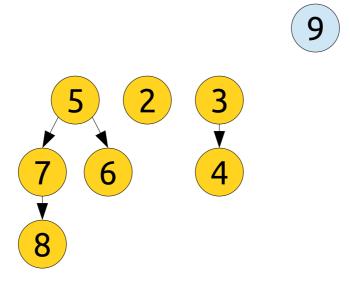


Lazy Binomial Heap

1 2 3 4 5 6 7 8 9

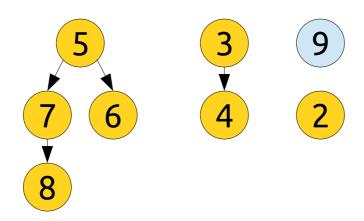


Lazy Binomial Heap

1 2 3 4 5 6 7 8 9

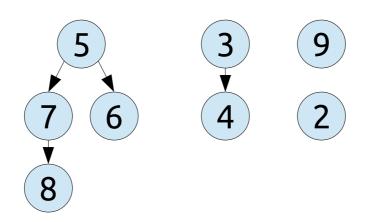


Lazy Binomial Heap

1 2 3 4 5 6 7 8 9

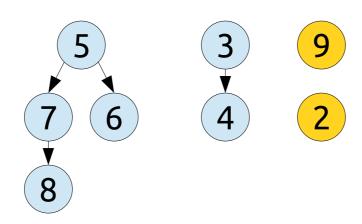


Lazy Binomial Heap



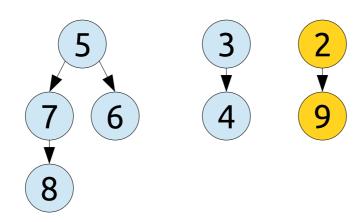


Lazy Binomial Heap

1 2 3 4 5 6 7 8 9




Lazy Binomial Heap

1 2 3 4 5 6 7 8 9




Lazy Binomial Heap

1 2 3 4 5 6 7 8 9




Lazy Binomial Heap

1 2 3 4 5 6 7 8 9




Lazy Binomial Heap

1 2 3 4 5 6 7 8 9




Lazy Binomial Heap

1 2 3 4 5 6 7 8 9




Lazy Binomial Heap

1 2 3 4 5 6 7 8 9




Lazy Binomial Heap


2 3 4 5 6 7 8 9



Lazy Binomial Heap					
Order 2	Order 1	Order 0			
		2 3 4 5 6 7 8 9			




Order 1	Order 0
	2 3 4 5 6 7 8 9




Lazy Binomial Heap	1		
Order 2	Order 1		Order 0
		2 3 4	5 6 7 8 9

Eager Binomial Heap




Lazy Binomial Heap					
Order 2	Order 1		Order 0		
	3 4	2	5 6 7 8 9		

Eager Binomial Heap




Lazy Binomial Heap					
Order 2	Order 1		Order 0		
	3	2	5 6 7 8 9		




Lazy Binomial Heap					
Order 2	Order 1		Order 0		
	3 4	2	5 6 7 8 9		

Eager Binomial Heap




Lazy Binomial Heap						
Order 2	Order 1		Order 0			
	3 4	2	5 6 7 8	9		

Eager Binomial Heap




Lazy Binomial Heap					
Order 2	Order 1		Order 0		
	3 7 4 8	2	5 6	9	

Eager Binomial Heap




Lazy Binomial Heap		1		
Order 2	Order 1		Order 0	
	3 7 Y X 8	2	5 6	9




Lazy Binomial Heap		1		
Order 2	Order 1		Order 0	
	3 7 4 8	2	5 6	9

Eager Binomial Heap




Lazy Binomial Heap		1		
Order 2	Order 1		Order 0	
	3 7 4 8	2	5	9


Eager Binomial Heap



Lazy Binomial Heap			
Order 2	Order 1	Order 0	
	3 7 5 4 8 6	2	9




Lazy Binomial Heap			
Order 2	Order 1	Order 0	
	3 7 5 v v v 4 4 8 6	2	9




Lazy Binomial Heap			
Order 0			
2			


Eager Binomial Heap



azy Binomial Heap			
Order 2	Order 1	Order 0	
	3 7 5	9	




Lazy Binomial Hea	p	
Order 2	Order 1	Order 0
	3 7 5 2	




Lazy Binomial Hea _l		
Order 2	Order 1	Order 0
	3 7 5 2 4 8 6 9	


Eager Binomial Heap




Lazy Binomial Heap		
Order 2	Order 1	Order 0
	3 5 2 4 7 6 9 8	


Eager Binomial Heap



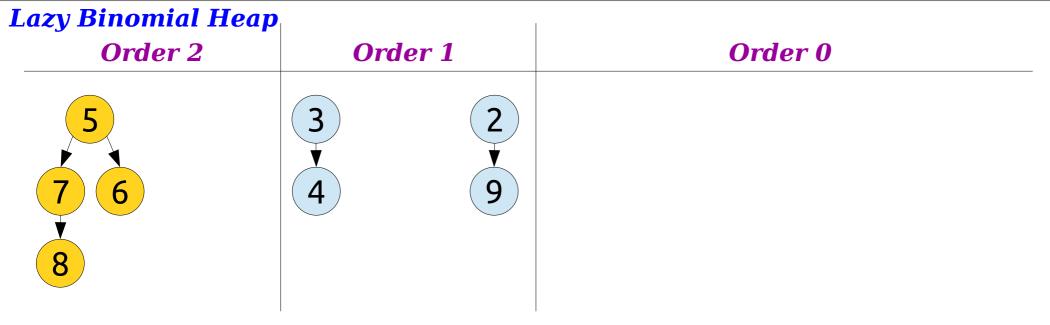



Eager Binomial Heap



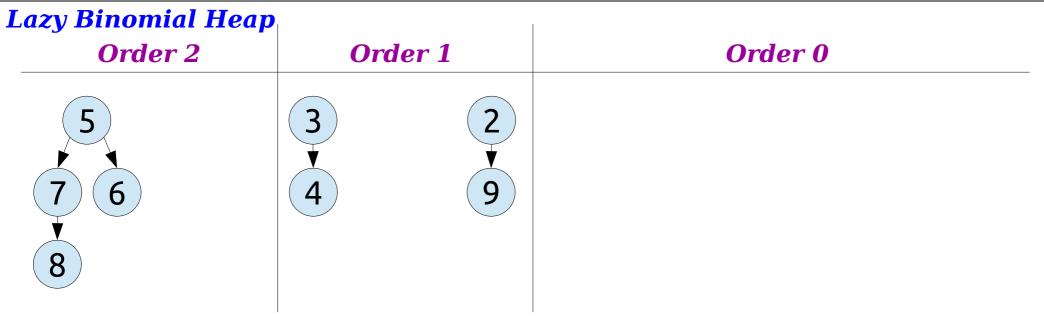



Eager Binomial Heap



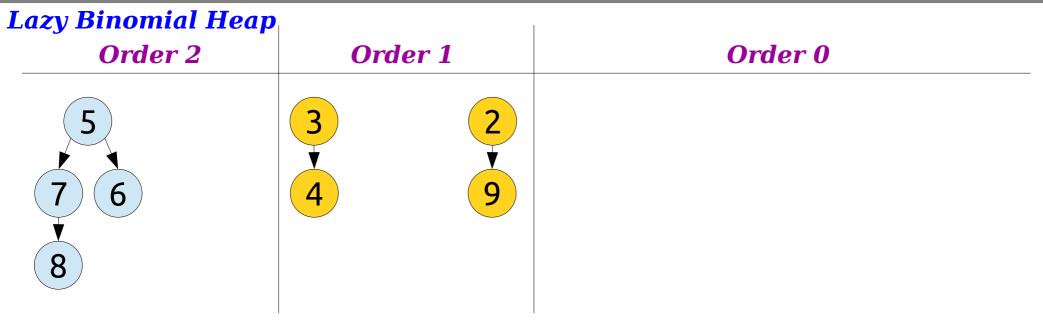



Eager Binomial Heap



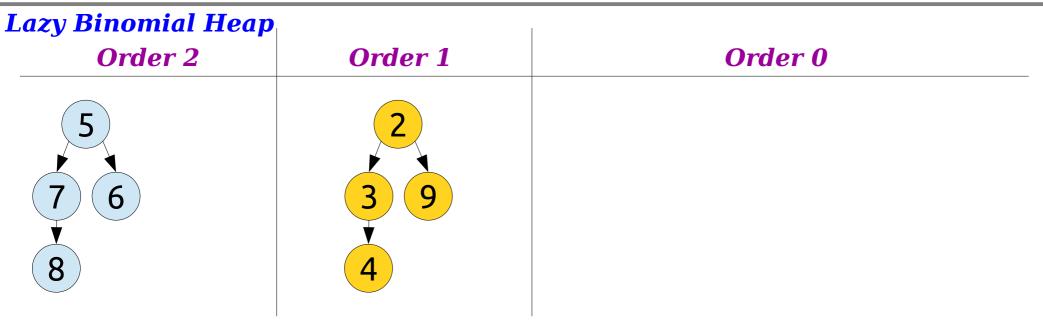



Eager Binomial Heap



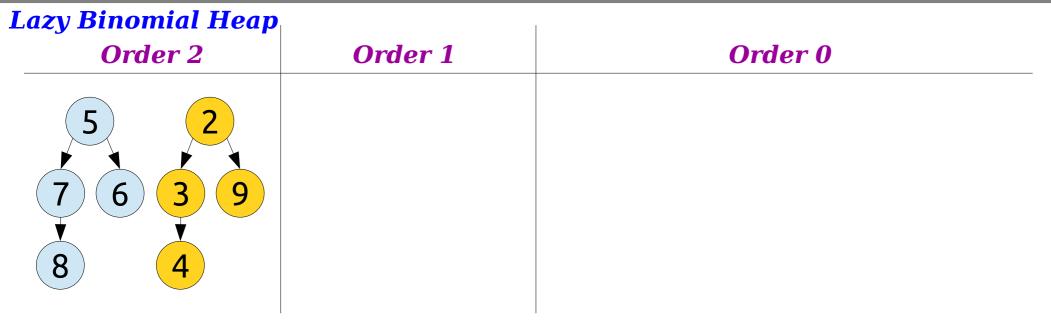


Eager Binomial Heap




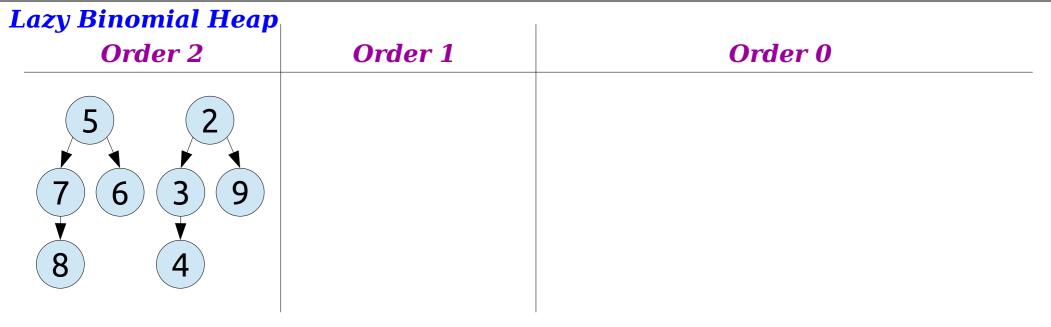


Eager Binomial Heap




Lazy Binomial Heap		
Order 2	Order 1	Order 0
5 7 6 3 9 8		




Lazy Binomial Heap







Lazy Binomial Heap




Let's *enqueue* 10, 11, and 12 into both heaps.

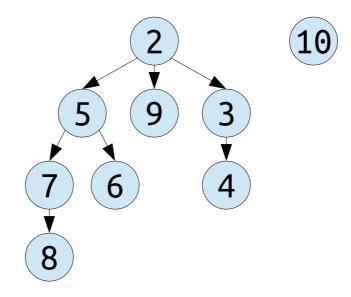


Lazy Binomial Heap




Let's *enqueue* 10, 11, and 12 into both heaps.

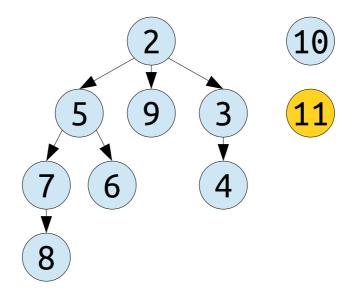


Lazy Binomial Heap




Let's *enqueue* 10, 11, and 12 into both heaps.

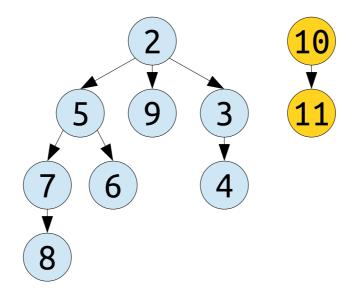



Lazy Binomial Heap



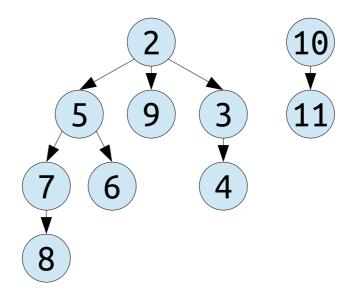



Lazy Binomial Heap



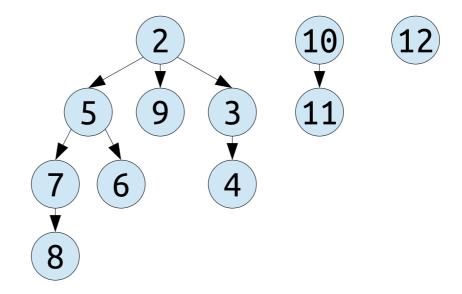



Lazy Binomial Heap



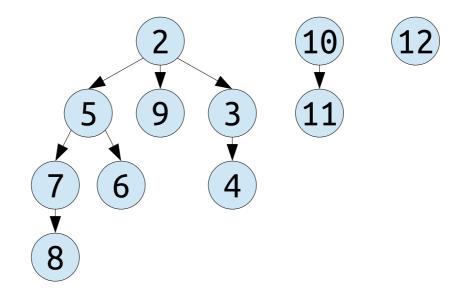



Lazy Binomial Heap

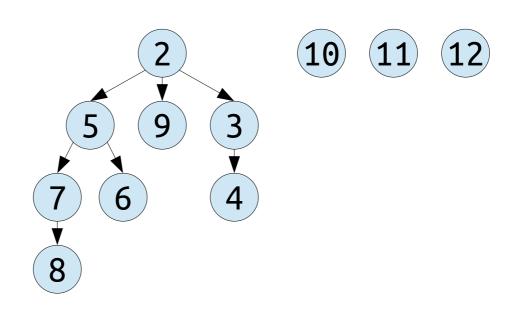

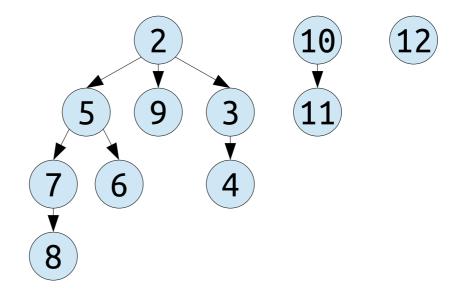



Lazy Binomial Heap

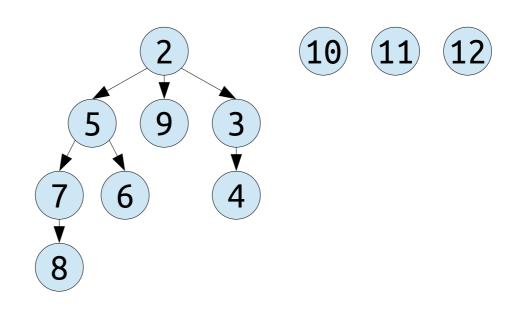

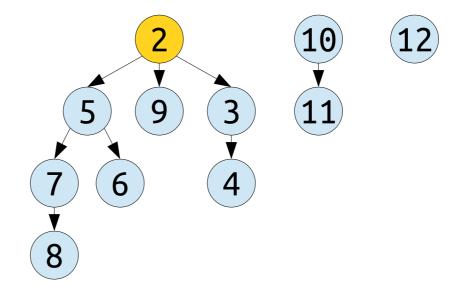



Lazy Binomial Heap

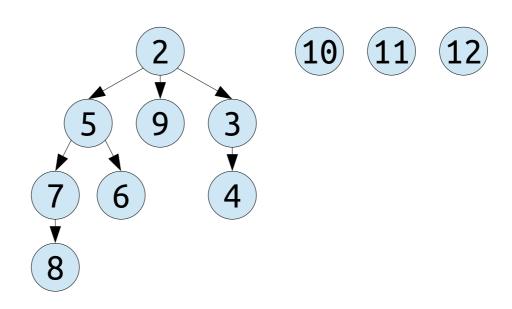

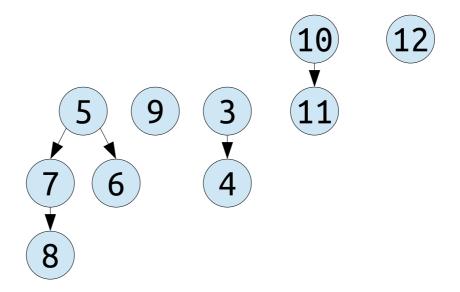



Lazy Binomial Heap

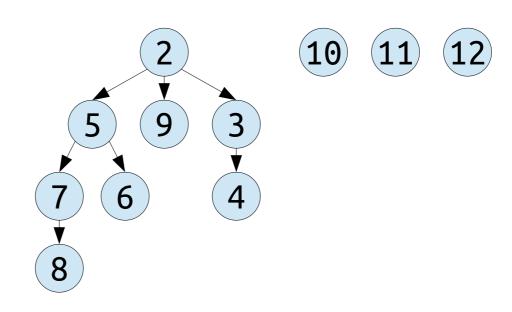

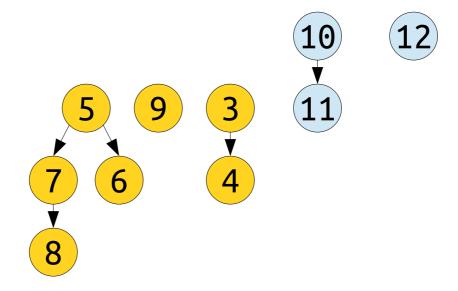



Lazy Binomial Heap

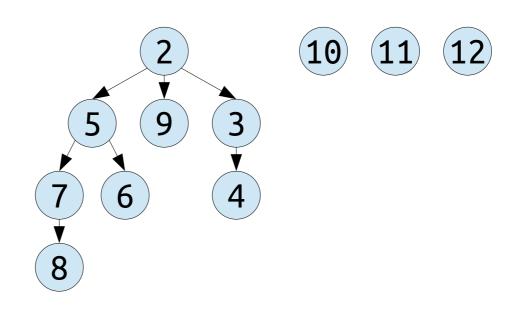





Lazy Binomial Heap

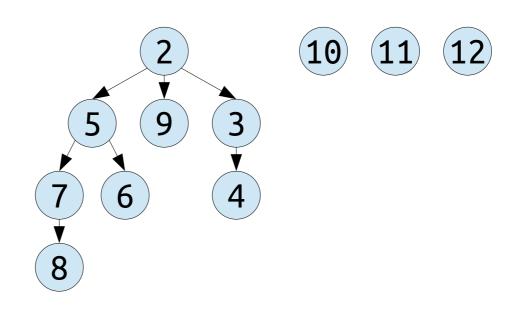





Lazy Binomial Heap

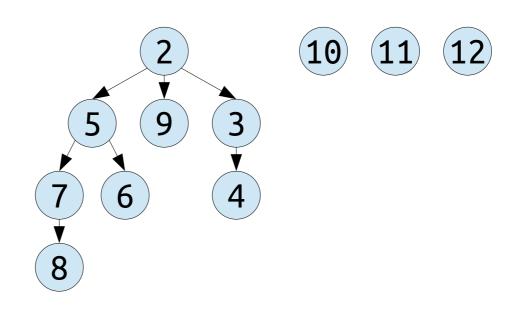





Lazy Binomial Heap

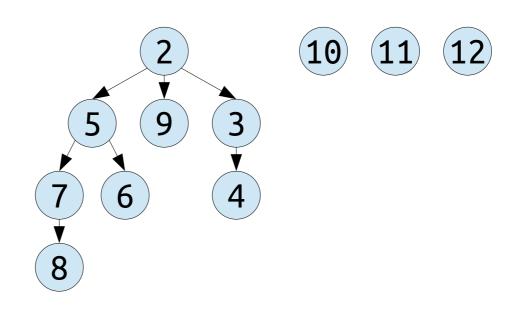





Lazy Binomial Heap

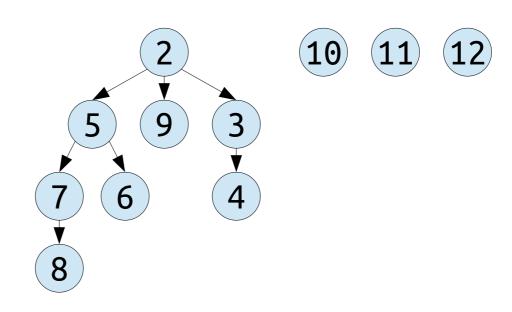





Lazy Binomial Heap

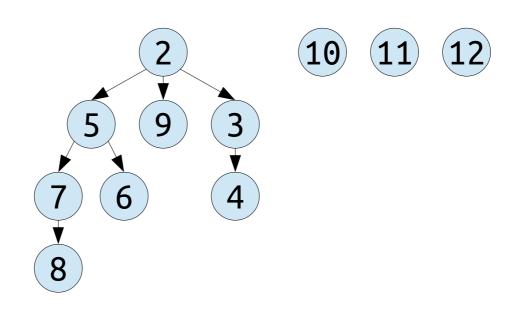





Lazy Binomial Heap

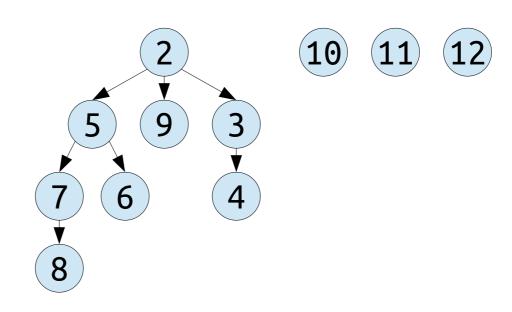

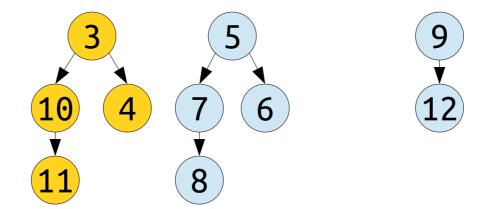



Lazy Binomial Heap

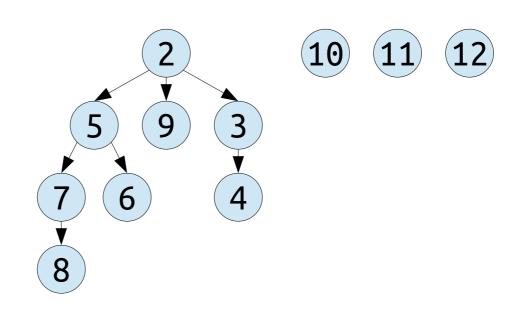

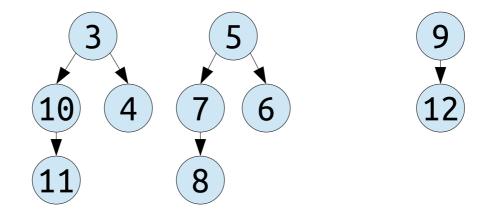



Lazy Binomial Heap

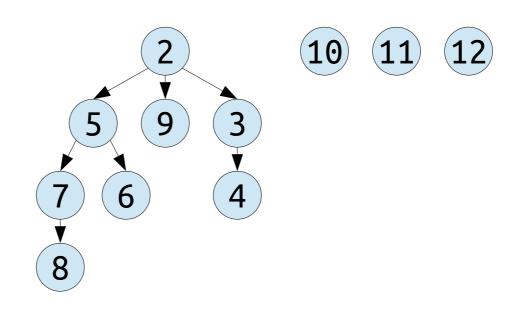

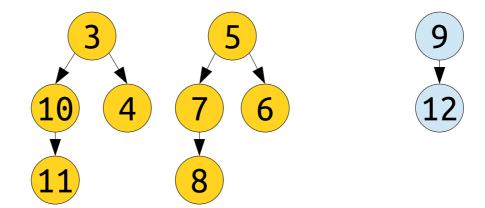



Lazy Binomial Heap

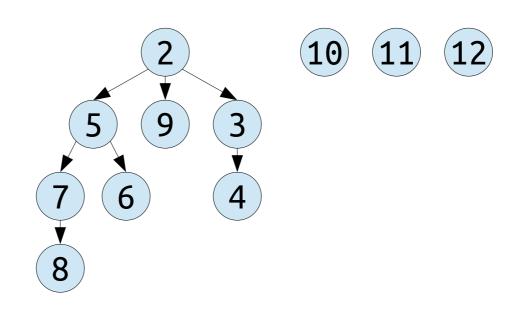

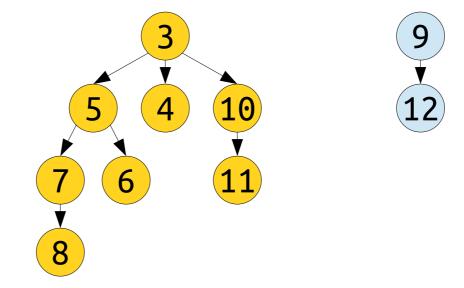



Lazy Binomial Heap

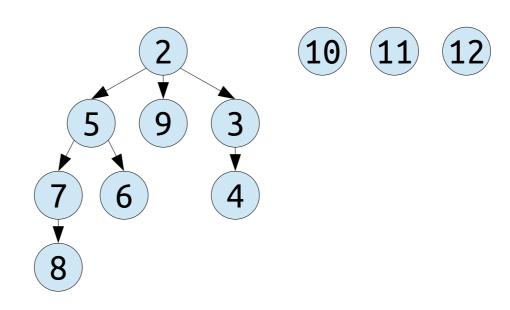

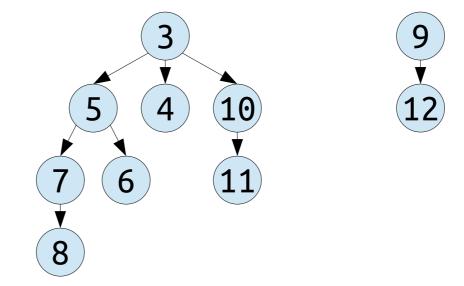



Lazy Binomial Heap

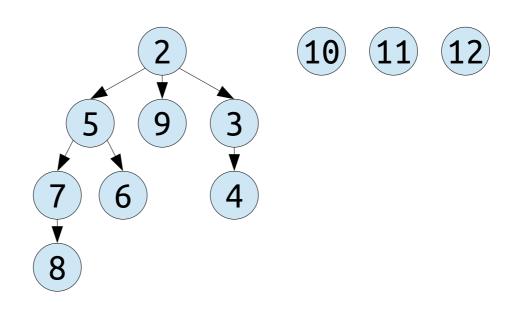

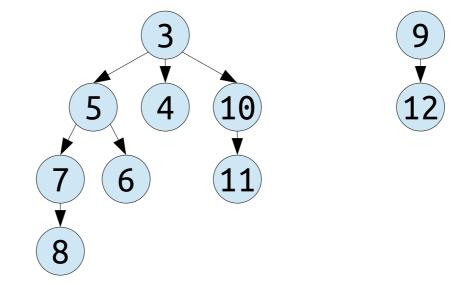



Lazy Binomial Heap

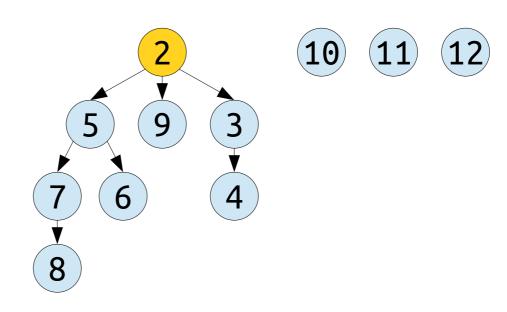

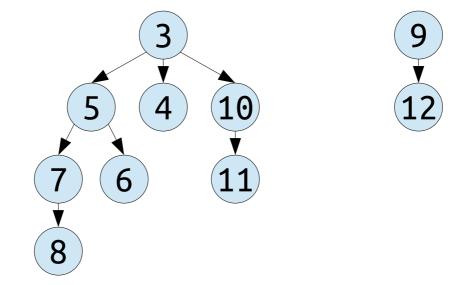



Lazy Binomial Heap

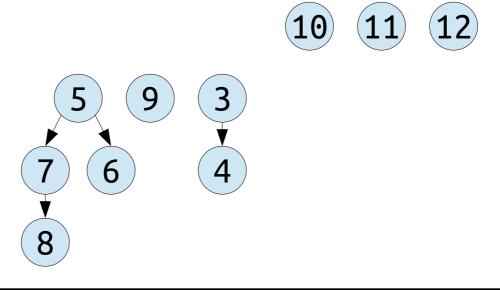

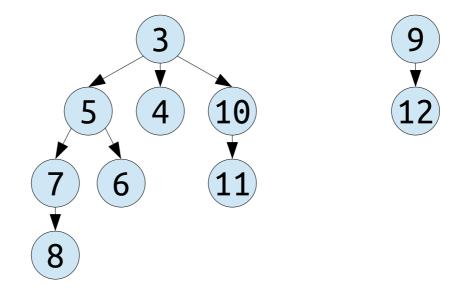



Lazy Binomial Heap

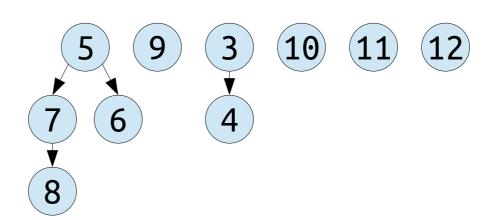


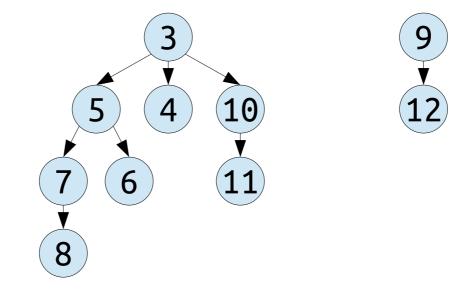



Lazy Binomial Heap			
	Order 2	Order 1	Order 0
	5 7 6 8	3	9 10 11 12

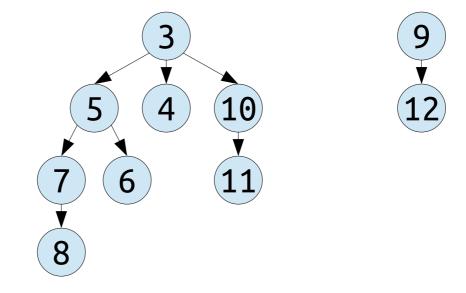


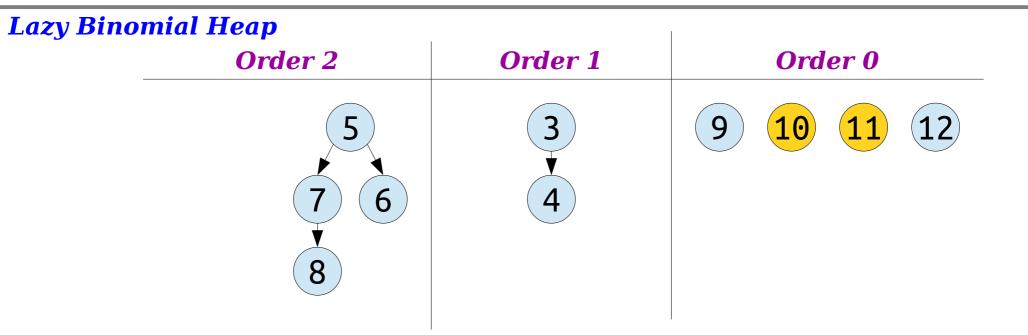


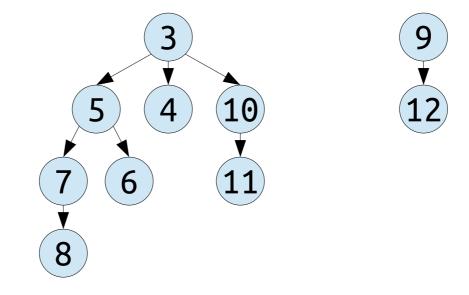


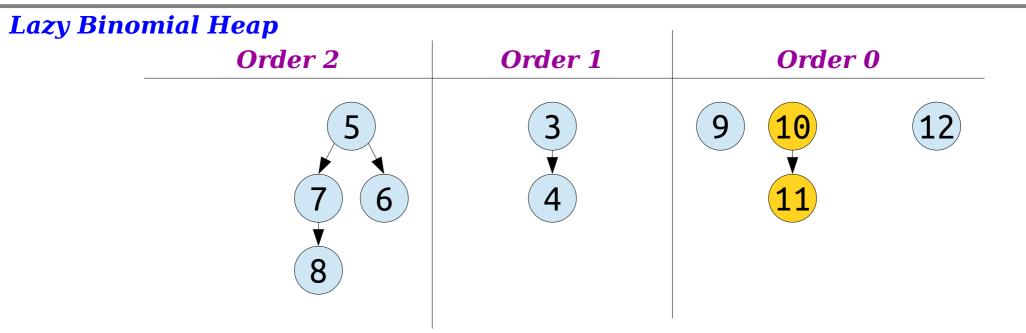


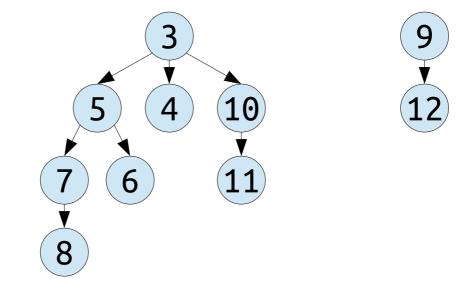


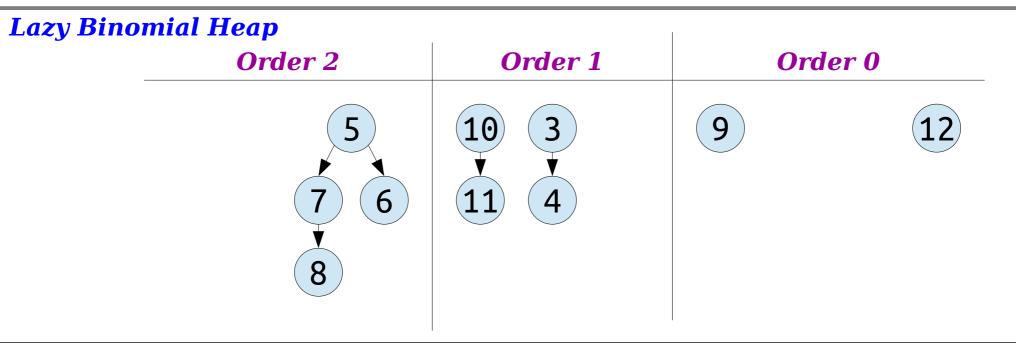


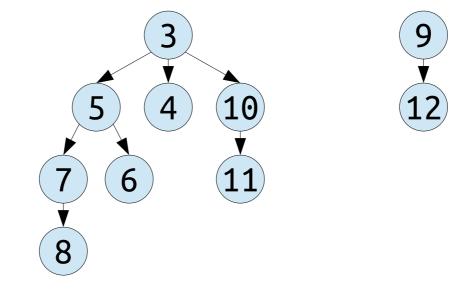


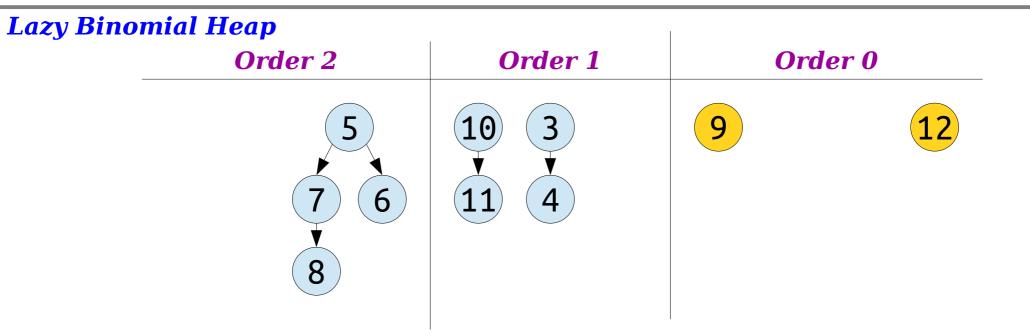


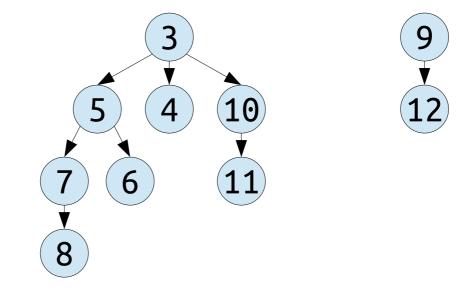


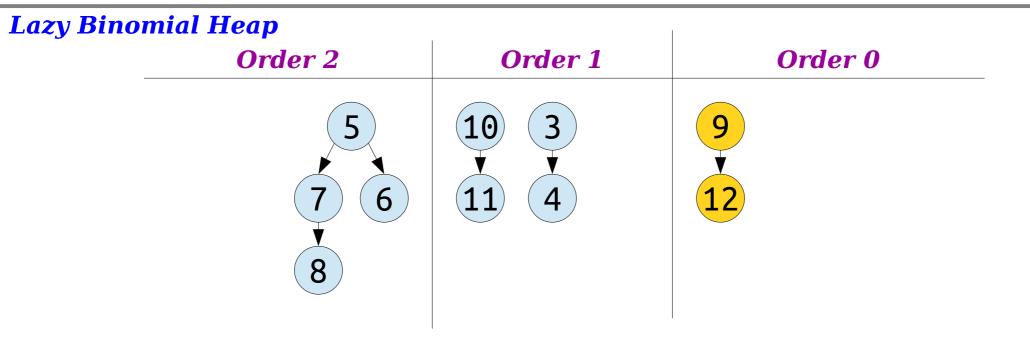


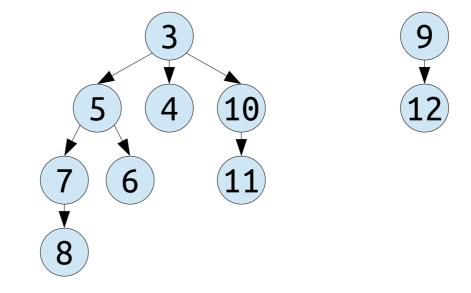


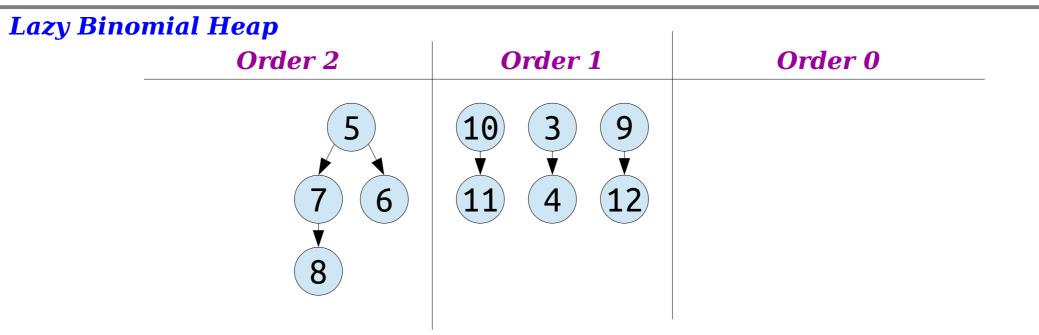


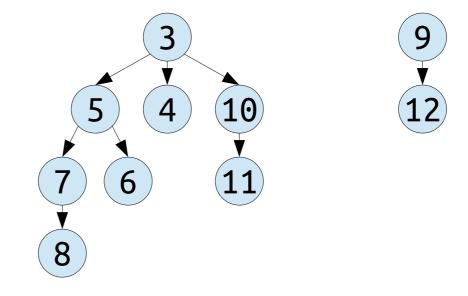


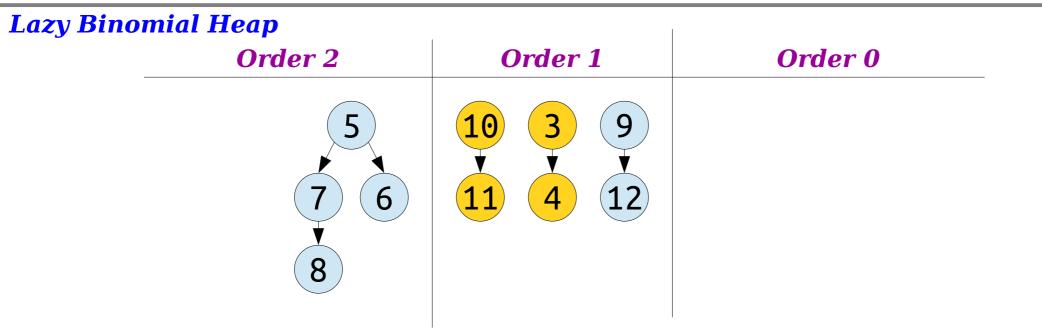


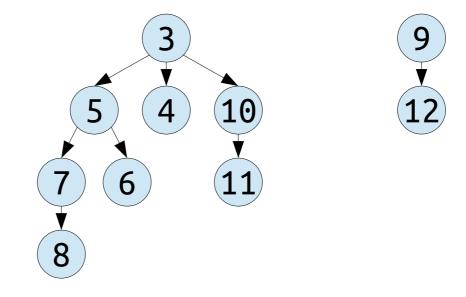


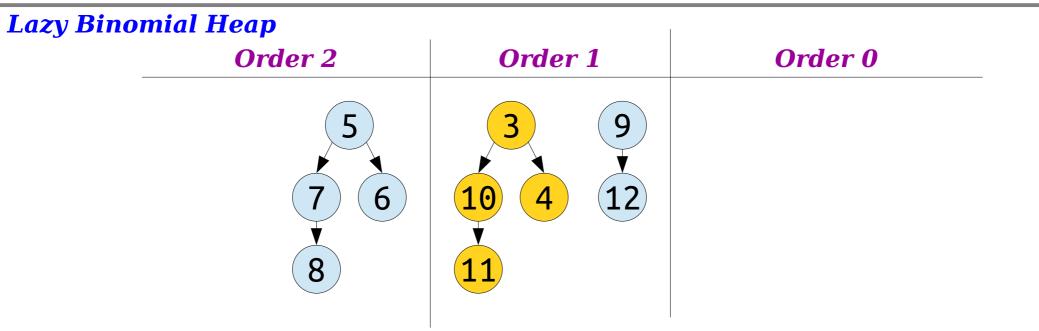


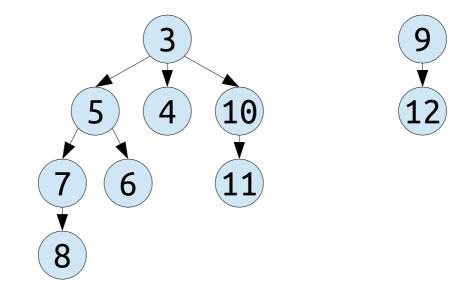


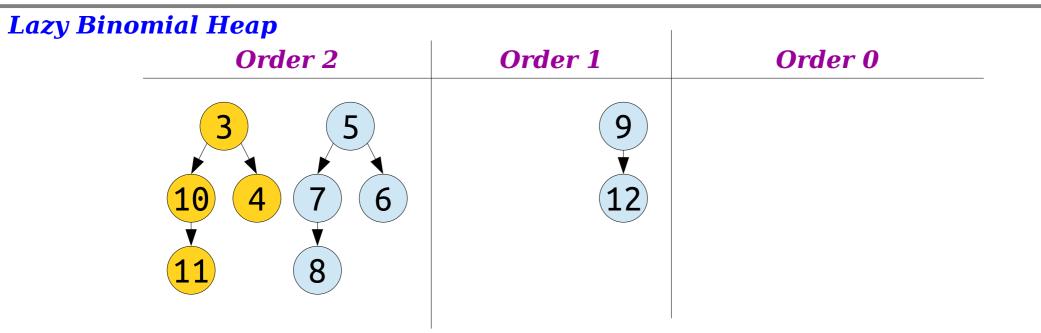


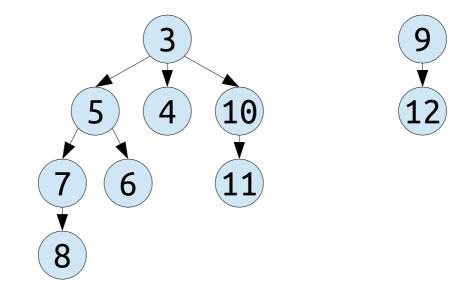


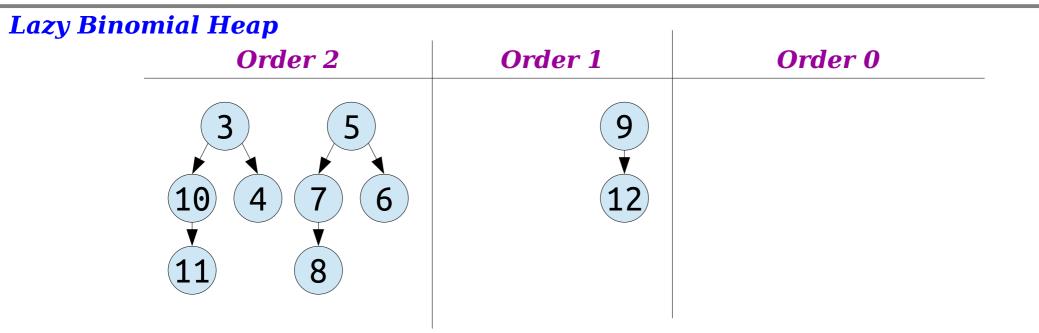


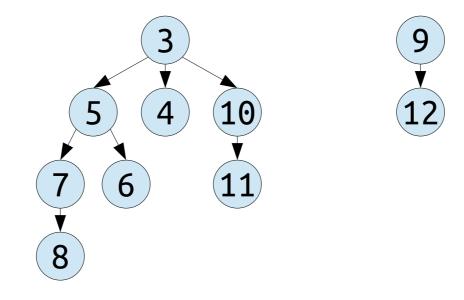

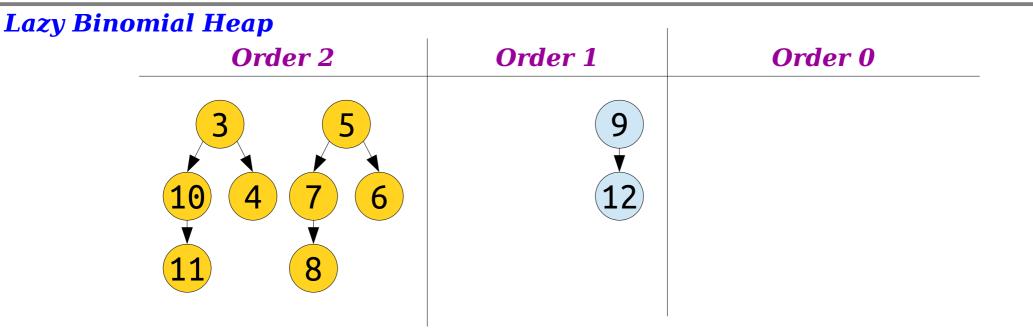


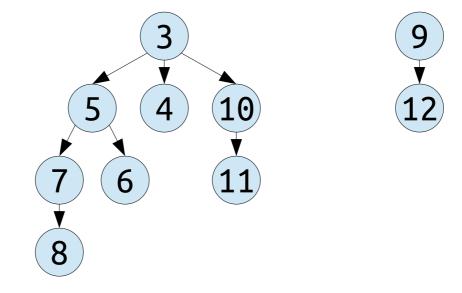

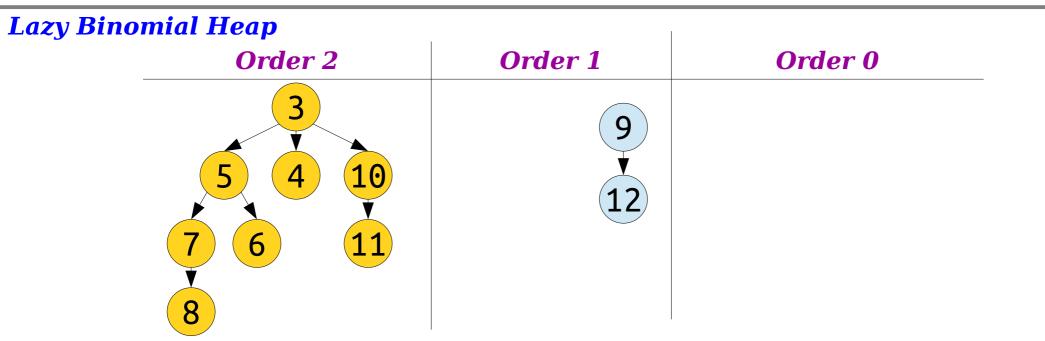

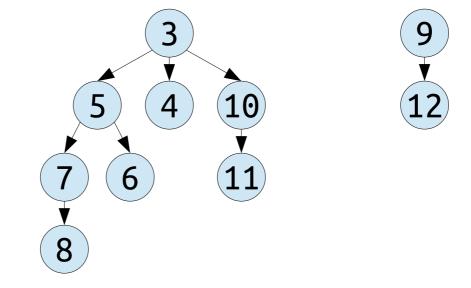

Lazy Binomial Heap

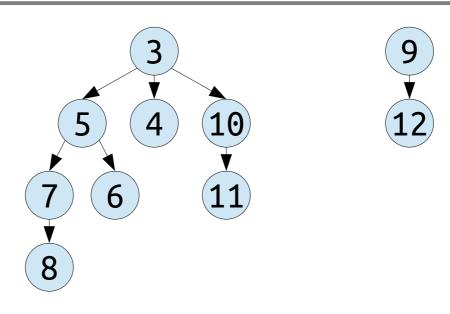

Operation Costs

- Eager Binomial Heap:
 - **enqueue**: O(log *n*)
 - *meld*: O(log *n*)
 - *find-min*: O(log *n*)
 - *extract-min*: O(log *n*)

- Lazy Binomial Heap:
 - **enqueue**: O(1)
 - **meld**: O(1)
 - *find-min*: O(1)
 - extract-min: $O(\log n)^*$
- *amortized

Intuition: Each extract-min has to do a bunch of cleanup for the earlier enqueue operations, but then leaves us with few trees.


New Stuff!

The Need for *decrease-key*


The decrease-key Operation

- Some priority queues support the operation decrease-key(v, k), which works as follows:
 - Given a pointer to an element v, lower its key (priority) to k. It is assumed that k is less than the current priority of v.
- This operation is crucial in efficient implementations of Dijkstra's algorithm and Prim's MST algorithm.


- Dijkstra's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

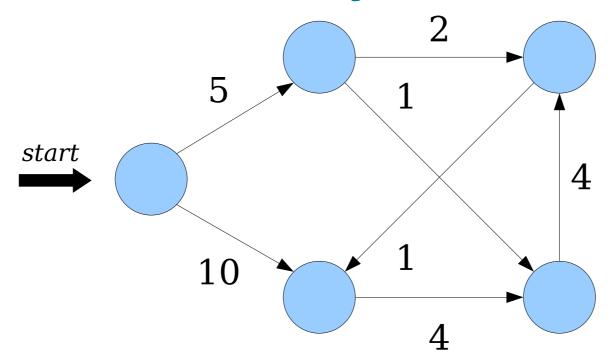


- Dijkstra's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

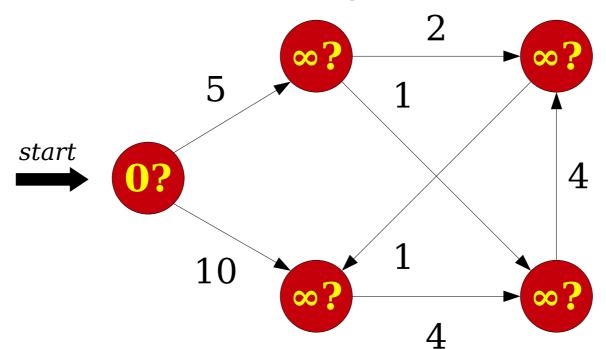


- Dijkstra's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

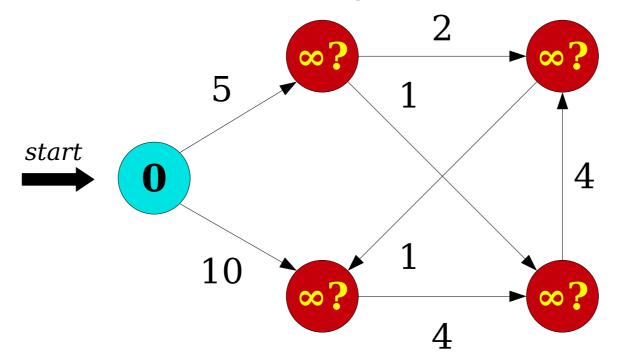


- Dijkstra's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

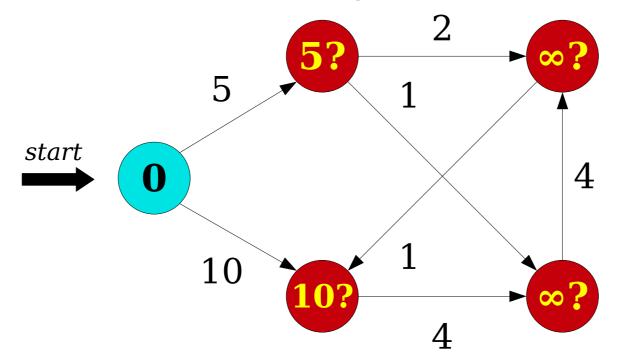


- Dijkstra's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

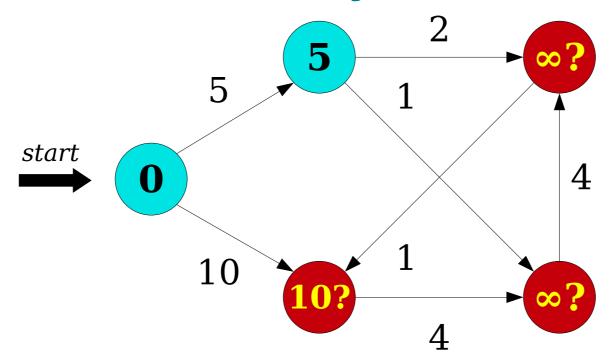


- Dijkstra's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

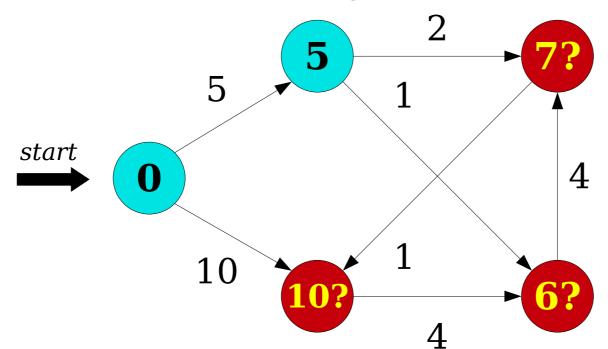


- Dijkstra's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

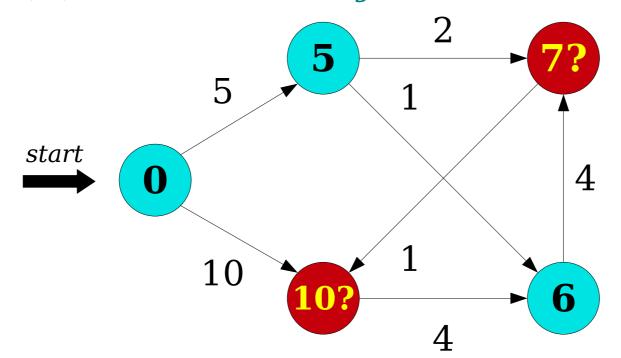


- Dijkstra's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

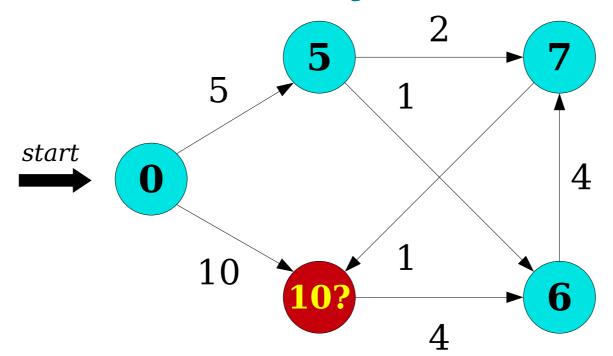

- Dijkstra's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

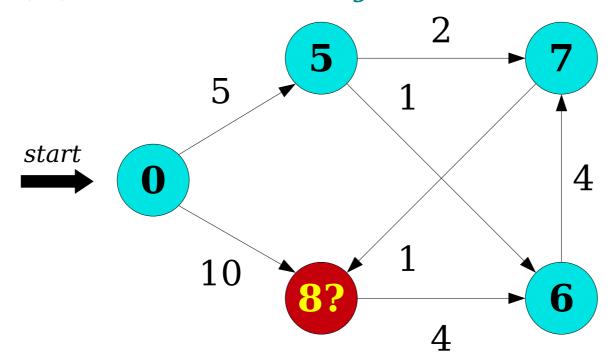

- Dijkstra's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

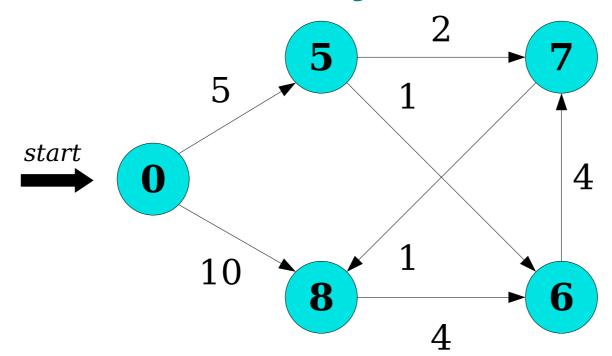


- Dijkstra's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total **extract-min**s, and
 - O(m) total **decrease-keys**.
- Dijkstra's algorithm runtime is


$$O(n T_{eng} + n T_{ext} + m T_{dec})$$

- Prim's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.


- Prim's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

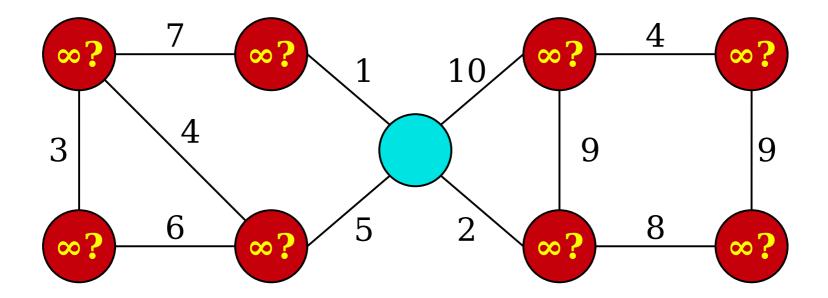


- Prim's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

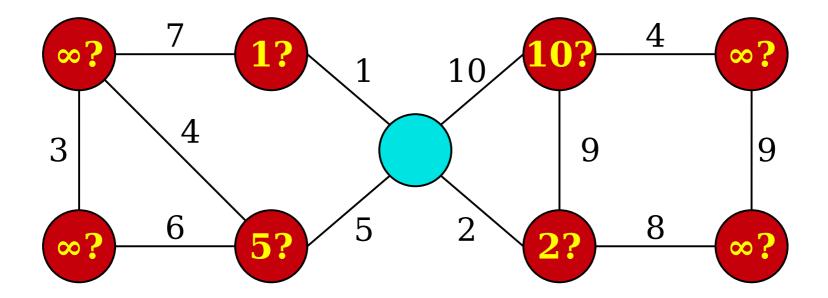


- Prim's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

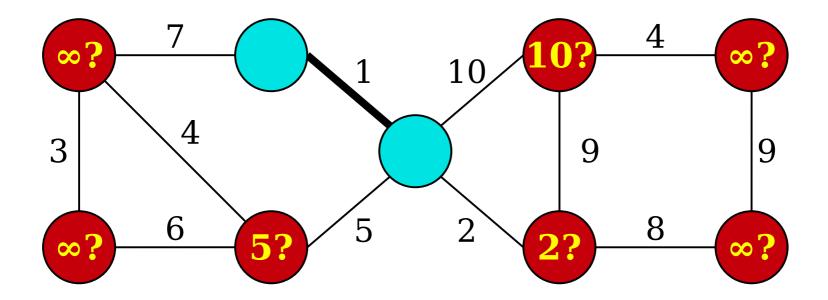


- Prim's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

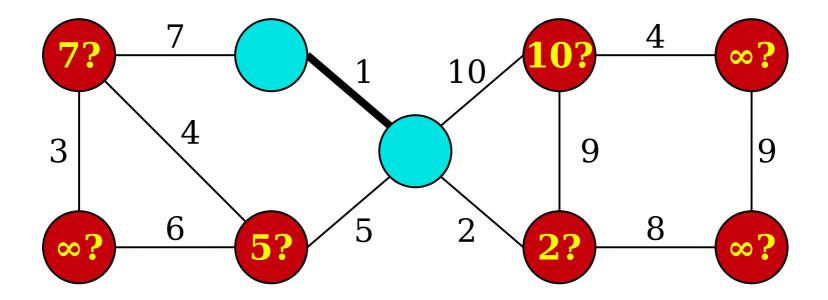


- Prim's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

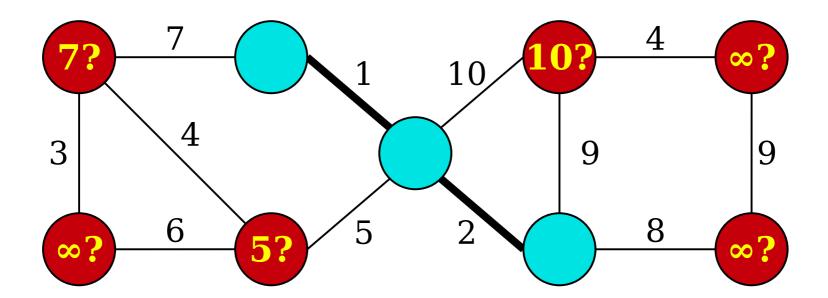


- Prim's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

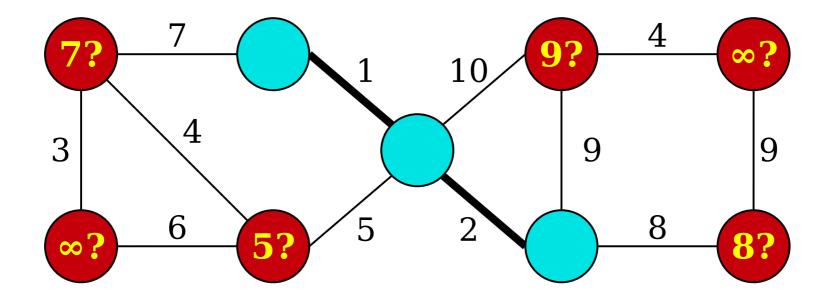


- Prim's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

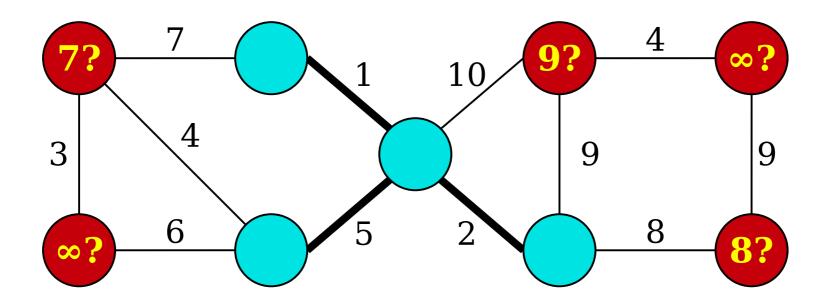


- Prim's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

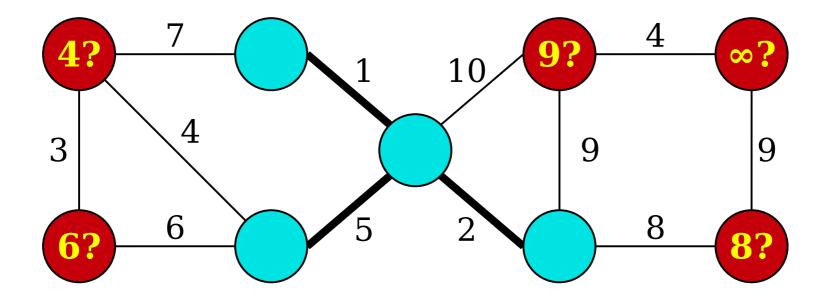


- Prim's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

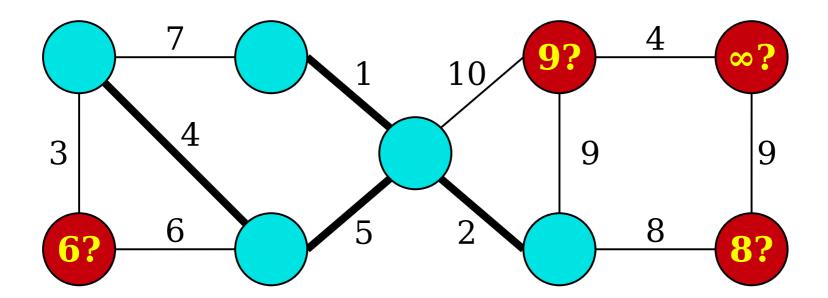


- Prim's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

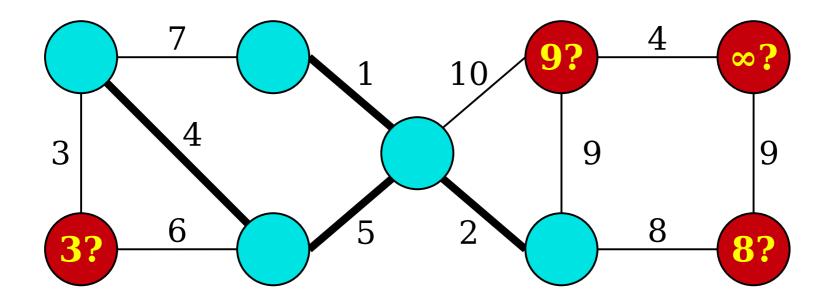


- Prim's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

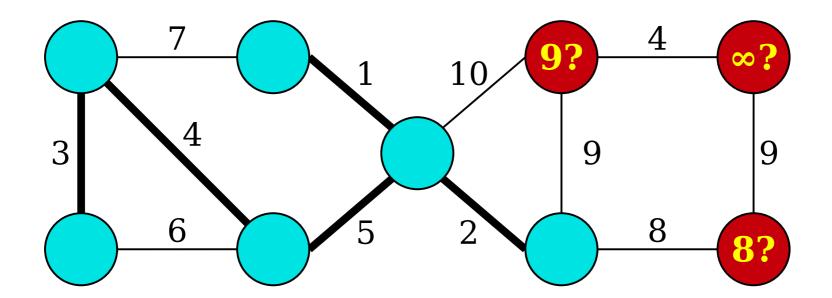


- Prim's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

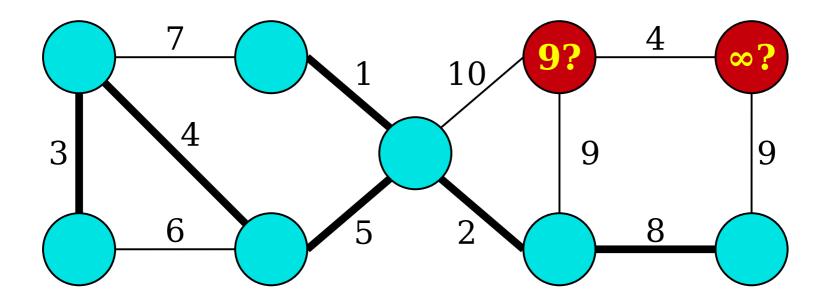


- Prim's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

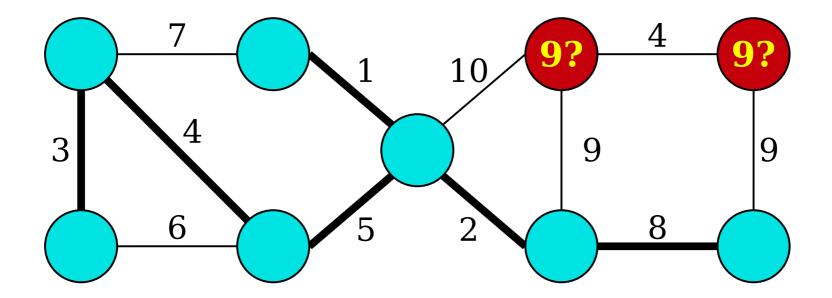


- Prim's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

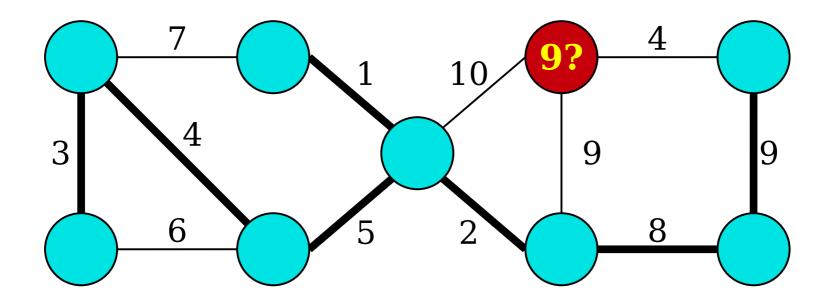

- Prim's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

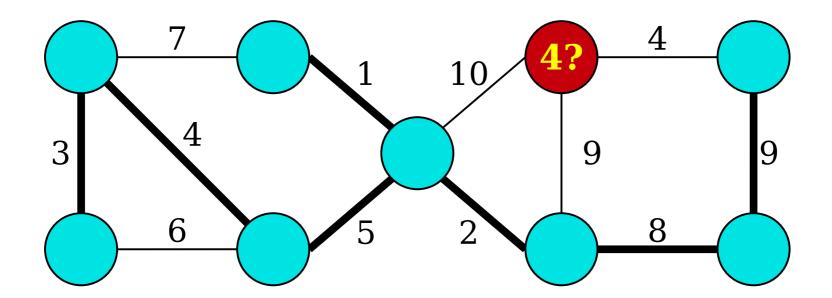

- Prim's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.

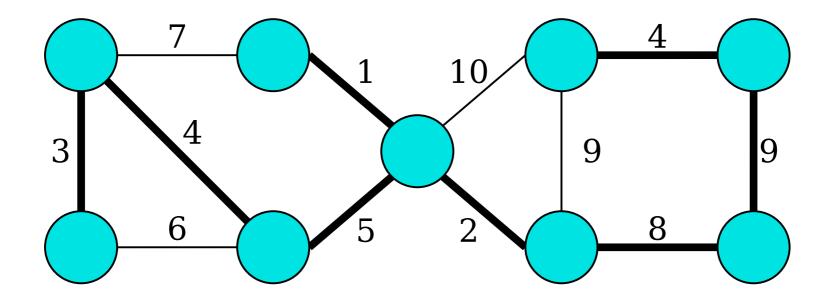

- Prim's algorithm can be implemented with a priority queue using
 - O(n) total **enqueue**s,
 - O(n) total *extract-mins*, and
 - O(m) total **decrease-keys**.
- Prim's algorithm runtime is

$$O(n T_{eng} + n T_{ext} + m T_{dec})$$

Standard Approaches

- In a binary heap, enqueue, extract-min, and decrease-key can be made to work in time O(log n) time each.
- Cost of Dijkstra's / Prim's algorithm:

$$O(n T_{enq} + n T_{ext} + m T_{dec})$$

- $= O(n \log n + n \log n + m \log n)$
- $= O(m \log n)$

Standard Approaches

- In a lazy binomial heap, *enqueue* takes amortized time O(1), and *extract-min* and *decrease-key* take amortized time $O(\log n)$.
- Cost of Dijkstra's / Prim's algorithm:

$$O(n T_{enq} + n T_{ext} + m T_{dec})$$

- $= O(n + n \log n + m \log n)$
- $= O(m \log n)$


Where We're Going


- The *Fibonacci heap* has these amortized runtimes:
 - **enqueue**: O(1)
 - *extract-min*: O(log *n*).
 - *decrease-key*: O(1).
- Cost of Prim's or Dijkstra's algorithm:


$$O(n T_{enq} + n T_{ext} + m T_{dec})$$


- $= O(n + n \log n + m)$
- $= O(m + n \log n)$
- This is theoretically optimal for a comparison-based priority queue in Dijkstra's or Prim's algorithms.


The Challenge of *decrease-key*

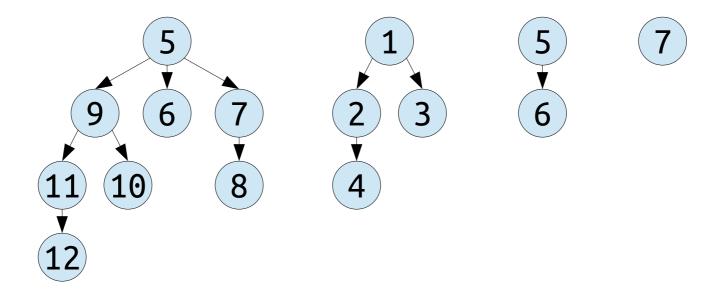


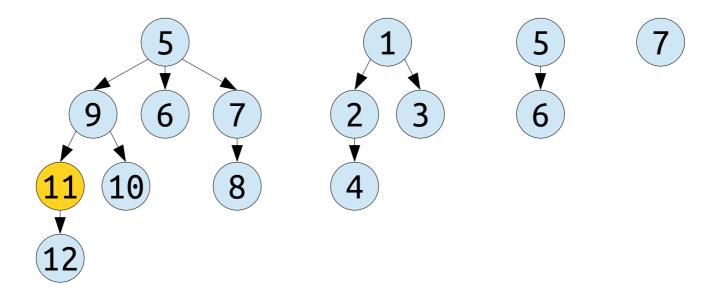


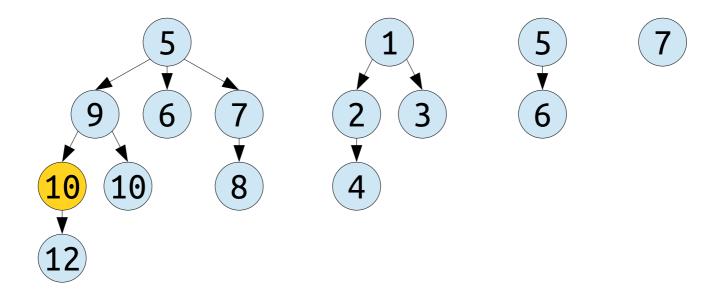


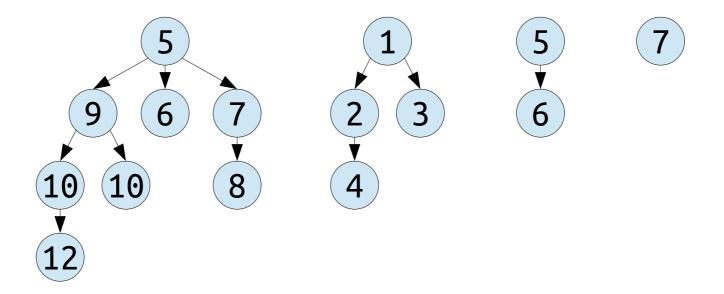


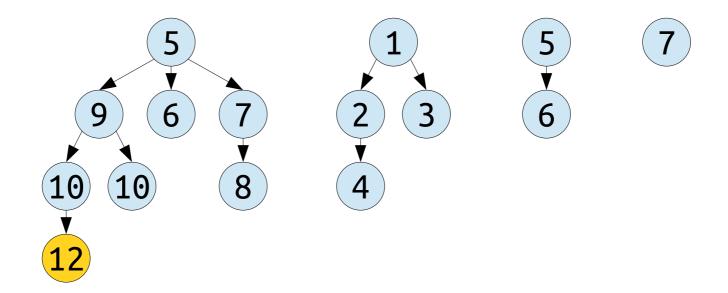

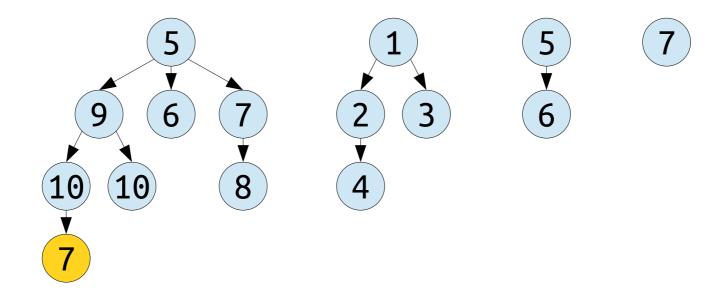


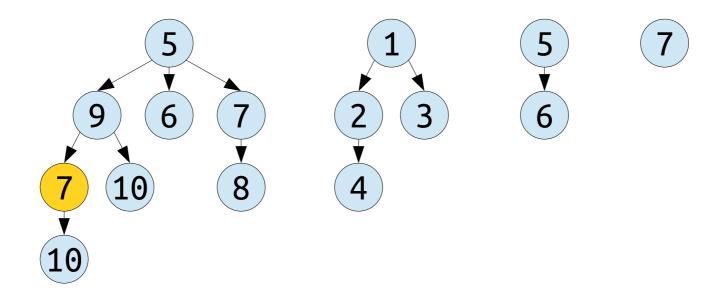

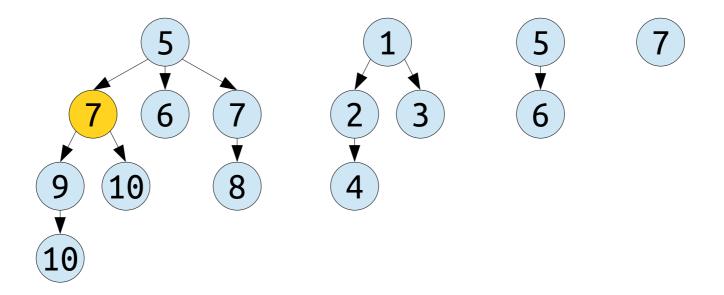

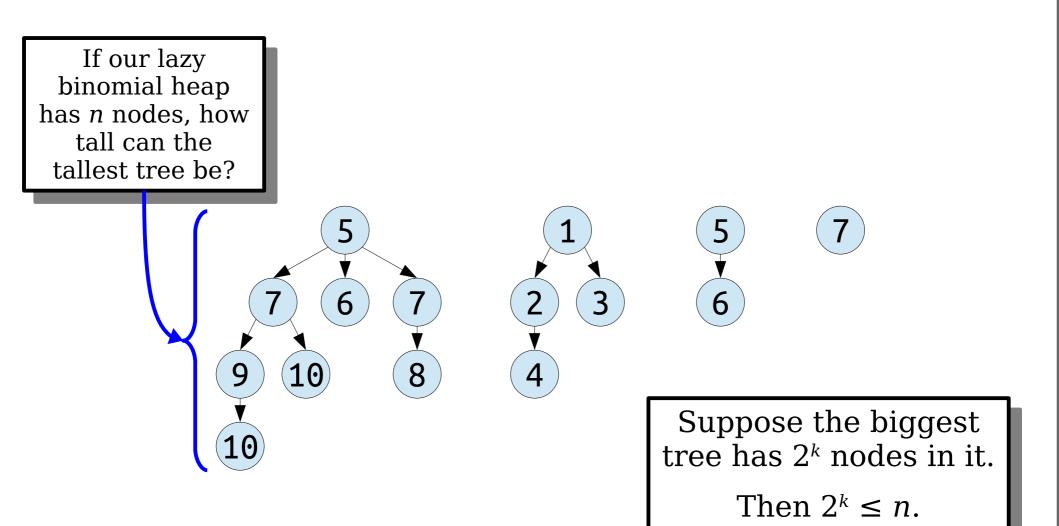



So $k = O(\log n)$.

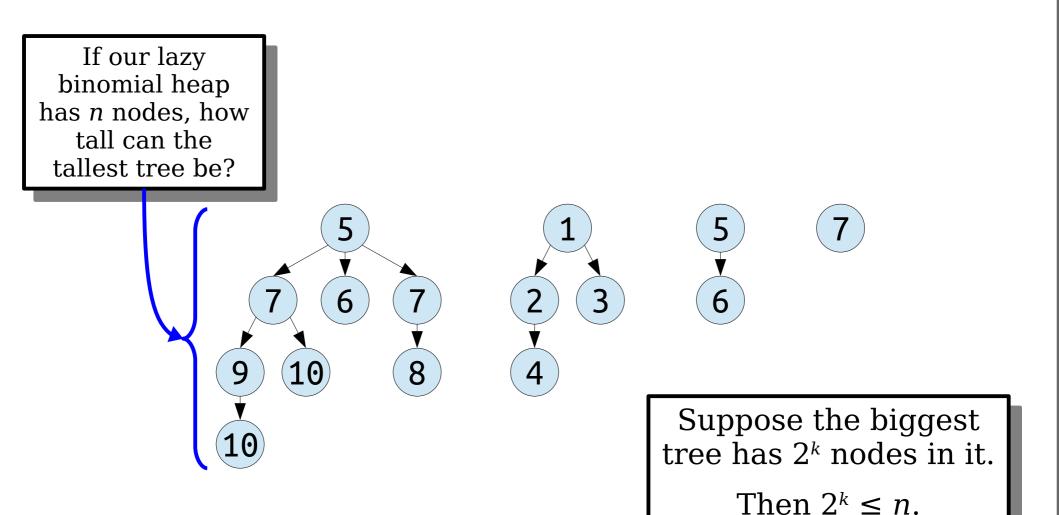



Challenge: Support **decrease-key** in (amortized) time O(1).

So $k = O(\log n)$.

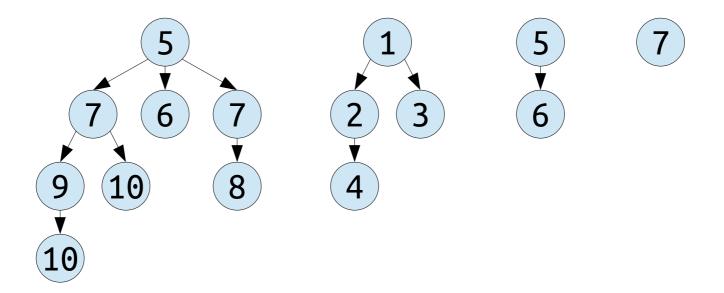

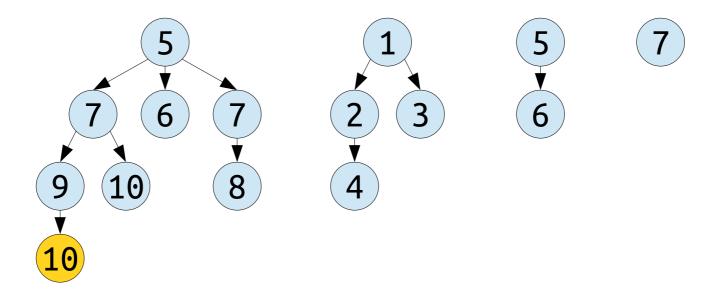

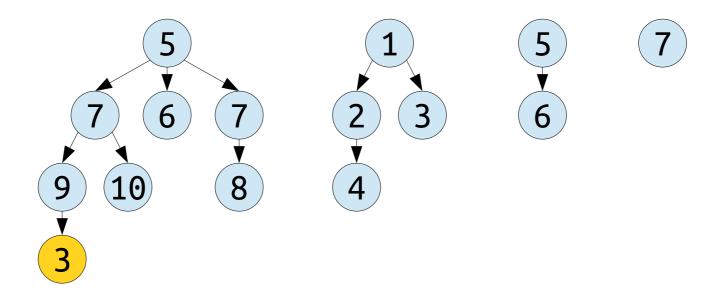


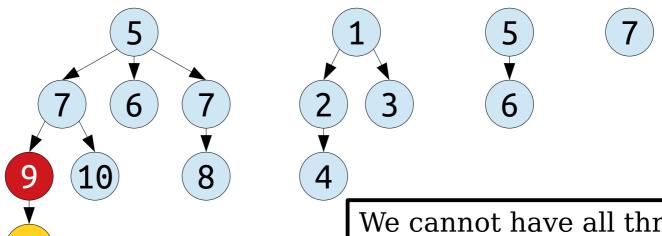

We cannot have all three of these nice properties at once:

- 1. decrease-key takes time O(1).
- 2. Our trees are heap-ordered.
- 3. Our trees are binomial trees.


Challenge: Support **decrease-key** in (amortized) time O(1).

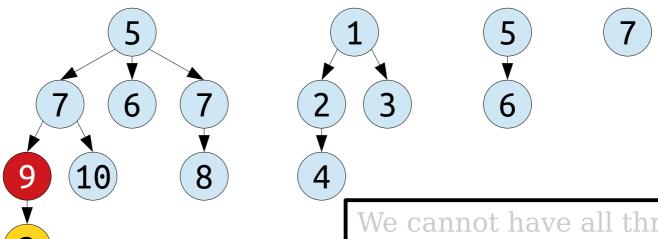



We cannot have all three of these nice properties at once:


- 1. decrease-key takes time O(1).
- 2. Our trees are heap-ordered.
- 3. Our trees are binomial trees.


Challenge: Support **decrease-key** in (amortized) time O(1).

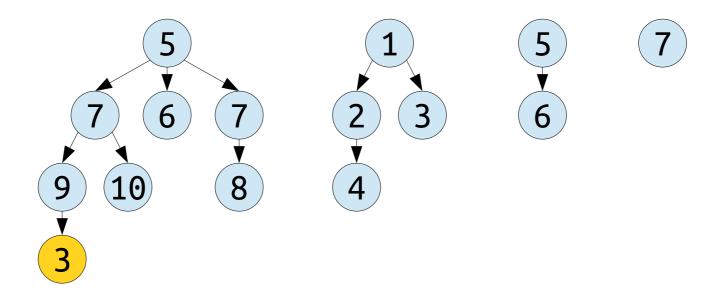


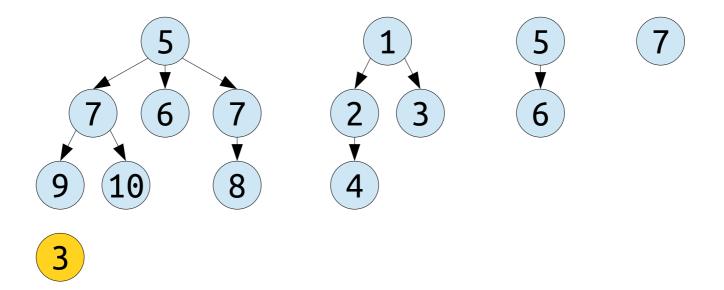


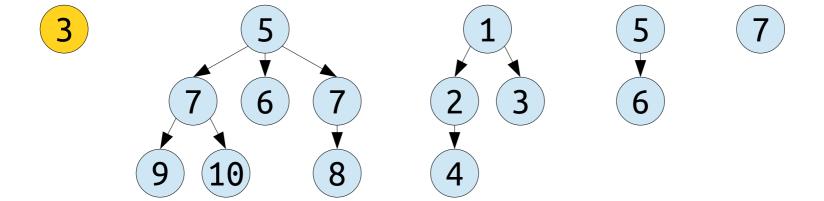


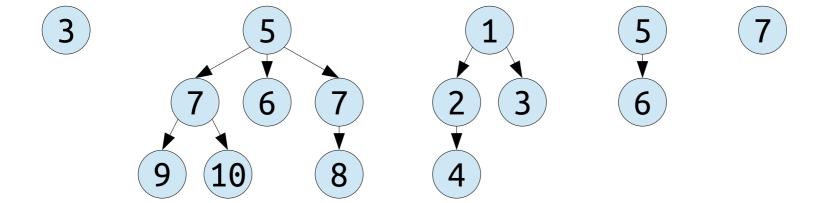


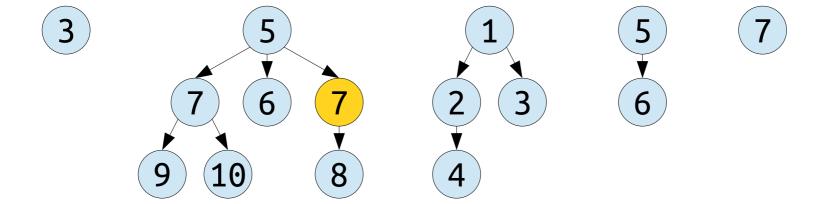


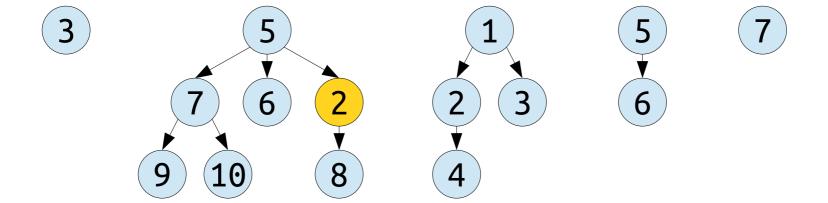


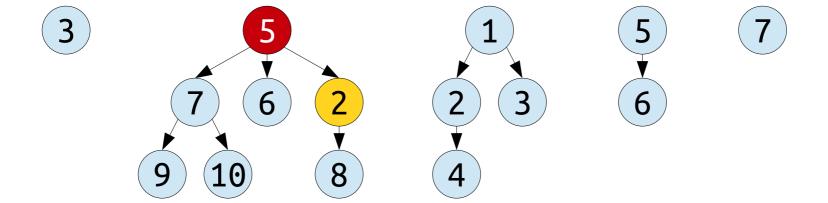


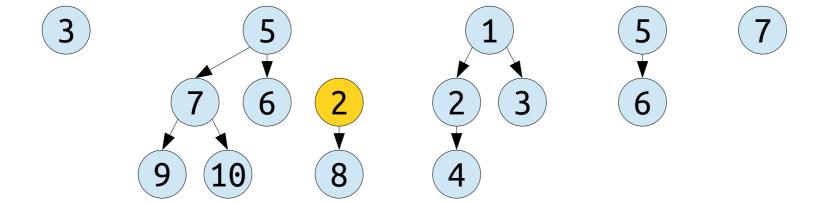


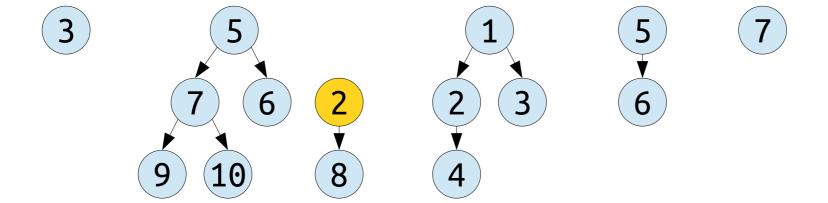


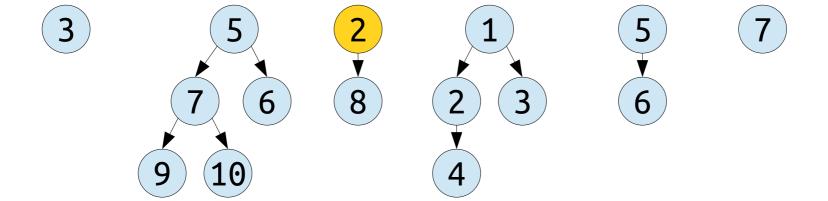


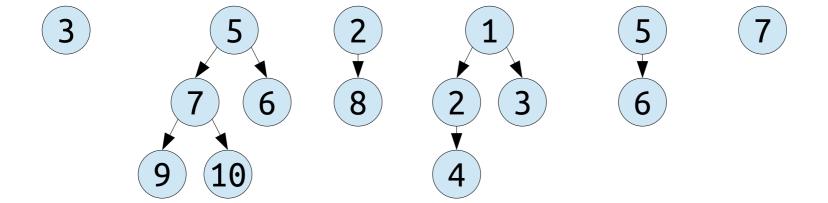


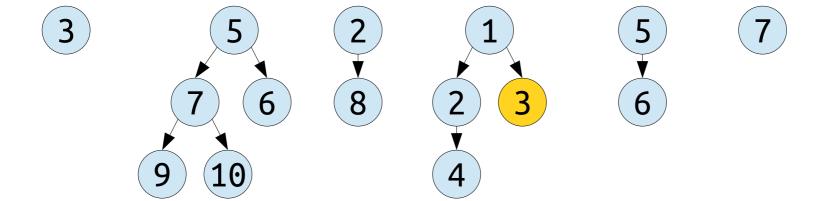


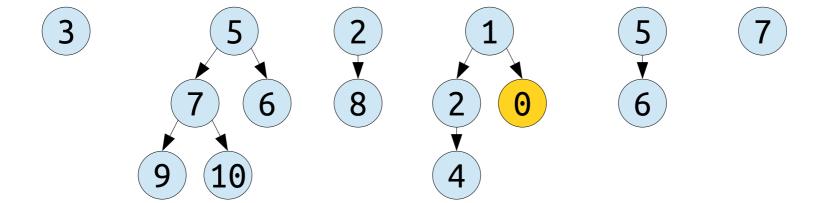


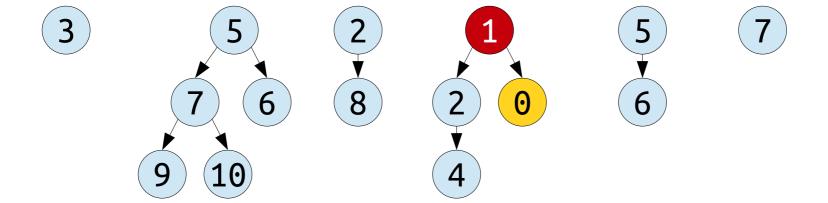


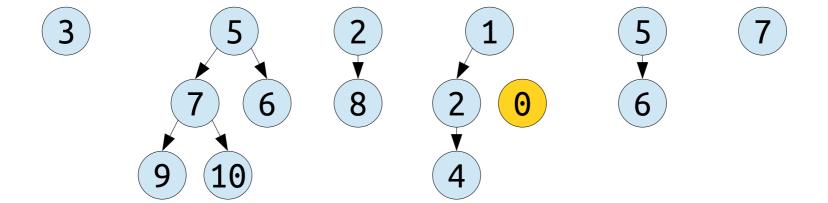

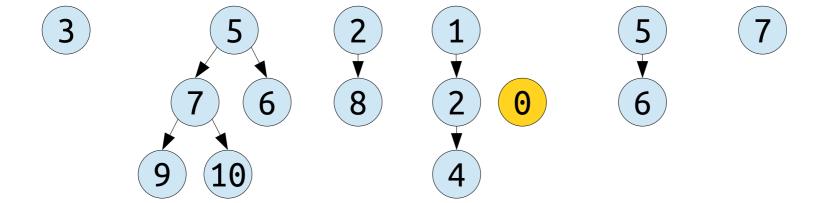


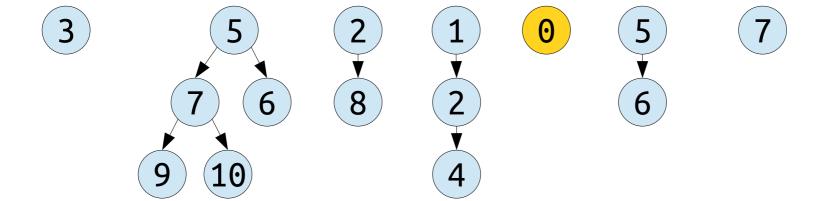

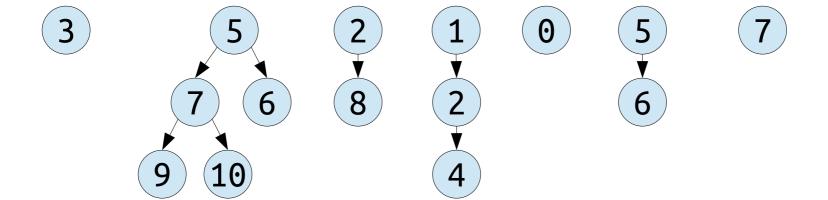


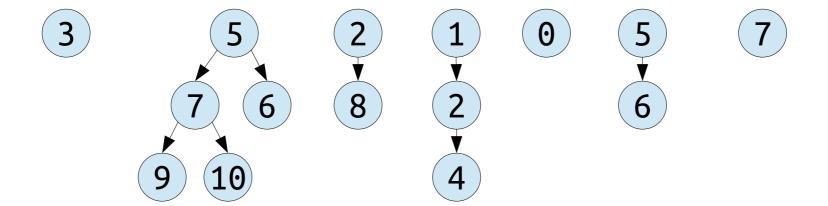



Problem: What do we do in an **extract-min**?

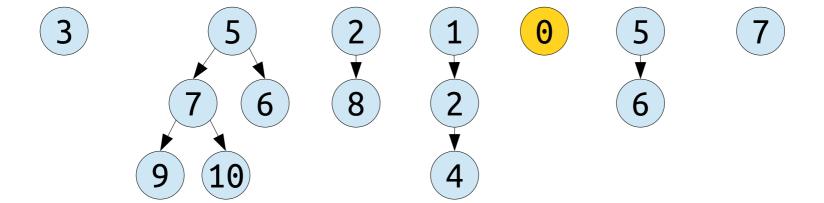


Problem: What do we do in an **extract-min**?

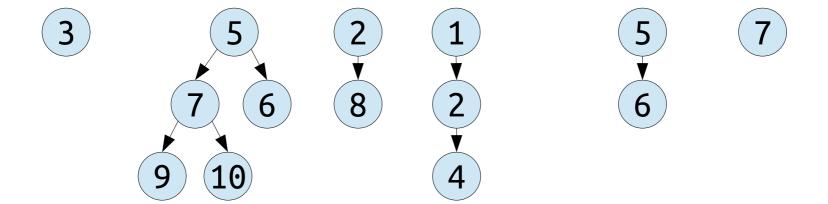


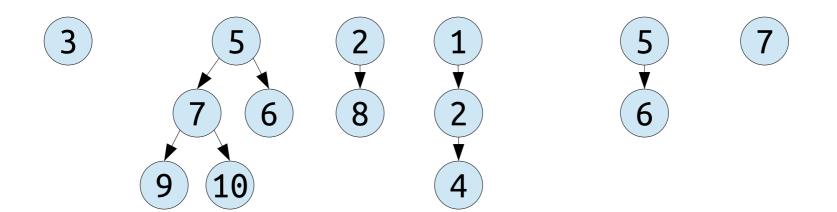

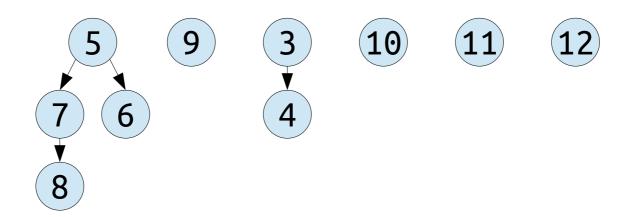


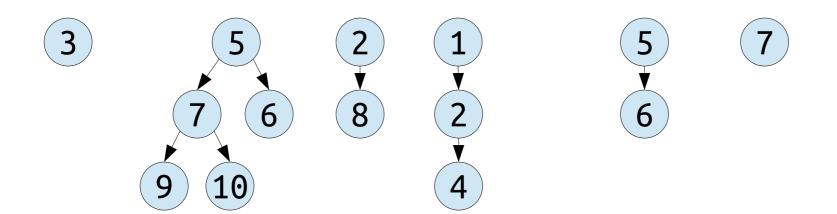


Order 2	Order 1	Order 0
5 7 6 8	3	9 10 11 12

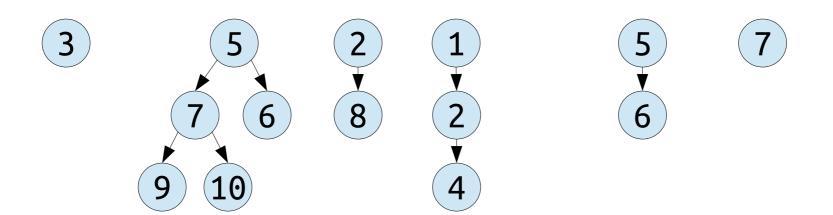


Order 2	Order 1	Order 0
5 7 6	3 4	9 10 11 12

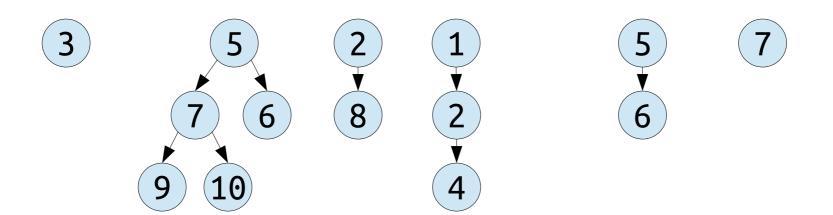


Order 2	Order 1	Order 0
5 7 6 8	3	9 10 11 12

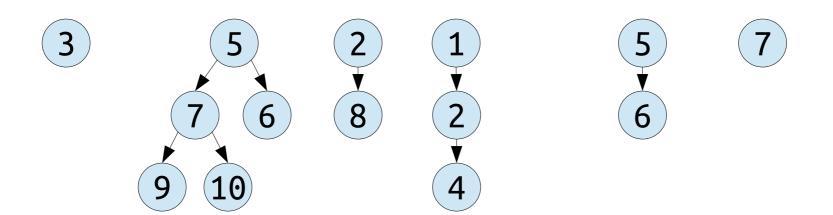


Order 2	Ord	er 1	Order 0
5 7 6 8	3 4	11 12	9 10

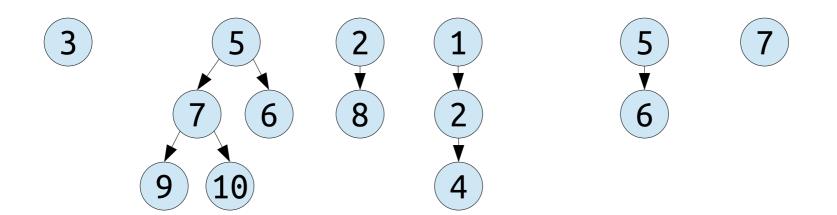


Order 2	Order 1	Order 0
5 7 6 8	3 11 4 12	9 10

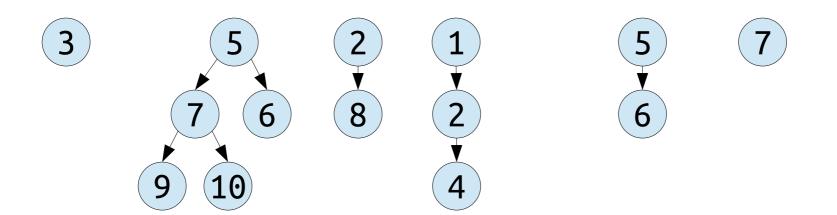



Order 2	Ord	er 1	Order 0
5 7 6	3 4	11 12	9 10

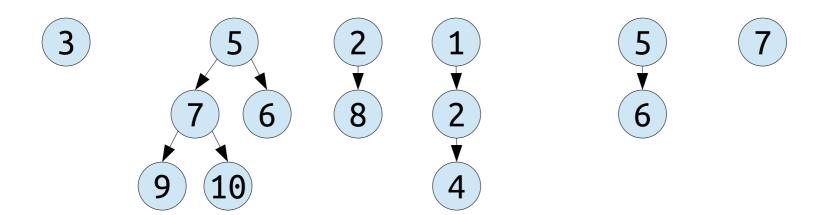


Order 2	Order 1	Order 0
5 7 6	3 11 4 12	9 10

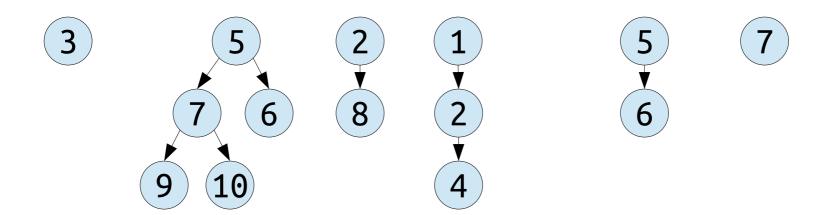

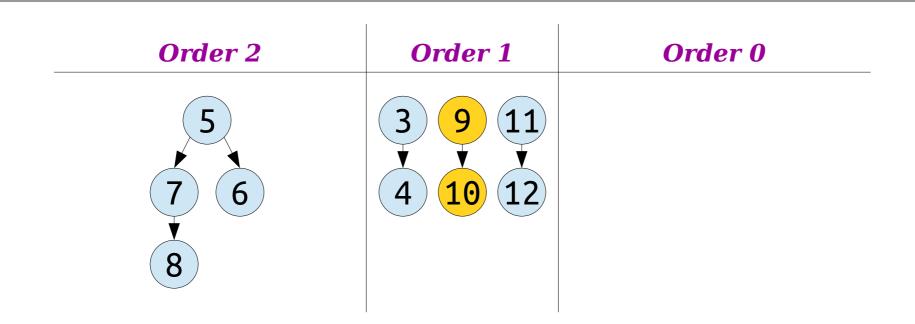


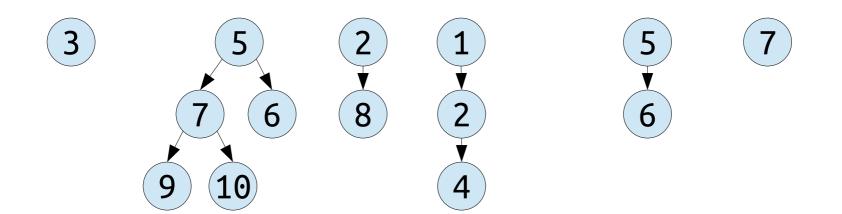



Order 2	Order 1	Order 0
7 6 8	3 9 11 4 10 12	

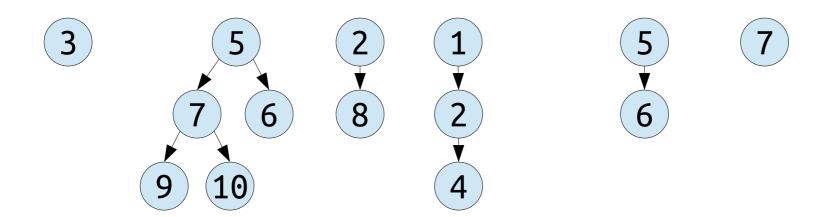


Order 2	Order 1	Order 0
5 7 6	3 9 11 4 10 12	

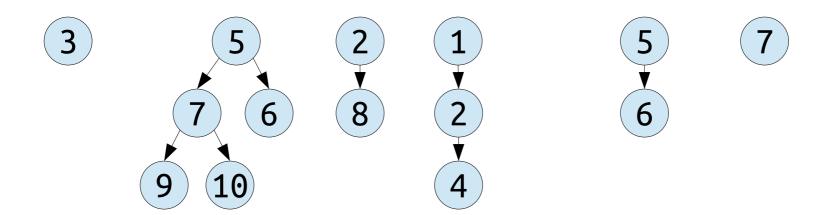


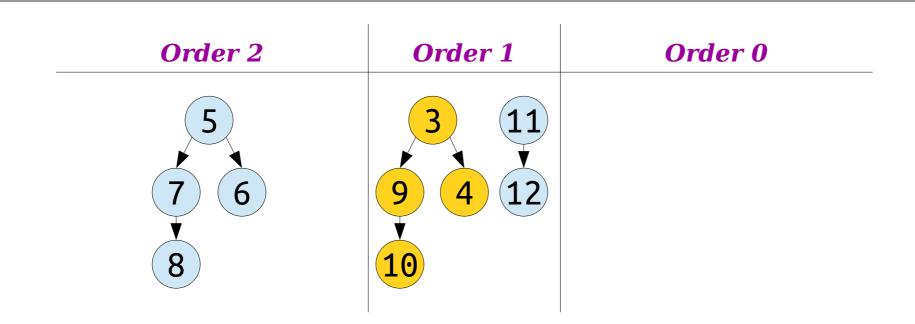


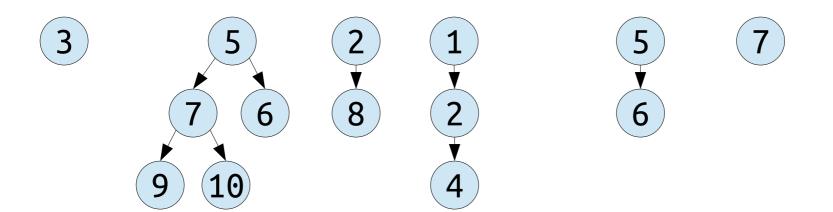



Order 2	Order 1	Order 0
5 7 6 9 4 8	11 12	

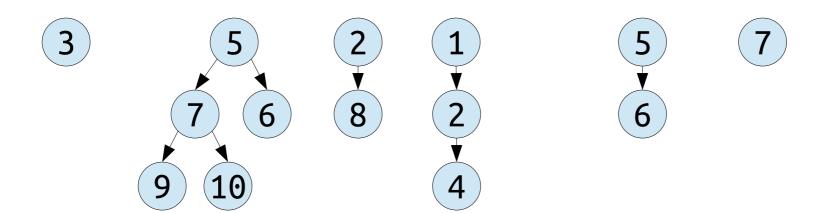


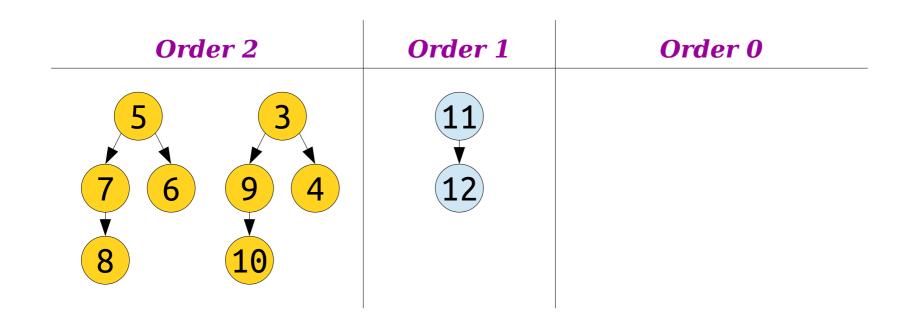


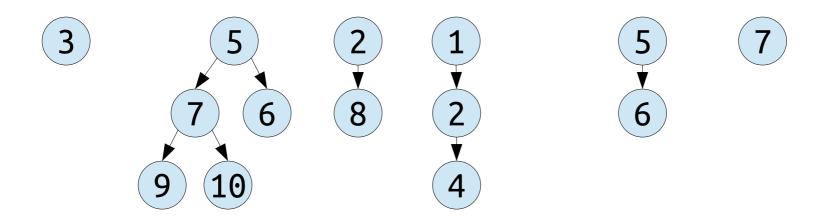


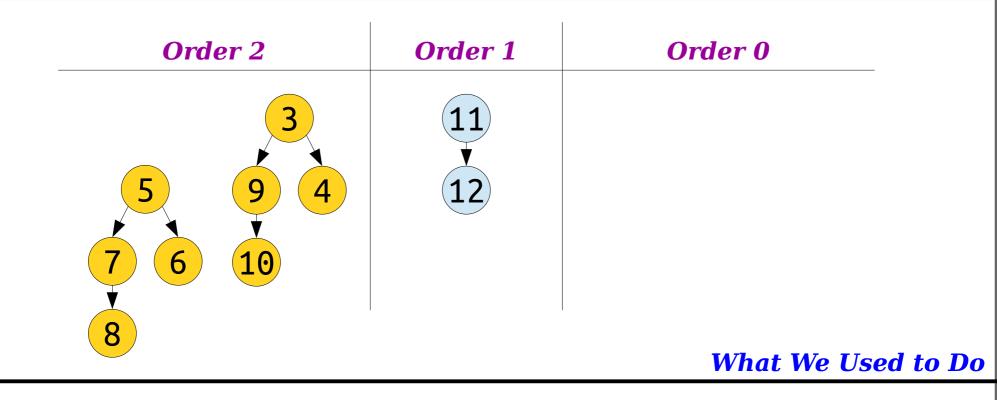


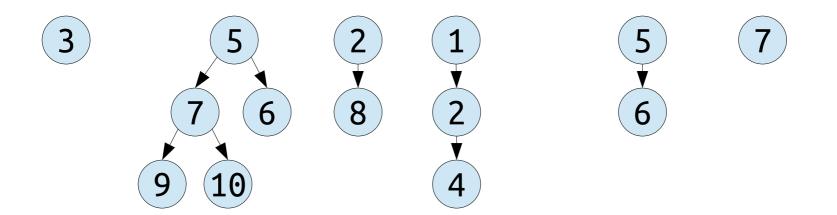

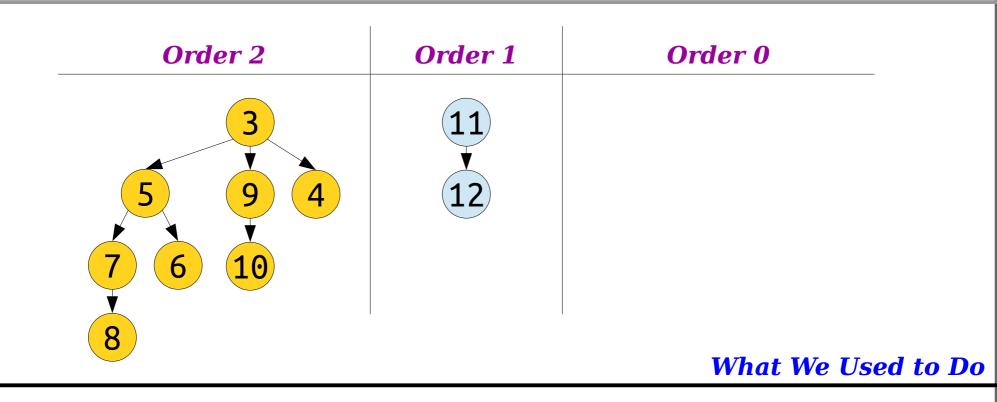

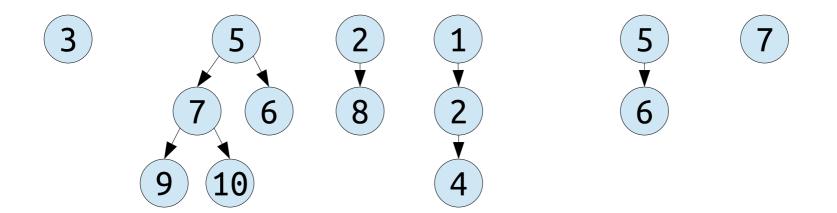






This system assumes we can assign an "order" to each tree.


That's easy with binomial trees.


That's harder with our new trees.


What should we do here?


What We Used to Do

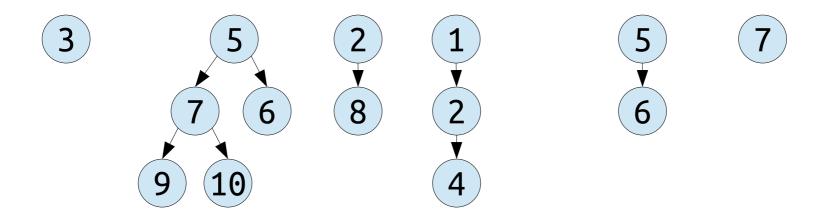


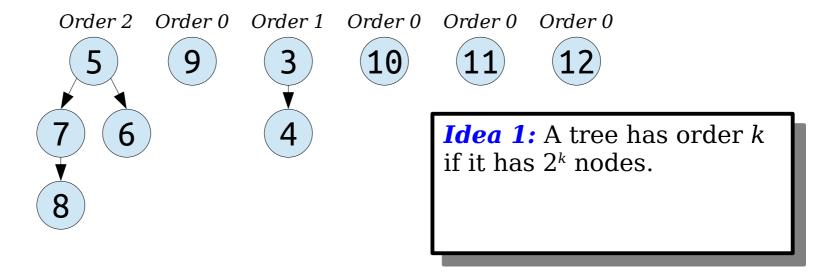


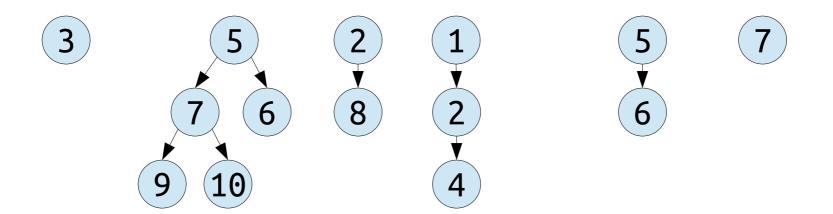


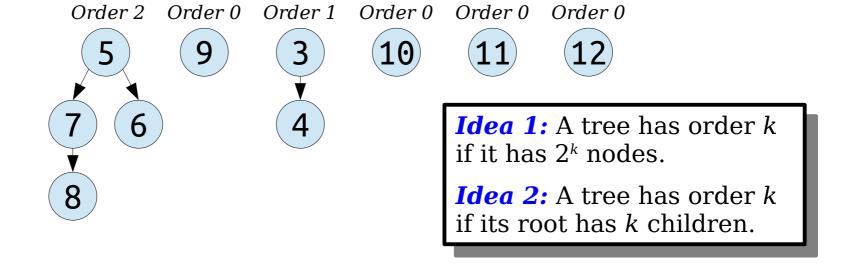


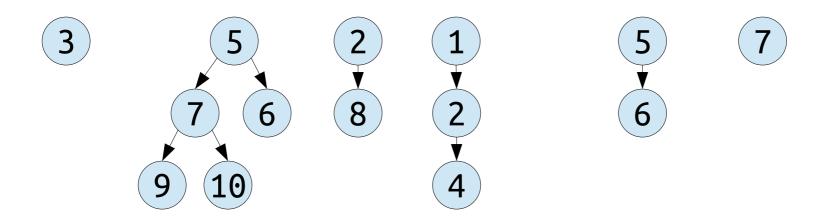


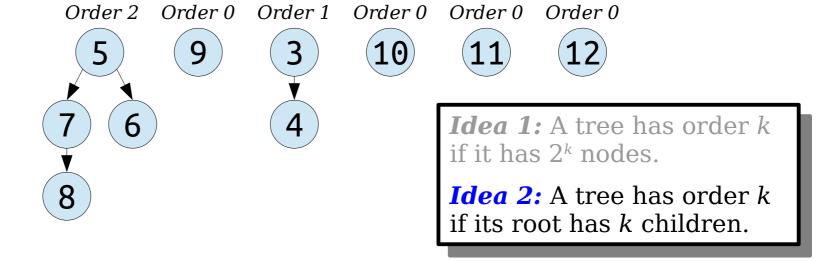

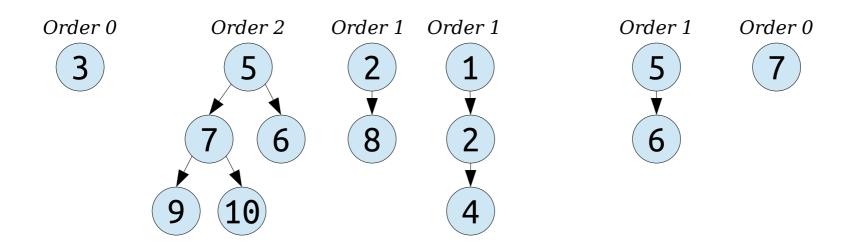

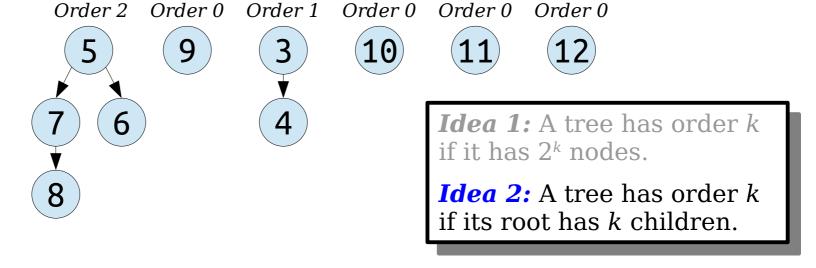


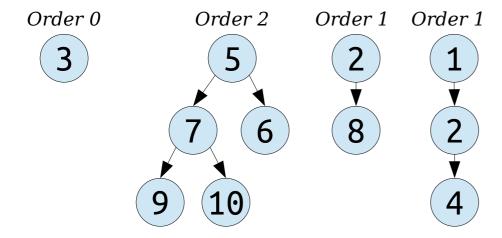






Idea 1: A tree has order k if it has 2^k nodes.


Idea 2: A tree has order *k* if its root has *k* children.

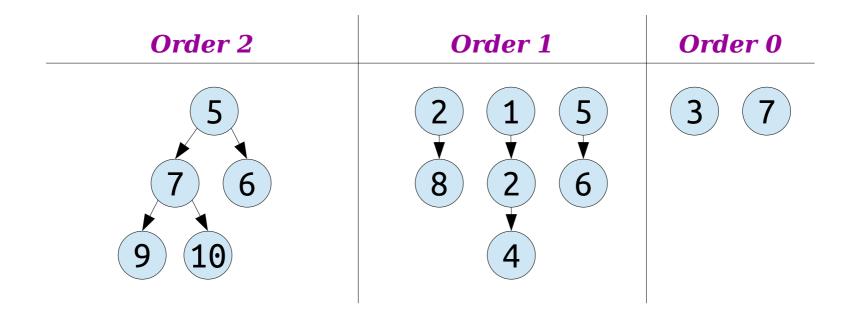


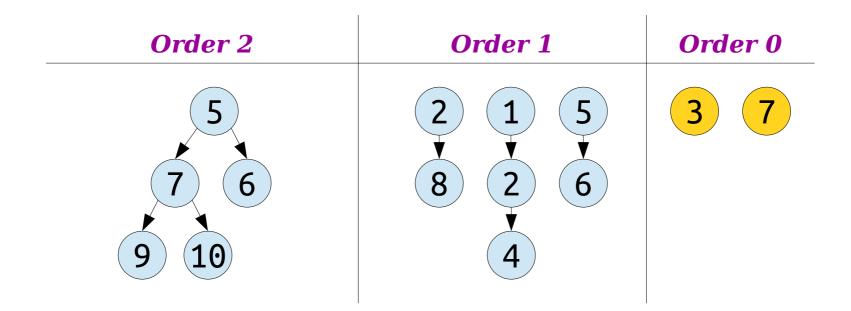


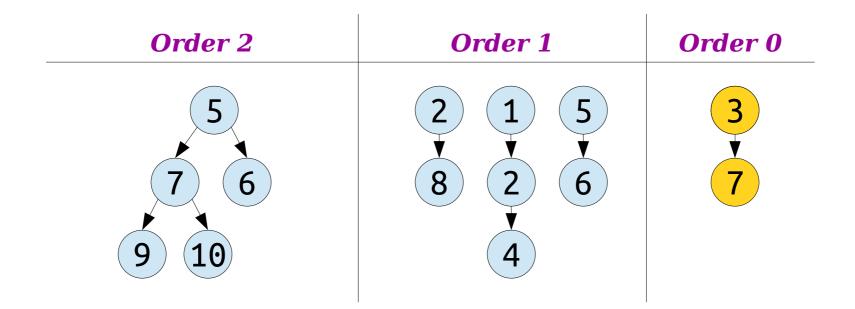


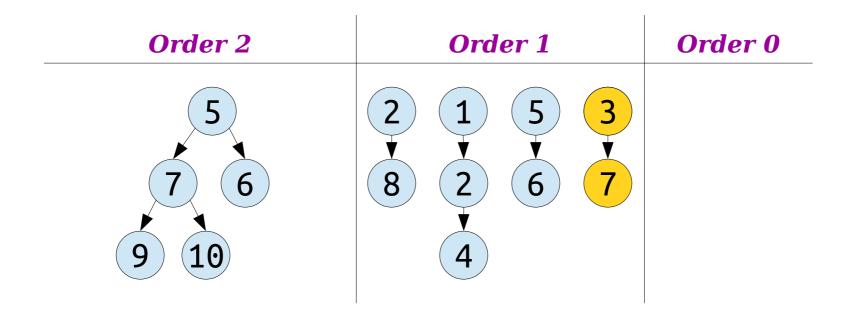


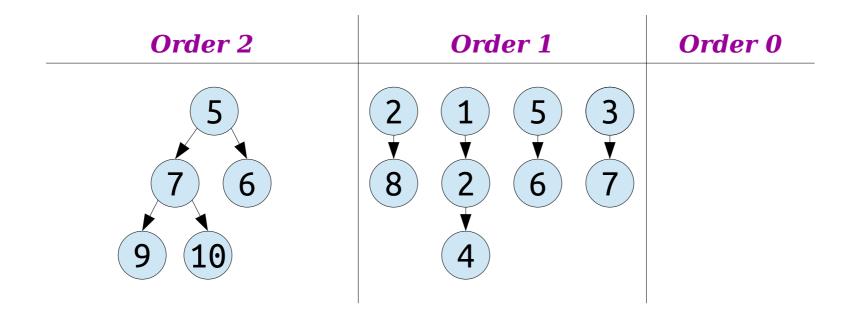


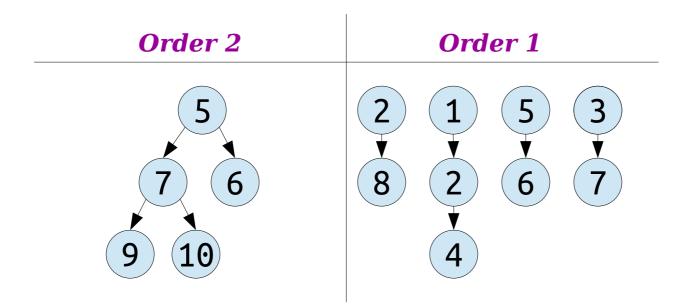


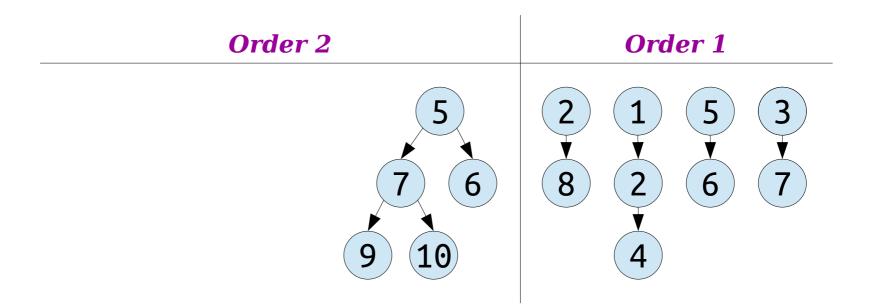


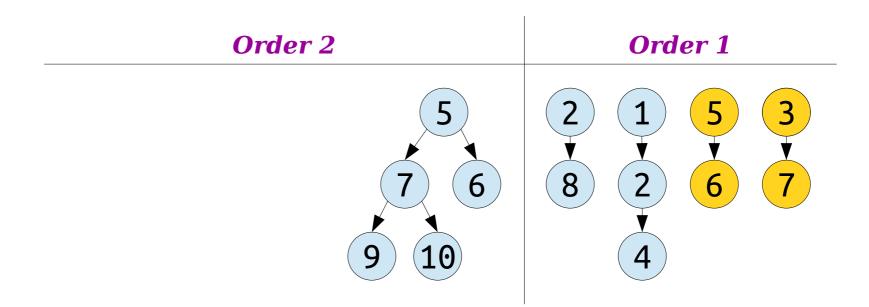


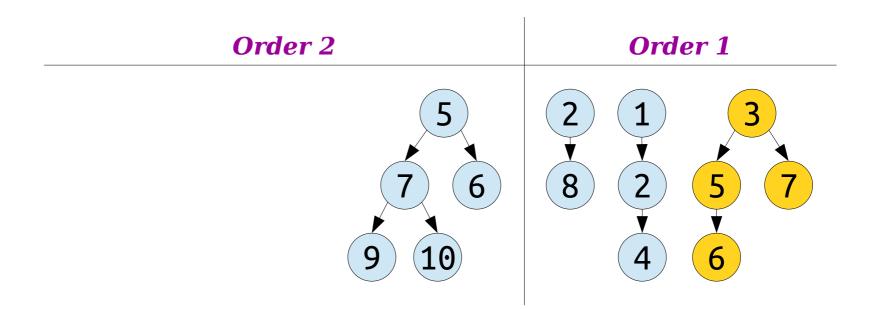

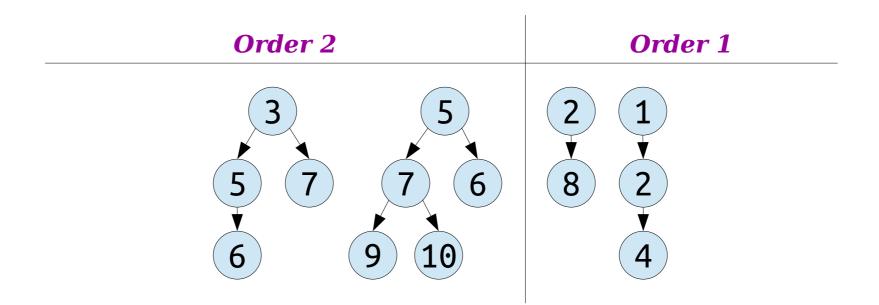


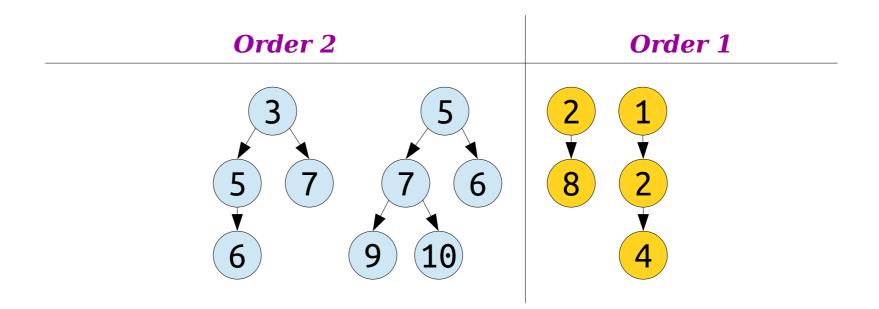


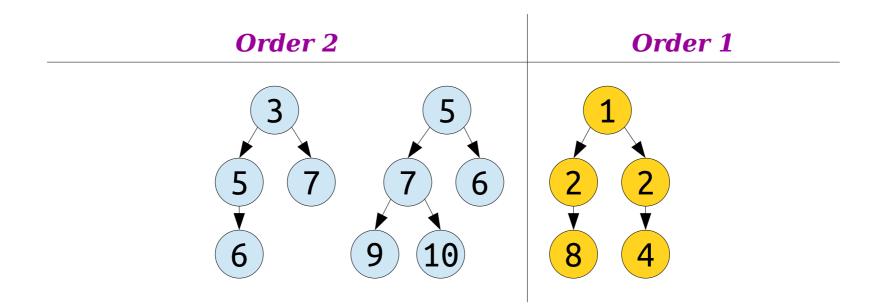


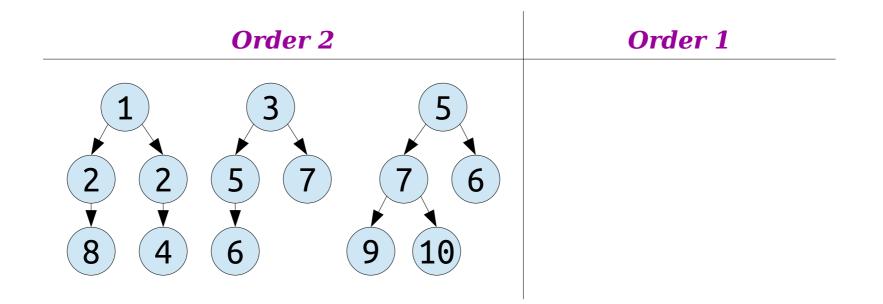



Order 2

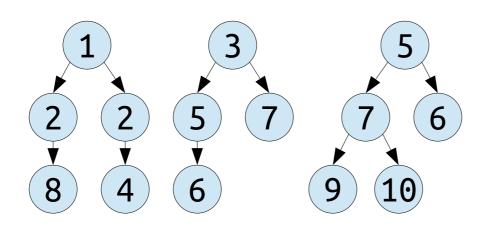


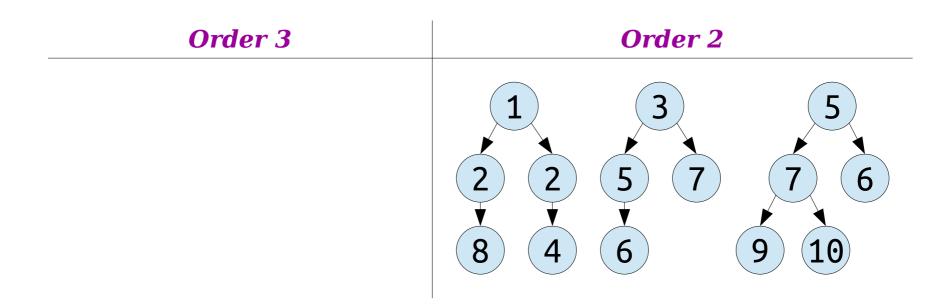


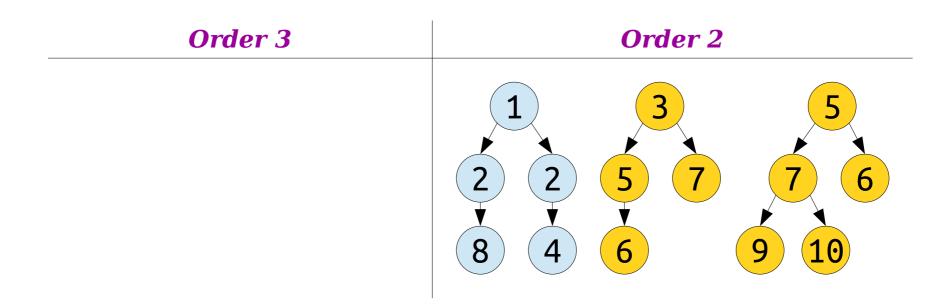


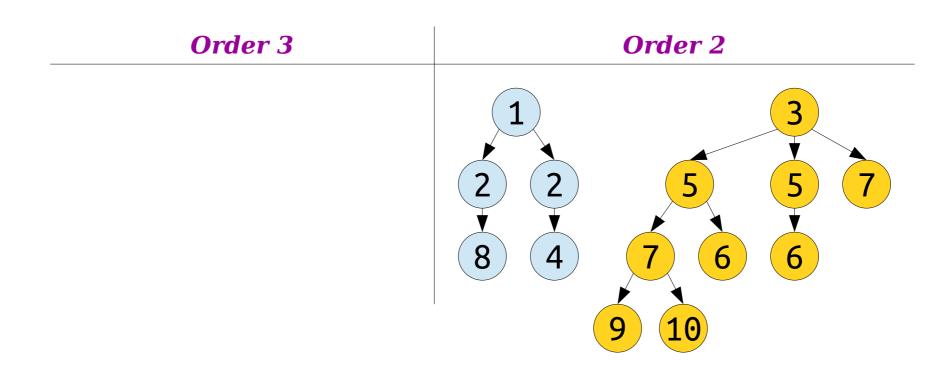

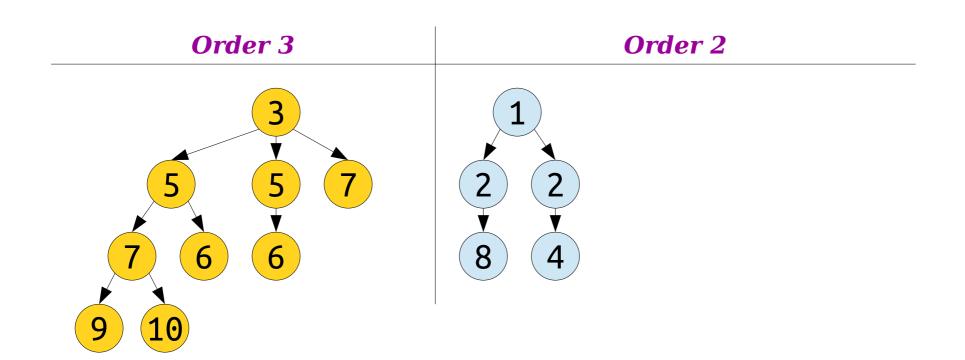

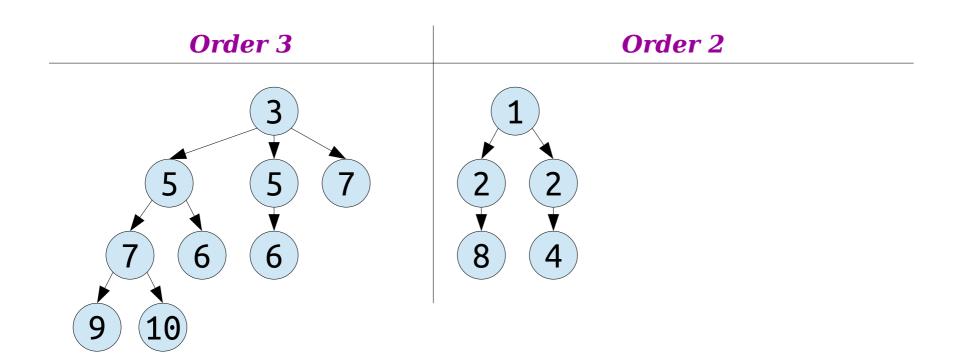


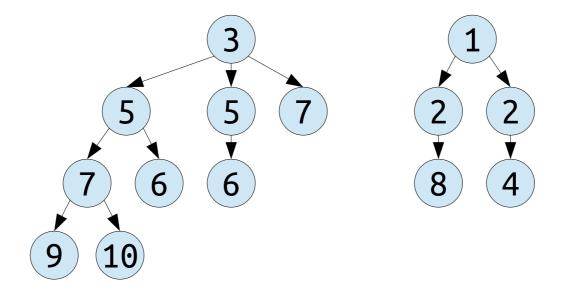

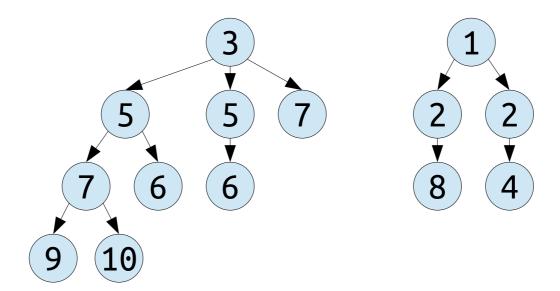


- (1) To do a *decrease-key*, cut the node from its parent.
- (2) Do extract-min as usual, using child count as order.

Question: How efficient is this?

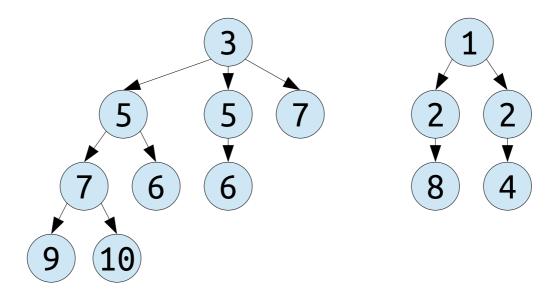



- (1) To do a *decrease-key*, cut the node from its parent.
- (2) Do extract-min as usual, using child count as order.





Find a series of operations that gives rise to a heap containing a single tree with this shape.










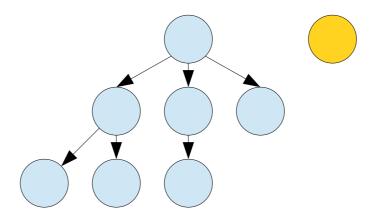































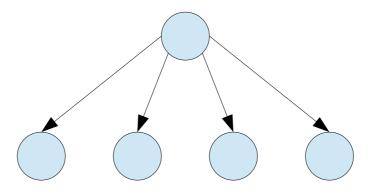



Find a series of operations that gives rise to a heap containing a single tree with this shape.

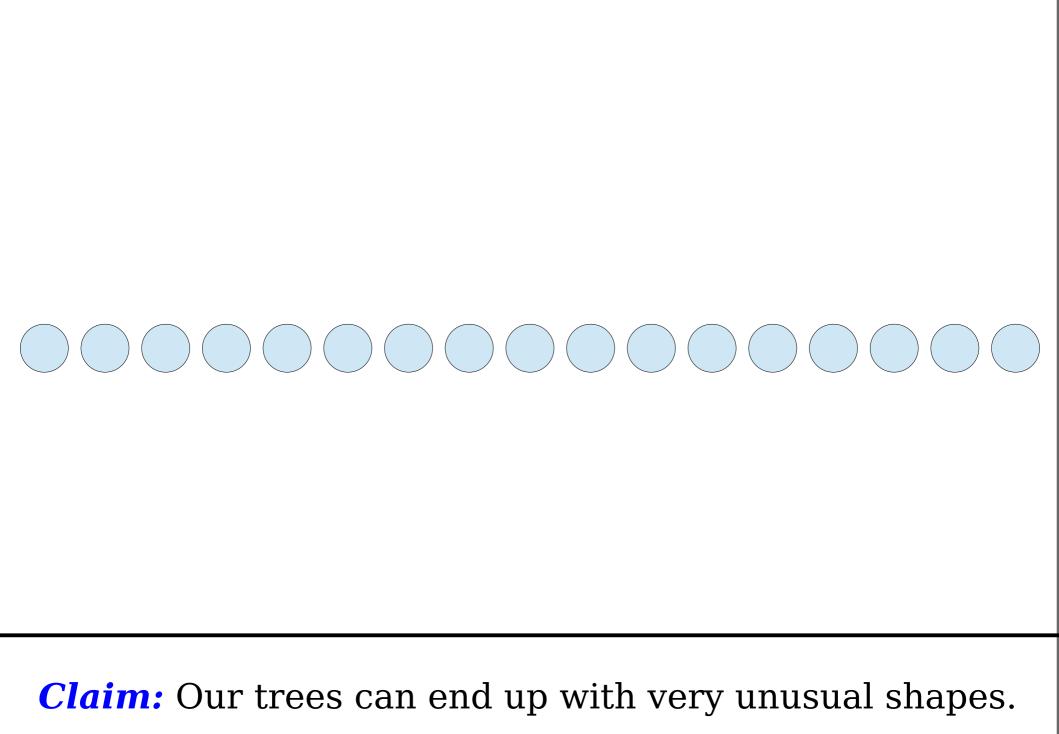


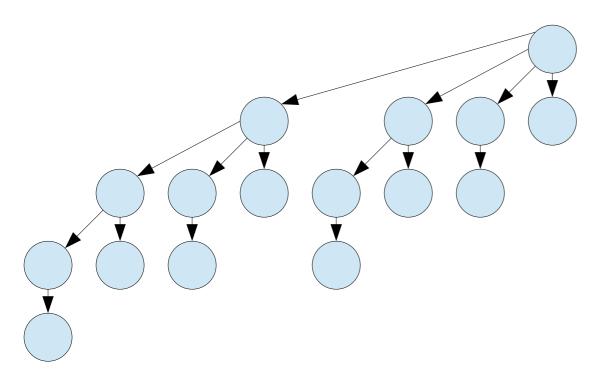


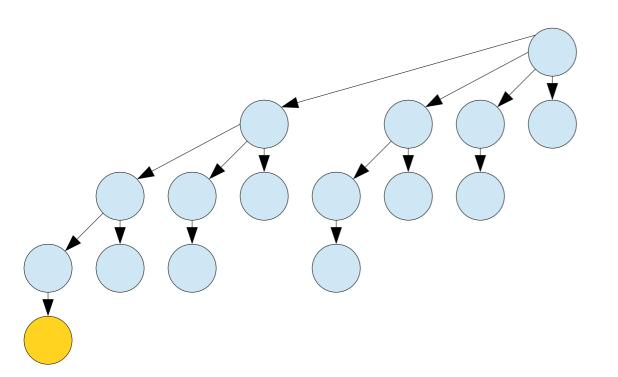

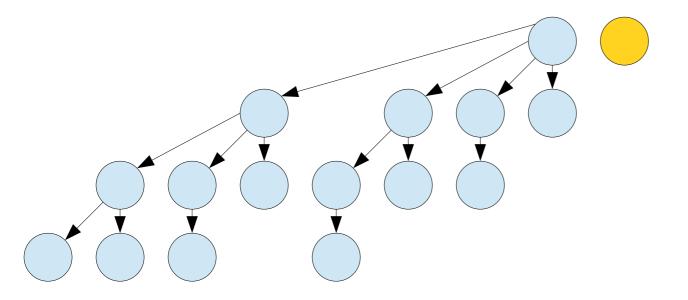

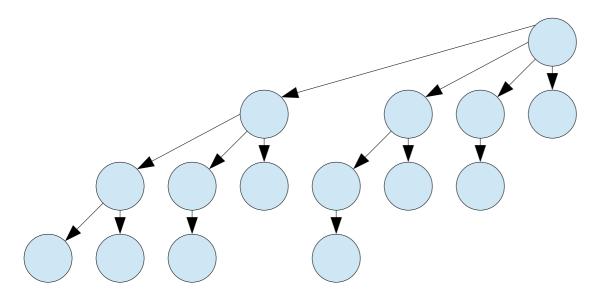






- 1. *enqueue* $2^k + 1$ nodes.
- 2. Do an *extract-min*.
- 3. Use *decrease-key* and *extract-min* to prune the tree.

Intuition: extract-min
is only fast if it
compacts nodes into a
few trees.


There are $\Theta(n^{1/2})$ trees here. What happens if we repeatedly **enqueue** and **extract-min** a small value?

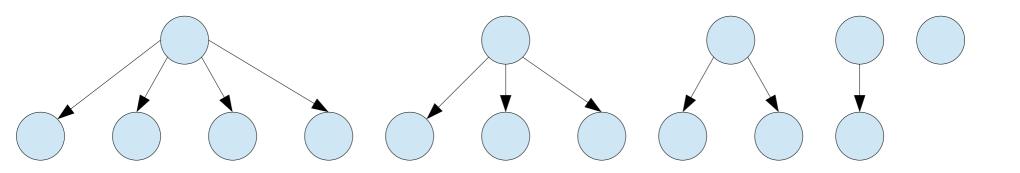

Intuition: extract-min
is only fast if it
compacts nodes into a
few trees.

There are $\Theta(n^{1/2})$ trees here.


What happens if we repeatedly **enqueue** and **extract-min** a small value?

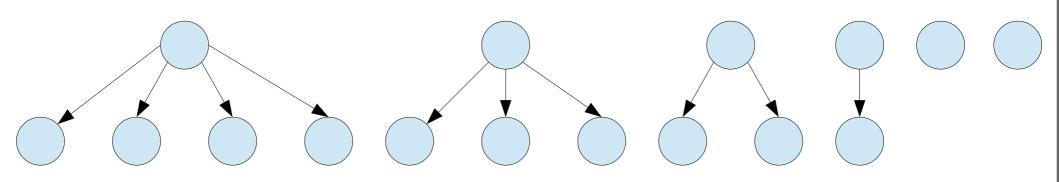

Intuition: extract-min
is only fast if it
compacts nodes into a
few trees.

There are $\Theta(n^{1/2})$ trees here.


What happens if we repeatedly **enqueue** and **extract-min** a small value?

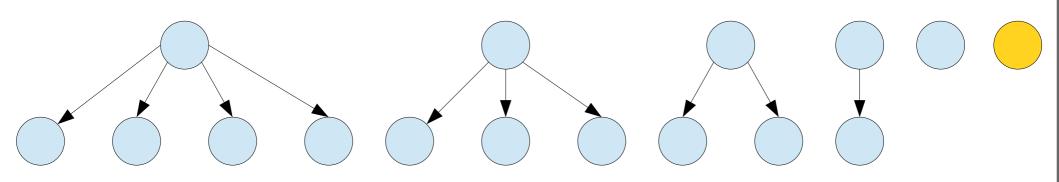

Intuition: extract-min is only fast if it compacts nodes into a few trees.

There are $\Theta(n^{1/2})$ trees here.

What happens if we repeatedly **enqueue** and **extract-min** a small value?

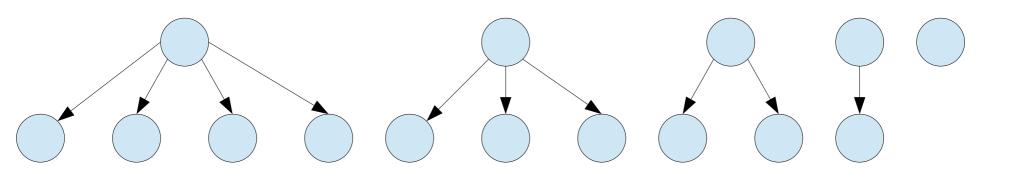


(Do a bunch of work to compact the trees, which doesn't accomplish anything.)

Intuition: extract-min
is only fast if it
compacts nodes into a
few trees.

There are $\Theta(n^{1/2})$ trees here.


What happens if we repeatedly **enqueue** and **extract-min** a small value?

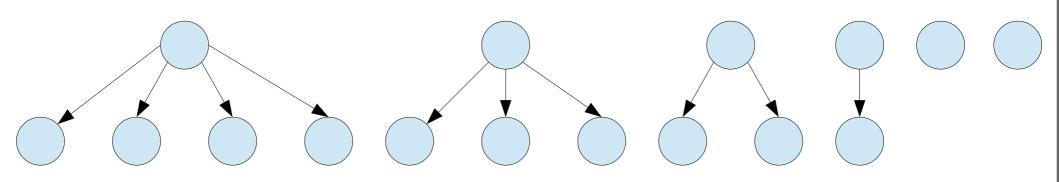

Intuition: extract-min
is only fast if it
compacts nodes into a
few trees.

There are $\Theta(n^{1/2})$ trees here.


What happens if we repeatedly **enqueue** and **extract-min** a small value?

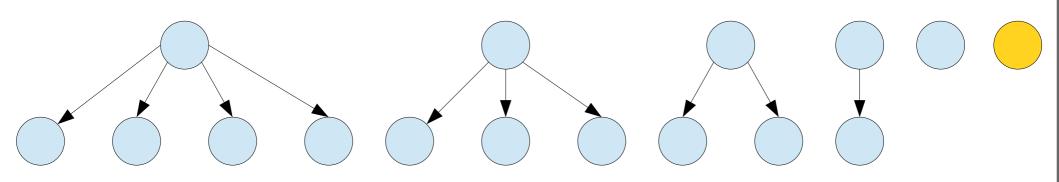

Intuition: extract-min is only fast if it compacts nodes into a few trees.

There are $\Theta(n^{1/2})$ trees here.

What happens if we repeatedly **enqueue** and **extract-min** a small value?

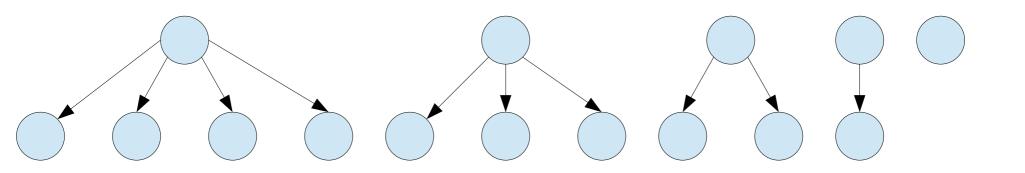


(Do a bunch of work to compact the trees, which doesn't accomplish anything.)


Intuition: extract-min is only fast if it compacts nodes into a few trees.

There are $\Theta(n^{1/2})$ trees here.

What happens if we repeatedly **enqueue** and **extract-min** a small value?

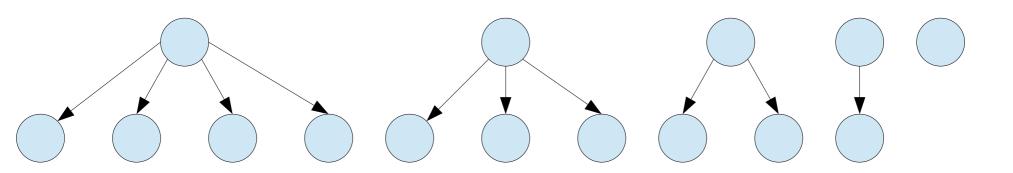


Each operation does $\Theta(n^{1/2})$ work, and doesn't make any future operations any better.

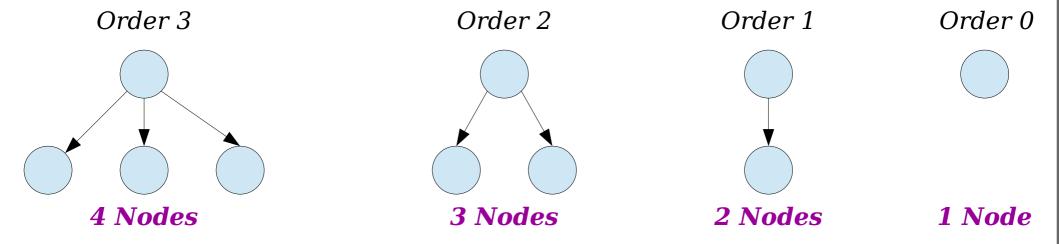


With n nodes, it's possible to have $\Omega(n^{1/2})$ trees of distinct orders.

Question: Why didn't this happen before?

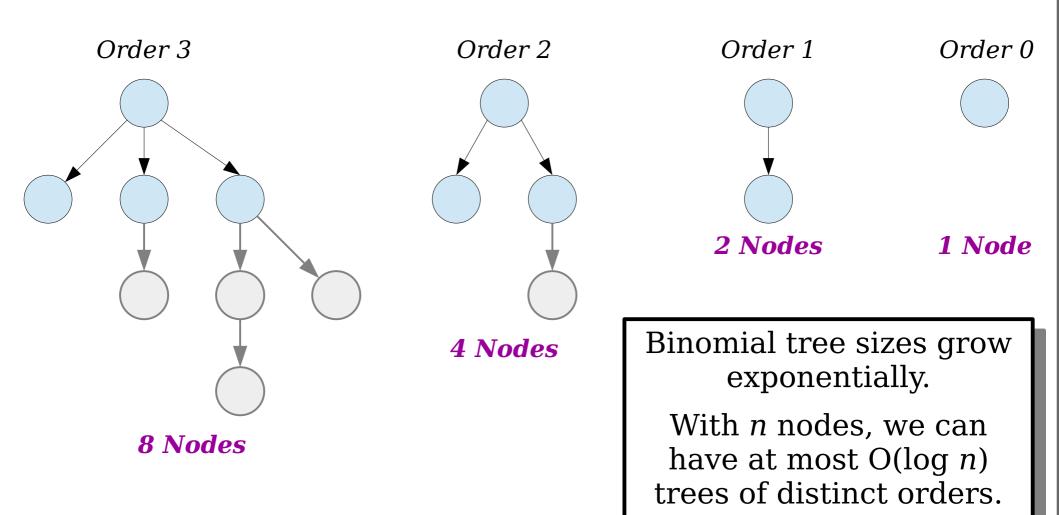


Question: Why didn't this happen before?


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

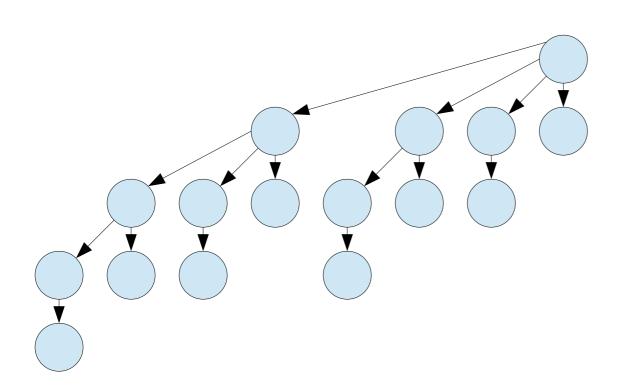


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

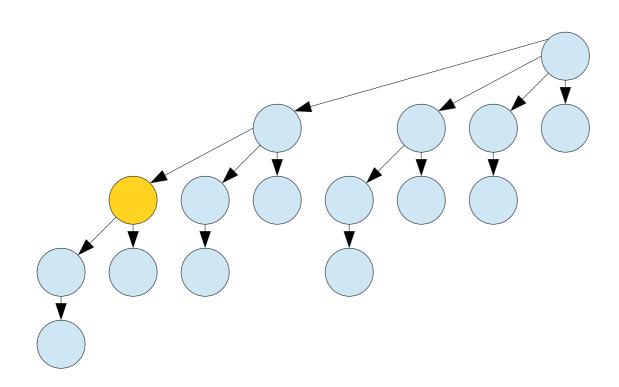


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

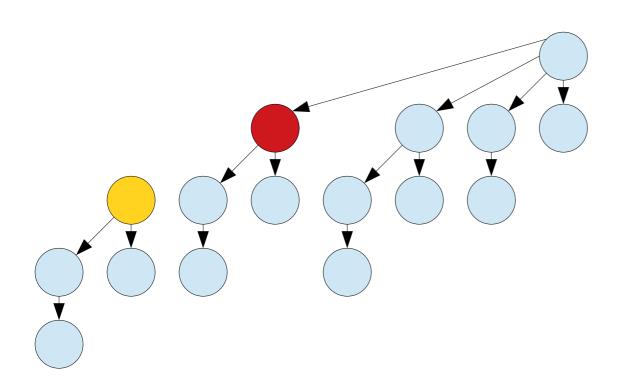


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

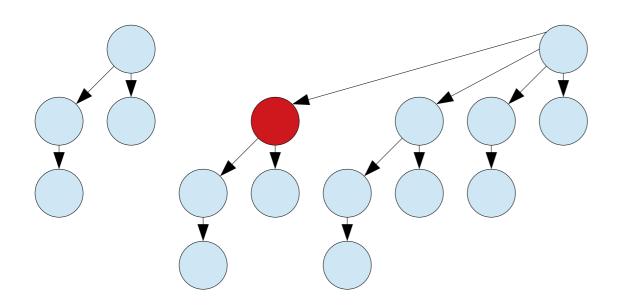


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

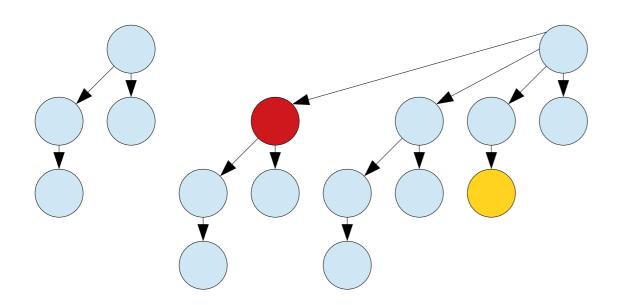


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

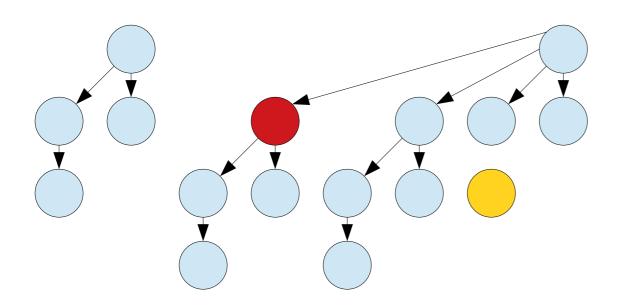


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

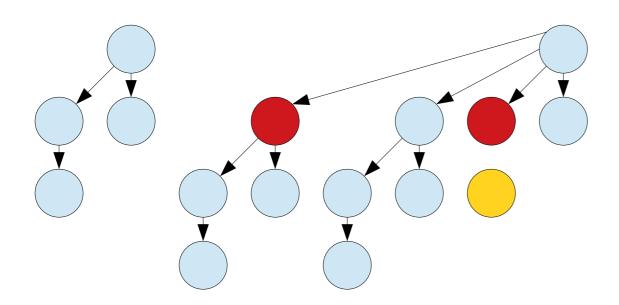


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

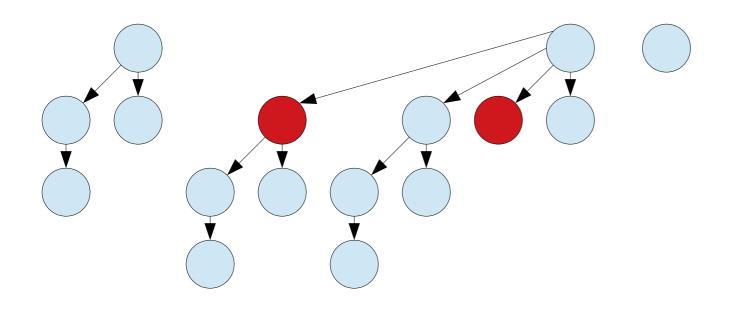


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

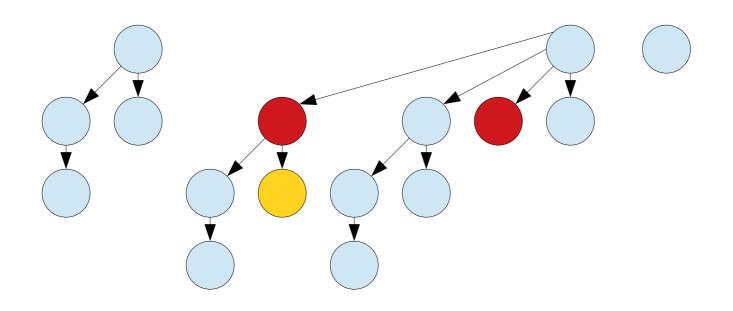


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

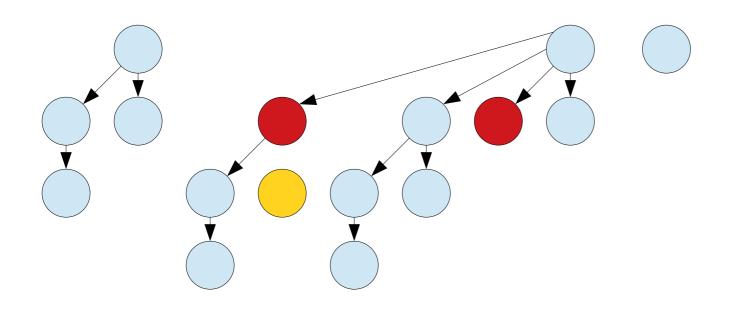


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

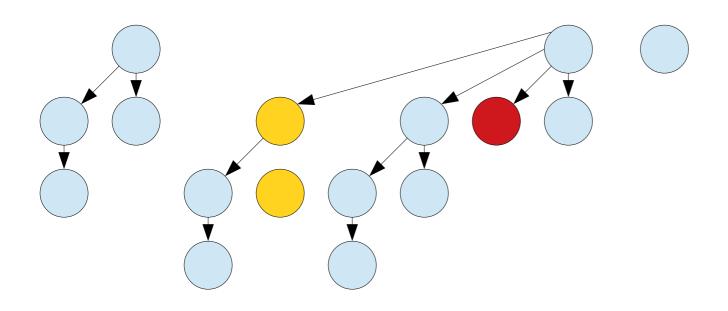


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

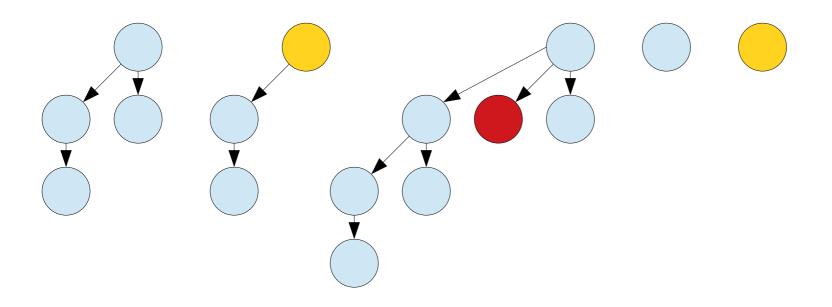


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

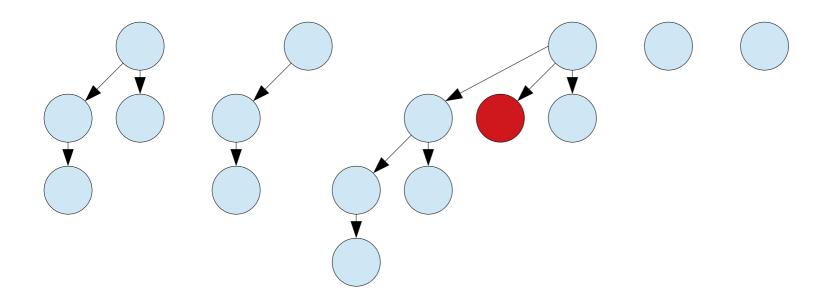


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

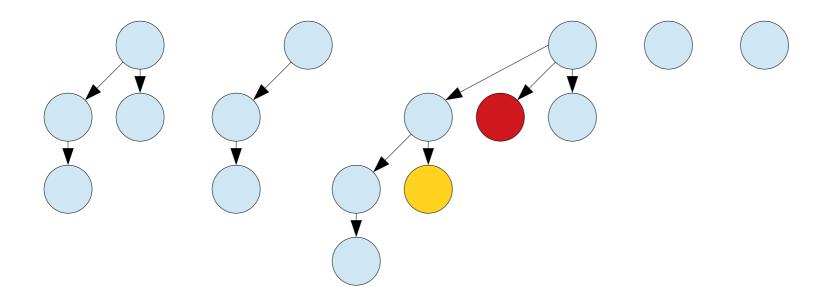


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

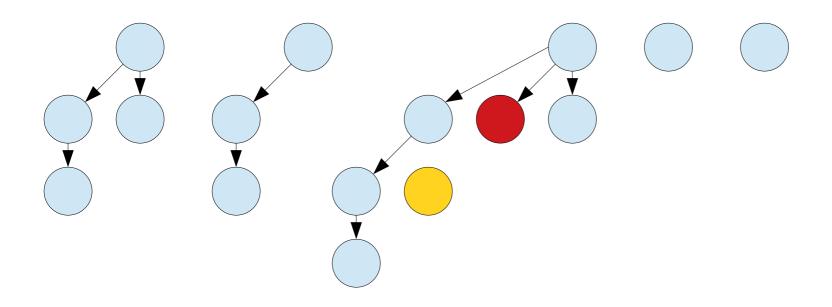


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

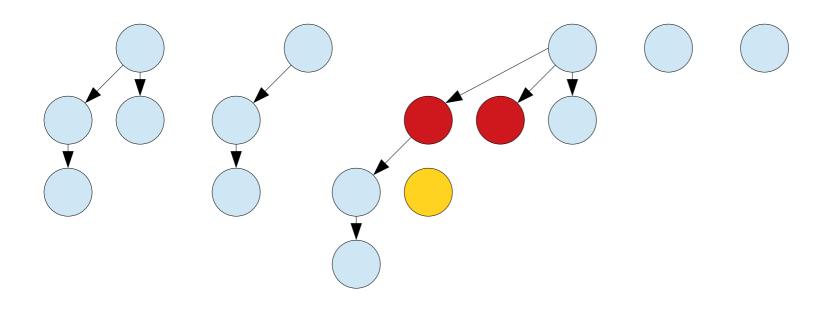


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

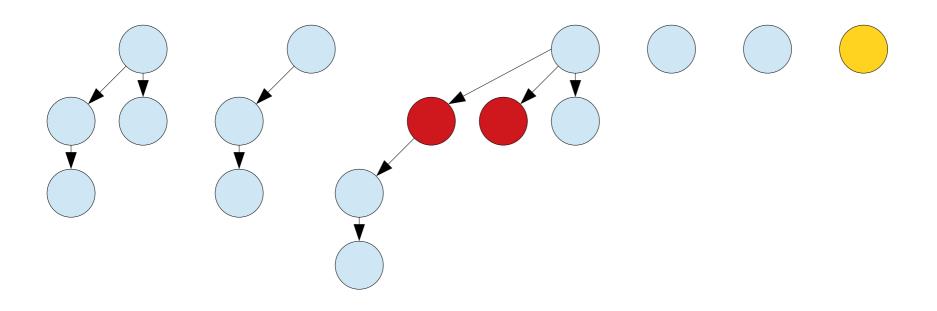


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

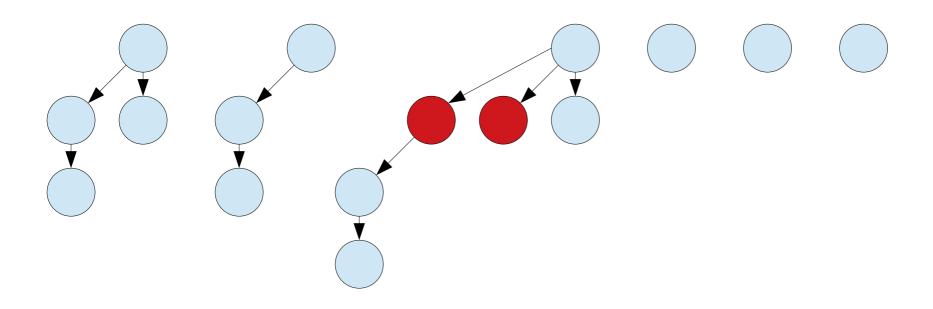


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

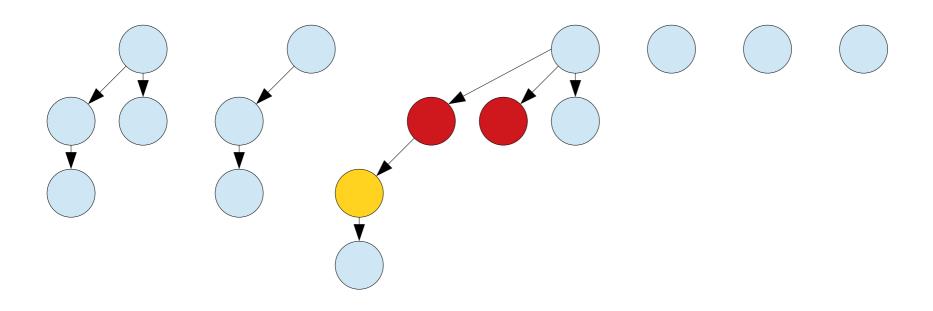


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

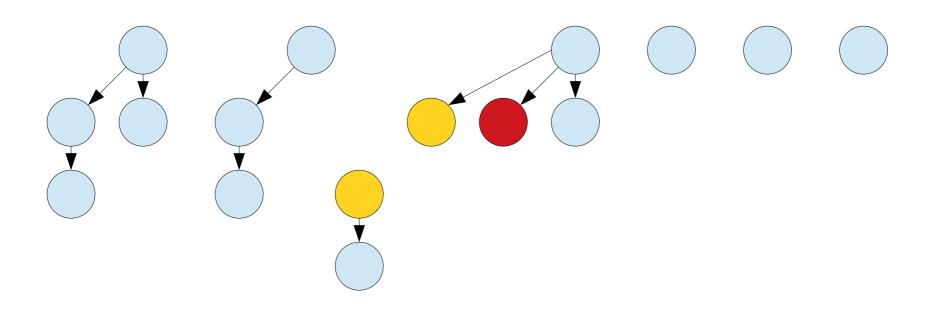


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

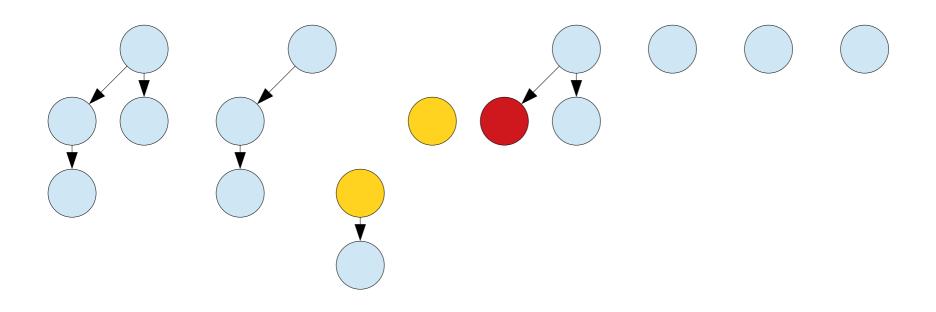


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

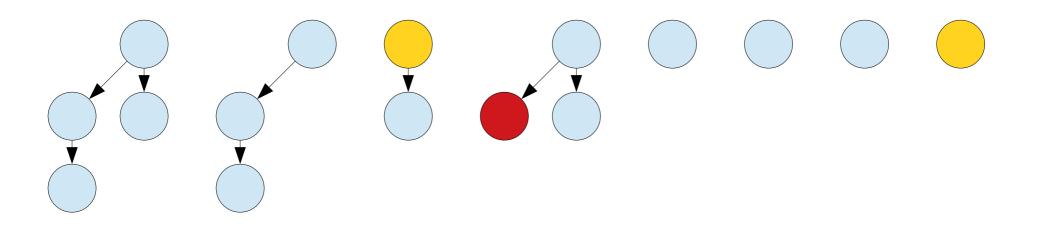

Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

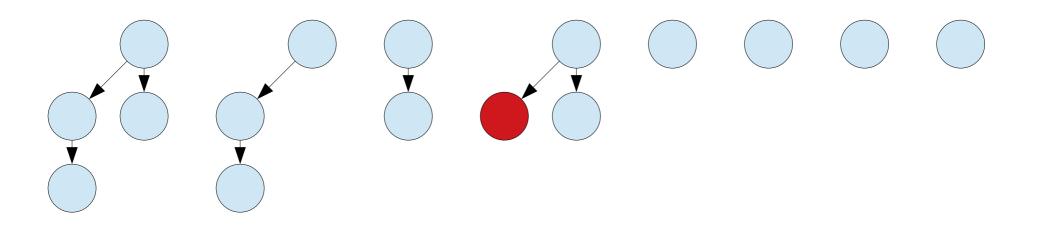


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

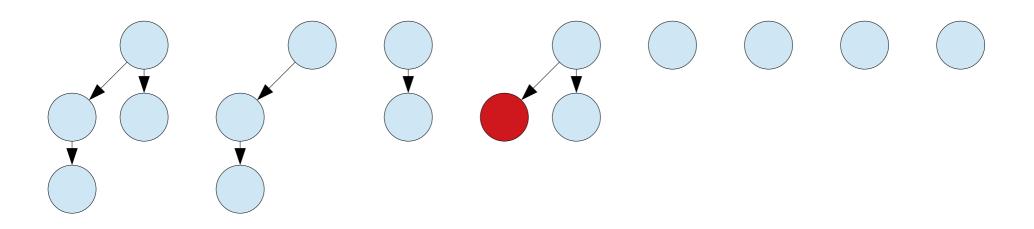


Question: Does this guarantee exponential tree size?

- Here's a binomial tree of order 4. That is, the root has four children.
- Question: Using our marking scheme, how many nodes can we remove without changing the order of the tree?
- Equivalently: how many nodes can we remove without removing any direct children of the root?

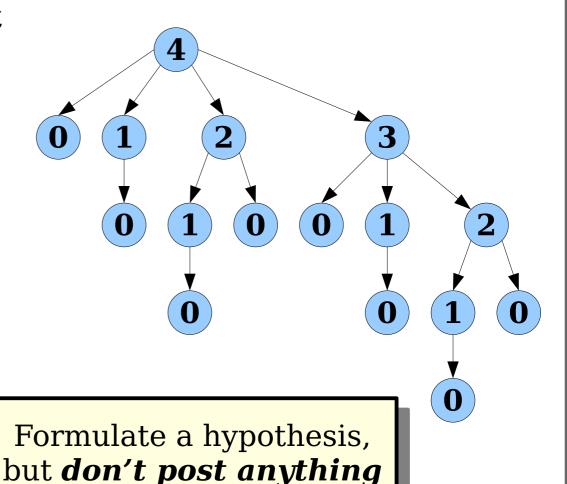


in chat just yet.


- Here's a binomial tree of order 4. That is, the root has four children.
- Question: Using our marking scheme, how many nodes can we remove without changing the order of the tree?
- Equivalently: how many nodes can we remove without removing any direct children of the root?

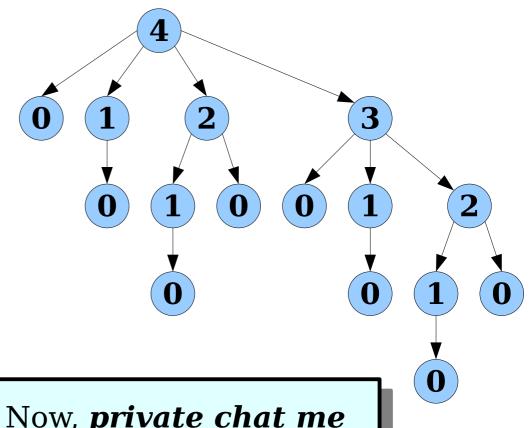


Now, private chat me your best guess. Not sure? Just answer "??".










We can't cut any nodes from this tree without making the root node have order 0.







We can't cut any of the root's children without decreasing its order.

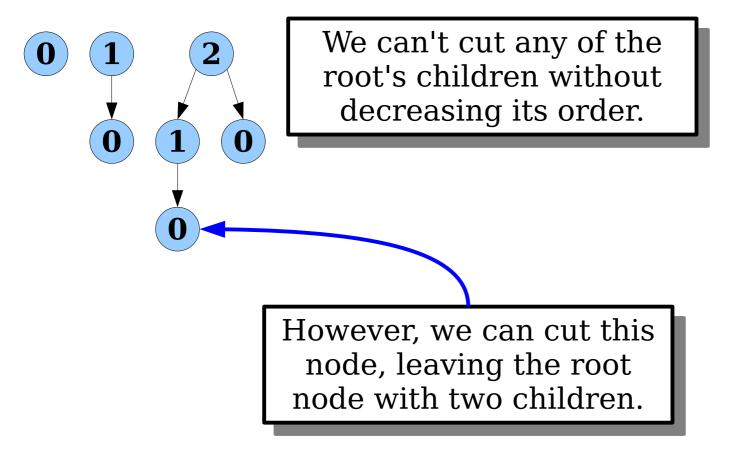




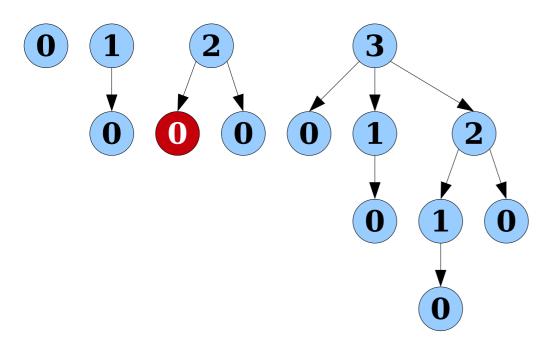

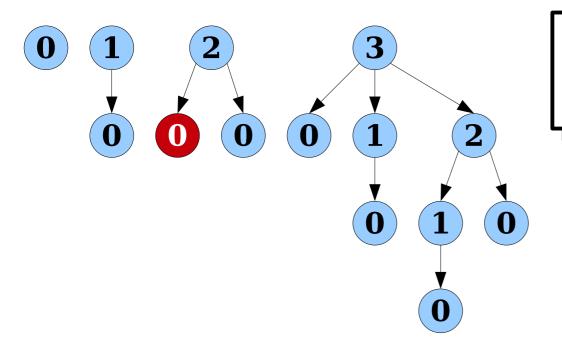



As before, we can't cut any of the root's children without decreasing its order.

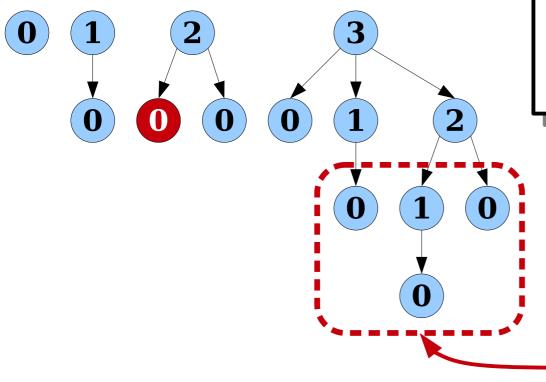



As before, we can't cut any of the root's children without decreasing its order.


However, any nodes below the second layer are fair game to be eliminated.

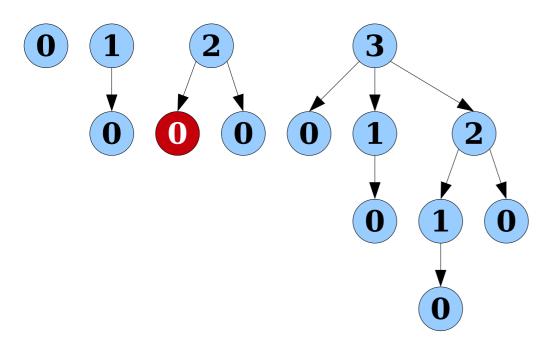


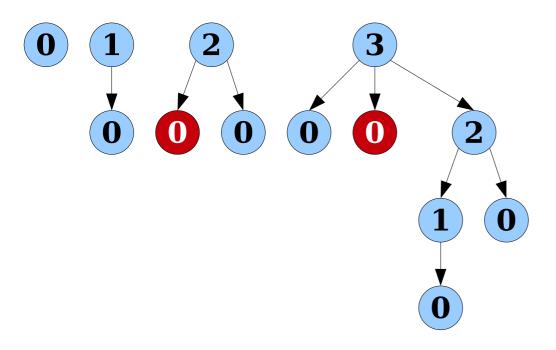


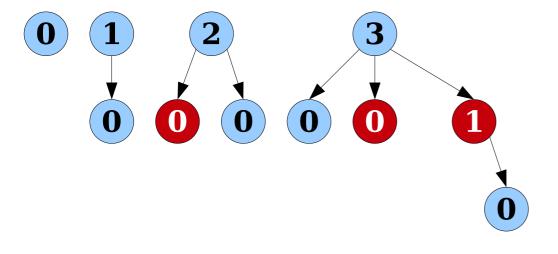


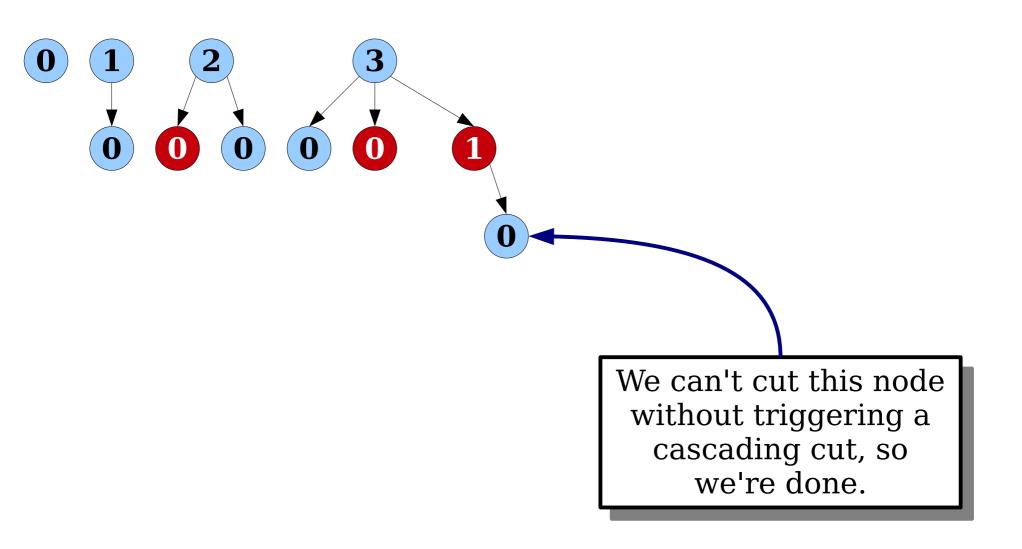


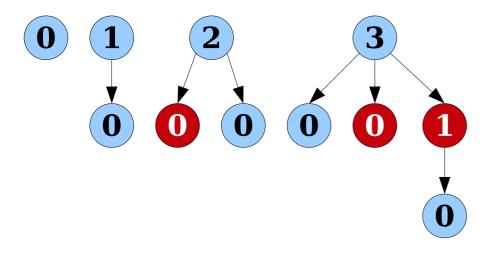


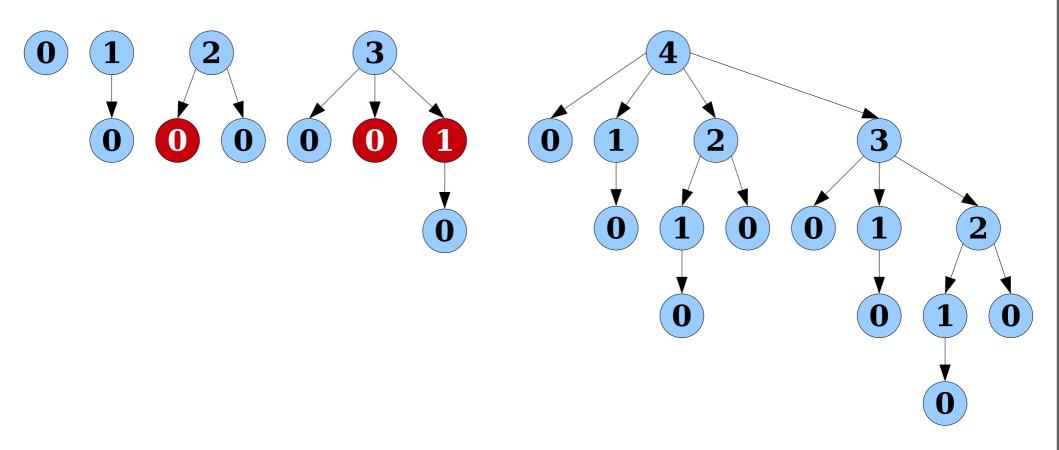


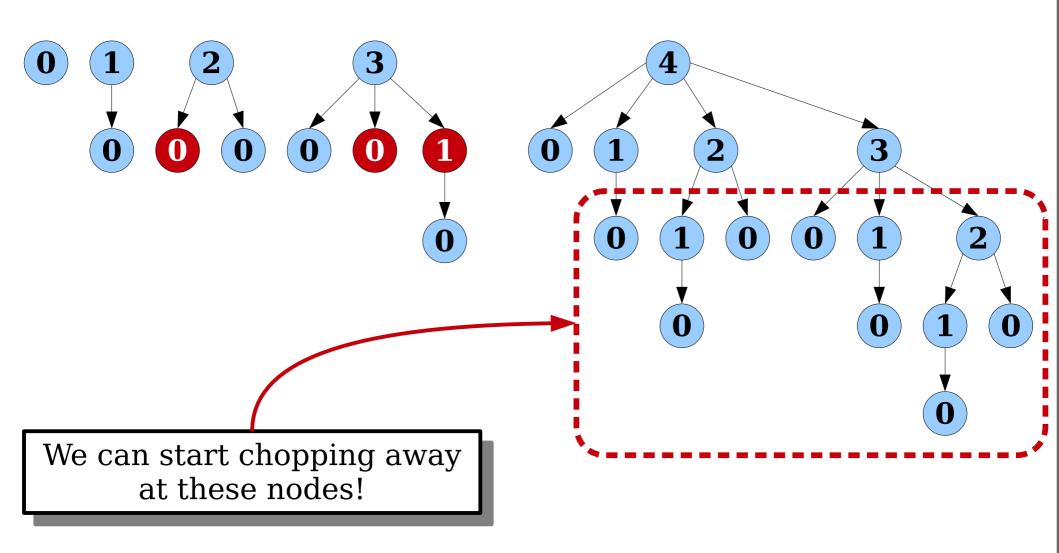


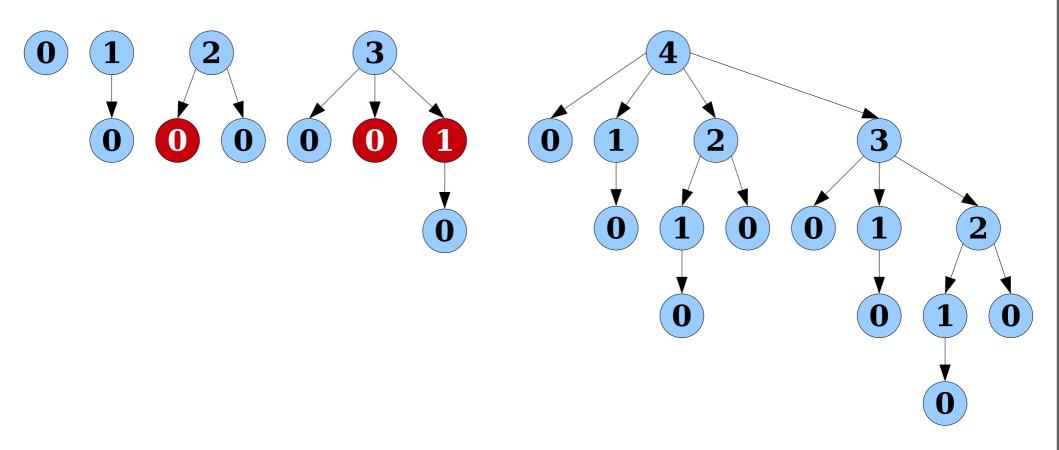


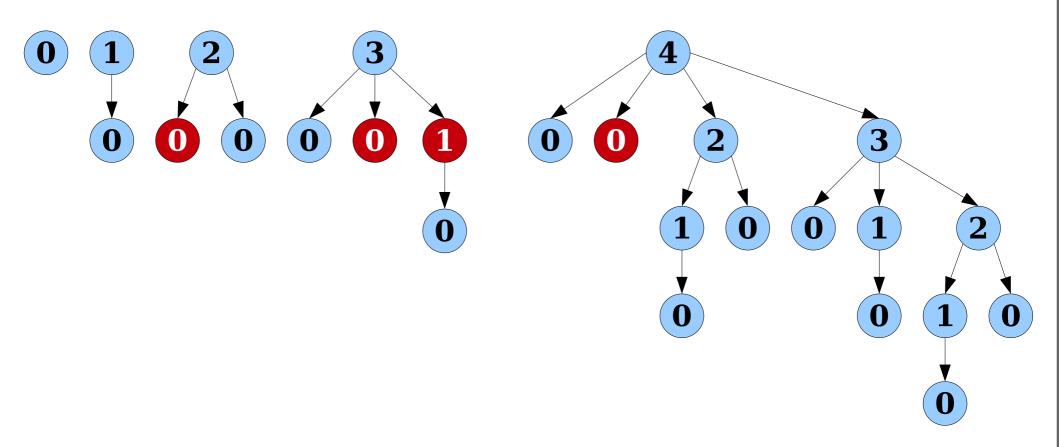


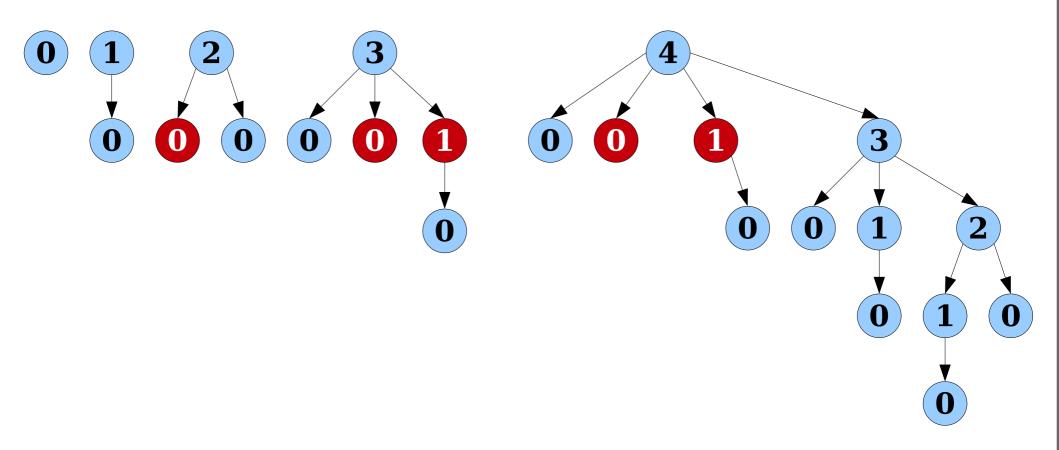


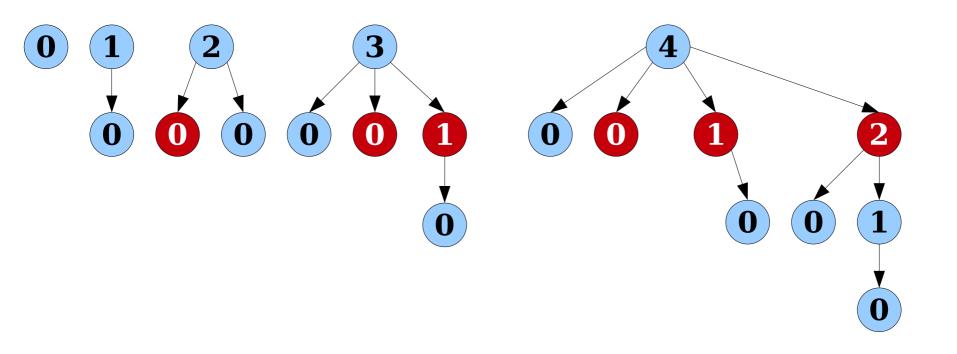


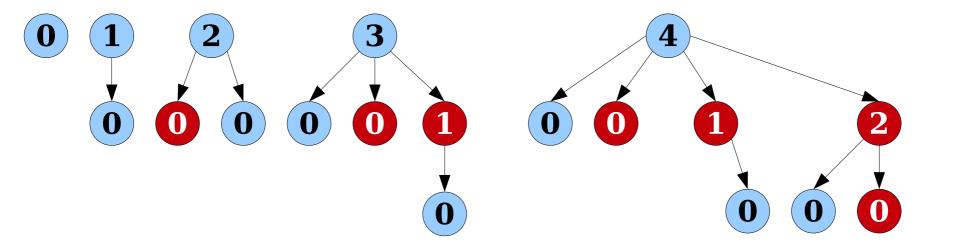


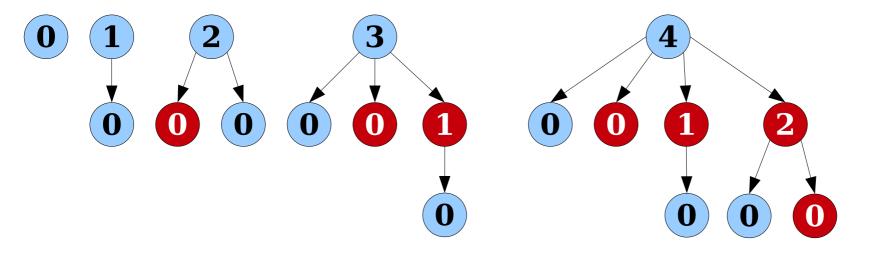

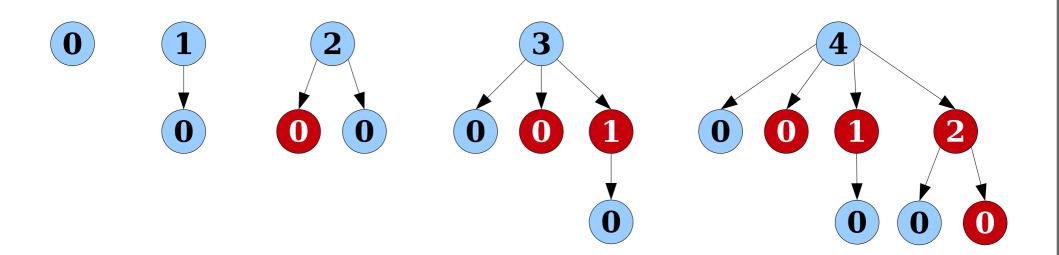


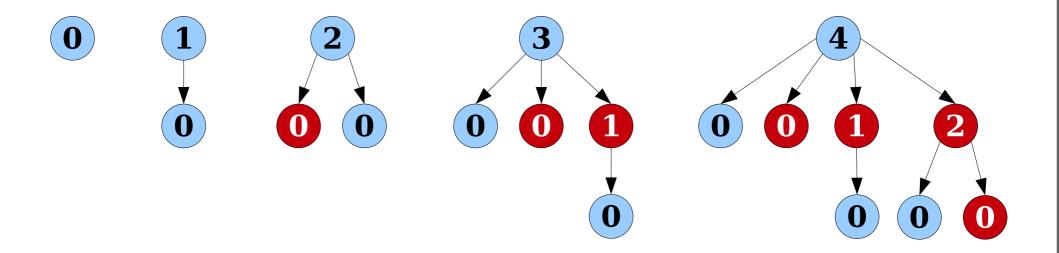

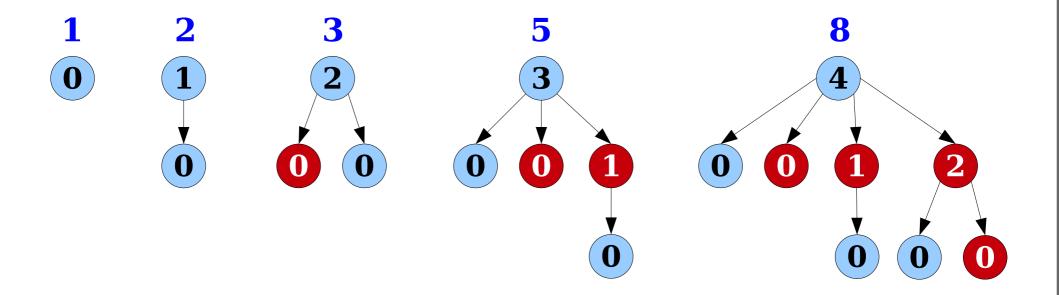

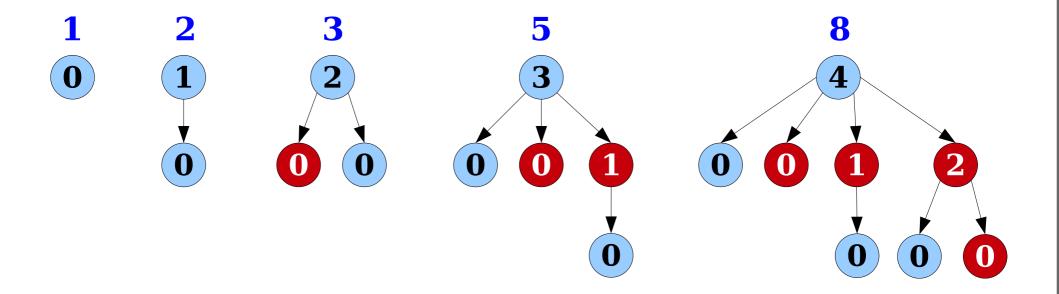


Claim: The minimum number of nodes in a tree of order k is F_{k+2}




These trees are the base cases for our inductive line of reasoning.


Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .

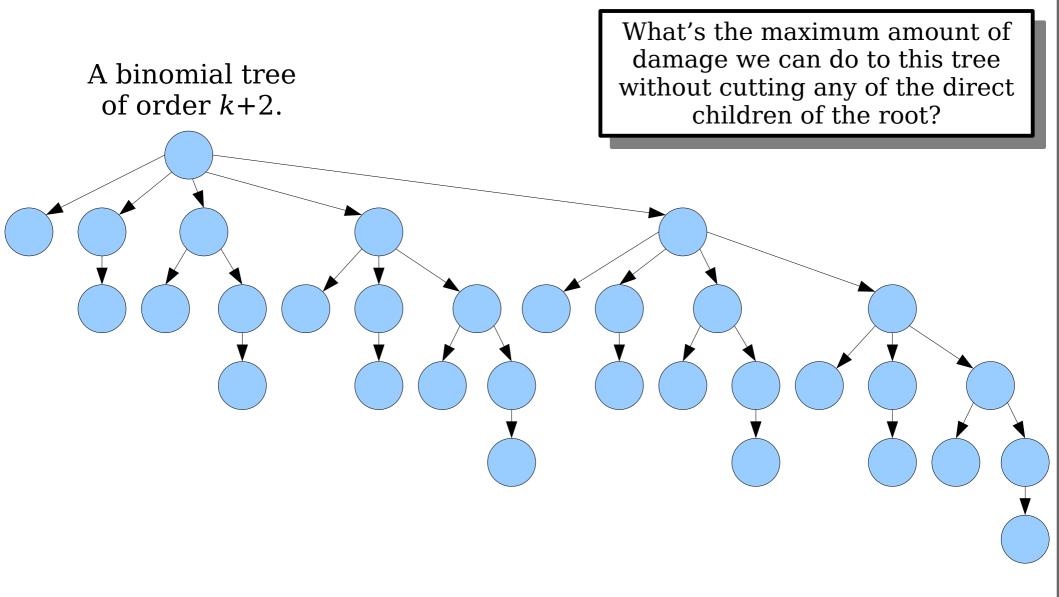



A binomial tree of order k+2.

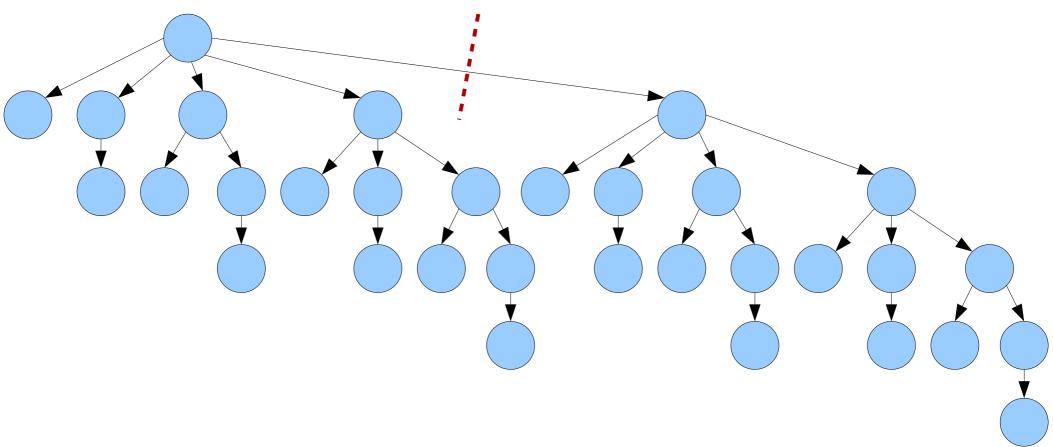


Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .




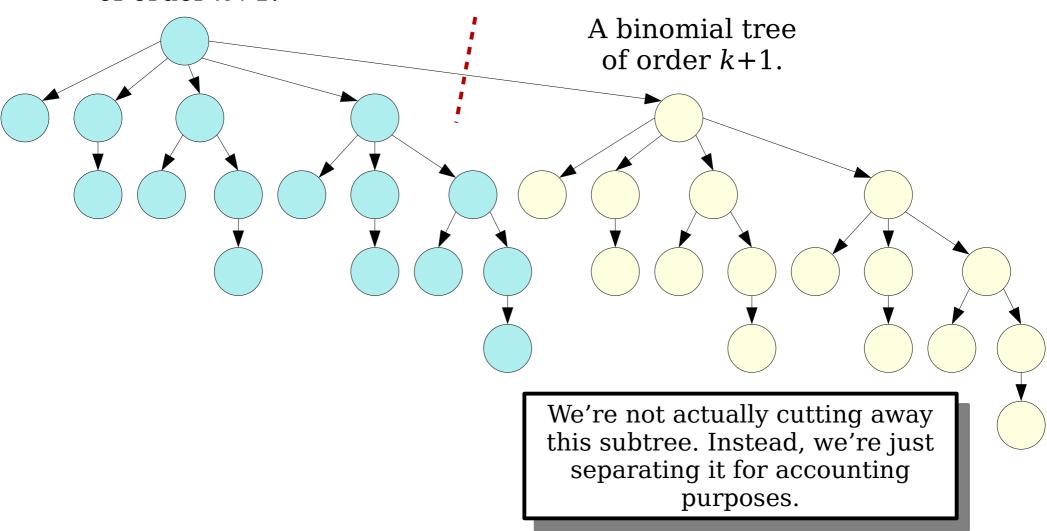



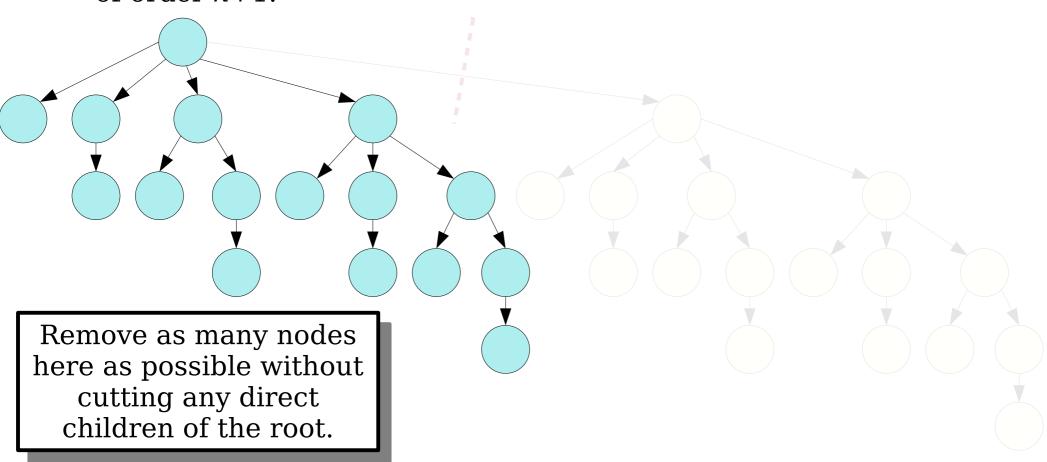


A (former) binomial tree of order k+1.

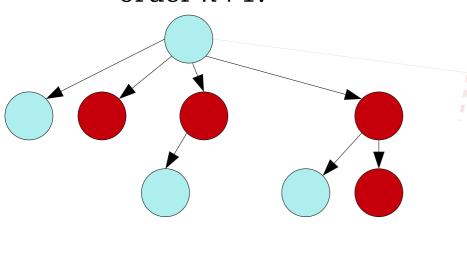

Remove as many nodes here as possible without cutting any direct children of the root.

Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .


A (former) binomial tree of order k+1.

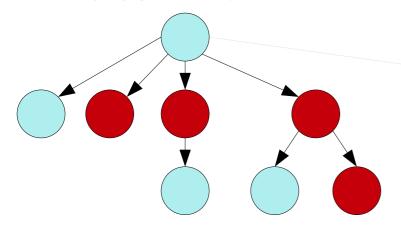

Remove as many nodes here as possible without cutting any direct children of the root.


Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .


A (former) binomial tree of order k+1.

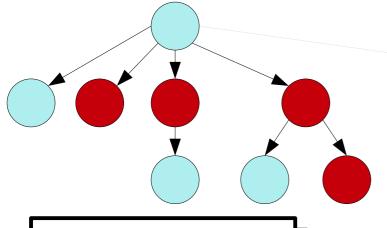


A maximallydamaged tree of order k+1.

Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .

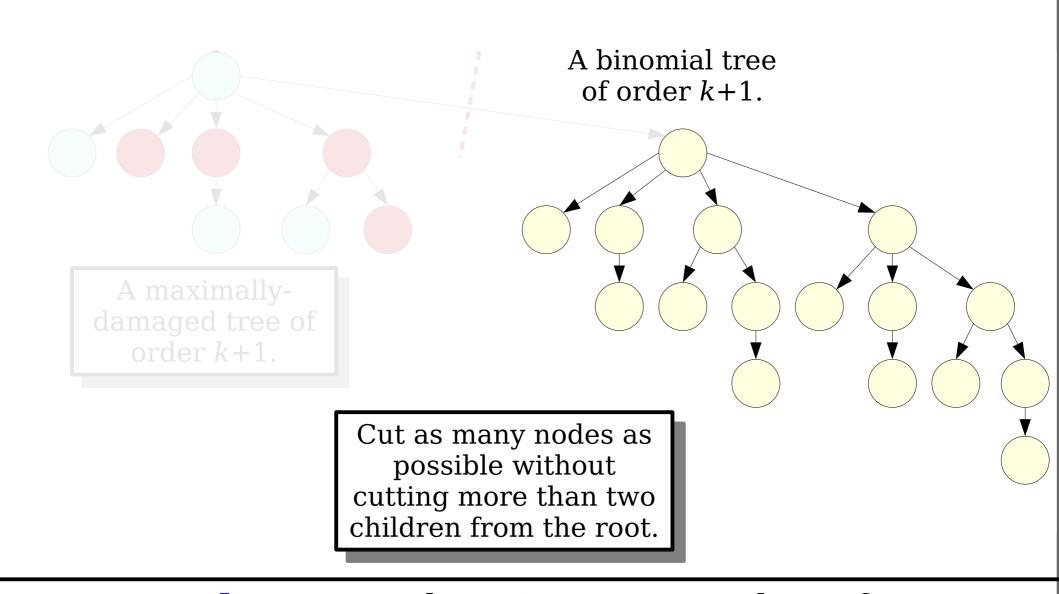


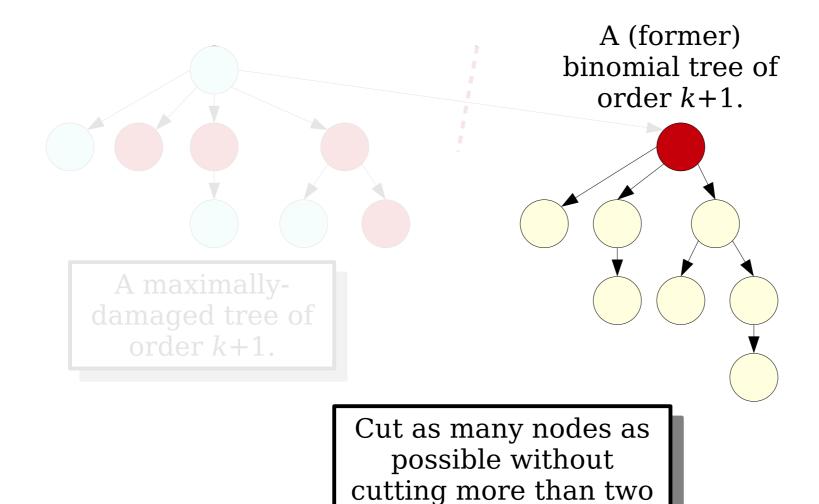


children from the root.

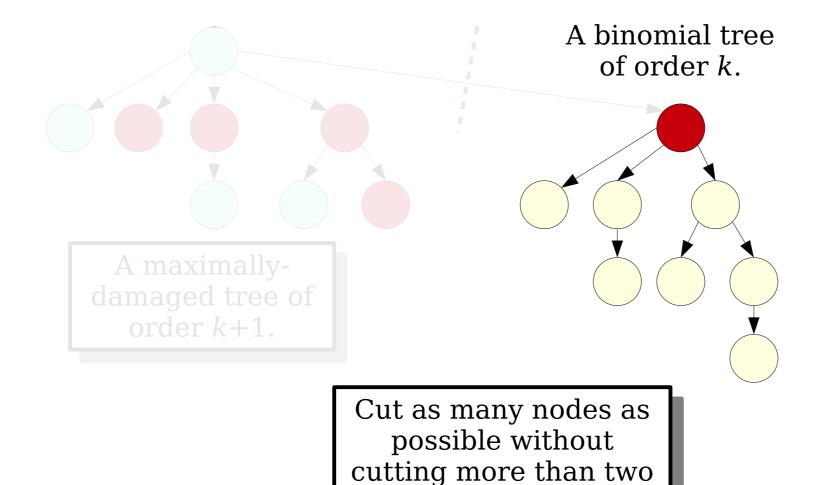


children from the root.

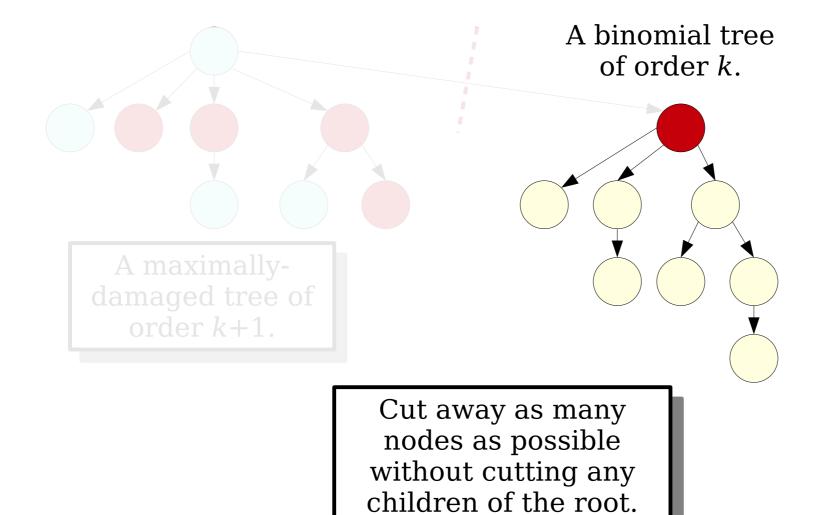

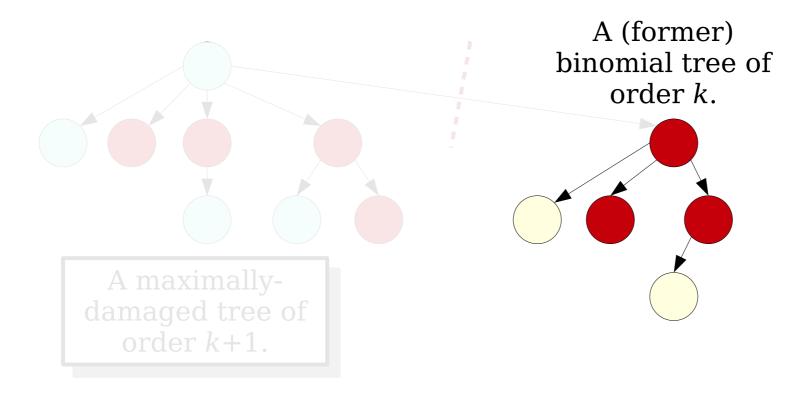


Cut away as many nodes as possible without cutting any children of the root.

Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .

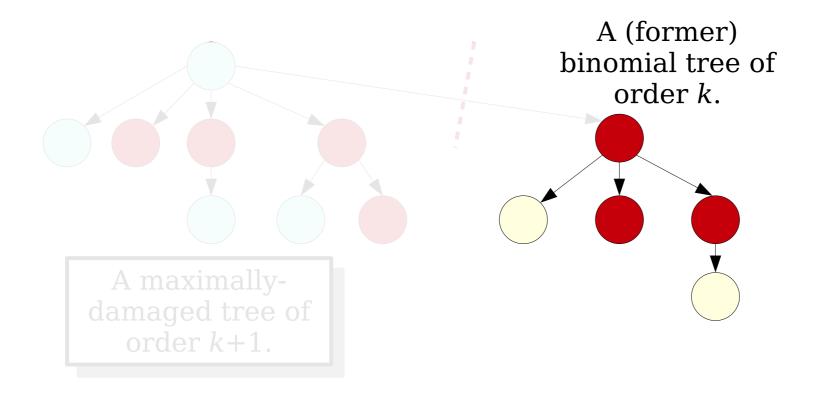


Cut away as many nodes as possible without cutting any children of the root.

Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .

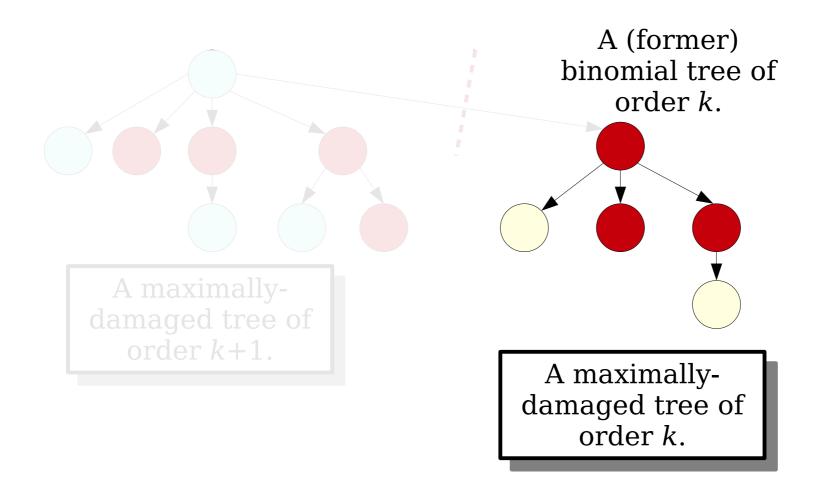

Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .

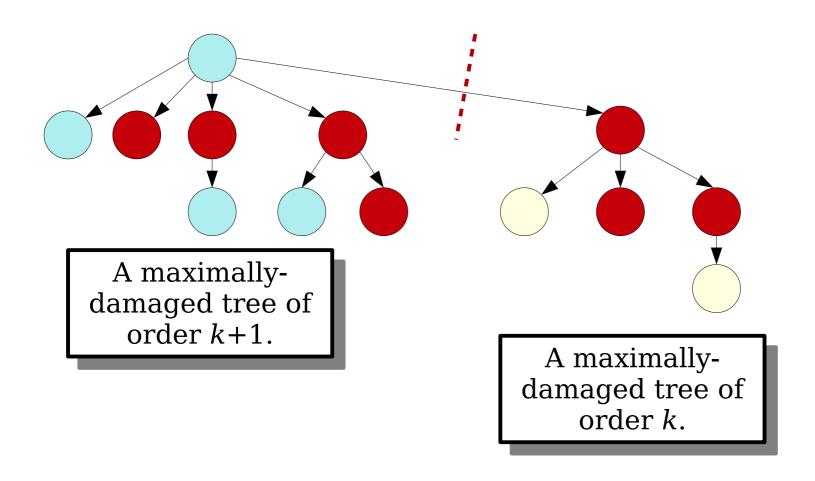

Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .

Fact: $F_k = \Theta(\varphi^k)$, where

$$\varphi = \frac{1+\sqrt{5}}{2}$$

is the golden ratio.

Corollary: The number of nodes in a tree of order k grows exponentially with k (approximately 1.61^k versus our previous 2^k).


Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .

A *Fibonacci heap* is a lazy binomial heap with *decrease-key* implemented using the "lose at most one child" marking scheme.

How fast are the operations on Fibonacci heaps?

$$\Phi = t$$

t is the number of trees.

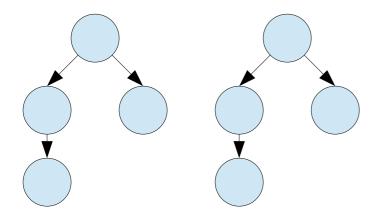














Actual cost: O(1)

 $\Delta\Phi$: +1

Amortized cost: O(1).


$$\Phi = t$$

t is the number of trees.

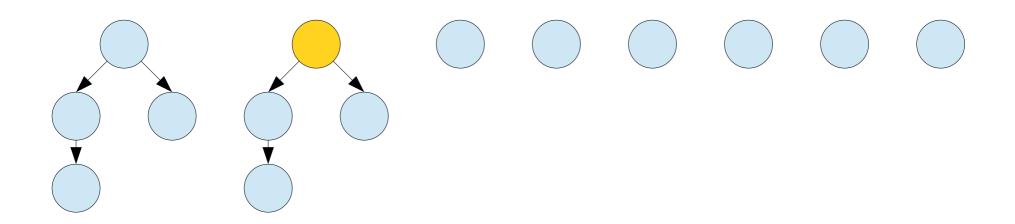


$$\Phi = t$$

t is the number of trees.

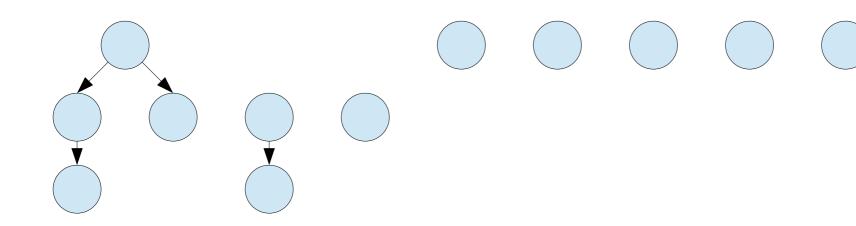


$$\Phi = t$$

t is the number of trees.

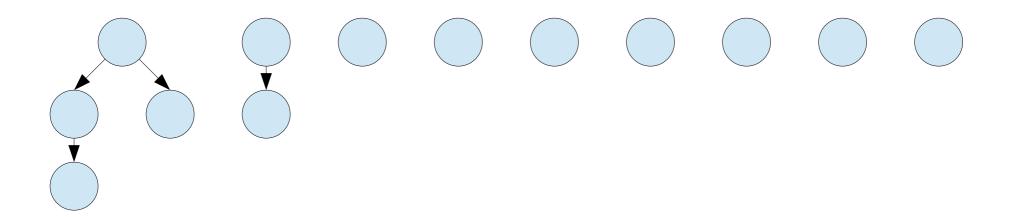


$$\Phi = t$$

t is the number of trees.

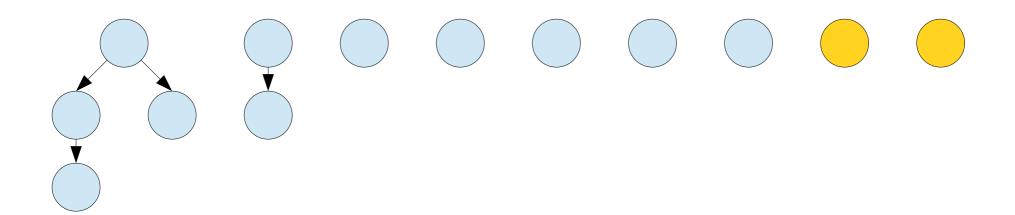


$$\Phi = t$$

t is the number of trees.

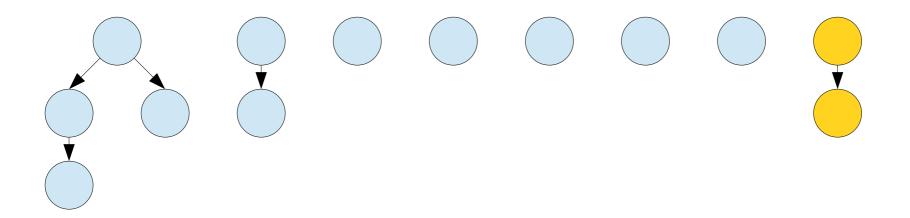


$$\Phi = t$$

t is the number of trees.

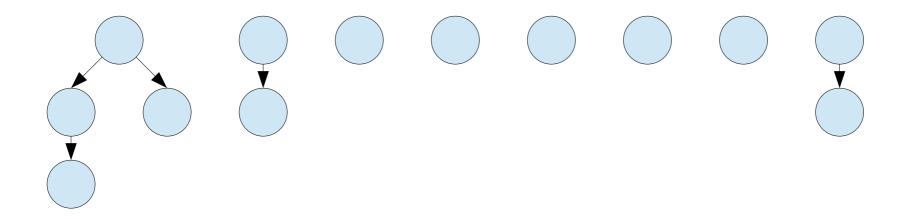


$$\Phi = t$$

t is the number of trees.

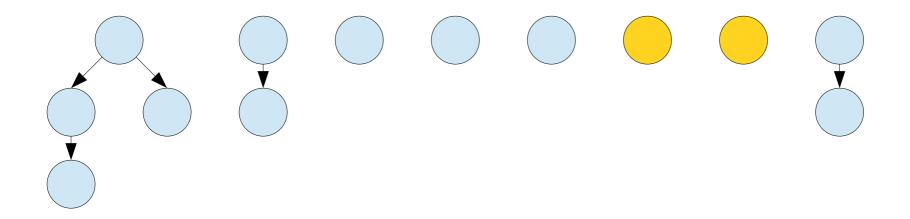


$$\Phi = t$$

t is the number of trees.

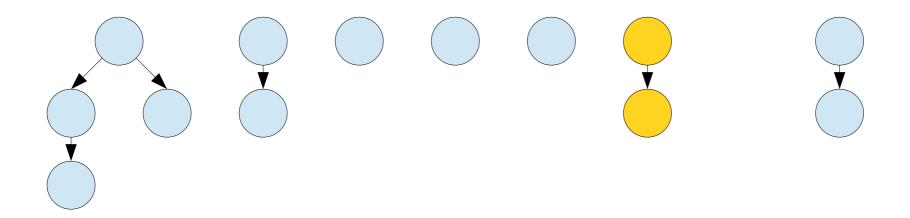


$$\Phi = t$$

t is the number of trees.

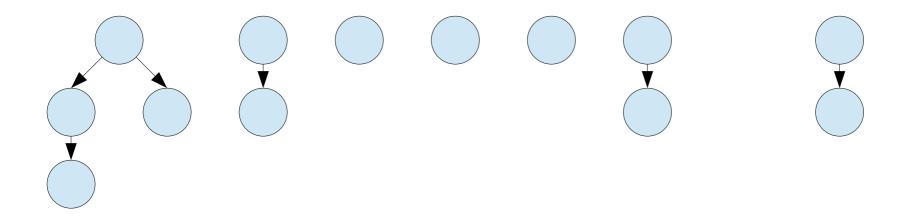


$$\Phi = t$$

t is the number of trees.

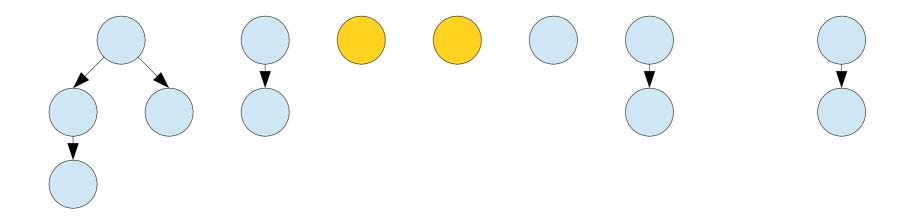


$$\Phi = t$$

t is the number of trees.

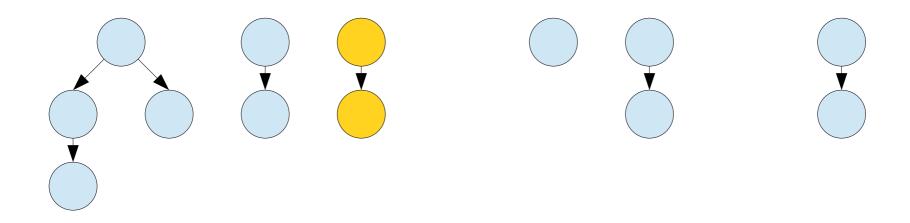


$$\Phi = t$$

t is the number of trees.

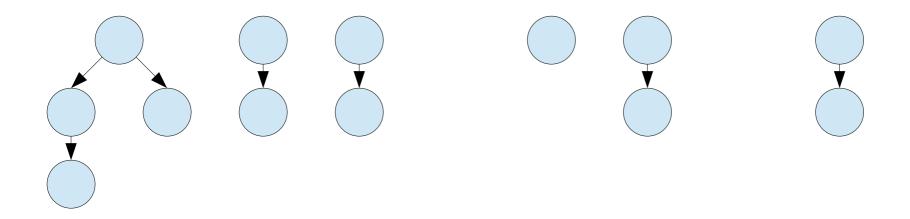


$$\Phi = t$$

t is the number of trees.

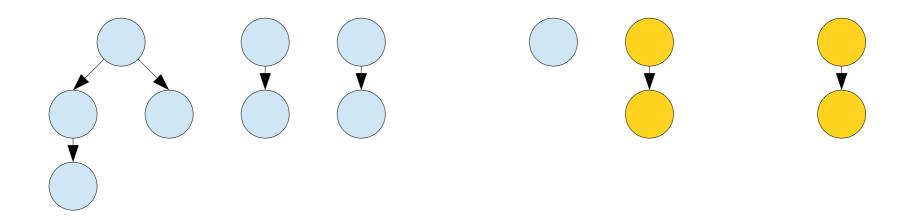


$$\Phi = t$$

t is the number of trees.

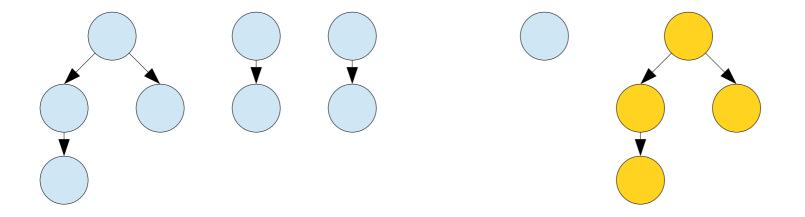


$$\Phi = t$$

t is the number of trees.

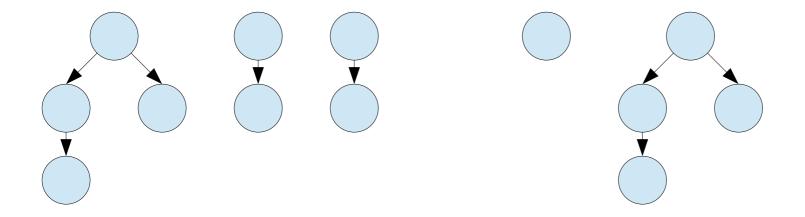


$$\Phi = t$$

t is the number of trees.

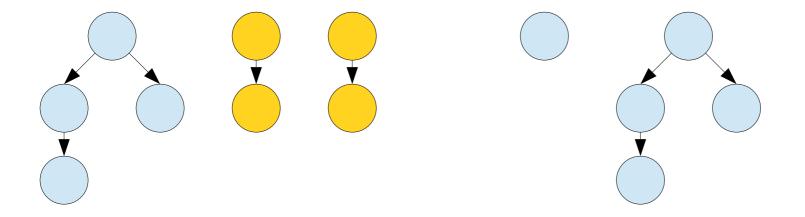


$$\Phi = t$$

t is the number of trees.

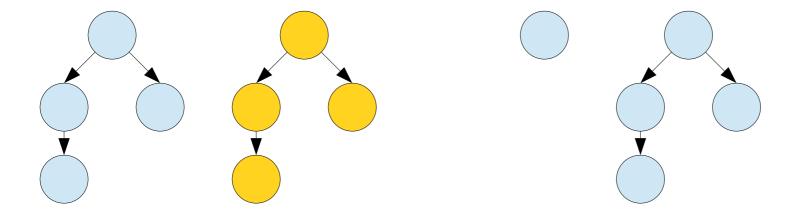


$$\Phi = t$$

t is the number of trees.

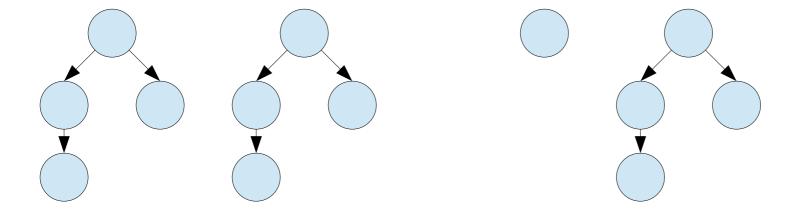


$$\Phi = t$$

t is the number of trees.

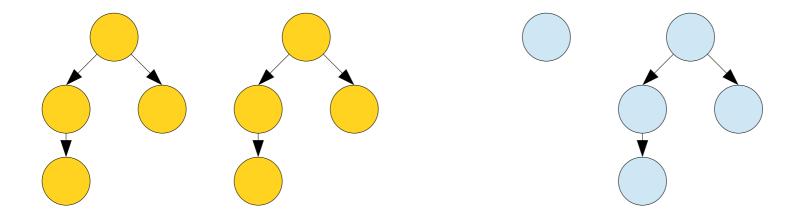


$$\Phi = t$$

t is the number of trees.

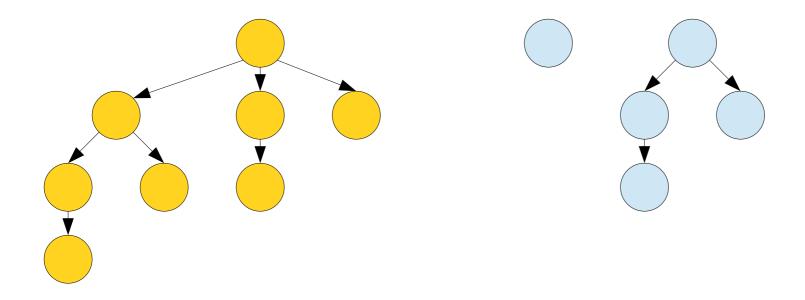


$$\Phi = t$$

t is the number of trees.

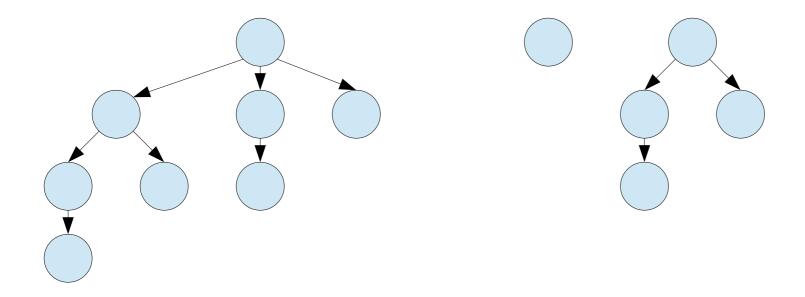

$$\Phi = t$$

t is the number of trees.

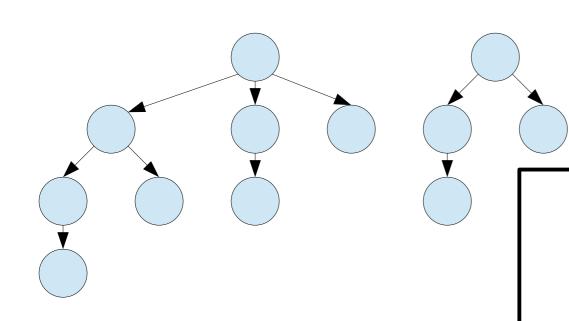

This is the same analysis from last lecture!


Cost: $O(t + \log n)$.

 $\Delta\Phi$: O(-t + log n).

Amortized cost: $O(\log n)$.


$$\Phi = t$$

t is the number of trees.

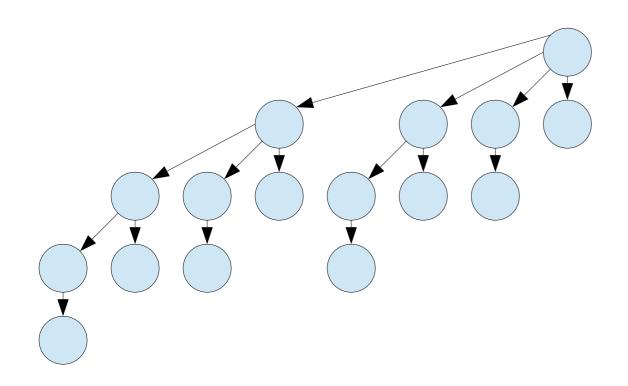


$$\Phi = t$$

t is the number of trees.

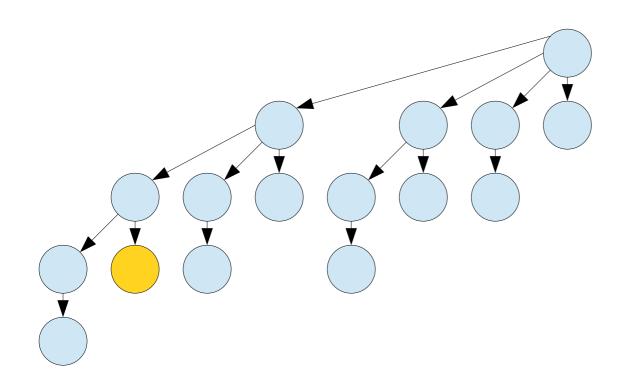


$$\Phi = t$$

t is the number of trees.

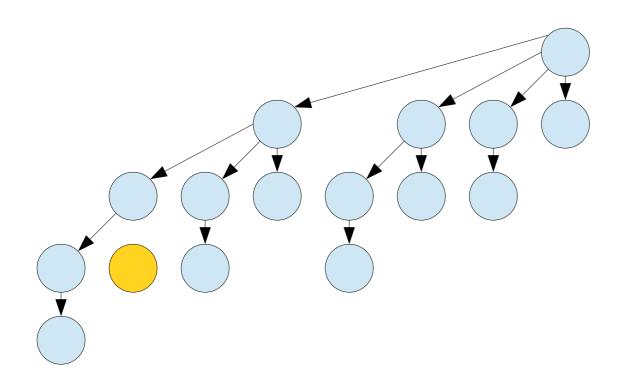


$$\Phi = t$$

t is the number of trees.

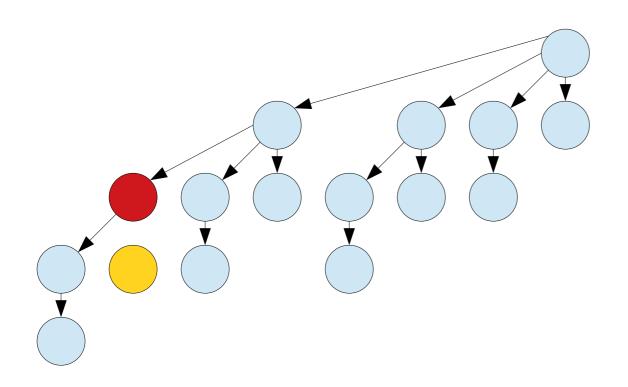


$$\Phi = t$$

t is the number of trees.

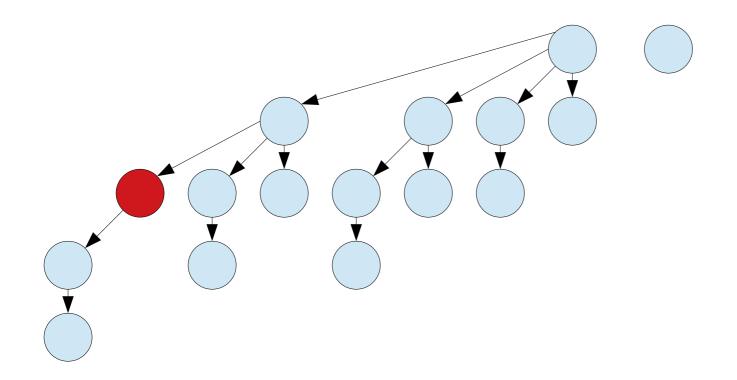


$$\Phi = t$$

t is the number of trees.

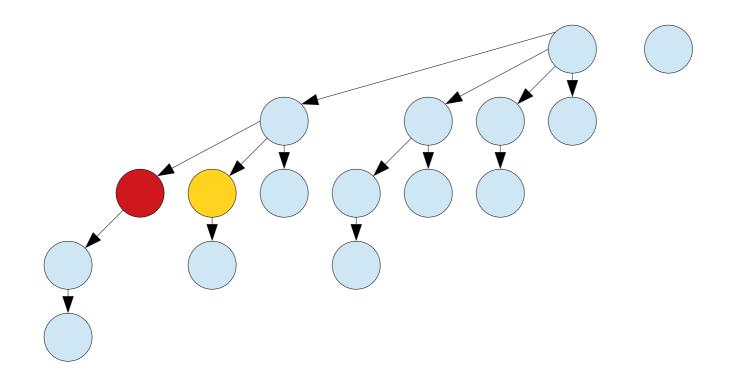


$$\Phi = t$$

t is the number of trees.

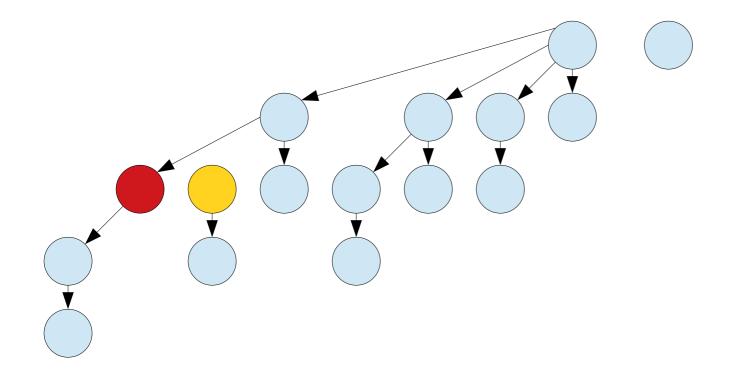


$$\Phi = t$$

t is the number of trees.

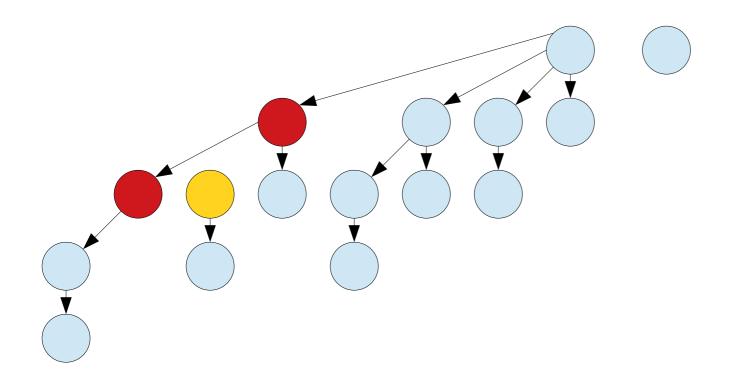


$$\Phi = t$$


t is the number of trees.

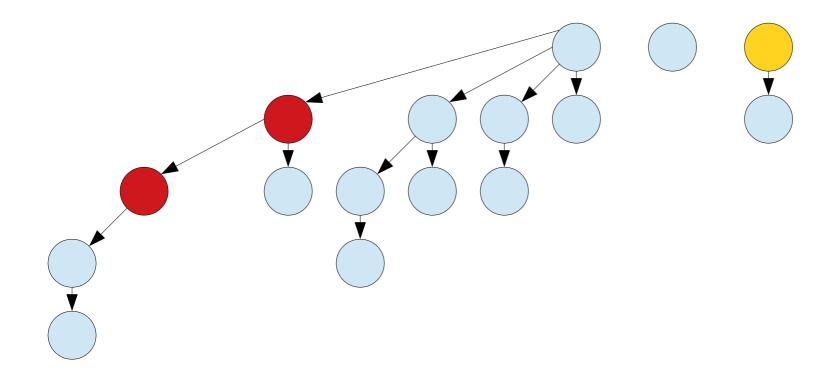


$$\Phi = t$$


t is the number of trees.

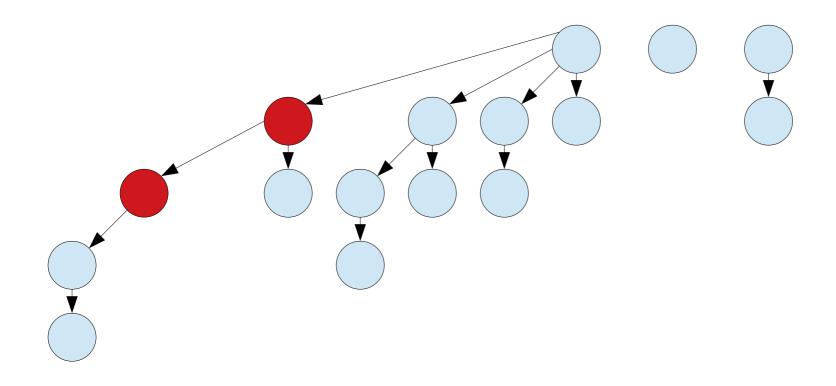





t is the number of trees.

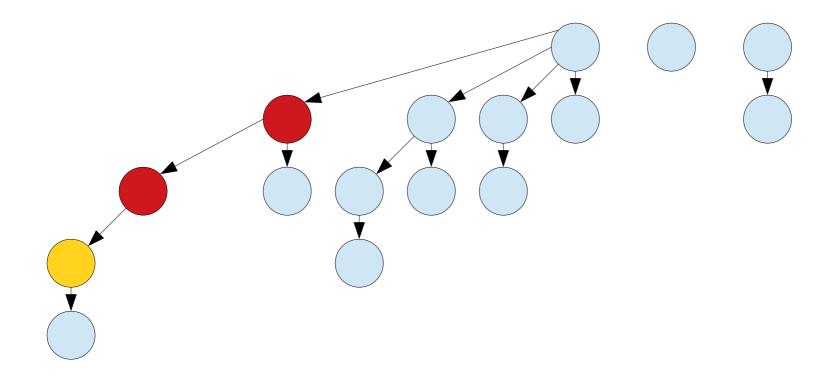





t is the number of trees.

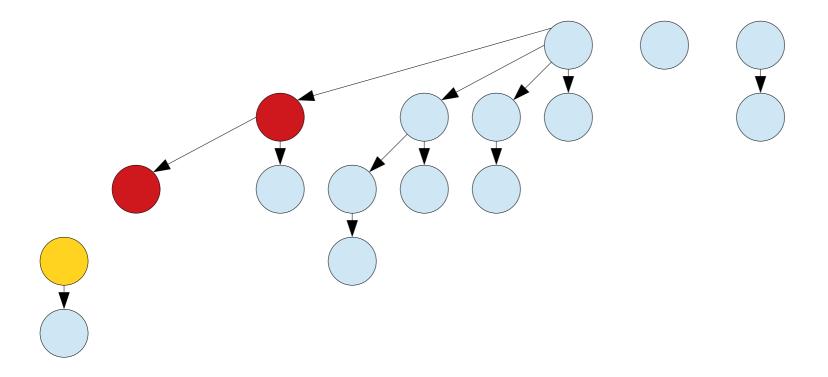





t is the number of trees.

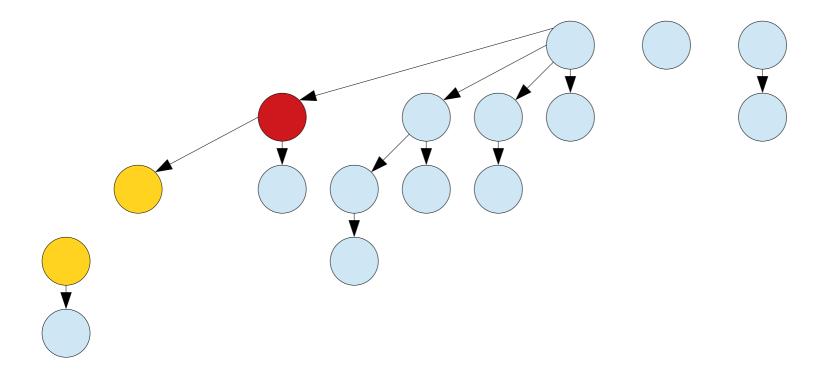





t is the number of trees.

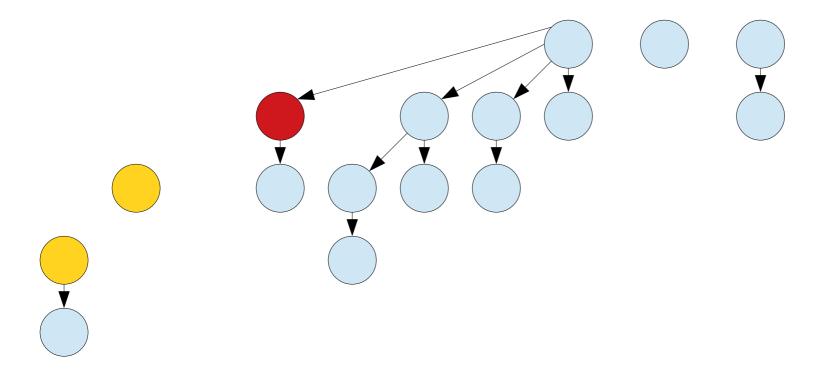




t is the number of trees.

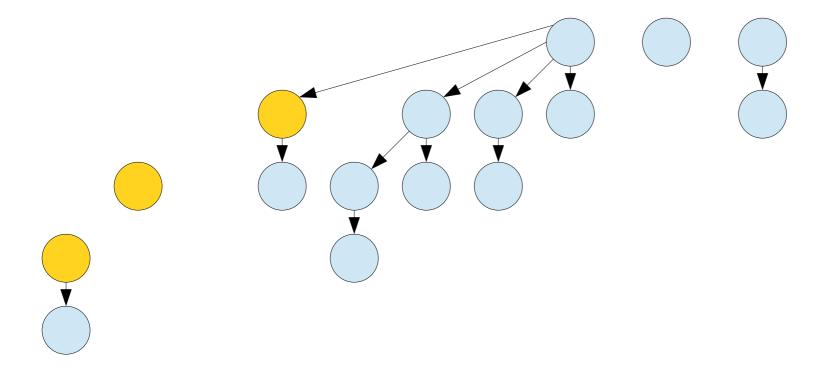




t is the number of trees.

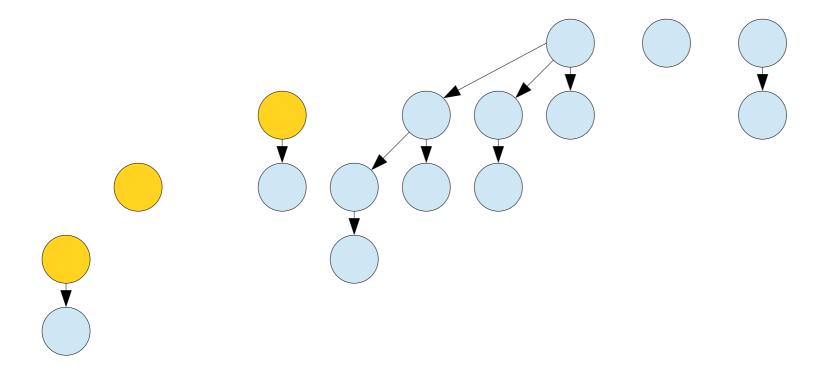


$$\Phi = t$$

t is the number of trees.

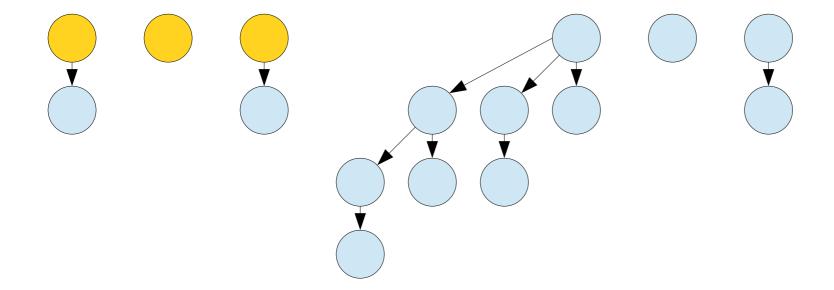

$$\Phi = t$$

t is the number of trees.

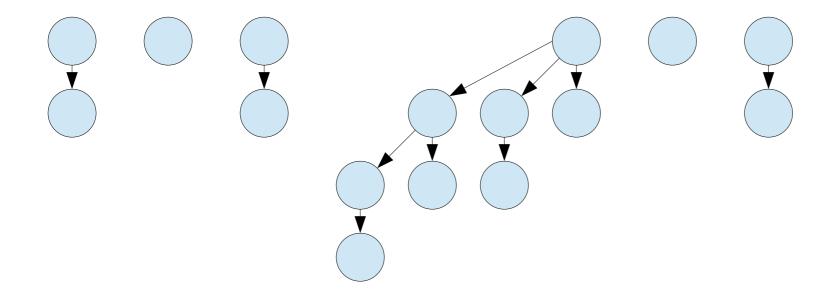


$$\Phi = t$$

t is the number of trees.


$$\Phi = t + m$$

t is the number of trees and m is the number of marked nodes.

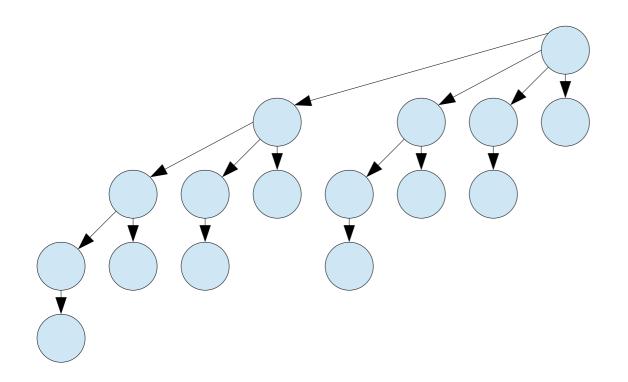


$$\Phi = t + m$$

t is the number of trees and *m* is the number of marked nodes.

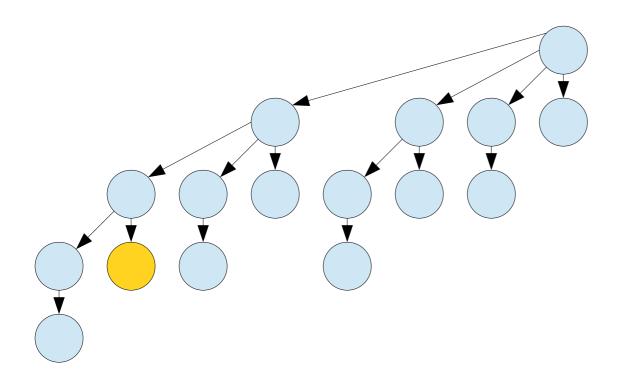


$$\Phi = t + m$$

t is the number of trees and m is the number of marked nodes.

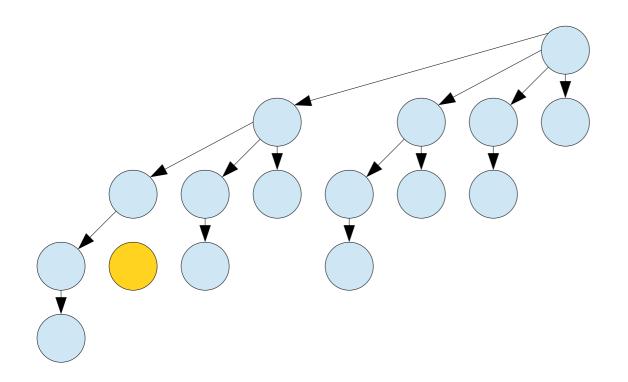


$$\Phi = t + m$$

t is the number of trees and *m* is the number of marked nodes.

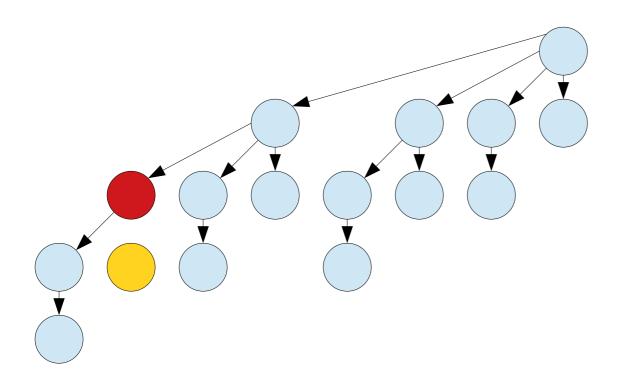


$$\Phi = t + m$$

t is the number of trees and *m* is the number of marked nodes.

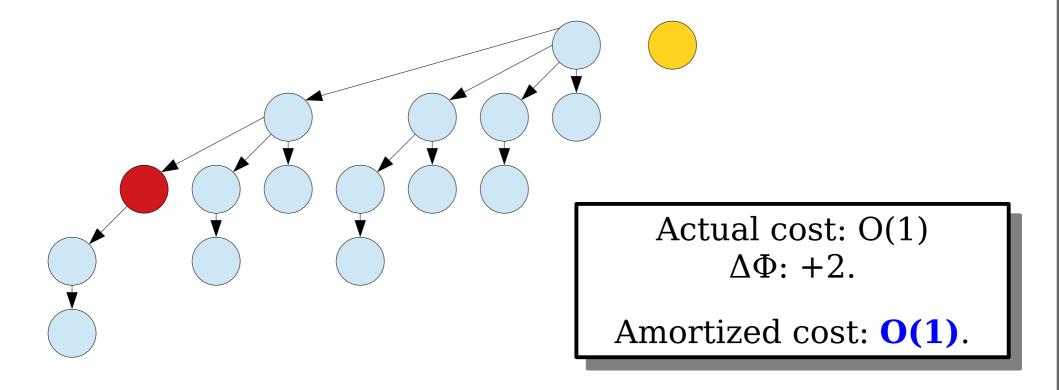


$$\Phi = t + m$$

t is the number of trees and *m* is the number of marked nodes.

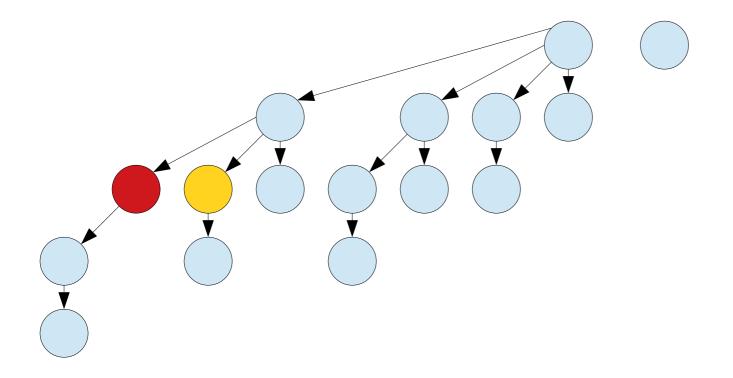


$$\Phi = t + m$$

t is the number of trees and *m* is the number of marked nodes.

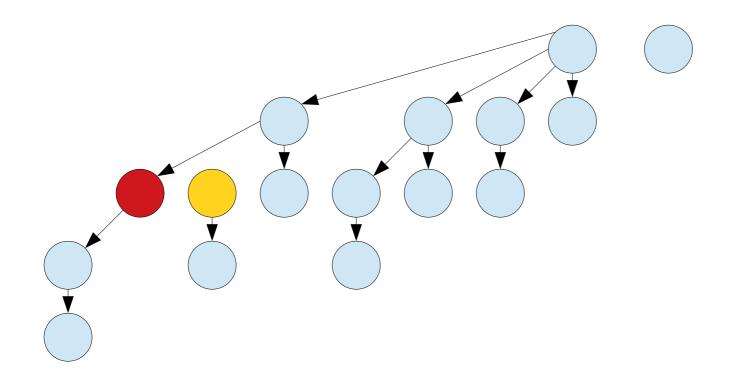


$$\Phi = t + m$$

t is the number of trees and *m* is the number of marked nodes.

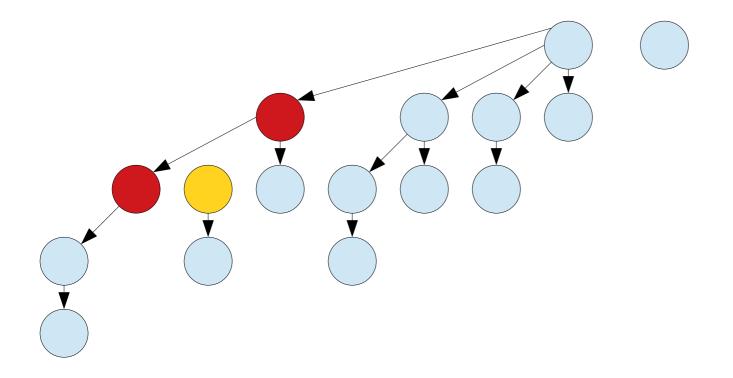


$$\Phi = t + m$$

t is the number of trees and m is the number of marked nodes.

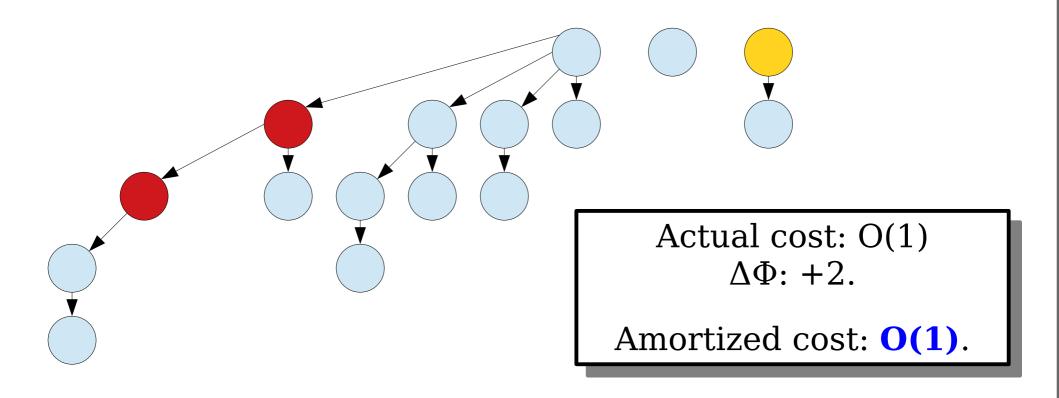


$$\Phi = t + m$$

t is the number of trees and *m* is the number of marked nodes.

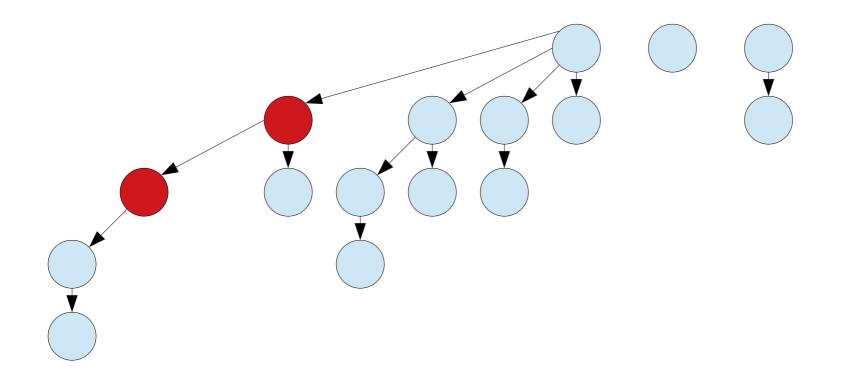


$$\Phi = t + m$$

t is the number of trees and *m* is the number of marked nodes.

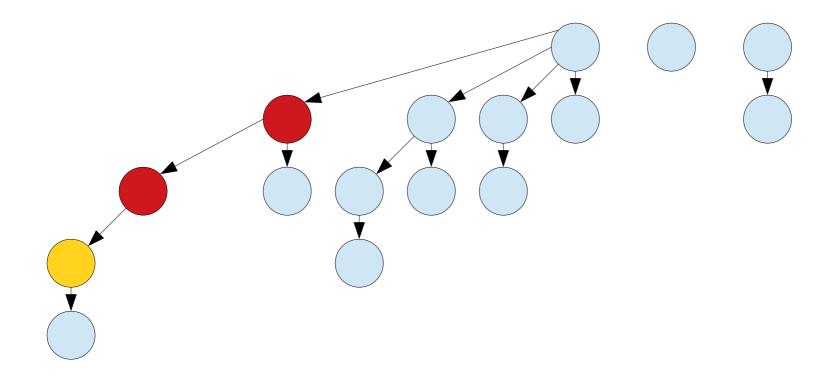


$$\Phi = t + m$$

t is the number of trees and *m* is the number of marked nodes.

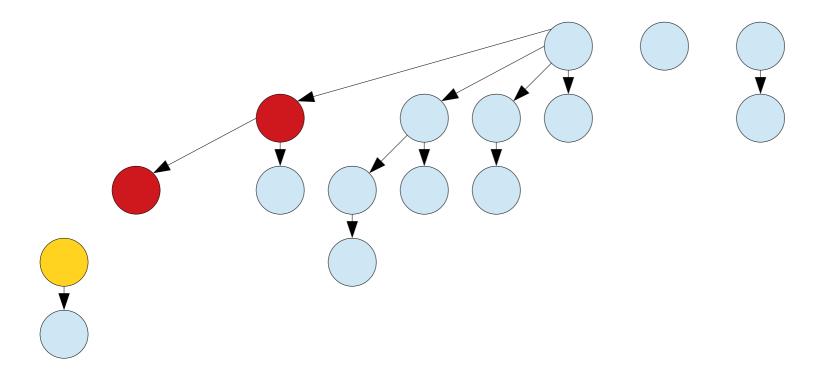


$$\Phi = t + m$$

t is the number of trees and *m* is the number of marked nodes.

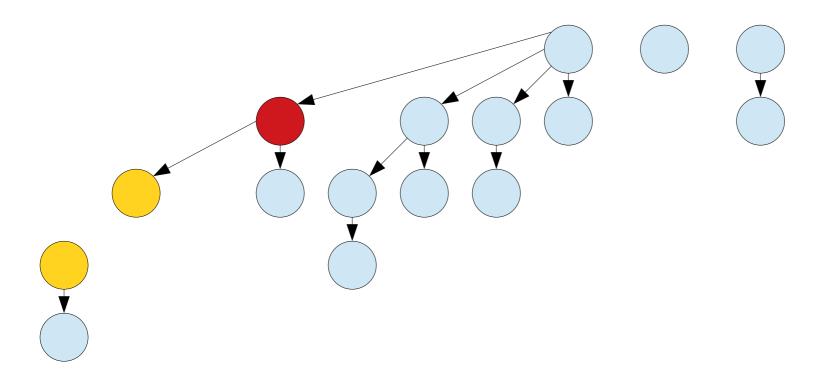


$$\Phi = t + m$$

t is the number of trees and *m* is the number of marked nodes.

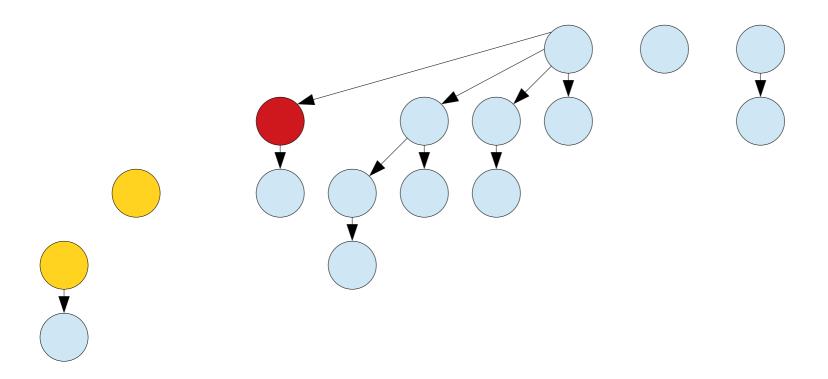


$$\Phi = t + m$$

t is the number of trees and *m* is the number of marked nodes.

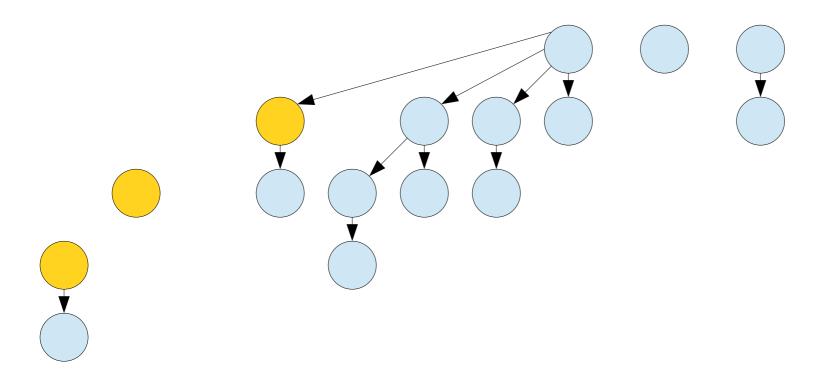


$$\Phi = t + m$$

t is the number of trees and *m* is the number of marked nodes.

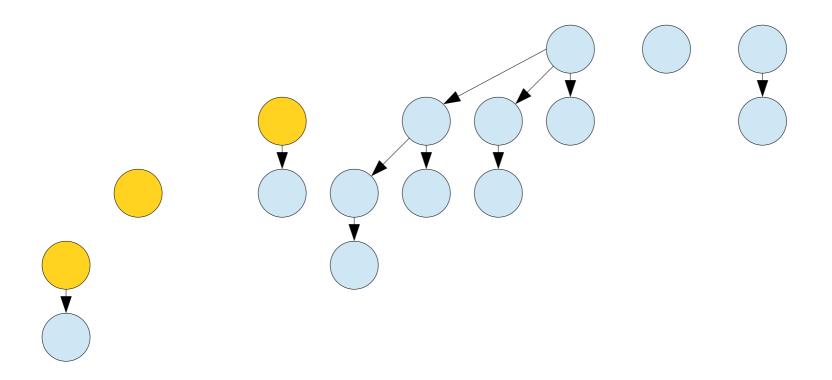


$$\Phi = t + m$$

t is the number of trees and m is the number of marked nodes.

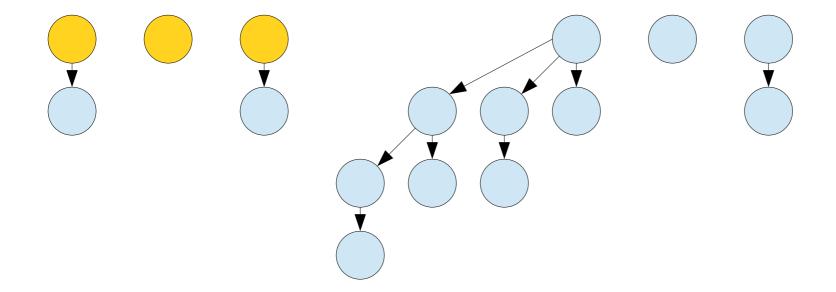

$$\Phi = t + m$$

t is the number of trees and m is the number of marked nodes.

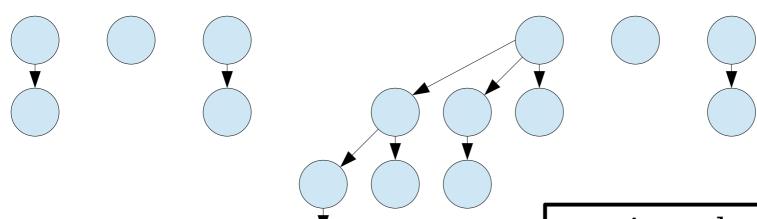

Suppose this operation did *C* total cuts.

Actual cost: O(C) $\Delta\Phi$: +1

Amortized cost: O(C).


$$\Phi = t + m$$

t is the number of trees and m is the number of marked nodes.

Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$


t is the number of trees and m is the number of marked nodes.

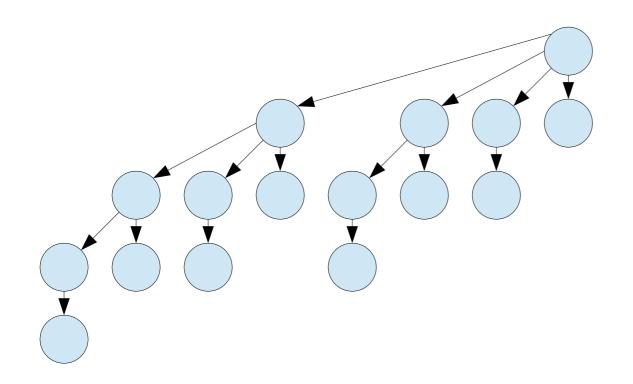

Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$


t is the number of trees and m is the number of marked nodes.

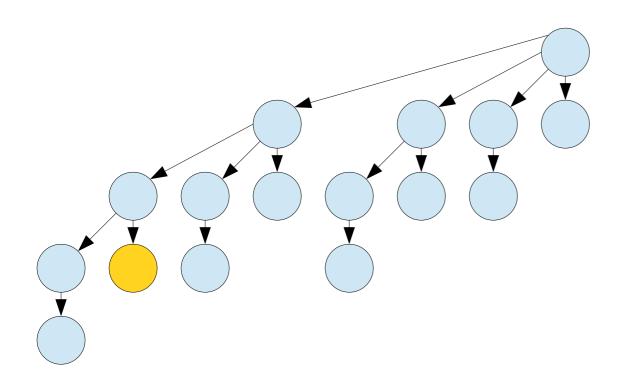

Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$


t is the number of trees and m is the number of marked nodes.

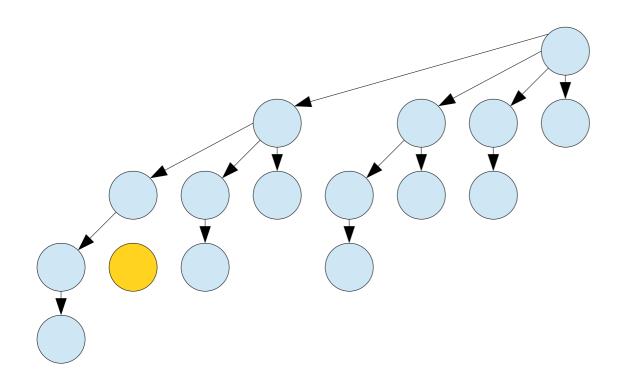

Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.


$$\Phi = t + 2m$$

t is the number of trees and m is the number of marked nodes.

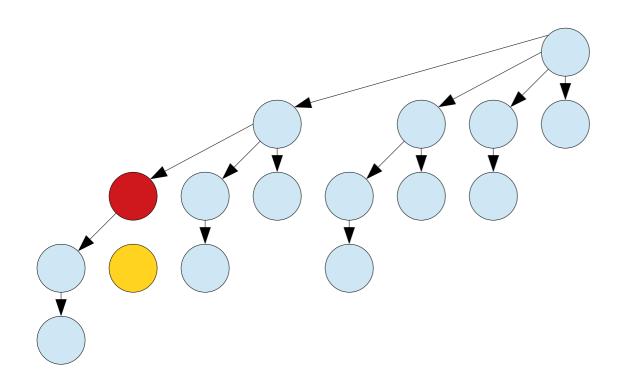


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

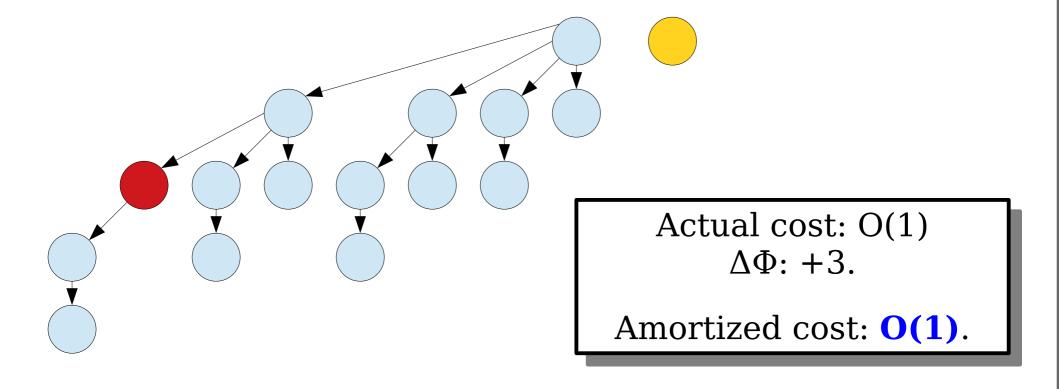


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

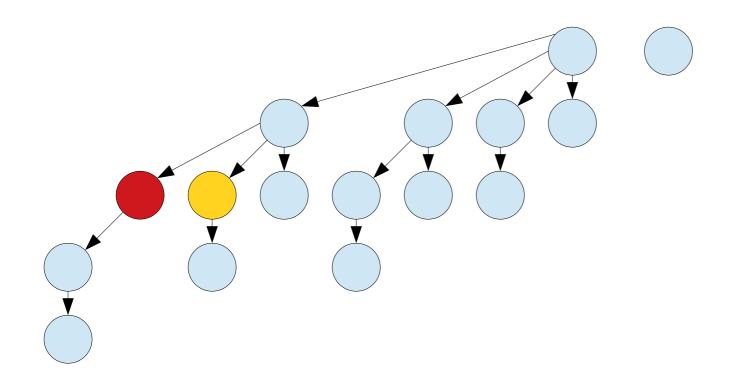


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

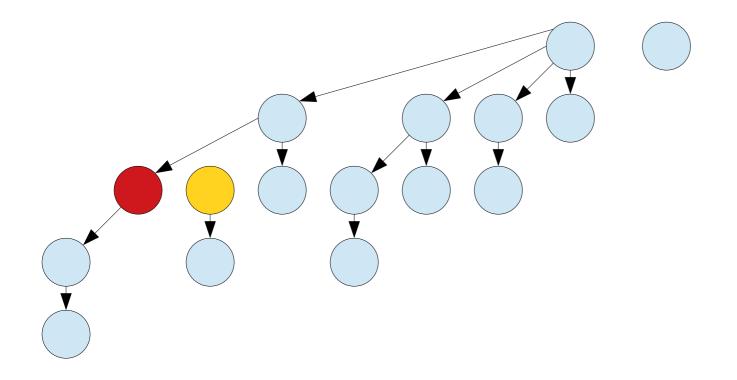


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

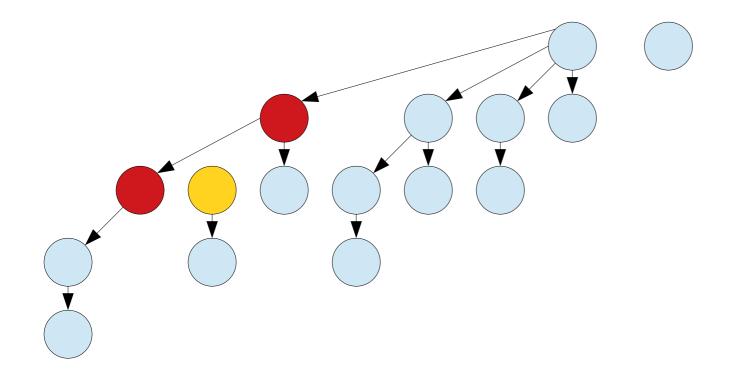


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

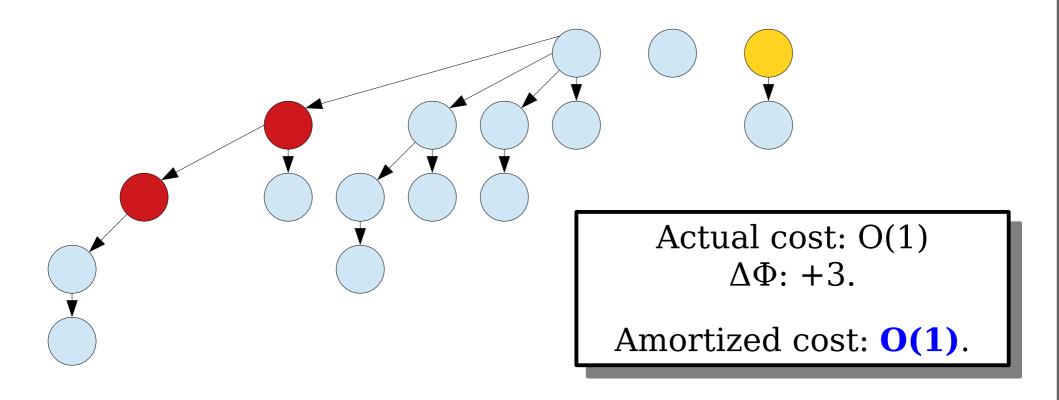


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

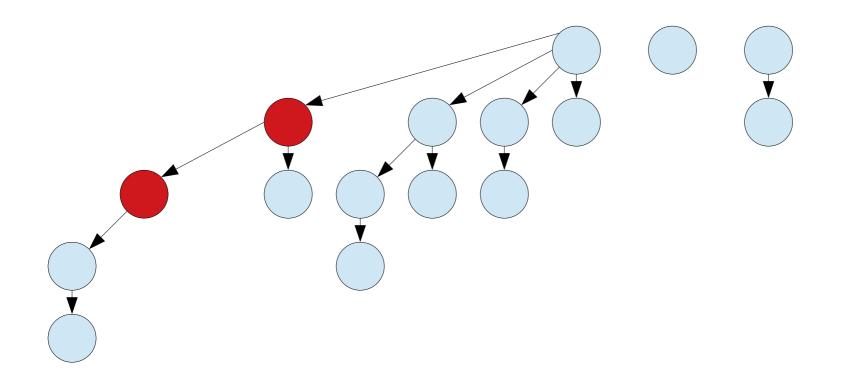


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

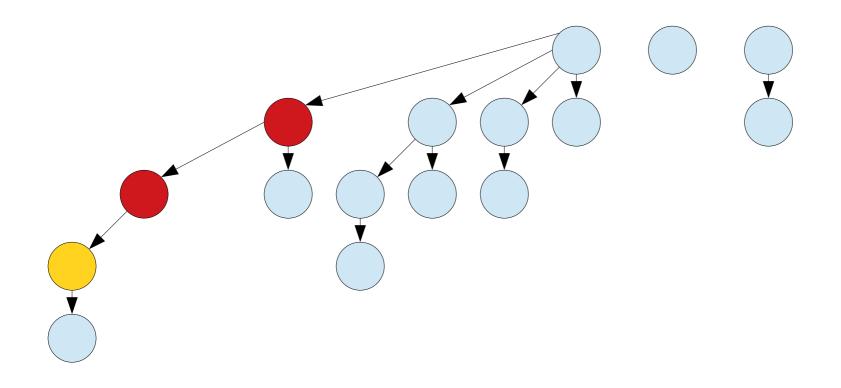


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

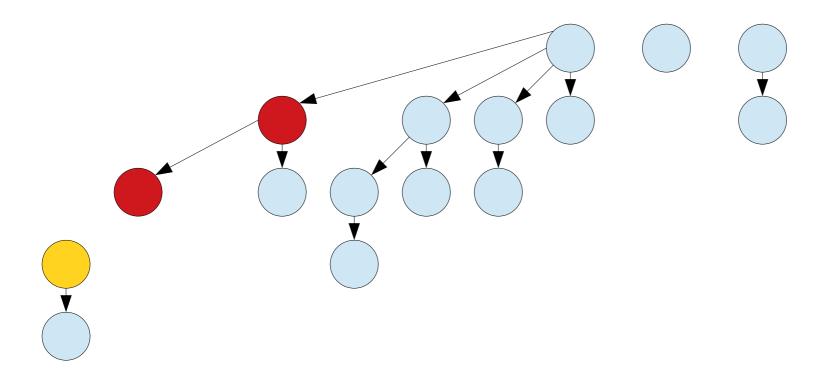


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

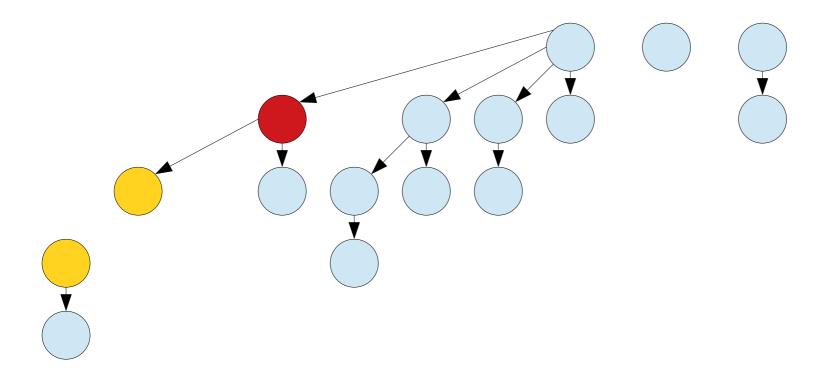


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

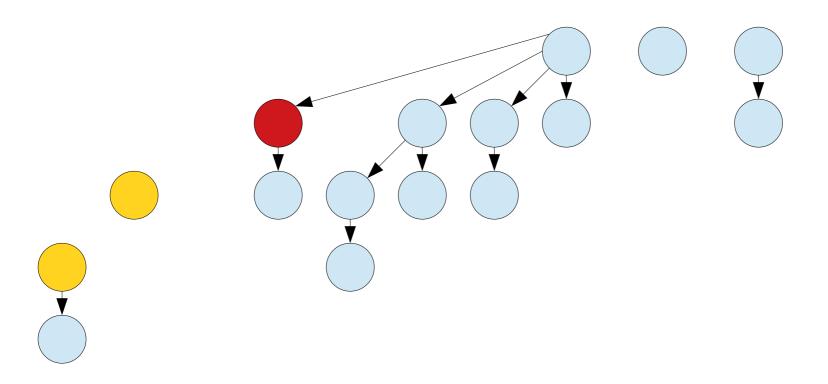


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

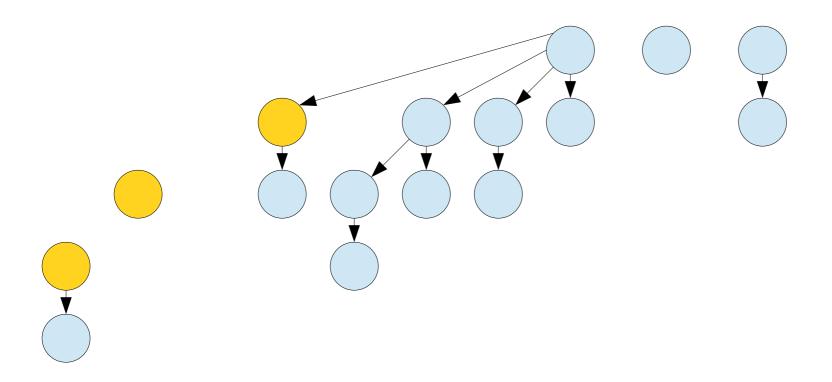


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

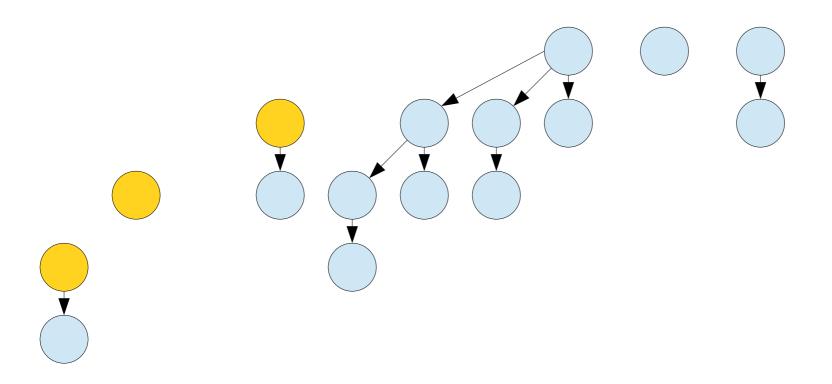

Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.


$$\Phi = t + 2m$$

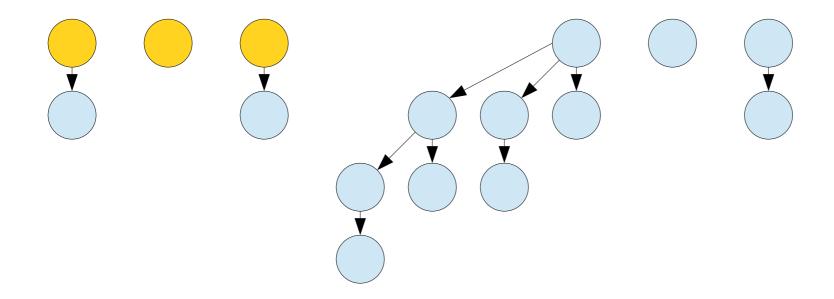

Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

t is the number of trees and m is the number of marked nodes.

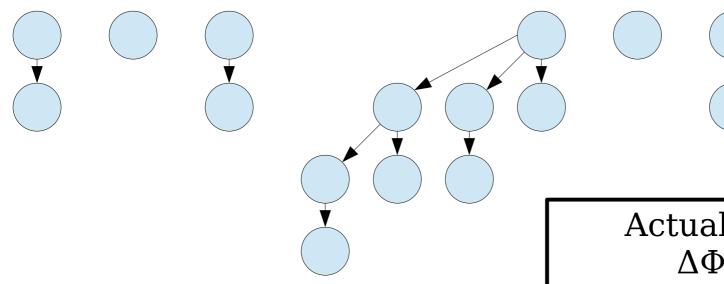

Actual cost: O(C)

 $\Delta\Phi$: -C + 1

Amortized cost: **O(1)**.

Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

The Overall Analysis

- Here's the final scorecard for the Fibonacci heap.
- These are excellent theoretical runtimes. There's minimal room for improvement!
- Later work made all these operations worst-case efficient at a significant increase in both runtime and intellectual complexity.

enqueue: O(1)

find-min: O(1)

meld: O(1)


extract-min: $O(\log n)^*$


decrease-key: O(1)*


*amortized


Representation Issues


- The trees in a Fibonacci heap must be able to do the following:
 - During a merge: Add one tree as a child of the root of another tree.
 - During a cut: Cut a node from its parent in time O(1).
- *Claim:* This is trickier than it looks.

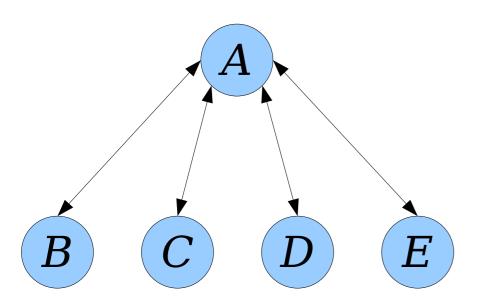


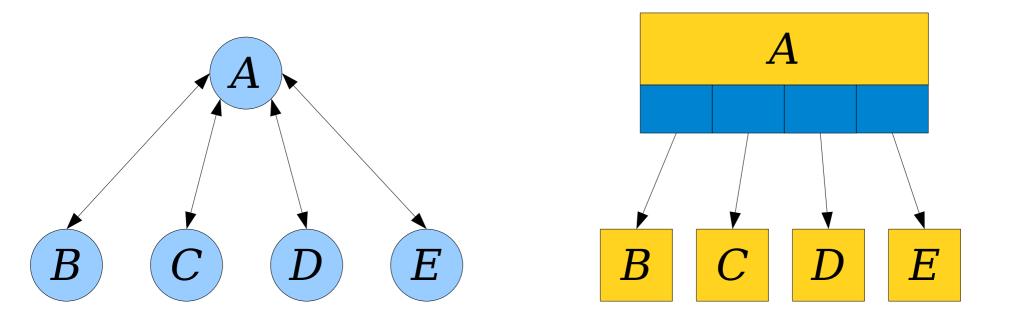


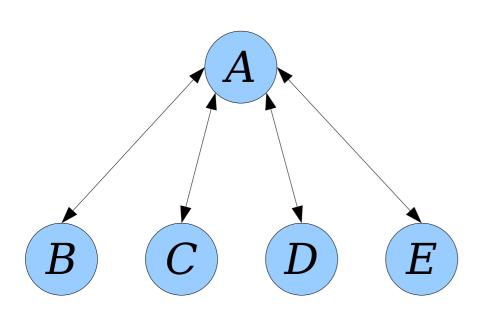


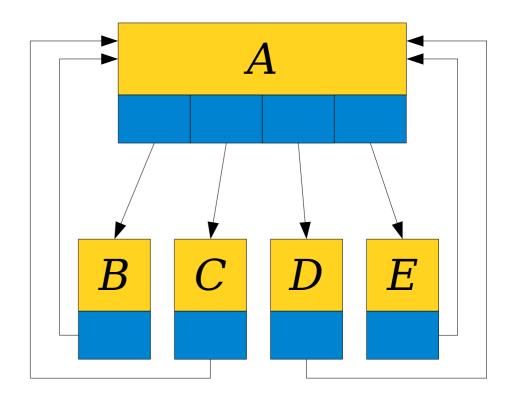

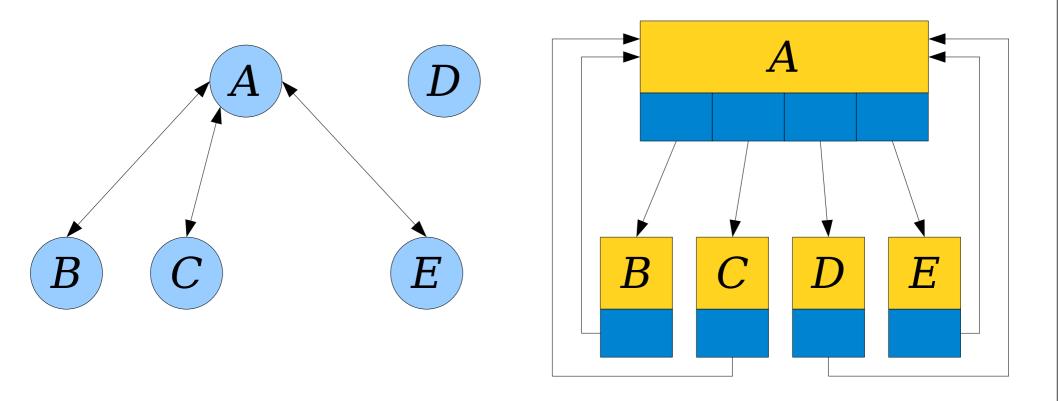

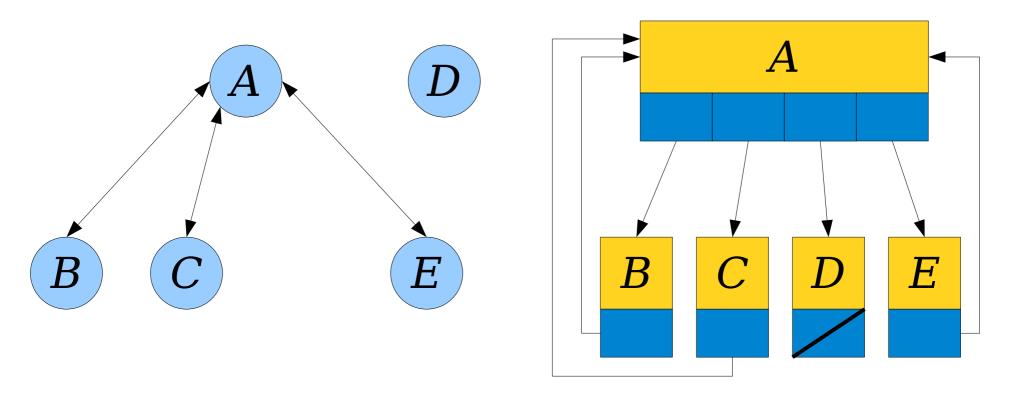

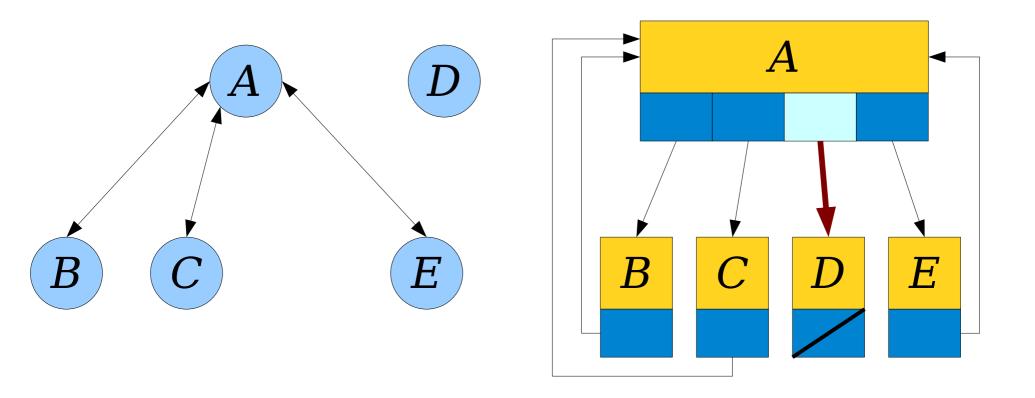


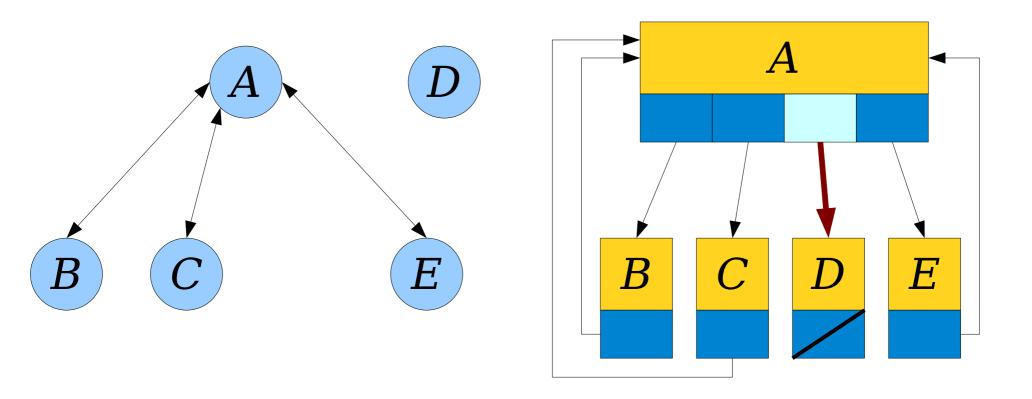



Finding this pointer might take time $\Theta(\log n)!$


This is going to be weird.


Sorry.

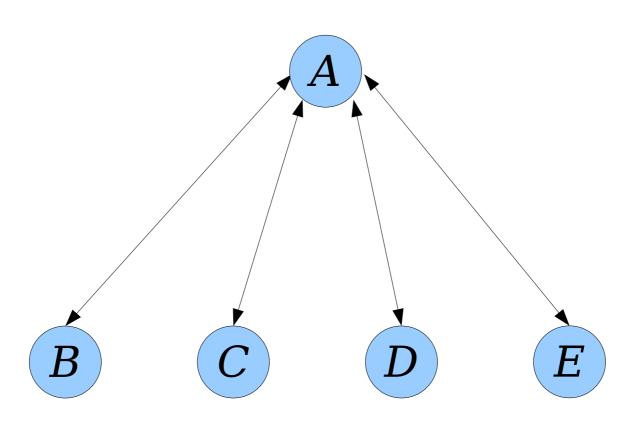


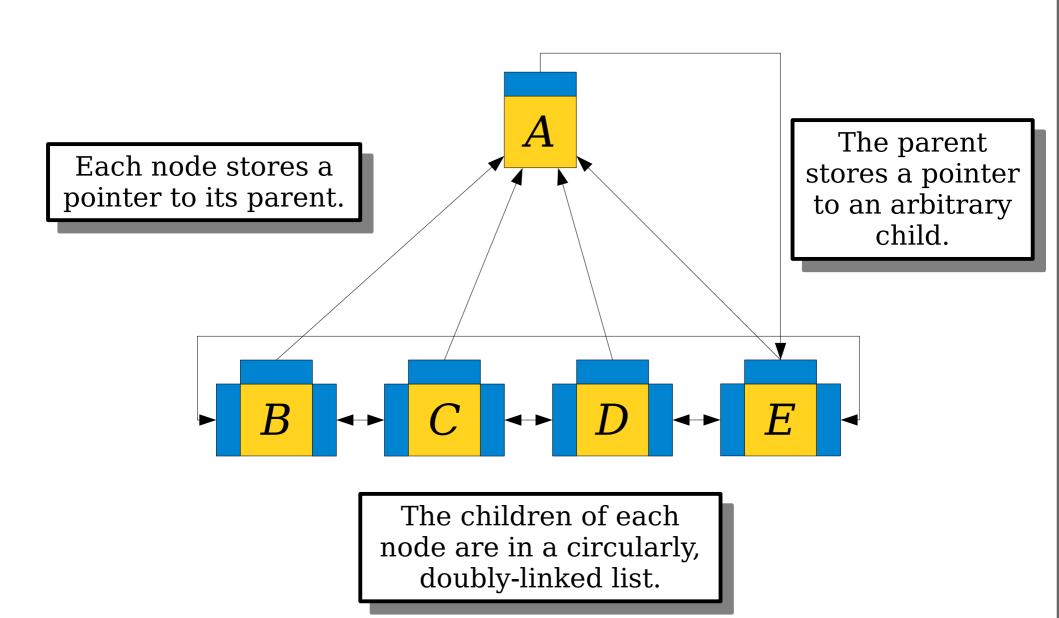

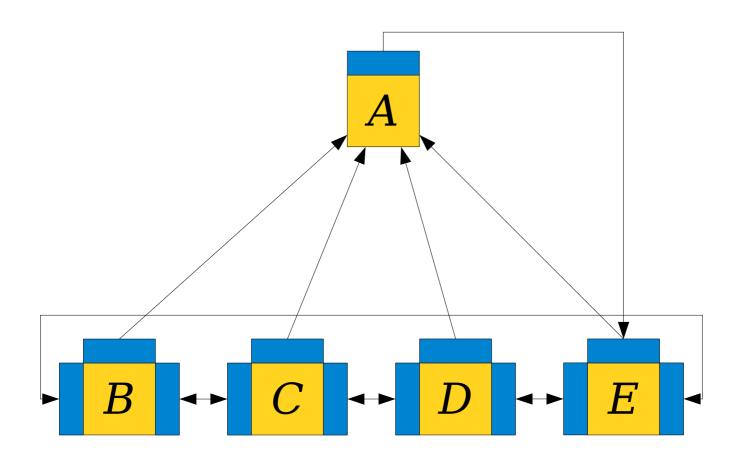


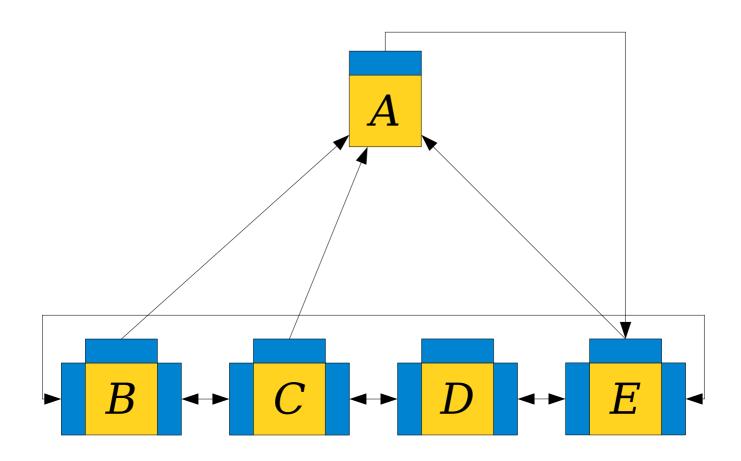


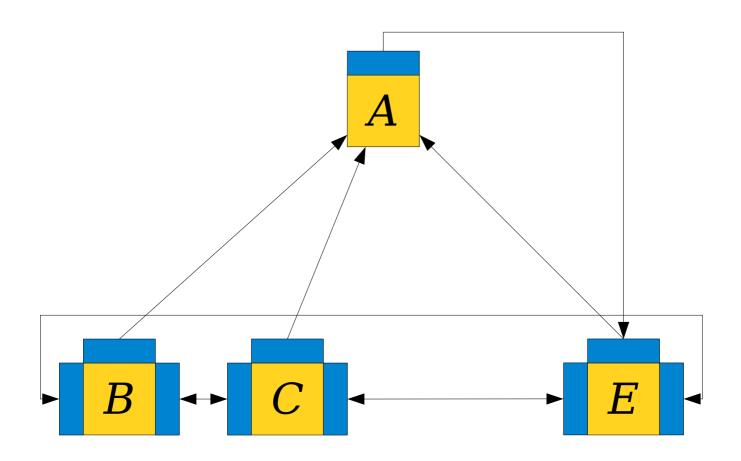


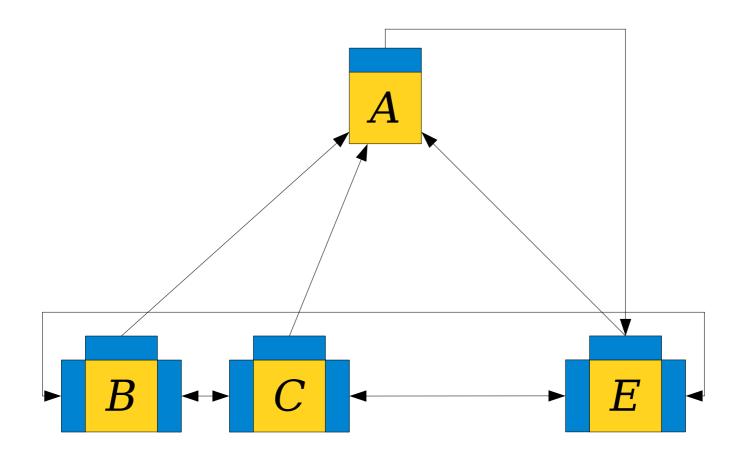



To cut a node from its parent, if it isn't the representative child, just splice it out of its linked list.

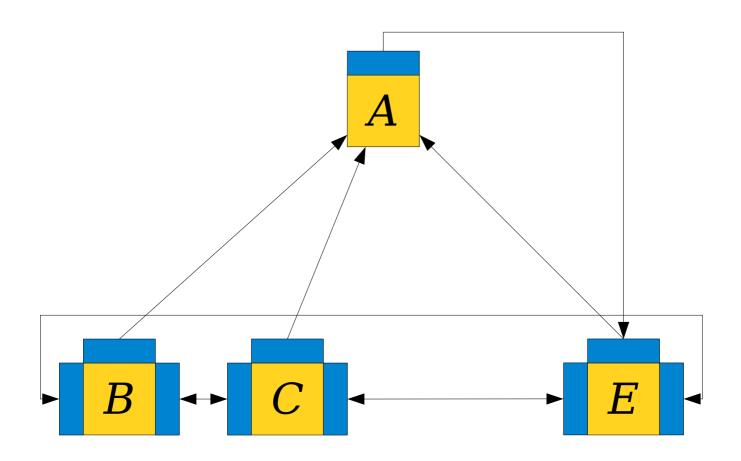

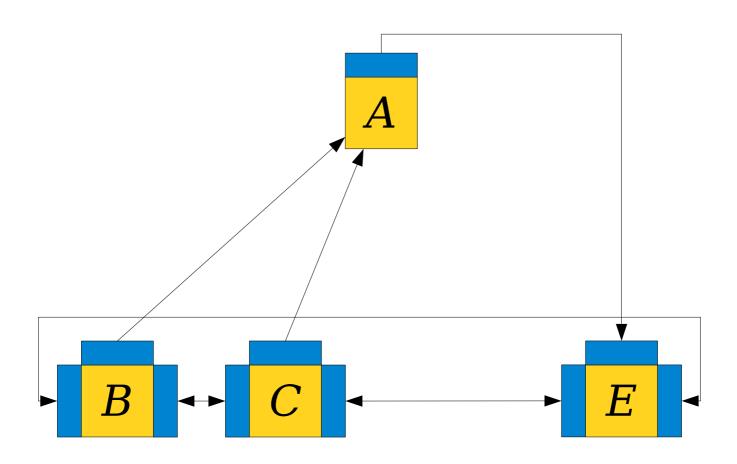

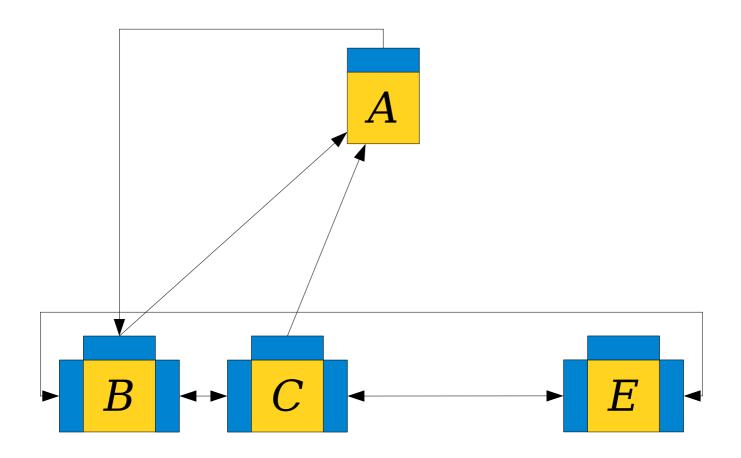

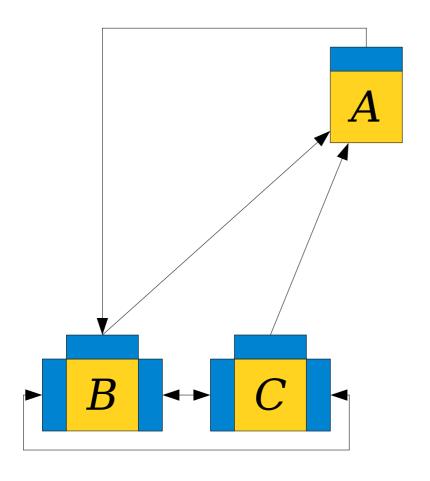

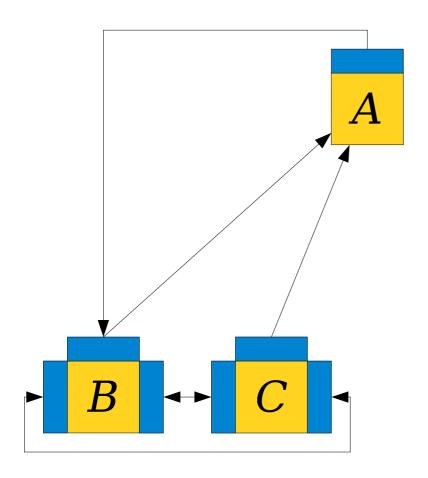

If it is the representative, change the parent's representative child to be one of the node's siblings.

Awful Linked Lists

- Trees are stored as follows:
 - Each node stores a pointer to some child.
 - Each node stores a pointer to its parent.
 - Each node is in a circularly-linked list of its siblings.
- The following possible are now possible in time O(1):
 - Cut a node from its parent.
 - Add another child node to a node.

Fibonacci Heap Nodes

- Each node in a Fibonacci heap stores
 - A pointer to its parent.
 - A pointer to the next sibling.
 - A pointer to the previous sibling.
 - A pointer to an arbitrary child.
 - A bit for whether it's marked.
 - Its order.
 - Its key.
 - Its element.

In Practice

- In practice, the constant factors on Fibonacci heaps make it slower than other heaps, except on huge graphs or workflows with tons of *decrease-key*s.
- Why?
 - Huge memory requirements per node.
 - High constant factors on all operations.
 - Poor locality of reference and caching.

In Theory

- That said, Fibonacci heaps are worth knowing about for several reasons:
 - Clever use of a two-tiered potential function shows up in lots of data structures.
 - Implementation of *decrease-key* forms the basis for many other advanced priority queues.
 - Gives the theoretically optimal comparisonbased implementation of Prim's and Dijkstra's algorithms.

More to Explore

- Since the development of Fibonacci heaps, there have been a number of other priority queues with similar runtimes.
 - In 1986, a powerhouse team (Fredman, Sedgewick, Sleator, and Tarjan) invented the *pairing heap*. It's much simpler than a Fibonacci heap, is fast in practice, but its runtime bounds are unknown!
 - In 2012, Brodal et al. invented the *strict Fibonacci heap*. It has the same time bounds as a Fibonacci heap, but in a *worst-case* rather than *amortized* sense.
 - In 2013, Chan invented the *quake heap*. It matches the asymptotic bounds of a Fibonacci heap but uses a totally different strategy.
- Also interesting to explore: if the weights on the edges in a graph are chosen from a continuous distribution, the expected number of decrease-keys in Dijkstra's algorithm is $O(n \log (m / n))$. That might counsel another heap structure!
- Also interesting to explore: binary heaps generalize to b-ary heaps, where each node has b children. Picking $b = \log (2 + m/n)$ makes Dijkstra and Prim run in time $O(m \log n / \log m/n)$, which is O(m) if $m = \Theta(n^{1+\varepsilon})$ for any $\varepsilon > 0$.

Next Time

- Randomized Data Structures
 - Doing well on average, broadly speaking.
- Frequency Estimation
 - Counting in sublinear space.
- Count-Min Sketches
 - A simple, elegant, fast, and widely-used data structure.