

Network Structure, Efficiency, and Performance in WikiProjects

Anonymized
for
blind review

Anonymized
for
blind review

Abstract

The internet has enabled collaborations at a scale never before possible, but the best practices for organizing such large collaborations are still not clear. Wikipedia is a visible and successful example of such a collaboration which might offer insight into what makes large-scale, decentralized collaborations successful. We analyze the relationship between the structural properties of WikiProject coeditor networks and the performance and efficiency of those networks. We also perform numerical simulations to determine whether social learning on an NK model can reproduce the behavior observed on Wikipedia. We find several results seen in numerical and small-scale lab studies: a performance/efficiency trade-off, higher performance with less skewed node distributions, and higher performance with shorter path lengths. We also see behaviors not previously identified: an association between low degree coeditor networks and both higher performance and higher efficiency, suggesting possible benefits to decentralized collaborations made of smaller, more tightly-knit teams. We also propose a novel consensus-based social learning strategy that is both more efficient and higher performance than existing strategies, and reproduces some behaviors seen in WikiProjects.

Introduction

The problem with Wikipedia is that it only works in practice. In theory, it's a total disaster.

Gareth Owen (Elsharbaty 2016)

The internet has enabled collaborations at a scale never before possible, a global scale. Wikipedia is one of the most successful and visible of these collaborations, and is particularly interesting for its highly decentralized structure with very little top-down control. It is notoriously difficult to organize even small groups without top-down control (Freeman 1972), and yet Wikipedia, with millions of self-organized editors, has produced a high-quality encyclopedia (Giles 2005; Keegan and Fiesler 2017). A better theoretical understanding of projects like Wikipedia is highly desirable as it could help inform the design of new collaborative projects. We focus on one aspect of organizing a large-scale decentralized collaboration: the network structure (Newman

Copyright © 2018, Association for the Advancement of Artificial Intelligence (www.aaai.org). All rights reserved.

2003). If Wikipedia is not structured as a top-down hierarchy, how is it structured? And is that structure related to its success?

We approach these questions by analyzing WikiProjects on the English-language Wikipedia. WikiProjects are collections of thematically related articles, each with their own standards, norms, and processes for evaluating and improving articles. We focus on the coeditor networks of these projects: which editors have edited at least one article in common? When measuring the quality of collaborative projects, there are at least two distinct measures to consider. The first measure is short-term: how effective a unit of work is at improving the collaboration's output, which we call *efficiency*. The other measure is long-term: the highest quality typically reached by an output, which we call *performance*. These two terms are often used interchangeably, but we find it fruitful to distinguish between the two concepts.

Our main findings are:

- WikiProjects having low-degree coeditor networks tend to have both higher performance and higher efficiency, independent of path lengths;
- Short path lengths tend to be associated with higher performance, consistent with a conformity-based learning strategy;
- Structural inequality, as measured by degree skewness, is associated with lower performance, and lower efficiency at reaching the highest quality levels;
- Using numerical simulations, we show that the performance and efficiency of some networked learning strategies depends on degree distribution.

The rest of the paper is structured as follows. Section reviews related work and the motivation for the present project, Section describes the methodology and results of our empirical analysis of WikiProjects, Section describes the methodology and results of our numerical simulations, Section discusses the interpretation and broader impact of our results, and Section concludes.

Background and Related Work

The field of social learning studies how groups of interacting agents can collaborate to solve complex problems. In *networked social learning*, agents are represented by nodes

on a network and can only interact with their neighbors. Social learning tasks can be divided into cases where agents have *generated signals* (independently noisy estimates of a true value) and those where agents have *interpreted signals* (solutions based on different selections of available data) (Hong and Page 2009). The behavior of individual agents is described by their *social learning strategy*. For generated signals, a naive Bayesian approach converges to the truth when all agents have the same degree, while the speed of convergence depends on the *spectral gap* between the two largest eigenvalues of the network's adjacency matrix (DeGroot 1974; Golub and Jackson 2010). Complex social learning tasks can also be modeled as the problem of maximizing an objective function with many local maxima, referred to as a *rugged landscape* (Lazer and Friedman 2007; Mason, Jones, and Goldstone 2008; Mason and Watts 2012; Grim et al. 2013; Barkoczi and Galesic 2016). Numerical simulations have shown that efficient networks (those with short paths between nodes) can result in faster convergence at the cost of a less optimal solution, due to less time for exploration (Mason, Jones, and Goldstone 2008; Grim et al. 2013). However, when conformity-based social learning strategies are used, efficient networks can sometimes find more optimal solutions than inefficient ones (Barkoczi and Galesic 2016). The above tradeoff between convergence time, optimality, and learning strategy motivates the distinction between performance and efficiency in the current study.

Lab-based experiments on networked collaboration suggest a complex interaction between network topology, and other factors. While groups of networked human subjects reliably perform very well on difficult graph-coloring tasks, the best performing network architectures (e.g., fully-connected vs. small-world) vary from task to task (Kearns 2012). The same studies found that while human subjects tend to perform very well on a number of networks, they perform worst on collaboratively self-organized networks, highlighting the importance of intentionality in constructing communication channels for collective decision-making. Similarly, some network topologies are able to reach faster decisions in the presence of more information, while others show the opposite effect (Kearns, Suri, and Montfort 2006). Based on lab experiments, Fowler and Christakis (Fowler and Christakis 2010) suggest that individual decisions towards altruism are conditional on their neighbor's behavior and "contagious" up to three degrees away. Later experiments by Suri and Watts (Suri and Watts 2011) confirmed the existence of conditional altruism, but concluded that altruistic behavior only influences first-degree neighbors. While theories of networked social learning have been tested in small-scale lab experiments, there is a need to study real-world, large-scale collaborations, as we do in the present paper.

In addition to learning, decision-making is a crucial component of collaboration. The Condorcet jury theorem and its extensions (List and Goodin 2001) describe how individuals can use majority voting to improve their decision-making ability. The process of decision-making is sometimes divided into "talking" and "voting" stages. Robert

Michels proposed the "iron law of oligarchy," (Michels 1999) which states that the earlier members of a group will, over time, gain disproportionate decision-making power and act increasingly out of self-interest rather than the good of the group. Shaw and Hill found that behavior in online wiki communities is consistent with the iron law (Shaw and Hill 2014). A number of studies, summarized in (Gentry 1982), have examined consensus-based decision-making procedures, used extensively by the Quakers and later by activist communities. The hallmark of consensus is the equal and active participation by all members of a group. Key findings include the trade-off between speed and quality of decisions, the importance of expressing conflict early in the process, and the willingness to recognize when one's own views are counter to the existing consensus. De Tar created InterTwinkles (DeTar 2013), an online suite of tools to facilitate consensus decision-making in small cooperatives. Consensus decision making is notoriously difficult to apply in large groups. Wikipedia is one of the largest collaborations to use consensus-based decision-making, making it an excellent place to study the role of network structure in large-scale collaboration.

Research on digital communities has also examined the role of factors such as diversity and inequality in collaborative work and decision-making. Using a simulation model, Hong and Page (Hong and Page 2004) found that diverse groups can outperform groups composed of the best individual problem-solvers. In sociology, much research has been done examining the relationship between network structure and social capital. Powerful individuals are often "brokers" who act as exclusive intermediaries between disconnected portions of the social network (Silverman 1965). Similarly, successful innovation in organizations often occurs in "structural holes" between groups (Granovetter 1973). There is some evidence that groups with high structural inequality, as evidenced by highly-skewed degree distributions, perform worse on collaborative tasks (Kearns 2012). In the present project, we use co-editor network degree skewness to examine the relationships between structural inequality, project performance, and project efficiency.

Several studies have examined the role of community in the specific context of Wikipedia. Robert and Romero found that larger group sizes yield higher article ratings (as determined by editor peer-review) when the groups are diverse and experienced (Robert and Romero 2015). Also on Wikipedia, Kittur and Kraut found that different types of coordination have a complex effect on the quality of Wikipedia articles (Kittur and Kraut 2008). Both explicit and implicit coordination result in higher quality articles, with explicit coordination being especially central in the early life of an article. Looking specifically at Wikipedia policies determined by editor consensus, Keegan and Fiesler found a trend from flexible rule-making towards less flexible maintenance and deliberation (Keegan and Fiesler 2017).

Across the broad range of work discussed above, a few key themes emerge. The efficiency and performance of collaborations are important considerations and vary depending on both network structure and type of task (Kearns 2012). While generated signal models of social learning predict

no relationship between the two (Golub and Jackson 2010), contagion-style innovation models predict a trade-off (Mason and Watts 2012; Barkoczi and Galesic 2016). Such a trade-off has been observed in simulations and lab experiments on collaboration (Kearns 2012; Grim et al. 2013).

In this project, I will investigate several gaps in the existing literature. In much of the existing literature, degree distribution correlates to performance. But aside from the naive Bayes case in social learning, it is unknown whether the correlation is explained best by degree or by another structural property correlated with degree. The characteristic path length and min-cut studied here are candidates for such degree-correlated factors. While existing work has focused on families of artificial networks, this project examines a large number of naturally-occurring networks. Unlike artificial networks, the structural properties of these naturally-occurring networks can vary independently, making it easier to isolate individual network properties that correlate with outcome variables. This project will also examine Wikipedia for evidence that structural inequality (in the form of skewed degree distributions) has relationship with performance, as has been observed in lab experiments (Kearns 2012).

WikiProjects

Many articles on Wikipedia belong to one or more WikiProject. WikiProjects are groups of thematically-related articles (e.g., articles related to Philosophy). Information about the an article’s associated WikiProjects can be viewed on that article’s talk page (Figure 1). Each WikiProject has its own page and talk page. These pages contain information about community norms within the project as well as discussions about individual articles. WikiProjects are thus distinct communities, with distinct norms and processes. These communities are the fundamental units of analysis in the present paper.

One of the main roles of a WikiProject is to evaluate the quality of its articles. Quality assessments are made through consensus-based deliberation on the WikiProject talk page. Within a WikiProject, assessments are typically made using the following *assessment classes* (in order of increasing quality): Stub, Start, C, B, A. Different WikiProjects can assign different quality assessments to the same article. Differences between quality assessments could reflect different quality standards, different grading systems, different responsiveness to changes in an article, etc.

In addition to the above assessment classes, articles on Wikipedia can be tagged as “good article” (GA) or “featured article” (FA) quality. FA and GA determinations are made using a Wikipedia-wide consensus, in parallel to any WikiProject-based evaluations. FA articles are “the best articles Wikipedia has to offer” (). GA articles meet “a core set of editorial standards” but are “not featured article quality” (). When an article is assigned GA or FA status, WikiProject quality assessments are often updated to reflect that status. For example, the article *Mewtwo* was assessed as GA status on October 5, 2009 and shortly afterwards its quality assessment was changed from B to GA within both *WikiProject Pokémon* and *WikiProject Video Games*. This example also illustrates a quirk of Wikipedia norms: very often, articles



Knitting is a former [featured article candidate](#). Please view the links under Article milestones below to see why the nomination failed. For older candidates, please check the [archive](#).

Article milestones		
Date	Process	Result
December 16, 2006	Featured article candidate	Not promoted
March 26, 2007	Peer review	Reviewed
April 7, 2007	Good article nominee	Not listed

Current status: **Former featured article candidate**



Knitting has been listed as a [level-4 vital article](#) in Technology. If you can improve it, [please do](#). This article has been rated as [B-Class](#).



This article is within the scope of [WikiProject Textile Arts](#), a collaborative effort to improve the coverage of [textile arts](#) on Wikipedia. If you would like to participate, please visit the project page, where you can join the [discussion](#) and see a list of open tasks.

B

Top

This article has been rated as **B-Class** on the [quality scale](#).

This article has been rated as **Top-importance** on the [importance scale](#).

Figure 1: Templates appearing at the top of the English-language Wikipedia talk page for *Knitting*. The article belongs to both *WikiProject Technology* and *WikiProject Textile Arts*. Both WikiProjects have assessed the article as B-class quality. The article has also been nominated for both good article (GA) and featured article (FA) status, but after a consensus-based deliberation open to all Wikipedia editors, was not assigned GA or FA status.

pass to GA or FA directly from B, skipping A. The majority of WikiProjects rarely use the A class quality assessment.

Data

Our analysis combines multiple data sets from the English-language Wikipedia. For information about edit history, we used a publicly-available data set containing metadata about all edits from July 12, 2006 to December 2, 2015. To get the rating history of each article, we wrote a script to scrape the daily logs produced by WP 1.0 Bot for all unique WikiProjects (2279) between May 4, 2006 and December 2, 2015. Finally, we used a publicly-available log of page events (including rename events) to reconstruct the unique identifier for each article title mentioned in the rating history logs.

Efficiency and Performance

When individuals collaborate to solve a problem, there are many ways to gauge their success. Two possibilities are 1. how quickly they find a solution, and 2. how good their solution is. Evidence from numerical simulations (Lazer and Friedman 2007; Mason, Jones, and Goldstone 2008;

Mason and Watts 2012; Grim et al. 2013; Barkoczi and Galesic 2016), lab studies (Kearns 2012), and field observations (Gentry 1982) all suggest a trade-off between performance and efficiency. While common, this trade-off is not absolute, suggesting it is sometimes possible to simultaneously increase performance and efficiency. The identification of factors associated with both higher efficiency and higher performance has obvious practical importance. In this paper, we focus specifically on how network structure relates to efficiency and performance within WikiProjects.

For a WikiProject, efficiency quantifies how much participants can raise the assessed quality of an article for a fixed amount of work. We measure work by the number of revisions made. Quality assessments are made through consensus of the project participants themselves, so different projects can have different standards and practices for assessing article quality. So the efficiency is not a measure of how quickly some objective measure of quality improves, but rather of how quickly the project participants can reach consensus on the improvements that need to be made and make those improvements. Because our definition relies on assessment transitions, we must define efficiency variables for each of the project-level quality assessments: A, B, and C. For a particular grade G , we desire our definition of efficiency to meet the following conditions:

- Strictly increasing in the number of articles reaching grade G (with revision count fixed);
- Strictly decreasing in the number of revisions (with transition count fixed);
- Independent of WikiProject size: not affected by adding an article if that article’s transition/revision ratio is equal to the efficiency.

We now define an efficiency measure which meets the above criteria. Let $T(W, G)$ be the set of article assessment transitions from below grade G to grade G or higher in project W . Let $N(W, G)$ be the number of articles in project W which ever transition from below grade G to grade G (or higher). Let $r(t)$ be the number of article revisions since its previous grade transition, and let $g(t)$ be the number of grade levels crossed by transition t . We quantify the efficiency $E(W, G)$ as the inverse of the mean number of revisions per transition:

$$E(W, G) = \left[\frac{1}{N(W, G)} \sum_{t \in T(W, G)} \frac{r(t)}{g(t)} \right]^{-1}, \quad (1)$$

Where the $g(t)$ term is present because a assessments sometimes raise article quality by several grades, in which case we divide the revisions evenly between all grade levels achieved.

For performance, we wish to quantify how good articles tend to be when they reach a stable state. Measuring performance is difficult for several reasons: there is no objective measure of article quality available, and articles are always changing, making it difficult to know which articles should be considered complete or stable. We use an extremely simple performance measure that gives surprisingly consistent

results. In addition to per-project quality assessment, articles can be given “featured article” or “good article” status. The criteria for these statuses are consistent across all of Wikipedia, and any editor can participate in the discussion and decision to award good or featured status. In other words, the good and featured statuses are more objective than per-project assessments.

Our performance measure $P(W)$ is defined simply as the percentage of articles in project W which have reached good or featured status:

$$P(W) = \frac{f(W) + g(W)}{n(W)}, \quad (2)$$

where $f(W)$ and $g(W)$ are the numbered of featured and good articles respectively, and $n(W)$ is the total number of articles.

Empirically, we find that both efficiency and performance are highly right-skewed, with a small number of projects having values much higher than the average. After log-transforming the values, both the efficiency and the performance have a unimodal distribution with low skew (see Figure 2).

Coeditor Networks

For each WikiProject, we compare the efficiency and performance measures to the structural properties of its coeditor network. The *coeditor network* of a WikiProject consists of nodes representing editors. Two editors are connected when they have both edited the same article or talk page. The edges are directed, with the direction representing the direction of *plausible information flow*; an edge from editor A to editor B exists if A edited an article and then B edited the same article at a later time. Edges can exist in both directions e.g., if an article was edited first by A, then by B, and again by A. For simplicity, we assign all edges unit weight. We focus on three structural properties: degree, characteristic path length, and min-cut.

The node degree distribution is the simplest structural property we analyze for WikiProject coeditor networks. The in-degree (out-degree) of a node is the number of edges to (from) that node. Taking the average of either in-degree or out-degree gives the same value: the *mean degree* of the network. In our context, the mean degree represents how many others a given editor has collaborated with. We also consider the *skewness* of the in-degree and out-degree distributions. A large positive degree skewness value for a WikiProject coeditor network implies that a small number of editors have a very large number of collaborators, while a small positive value implies that the editors having the most collaborators don’t have many more than a typical editor.

We also calculate the characteristic path length for each WikiProject coeditor network. The *distance* from editor A to editor B is the length of the shortest path from A to B. The *characteristic path length* is the mean distance between all editor pairs. If no path exists between two editors, we exclude that pair from the mean. For brevity, we will simply refer to this quantity as the *path length*. The path length represents how quickly information can move through the network. Networks with longer paths require more interactions

for information to propagate through the network, which has been shown to reduce efficiency in some settings (Mason, Jones, and Goldstone 2008; Barkoczi and Galesic 2016).

Our final network measure quantifies the connectivity of a project’s coeditor network using min-cut size. The minimum st -cut between nodes s and t is the set of edges that must be removed in order that no path exists from s to t . The minimum cut (min-cut) of a graph is the smallest minimum st -cut over all node pairs st . The size of the graph min-cut quantifies the connectivity of a graph, but only incorporates information about edges lying on paths crossing the min-cut. Instead, we use the mean size of all minimum st -cuts, which we refer to as the *mean min-cut*. This measure quantifies the number of redundant paths information can take through the network. Networks with higher redundancy are more resilient to errors on one path (Albert, Jeong, and Barabasi 2000) and allow innovations to propagate through complex contagion, in which innovations are only adopted after multiple exposures through different sources (Centola and Macy 2007).

The mean path and min-cut network measures are computationally intensive, requiring distance and minimum st -cut calculations for each all node pairs. For larger projects, these calculations are impractical. When coeditor networks were large, we employed sampling to determine mean path length and mean min-cut. For mean path length, source nodes were sampled, and path length was calculated to all destination nodes from each of these. For min-cut, node pairs were sampled. In both cases, stratification was used to ensure the same number of nodes were sampled from each of 12 node degree quantiles. We estimated the error due to sampling by determining true values for a medium-sized project, and calculating error as a function of sample-size. Sample sizes were chosen such that relative error was below 10%. Even with sampling, however, it was impractical to calculate these properties for the largest projects, so we exclude them from the analysis. To control for bias in project size, we include several size-related variables in our models.

Regression Models

We model performance and efficiency in WikiProjects using ordinary least-squares linear regression. Each WikiProject is taken as a single observation. The models include each project’s coeditor network properties as independent variables. We also include several project-level variables to control for confounding factors. The C-efficiency is included in the model for performance to control for the presence of articles that are actively being improved. Projects with lower efficiency will have more works-in-progress and could have an artificially low performance without controlling for efficiency. Some variables are log-transformed to reduce heteroscedasticity.

Our models are summarized in Table 1. Mean min-cut was found to be highly correlated with degree ($r = 0.980$, $p < 0.001$), so we exclude min-cut to prevent collinearity (see Figure 3). The high correlation between mean degree and min-cut implies that in most cases the minimum st -cut is simply the either set of edges from s or the set of edges to t . The rarity of non-trivial min-cuts suggests that WikiProject

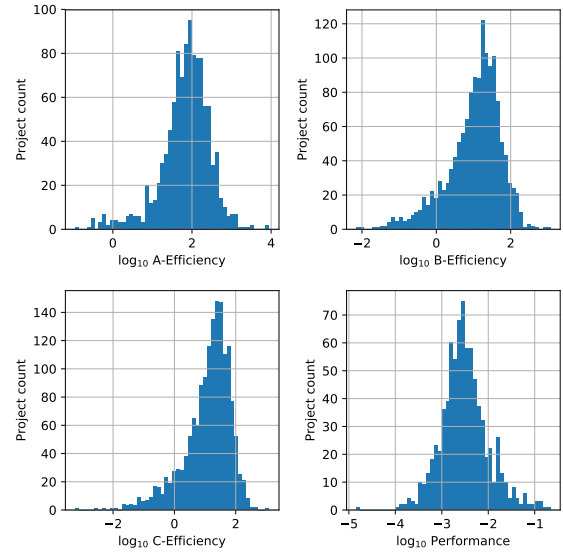


Figure 2: Histograms of WikiProject efficiency and performance. Both measures are highly right-skewed, but form unimodal distributions with low skewness after log transformation.

coeditor networks have very few central bottlenecks and are thus highly decentralized. In-degree and out-degree skewness were also highly correlated, so each dependent variable was modeled twice: once with in-degree skewness and once with out-degree skewness.

The regression results are consistent whether in-degree or out-degree skewness is used, although the out-degree models are slightly more significant when modeling efficiency. We also see that B-efficiency and C-efficiency have very similar models, but that A-efficiency behaves differently in its dependence on degree skewness and connectivity. The different behavior of A-efficiency is likely explained by the observation that the A-Class quality is infrequently used in practice, meaning that the quality level is usually achieved when an article is rated as a good or featured article, which involves a different consensus process than lower ratings.

The negative dependence of performance on C-efficiency suggests there is generally a trade-off between performance and efficiency. However, low degree is correlated with both higher efficiency and higher performance, suggesting that it is sometimes possible to improve both simultaneously. Much of the existing numerical work on networked social learning focuses on path length rather than degree, so we explore this result further using simulations in the next section.

For path length, we find that longer lengths correspond to lower performance, contrary to the conjecture that longer path lengths allow more exploration (Mason, Jones, and Goldstone 2008) but consistent with a conformity-based social learning strategy (Barkoczi and Galesic 2016).

We also observe that high degree skewness is correlated with lower performance and lower A-efficiency, suggesting

Table 1: Standardized coefficients for OLS models.

	Perf ₁ [†]	Perf ₂ [†]	A-Eff ₁ [†]	A-Eff ₂ [†]	B-Eff ₁ [†]	B-Eff ₂ [†]	C-Eff ₁ [†]	C-Eff ₂ [†]
Mean degree [†]	-0.84***	-0.78***	-0.61**	-0.84***	-0.50***	-0.61***	-0.34**	-0.31*
In-degree skewness [†]	-0.58***	—	-0.43**	—	-0.19	—	-0.1	—
Out-degree skewness [†]	—	-0.48***	—	-0.57***	—	-0.26*	—	-0.066
Mean path [†]	-0.357***	-0.356***	-0.026	-0.096	-0.020	-0.045	-0.092**	-0.086
C-eff [†]	-0.083**	-0.085**	—	—	—	—	—	—
Connectivity	0.018	0.016	0.081	0.088	0.126***	0.142***	0.080**	0.081**
Mean editors/article [†]	0.37***	0.40***	0.22	0.27	0.20	0.22*	0.076	0.075
Article count [†]	-0.32	-0.27	0.63*	0.70*	0.76**	0.78**	0.67***	0.67***
Editor count [†]	0.68*	0.48	0.74*	0.97**	0.60*	0.72**	0.52*	0.46*
Revision count [†]	0.37	0.39	-0.84**	-0.88**	-1.05***	-1.05***	-1.00***	-1.00***
First assessment	0.028	0.058	0.086*	0.101**	0.309***	0.321***	0.456***	0.460***
Mean article age	-0.040	-0.029	-0.049	-0.037	-0.019	-0.014	-0.046*	-0.045*
DoF	1278	1278	1048	1048	1371	1371	1540	1540
R _{adj} ²	0.37	0.37	0.15	0.16	0.30	0.30	0.43	0.43

[†] Log-transformed. * $p < 0.05$. ** $p < 0.01$. *** $p < 0.001$.

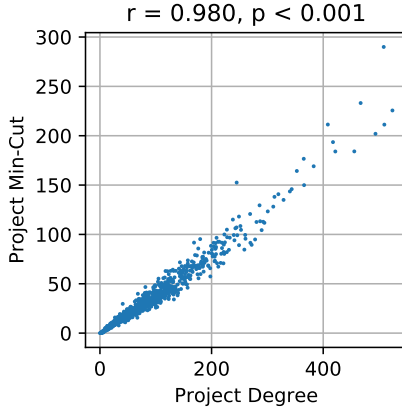


Figure 3: Min-cut of WikiProject coeditor networks vs. their mean degree.

that articles in projects with decentralized coeditor networks reach featured or good status more efficiently, and reach higher quality ratings in general.

Numerical Simulations

We use numerical simulations to determine whether simple models can reproduce the behavior we observe in WikiProject coeditor networks. Following existing numerical work on networked social learning (Lazer and Friedman 2007; Mason, Jones, and Goldstone 2008; Mason and Watts 2012; Barkoczi and Galesic 2016), we use the NK model (Kauffman and Levin 1987) to create NP-hard, nonlinear optimization problems and evaluate the effects of network structure and learning strategy on a group’s ability to find solution to those problems. We are particularly interested in the effect of degree on the efficiency and performance of a group of networked problem-solving agents.

In the NK model, N loci each have a binary state and value

determined by a random lookup table mapping its state and the state of another K loci to a real number in $[0, 1]$. We report results for the case $N = 250$, $K = 7$. Solutions thus take the form of an N -bit string, and the value of the solution is the mean over all loci values.

For a particular problem-solving trial, agents each store their current favored solution and apply learning strategies to iteratively improve those solutions. We define their efficiency and performance in terms of the mean solution values for each time step. We define the performance to be the mean solution value after the process has converged, while the efficiency is the reciprocal of the number of steps required to converge. We measure the time to convergence as the number of steps required to reach 99% of the maximum mean solution value.

Learning Strategies

Agents can engage in individual learning by applying a hill-climbing algorithm to their current solution. In each iteration, one bit of the NK solution string is flipped to maximize the solution value. If no change improves the value, the original solution is kept. Agents can also incorporate information from any other agents they are connected to by a network edge. While individual learning always converges to the local maximum relative to the starting point, social learning strategies allow agents to “jump” to drastically different solutions with higher local maxima.

We use both the conformity and best-neighbor strategy from (Barkoczi and Galesic 2016). In the *best-neighbor* strategy, each agent compares its solution to the those of all its neighbors, and chooses the solution with the highest value. In the *conformity* strategy, agents simply choose the most common solution among their neighbors (ties are broken uniformly at random). In both cases, a single iteration of individual learning is performed after each social learning iteration.

We introduce a new strategy, which we call the consensus strategy. In *consensus*, agents first apply individual learning.

Next, a consensus solution is constructed from each agent’s individual solution by setting each NK locus’s state to its most common value among the agent’s individual solutions. The result of this process is that agents accept a single consensus solution at each iteration, which forms the basis for future individual learning. We include this strategy because of its similarity to the editing process of Wikipedia: at any given time, a Wikipedia article has a single state, determined by consensus, but editors may have differing opinions on how to improve that article.

We also introduce local variants of the above strategies. The local variants are meant to reflect a more realistic collaboration setting where individual agents focus on sub-problems. In these variants, individual learning takes place on a subset of NK loci. Each agent is associated with an NK locus and the loci its value depends on. These loci are the agent’s *concern*, and are the only ones used for individual learning. Similarly, in the consensus strategy, an NK locus’s value is determined only by the agents concerned with that locus, rather than all agents.

Network family

The agent networks used in our simulations vary from those in previous work in two important ways: they reflect the structure of the NK model being optimized, and they allow the degree to be tuned with minimal change to the mean path length.

Our networks are generated by first creating an agent node for each NK locus. Each node is assigned a concern consisting of its associated locus and all loci its value depends on, as in the local learning strategies. This procedure forms an agent-locus affiliation network. Next, an agent-agent co-affiliation network is created by connecting two agents if they share at least one locus in their concerns. This process is exactly analogous to our definition of a WikiProject coeditor network, with agents playing the role of editors and NK loci playing the role of Wikipedia articles.

To create a tunable degree, we duplicate each node and its node-locus edges and then randomly rewire those edges before creating the agent-agent network. The duplication process creates a high overlap between agent concerns, meaning that most agent-locus edges are redundant and do not create additional agent-agent edges, resulting in a low average degree. By randomly rewiring the agent-locus edges, the redundancy is reduced and the average degree of the agent-agent network is increased.

Simulation results

We simulated 100 trials for rewiring values of 0.0, 0.167, 0.333, 0.5, 0.667, 0.833, and 1.0. For each trial we generated an NK model with $N=250$ and $K=7$ and ran each social learning strategy for 300 iterations, as well as a network based on that NK model and rewired. We confirmed that all trials converged to their maximum value before reaching the last iteration. Some statistics on the network properties of the networks are summarized in Table 2. We see that the coefficient of variation of degree is approximately 10%, while only 1% for mean path length, confirming that

Table 2: Simulated network statistics.

Property	Mean	Std. Dev.
Mean Degree	132.3	9.2
Mean Path length	1.735	0.019

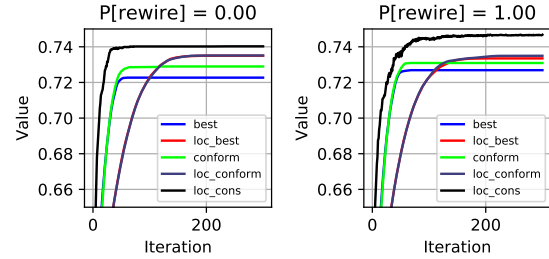


Figure 4: Mean agent solution value over time, averaged over 100 trials. The left and right figures show results for agent networks with the probability of rewiring set to 0 and 1, respectively. In both, local strategies are less efficient and more performant than non-local. The consensus strategy is both more efficient and more performant than others, with its performance increasing with higher rewiring.

the rewiring process has a stronger influence on degree than on path length.

Figure 4 shows how agents’ solutions improve after repeated applications of different learning strategies and rewiring values. Each curve represents an average over 100 trials, each with 250 agent solutions. For all rewiring values, local strategies are less efficient and more performant than their non-local counterparts. The consensus strategy is both more efficient and more performant than others, with its performance increasing with higher rewiring.

The effect of degree on performance and efficiency is shown in Figure 5 and Tables 3 and 4. For both local and non-local versions of the best-neighbor and conformity strategies, there is no significant effect of degree on performance or efficiency. As noted above however, the local versions consistently have higher performance and lower efficiency than their non-local counterparts. We observe more interesting behavior with the consensus strategy. Node degree shows a significant negative correlation with degree, and a small but significant positive correlation with efficiency. The consensus simulations replicate the efficiency

Table 3: Efficiency regression coefficients.

Strategy	Std. Coeff.
Best-neighbor	-0.064
Conformity	-0.080
Local best-neighbor	-0.086
Local conformity	0.049
Consensus	-0.0325***

* $p < 0.05$. ** $p < 0.01$. *** $p < 0.001$.

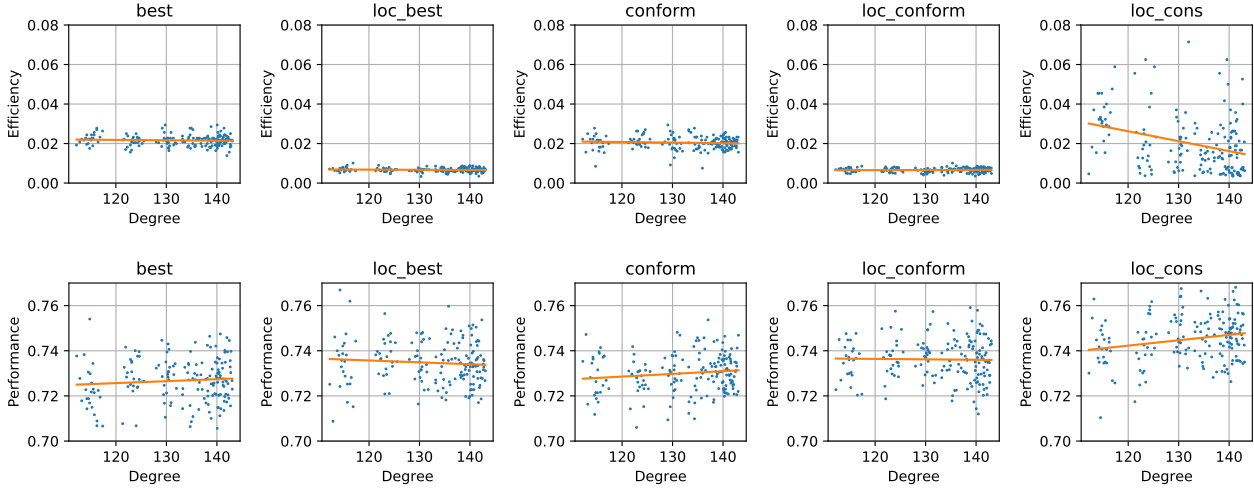


Figure 5: Efficiency and Performance of social learning strategies vs network degree. Each point represents a single trial of 300 iterations. The consensus strategy shows increased performance and decreased efficiency as degree increases, while other strategies show no degree dependence.

Table 4: Performance regression coefficients.

Strategy	Std. Coeff.
Best-neighbor	0.084
Conformity	0.130
Local best-neighbor	-0.080
Local conformity	-0.020
Consensus	$2.38 \times 10^{-4} **$

* $p < 0.05$. ** $p < 0.01$. *** $p < 0.001$.

behavior observed in WikiProjects, but the opposite behavior for performance. But unlike other strategies, consensus demonstrates that degree distribution can have an impact on both performance and efficiency.

Discussion

While existing research into the role of network structure in collaboration has focused on numerical simulations and lab experiments, analysis of large real-world systems is an important next step. Our empirical analysis of WikiProjects contributes several findings towards a better understanding of large, decentralized, real-world collaboration. We observe several results consistent with previous work: a trade-off between performance and efficiency, higher performance for shorter path lengths in a conformity setting, and a reduction in performance with increased structural inequality. By using real-world networks, we were also able to analyze network properties independently, allowing us to show that while most existing work has focused on the importance of path length, degree distribution may be just as, or more, important. The association of low-degree with both high performance and high efficiency is compelling, as it sidesteps the usual trade-off between performance and efficiency. In low-degree networks, agents have more repeated interac-

tions with smaller groups of collaborators, possibly suggesting that small team sizes could be beneficial for large collaborations. Similarly, the observation that performance is higher in projects with less structural inequality suggests that, if the challenges of egalitarian organizing can be overcome, decentralized collaborations may produce better outcomes than those with centralized, top-down structures.

Our numerical simulations offer a few additional insights. Our proposed local variants of best-neighbor and conformity strategies out-performed the standard variants while searching fewer alternatives. The higher performance for less work is analogous to the performance increases that have been seen for sampling fewer neighbors (Barkoczi and Galesic 2016). However, our network is a special case in that its structure is related to the structure of the NK model being optimized, which could increase the usefulness of local information. Our proposed consensus strategy, intended to model Wikipedia more closely, exhibits a degree-dependent performance and efficiency, unlike other strategies. This dependence is also seen in our Wikipedia analysis, although performance’s dependence has the opposite sign. The consensus strategy is also interesting in that it is more efficient and higher performance than the other strategies. The unique properties of the consensus strategy may be due to a major difference it has from the others: rather than exploring through local hill-climbing, the consensus strategy combines parts of existing solutions to create entirely new ones.

Our work has several limitations. Our empirical analysis is purely correlative and cannot be used to draw conclusions about the causal influence of network structure on collaboration. However, the consistency of our results with other lab-based and numerical studies suggests that the causal link is worth further study. Similarly, our study focuses entirely on a single setting and while it is suggestive, does not necessarily generalize, and studies of other systems are necessary

to corroborate our findings.

Our work raises several questions that could be the subject of future work. Is the correlation between network structure, performance, and efficiency causal? A time-dependent analysis of our data could offer insight. Are similar relationships observed in other large-scale collaborations? Does varying degree independently of path length influence performance and efficiency in a controlled lab setting?

Conclusion

In this paper, we have described the relationship between the structural properties of WikiProject coeditor networks and the performance and efficiency of those networks. As in other studies, we see a trade-off between performance and efficiency, but not an absolute trade-off. Some properties, such as low degree, are associated with both higher performance and higher efficiency. We also find that the correlations between path length and performance are consistent with a conformity-based social learning strategy, but not a greedy best-neighbor strategy. We also observe improved performance in more decentralized project, as has been seen in small-scale lab experiments. While the performance and efficiency of most previously-studied social learning strategies depend more on path length than degree, we have proposed a novel consensus learning strategy that is more realistic, more efficient, and higher performance than existing strategies. While the efficiency and performance of existing strategies do not exhibit any degree-dependence, our consensus strategy demonstrates that degree-dependence is possible. While additional work is needed to determine causal relationships and how generalizable our results are, we have shown evidence that several phenomena predicted by numerical and small-scale lab experiments are present in a large, real-world network. And, we have identified new behaviors not explained by existing models, suggesting the need for alternate models. Our results suggest that the success of large-scale collaborations may be aided by greater decentralization, consensus or conformity-based decision-making, and more tightly-knit collaborations between smaller teams.

Acknowledgments

Anonymized for blind review.

References

- Albert, R.; Jeong, H.; and Barabási, A.-L. 2000. Error and attack tolerance of complex networks. *Nature* 406(6794):378–382.
- Barkoczi, D., and Galesic, M. 2016. Social learning strategies modify the effect of network structure on group performance. *Nature* 7.
- Centola, D., and Macy, M. 2007. Complex contagions and the weakness of long ties. *American journal of Sociology* 113(3):702–734.
- DeGroot, M. H. 1974. Reaching a consensus. *Journal of the American Statistical Association* 69(345):118–121.
- DeTar, C. C. F. 2013. *InterTwinkles: online tools for non-hierarchical, consensus-oriented decision making*. Ph.D. Dissertation, Massachusetts Institute of Technology.
- Elsharbaty, S. 2016. Editing Wikipedia for a decade: Gareth Owen.
- Fowler, J. H., and Christakis, N. A. 2010. Cooperative behavior cascades in human social networks. *Proceedings of the National Academy of Sciences* 107(12):5334–5338.
- Freeman, J. 1972. The tyranny of structurelessness. *Berkeley Journal of Sociology* 17:151–164.
- Gentry, M. E. 1982. Consensus as a form of decision making. *J. Soc. & Soc. Welfare* 9:233.
- Giles, J. 2005. *Internet encyclopaedias go head to head*. Nature Publishing Group.
- Golub, B., and Jackson, M. O. 2010. Naive learning in social networks and the wisdom of crowds. *American Economic Journal: Microeconomics* 2(1):112–149.
- Granovetter, M. S. 1973. The strength of weak ties. *American journal of sociology* 1360–1380.
- Grim, P.; Singer, D. J.; Fisher, S.; Bramson, A.; Berger, W. J.; Reade, C.; Flocken, C.; and Sales, A. 2013. scientific networks on data landscapes: question difficulty, epistemic success, and convergence. *Episteme* 10(04):441–464.
- Hong, L., and Page, S. E. 2004. Groups of diverse problem solvers can outperform groups of high-ability problem solvers. *Proceedings of the National Academy of Sciences of the United States of America* 101(46):16385–16389.
- Hong, L., and Page, S. 2009. Interpreted and generated signals. *Journal of Economic Theory* 144(5):2174–2196.
- Kauffman, S., and Levin, S. 1987. Towards a general theory of adaptive walks on rugged landscapes. *Journal of theoretical Biology* 128(1):11–45.
- Kearns, M.; Suri, S.; and Montfort, N. 2006. An experimental study of the coloring problem on human subject networks. *Science* 313(5788):824–827.
- Kearns, M. 2012. Experiments in social computation. *Communications of the ACM* 55(10):56–67.
- Keegan, B., and Fiesler, C. 2017. The Evolution and Consequences of Peer Producing Wikipedia’s Rules. In *ICWSM*.
- Kittur, A., and Kraut, R. E. 2008. Harnessing the wisdom of crowds in wikipedia: quality through coordination. In *Proceedings of the 2008 ACM conference on Computer supported cooperative work*, 37–46. ACM.
- Lazer, D., and Friedman, A. 2007. The network structure of exploration and exploitation. *Administrative Science Quarterly* 52(4):667–694.
- List, C., and Goodin, R. E. 2001. Epistemic democracy: generalizing the Condorcet jury theorem. *Journal of Political Philosophy* 9(3):277–306.
- Mason, W., and Watts, D. J. 2012. Collaborative learning in networks. *Proceedings of the National Academy of Sciences* 109(3):764–769.
- Mason, W. A.; Jones, A.; and Goldstone, R. L. 2008. Propagation of innovations in networked groups. *Journal of Experimental Psychology: General* 137(3):422.

- Michels, R. 1999. *Political parties a sociological study of the oligarchical tendencies of modern democracy*. New Brunswick, N.J., U.S.A.: Transaction Publishers.
- Newman, M. E. 2003. The structure and function of complex networks. *SIAM review* 45(2):167–256.
- Robert, L., and Romero, D. M. 2015. Crowd size, diversity and performance. In *Proceedings of the 33rd Annual ACM Conference on Human Factors in Computing Systems*, 1379–1382. ACM.
- Shaw, A., and Hill, B. M. 2014. Laboratories of oligarchy? How the iron law extends to peer production. *Journal of Communication* 64(2):215–238.
- Silverman, S. F. 1965. Patronage and community-nation relationships in central Italy. *Ethnology* 4(2):172–189.
- Suri, S., and Watts, D. J. 2011. Cooperation and contagion in web-based, networked public goods experiments. *ACM SIGecom Exchanges* 10(2):3–8.