0.5: single page app

browser   server

User writes (to be listed) sentence into the textbox named note and click submit button valued Save
and the form is sent with method POST

HTTP GET https://studies.cs.helsinki.fi/exampleapp/spa →

← HTML-code

HTTP GET https://studies.cs.helsinki.fi/exampleapp/main.css →

← main.css

HTTP GET https://studies.cs.helsinki.fi/exampleapp/main.js →

← spa.js

HTTP GET https://studies.cs.helsinki.fi/exampleapp/data.json →

← data.json

HTTP GET https://studies.cs.helsinki.fi/favicon.ico →

address bar icon; favicon

← favicon.ico

Everything is loaded in the browser and then the browser constructs data
with instructs from the server

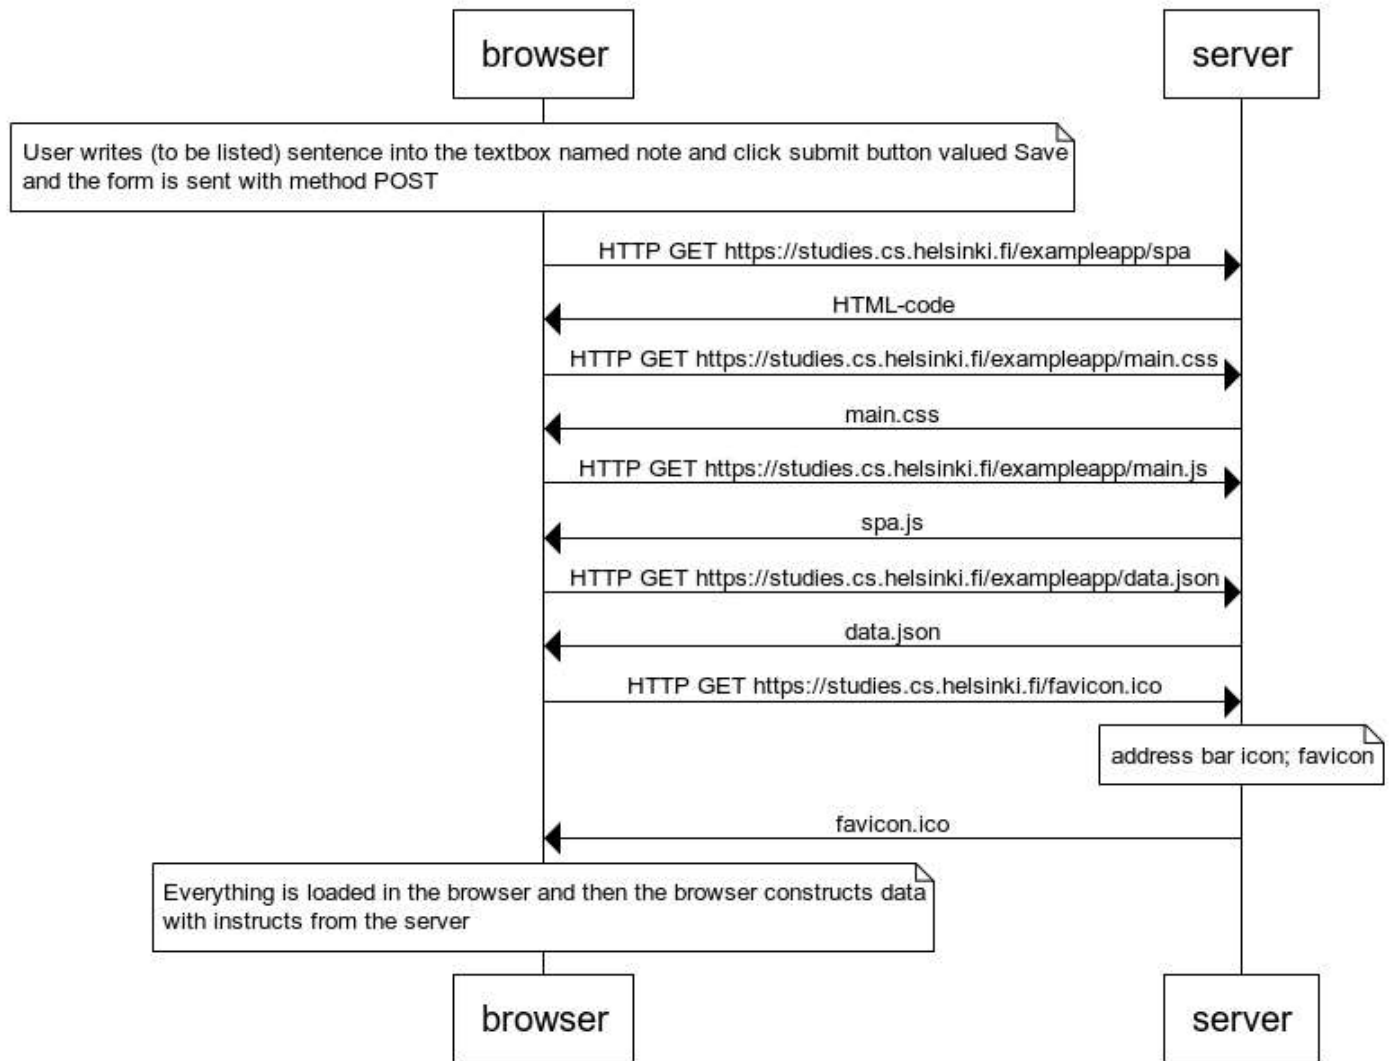browser   server

www.websequencediagrams.com