

Lecture 04



OPEN SOURCE
DEPARTMENT



You can access the course materials via this link
<https://maharatech.gov.eg/course/view.php?id=244>

Contents



- Odoo Security
- Qweb Reports
- Deployment

Odoo Security



➤ You can restrict access to your data in odoo by many Levels:


- Model level
- Record level
- Field/Menu item level

Odoo Security



1 – Model Level

- By default all models access is restricted
- You can manage access using user groups
- As a naming convention, create a new directory called ***“security”*** and add xml and csv files into it.

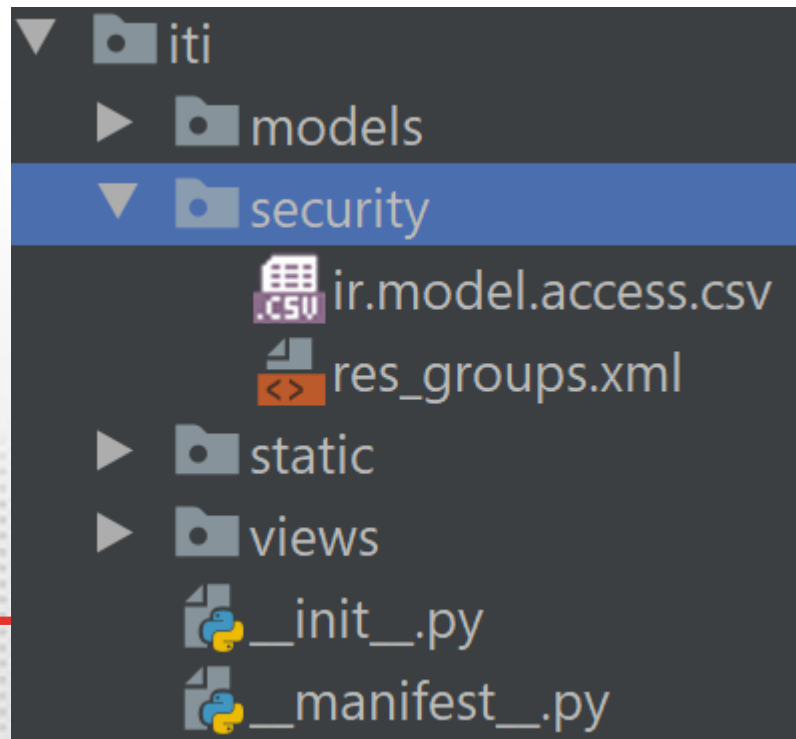

Odoo Security



- ***res_groups.xml***: is used to define access groups and its categories if needed

Category

```
<record id="category_vehicle_diagnosis" model="ir.module.category">  
  <field name="name">Easy Service</field>  
</record>
```

Group

```
<record id="group_vehicle_diagnosis_user" model="res.groups">  
  <field name="name">User</field>  
  <field name="category_id" ref="category_vehicle_diagnosis"/>  
  <field name="implied_ids" eval="[(4, ref('base.group_user'))]"/>  
</record>
```



- After defining all groups, start allocating permissions to them using ***ir.model.access.csv***

	A	B	C	D	E	F	G	H
1	id	name	model_id:id	group_id:id	perm_read	perm_write	perm_create	perm_unlink
2	access_user_vehicle_diagnosis	access_user_vehicle_diagnosis	model_vehicle_diagnosis	group_vehicle_diagnosis_user	1	1	1	0
3	access_manager_vehicle_diagn	access_manager_vehicle_diagnosis	model_vehicle_diagnosis	group_vehicle_diagnosis_manager	1	1	1	1

Odoo Security



2 – Record Level

- By default if user has access to model, the access is applied to all records.
- To restrict access to records we need to create **record rules**

```
<record id="rule_vehicle_diagnosis_user" model="ir.rule">  
  <field name="name">Vehicle Diagnosis User own only</field>  
  <field name="model_id" ref="model_vehicle_diagnosis"/>  
  <field name="domain_force">[('create_uid','=',user.id)]</field>  
</record>
```



3 – Field/Menu Level

- By default if user has access to model, the access is applied to all related fields and menus.
- To restrict access to field/menu we need to add **groups** attribute
- Once **groups** attribute added to a field/menu, it restricts access to be accessed only by listed groups

```
<menuitem id="iti_track_menu" name="Tracks"  
    parent="iti_root_menu"  
    action="action_track"  
    groups="group_vehicle_diagnosis_manager"/>
```

Qweb Reports



- Every report must be declared by a report action.
- For simplicity, a shortcut <report> element is available to define a report, rather than have to set up the action and its surroundings manually
- Report Action can have the following attributes:

Attribute	Desc.
id	the generated record's external xmlid
name	Xml template id
model	the model your report will be about
report_type	either qweb-pdf for PDF reports or qweb-html for HTML
print_report_name	the name of your report (which will be the name of the PDF output)

Qweb Reports



- As a naming convention, create a new directory contains the **report.xml** and xml template files
- In report.xml file, define the report action

```
<report
    id="iti_student_report"
    model="iti.student"
    string="Student Report"
    report_type="qweb-pdf"
    name="iti.iti_student_report_template"
    print_report_name="Myreport.pdf"/>
```

Qweb Reports



- Create new xml file to contain the template layout

```
<template id="iti_student_report_template">
  <t t-call="web.html_container">
    <t t-foreach="docs" t-as="o">
      <t t-call="web.external_layout">
        <div class="page">
          <h2>Report title</h2>
          <p>This student's name is
            <span t-field="o.name"/>
          </p>
        </div>
      </t>
    </t>
  </t>
</template>
```

Qweb Reference: <https://www.odoo.com/documentation/13.0/reference/qweb.html>