
# Taper Bore Sprockets


## BS Taper Bore Sprockets

### 06B 3/8" x 7/32"

| SPROCKET | mm | CHAIN | mm |
|---|---|---|---|
| Tooth Radius $r_3$ | 10.0 | Pitch | 9.525 |
| Chamfer c | 1.0 | Width Between Inner Plates | 5.720 |
| Tooth Width b1 | 5.2 | Roller Diameter | 6.350 |
| Tooth Width B1 | 5.3 | | |
| Tooth Width B2 | 15.4 | | |
| Tooth Width B3 | 25.6 | | |




Type 1 (C45) Type 2 (GG22) Type 3 (C45) Type 4 (GG22) Type 9 (C45) Type 7 (C45)

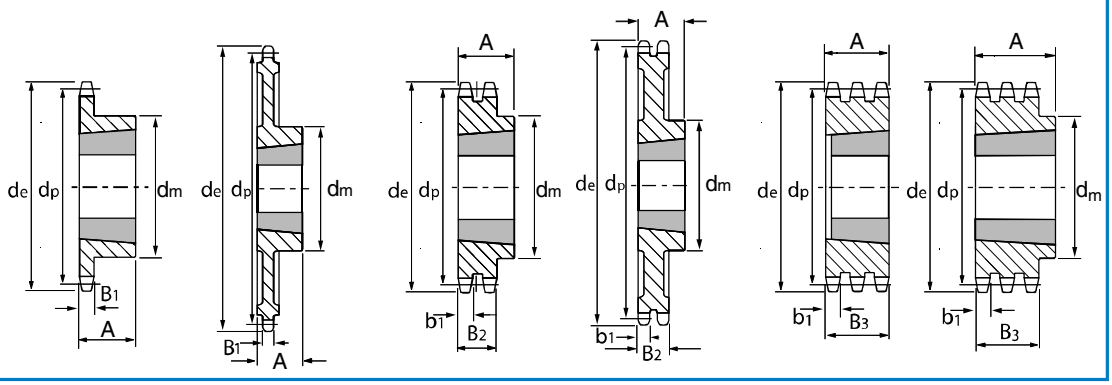


| Teeth | Outer Dia de | Pitch Dia dp | Simplex Ref | Hub Dia dm | Length thro' Bore A | Taper Bush | Type | Duplex Ref | Hub Dia dm | Length thro' Bore A | Taper Bush | Type | Triplex Ref | Hub Dia dm | Length thro' Bore A | Taper Bush | Type |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 17 | 55.3 | 51.83 | 31-17 | 45 | 22 | 1008 | 1 | 32-17 | 41 | 22 | 1008 | 3 | 33-17 | - | 25.6 | 1008 | 9 |
| 18 | 58.3 | 54.85 | 31-18 | 45 | 22 | 1008 | 1 | 32-18 | 43 | 22 | 1008 | 3 | | | | | |
| 19 | 61.3 | 57.87 | 31-19 | 45 | 22 | 1008 | 1 | 32-19 | 46 | 22 | 1008 | 3 | 33-19 | - | 25.6 | 1008 | 9 |
| 20 | 64.3 | 60.89 | 31-20 | 46 | 22 | 1008 | 1 | 32-20 | 48 | 22 | 1008 | 3 | | | | | |
| 21 | 68.0 | 63.91 | 31-21 | 46 | 22 | 1008 | 1 | 32-21 | 49 | 22 | 1008 | 3 | 33-21 | - | 25.6 | 1008 | 9 |
| 22 | 71.0 | 66.93 | 31-22 | 50 | 22 | 1108 | 1 | 32-22 | 52 | 22 | 1108 | 3 | | | | | |
| 23 | 73.5 | 69.95 | 31-23 | 63 | 25 | 1210 | 1 | 32-23 | 59 | 25 | 1210 | 3 | 33-23 | - | 25.6 | 1210 | 9 |
| 24 | 77.0 | 72.97 | 31-24 | 63 | 25 | 1210 | 1 | 32-24 | 61 | 25 | 1210 | 3 | | | | | |
| 25 | 80.0 | 76.02 | 31-25 | 63 | 25 | 1210 | 1 | 32-25 | 64 | 25 | 1210 | 3 | 33-25 | - | 25.6 | 1210 | 9 |
| 26 | 83.0 | 79.02 | 31-26 | 63 | 25 | 1210 | 1 | 32-26 | 65 | 25 | 1210 | 3 | | | | | |
| 27 | 86.0 | 82.02 | 31-27 | 63 | 25 | 1210 | 1 | 32-27 | 70 | 25 | 1210 | 3 | 33-27 | - | 25.6 | 1210 | 7 |
| 28 | 89.0 | 85.07 | 31-28 | 63 | 25 | 1210 | 1 | 32-28 | 70 | 25 | 1210 | 3 | | | | | |
| 30 | 94.7 | 91.12 | 31-30 | 63 | 25 | 1210 | 1 | 32-30 | 75 | 25 | 1210 | 3 | 33-30 | 79.0 | 38.0 | 1615 | 7 |
| 38 | 119.5 | 115.35 | 31-38 | 70 | 25 | 1210 | 1 | 32-38 | 80 | 25 | 1610 | 3 | 33-38 | 90.0 | 36.0 | 1615 | 7 |
| 45 | 140.7 | 136.55 | 31-45 | 70 | 25 | 1210 | 1 | 32-45 | 80 | 25 | 1610 | 3 | | | | | |
| 57 | 176.9 | 172.91 | 31-57 | 70 | 25 | 1210 | 2 | 32-57 | 80 | 25 | 1610 | 4 | | | | | |
| 76 | 234.9 | 230.49 | 31-76 | 70 | 25 | 1210 | 2 | 32-76 | 80 | 25 | 1610 | 4 | | | | | |
| 95 | 292.5 | 288.08 | 31-95 | 80 | 25 | 1210 | 2 | 32-95 | 90 | 25 | 1610 | 4 | | | | | |


All dimensions in millimetres unless otherwise stated. Every effort has been taken to ensure that the data listed in this catalogue is correct. Challenge accepts no liability for any inaccuracies or damage caused


# Taper Bore Sprockets

## BS Taper Bore Sprockets

### 08B 1/2" x 5/16"

| SPROCKET | mm | CHAIN | mm |
|---|---|---|---|
| Tooth Radius $r_3$ | 13.0 | Pitch | 12.700 |
| Chamfer c | 1.3 | Width Between Inner Plates | 7.750 |
| Tooth Width b1 | 7.0 | Roller Diameter | 8.510 |
| Tooth Width B1 | 7.2 | | |
| Tooth Width B2 | 21.0 | | |
| Tooth Width B3 | 34.9 | | |



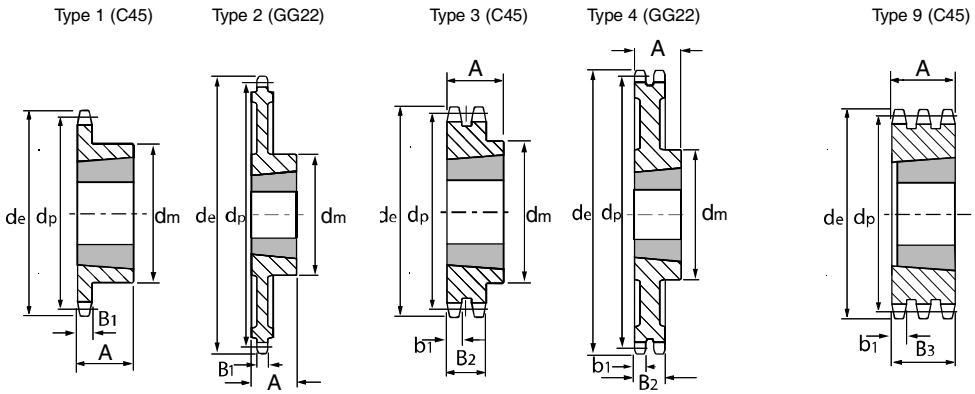
| Teeth | Outer Dia de | Pitch Dia dp | Simplex Ref | Hub Dia dm | Length thro' Bore A | Taper Bush | Type | Duplex Ref | Hub Dia dm | Length thro' Bore A | Taper Bush | Type | Triplex Ref | Hub Dia dm | Length thro' Bore A | Taper Bush | Type |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 15 | 65.5 | 61.90 | 41-15 | 45 | 22 | 1008 | 1 | 42-15 | 46 | 22 | 1008 | 3 | 43-15 | - | 34.9 | 1008 | 9 |
| 16 | 69.5 | 65.10 | 41-16 | 50 | 22 | 1108 | 1 | 42-16 | 50 | 22 | 1108 | 3 | | | | | |
| 17 | 73.6 | 69.11 | 41-17 | 60 | 25 | 1210 | 1 | 42-17 | 56 | 25 | 1210 | 3 | 43-17 | - | 34.9 | 1210 | 9 |
| 18 | 77.8 | 73.14 | 41-18 | 60 | 25 | 1210 | 1 | 42-18 | 60 | 25 | 1210 | 3 | | | | | |
| 19 | 81.7 | 77.16 | 41-19 | 63 | 25 | 1210 | 1 | 42-19 | 62 | 25 | 1210 | 3 | 43-19 | - | 34.9 | 1210 | 9 |
| 20 | 85.8 | 81.19 | 41-20 | 71 | 25 | 1610 | 1 | 42-20 | 66 | 25 | 1610 | 3 | | | | | |
| 21 | 89.7 | 85.22 | 41-21 | 71 | 25 | 1610 | 1 | 42-21 | 70 | 25 | 1610 | 3 | 43-21 | - | 34.9 | 1610 | 9 |
| 22 | 93.8 | 89.24 | 41-22 | 71 | 25 | 1610 | 1 | 42-22 | 76 | 25 | 1610 | 3 | | | | | |
| 23 | 98.2 | 93.27 | 41-23 | 76 | 25 | 1610 | 1 | 42-23 | 79 | 25 | 1610 | 3 | 43-23 | - | 34.9 | 1610 | 9 |
| 24 | 101.8 | 97.29 | 41-24 | 76 | 25 | 1610 | 1 | 42-24 | 84 | 25 | 1610 | 3 | | | | | |
| 25 | 105.8 | 101.33 | 41-25 | 76 | 25 | 1610 | 1 | 42-25 | 87 | 32 | 2012 | 3 | 43-25 | - | 34.9 | 2012 | 9 |
| 26 | 110.0 | 105.36 | 41-26 | 76 | 25 | 1610 | 1 | 42-26 | 87 | 32 | 2012 | 3 | | | | | |
| 27 | 114.0 | 109.40 | 41-27 | 76 | 25 | 1610 | 1 | 42-27 | 87 | 32 | 2012 | 3 | 43-27 | - | 34.9 | 2012 | 9 |
| 28 | 118.0 | 113.42 | 41-28 | 90 | 32 | 2012 | 1 | 42-28 | 87 | 32 | 2012 | 3 | | | | | |
| 30 | 126.1 | 121.50 | 41-30 | 90 | 32 | 2012 | 1 | 42-30 | 87 | 32 | 2012 | 3 | 43-30 | - | 34.9 | 2012 | 9 |
| 38 | 158.6 | 153.80 | 41-38 | 90 | 32 | 2012 | 1 | 42-38 | 100 | 32 | 2012 | 3 | 43-38 | - | 34.9 | 2012 | 9 |
| 45 | 188.0 | 182.07 | 41-45 | 100 | 32 | 2012 | 1 | 42-45 | 100 | 32 | 2012 | 4 | | | | | |
| 57 | 236.4 | 230.54 | 41-57 | 100 | 32 | 2012 | 2 | 42-57 | 100 | 32 | 2012 | 4 | | | | | |
| 76 | 313.3 | 307.33 | 41-76 | 100 | 32 | 2012 | 2 | 42-76 | 100 | 32 | 2012 | 4 | | | | | |
| 95 | 390.1 | 384.11 | 41-95 | 100 | 32 | 2012 | 2 | 42-95 | 100 | 32 | 2012 | 4 | | | | | |


Every effort has been taken to ensure that the data listed in this catalogue is correct. Challenge accepts no liability for any inaccuracies or damage caused All dimensions in millimetres unless otherwise stated.


# Taper Bore Sprockets

## BS Taper Bore Sprockets

### 10B 5/8" x 3/8"

| SPROCKET | mm | CHAIN | mm |
|---|---|---|---|
| Tooth Radius $r_3$ | 16.0 | Pitch | 15.875 |
| Chamfer c | 1.6 | Width Between Inner Plates | 9.650 |
| Tooth Width b1 | 9.0 | Roller Diameter | 10.160 |
| Tooth Width B1 | 9.1 | | |
| Tooth Width B2 | 25.5 | | |
| Tooth Width B3 | 42.1 | | |



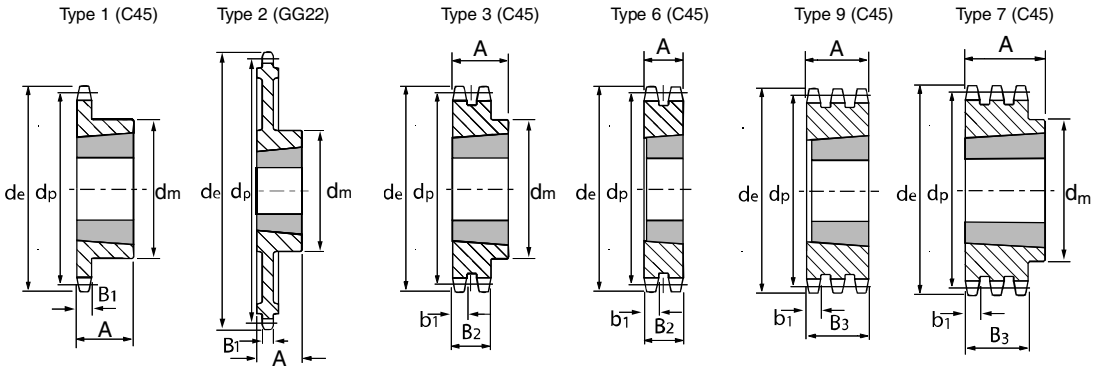
| Teeth | Outer Dia de | Pitch Dia dp | Simplex Ref | Simplex Hub Dia dm | Simplex Length thro' Bore A | Simplex Taper Bush | Simplex Type | Duplex Ref | Duplex Hub Dia dm | Duplex Length thro' Bore A | Duplex Taper Bush | Duplex Type | Triplex Ref | Triplex Hub Dia dm | Triplex Length thro' Bore A | Triplex Taper Bush | Triplex Type |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 13 | 73.0 | 66.32 | 51-13 | 47 | 22 | 1008 | 1 | | | | | | | | | | |
| 14 | 78.0 | 71.34 | 51-14 | 52 | 22 | 1108 | 1 | | | | | | | | | | |
| 15 | 83.0 | 76.36 | 51-15 | 60 | 25 | 1210 | 1 | 52-15 | - | 25.5 | 1210 | 3 | 53-15 | - | 42.1 | 1210 | 9 |
| 16 | 88.0 | 81.37 | 51-16 | 70 | 25 | 1610 | 1 | 52-16 | - | 25.5 | 1610 | 3 | | | | | |
| 17 | 93.0 | 86.36 | 51-17 | 71 | 25 | 1610 | 1 | 52-17 | - | 25.5 | 1610 | 3 | 53-17 | - | 42.1 | 1210 | 9 |
| 18 | 98.3 | 91.42 | 51-18 | 75 | 25 | 1610 | 1 | 52-18 | - | 25.5 | 1610 | 3 | | | | | |
| 19 | 103.3 | 96.45 | 51-19 | 75 | 25 | 1610 | 1 | 52-19 | - | 25.5 | 1610 | 3 | 53-19 | - | 42.1 | 1615 | 9 |
| 20 | 108.4 | 101.49 | 51-20 | 75 | 25 | 1610 | 1 | 52-20 | - | 25.5 | 1610 | 3 | | | | | |
| 21 | 113.4 | 106.52 | 51-21 | 76 | 25 | 1610 | 1 | 52-21 | - | 25.5 | 1610 | 3 | 53-21 | - | 42.1 | 1615 | 9 |
| 22 | 118.0 | 111.55 | 51-22 | 76 | 25 | 1610 | 1 | 52-22 | - | 25.5 | 1610 | 3 | | | | | |
| 23 | 123.4 | 116.58 | 51-23 | 76 | 25 | 1610 | 1 | 52-23 | - | 25.5 | 1610 | 3 | 53-23 | - | 42.1 | 2012 | 9 |
| 24 | 128.3 | 121.62 | 51-24 | 90 | 25 | 1610 | 1 | 52-24 | 90 | 32.0 | 2012 | 6 | | | | | |
| 25 | 134.0 | 126.66 | 51-25 | 90 | 32 | 2012 | 1 | 52-25 | 90 | 32.0 | 2012 | 6 | 53-25 | 105 | 45.0 | 2517 | 7 |
| 26 | 139.0 | 131.70 | 51-26 | 90 | 32 | 2012 | 1 | 52-26 | 90 | 32.0 | 2012 | 6 | | | | | |
| 27 | 144.0 | 136.75 | 51-27 | 90 | 32 | 2012 | 1 | 52-27 | 90 | 32.0 | 2012 | 6 | 53-27 | 110 | 45.0 | 2517 | 7 |
| 28 | 148.7 | 141.78 | 51-28 | 90 | 32 | 2012 | 1 | 52-28 | 90 | 32.0 | 2012 | 6 | | | | | |
| 30 | 158.8 | 151.87 | 51-30 | 90 | 32 | 2012 | 1 | 52-30 | 90 | 32.0 | 2012 | 6 | 53-30 | 120 | 45.0 | 2517 | 7 |
| 38 | 199.2 | 192.24 | 51-38 | 100 | 32 | 2012 | 1 | 52-38 | 108 | 45.0 | 2517 | 6 | | | | | |
| 45 | 235.0 | 227.58 | 51-45 | 100 | 32 | 2042 | 2 | | | | | | | | | | |
| 57 | 296.0 | 288.18 | 51-57 | 100 | 32 | 2012 | 2 | | | | | | | | | | |
| 76 | 392.1 | 384.16 | 51-76 | 100 | 32 | 2012 | 2 | | | | | | | | | | |
| 95 | 488.5 | 480.14 | 51-95 | 110 | 45 | 2517 | 2 | | | | | | | | | | |


All dimensions in millimetres unless otherwise stated. Every effort has been taken to ensure that the data listed in this catalogue is correct. Challenge accepts no liability for any inaccuracies or damage caused

# Taper Bore Sprockets


## BS Taper Bore Sprockets

### 12B 3/4" x 7/16"


| SPROCKET | mm | CHAIN | mm |
|---|---|---|---|
| Tooth Radius $r_3$ | 19.0 | Pitch | 19.050 |
| Chamfer c | 2.0 | Width Between Inner Plates | 11.680 |
| Tooth Width b1 | 10.8 | Roller Diameter | 12.070 |
| Tooth Width B1 | 11.1 | | |
| Tooth Width B2 | 30.3 | | |
| Tooth Width B3 | 49.8 | | |





Type 1 (C45)





Type 2 (GG22)





Type 5 (C45)





Type 3 (C45)





Type 4 (GG22)





Type 9 (C45)




Type 7 (C45)




Type 8 (GG22)

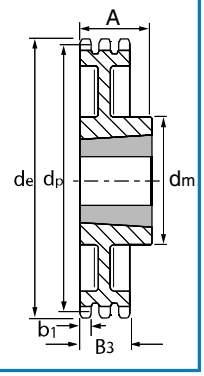


| Teeth | Outer Dia de | Pitch Dia dp | Simplex Ref | Simplex Hub Dia dm | Simplex Length thro' Bore A | Simplex Taper Bush | Simplex Type | Duplex Ref | Duplex Hub Dia dm | Duplex Length thro' Bore A | Duplex Taper Bush | Duplex Type | Triplex Ref | Triplex Hub Dia dm | Triplex Length thro' Bore A | Triplex Taper Bush | Triplex Type |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 13 | 87.5 | 79.59 | 61-13 | 60 | 25 | 1210 | 1 | | | | | | | | | | |
| 14 | 93.6 | 85.61 | 61-14 | 70 | 25 | 1610 | 1 | | | | | | | | | | |
| 15 | 99.8 | 91.63 | 61-15 | 70 | 25 | 1610 | 1 | 62-15 | - | 30.3 | 1610 | 5 | 63-15 | - | 49.8 | 1615 | 9 |
| 16 | 105.5 | 97.65 | 61-16 | 75 | 25 | 1610 | 1 | 62-16 | - | 30.3 | 1610 | 5 | | | | | |
| 17 | 111.5 | 103.67 | 61-17 | 76 | 25 | 1610 | 1 | 62-17 | - | 30.3 | 1610 | 5 | 63-17 | - | 49.8 | 1615 | 9 |
| 18 | 118.0 | 109.71 | 61-18 | 90 | 32 | 2012 | 1 | 62-18 | 90.0 | 32.0 | 2012 | 3 | | | | | |
| 19 | 124.2 | 115.75 | 61-19 | 90 | 32 | 2012 | 1 | 62-19 | 90.0 | 32.0 | 2012 | 3 | 63-19 | - | 49.8 | 2012 | 9 |
| 20 | 129.7 | 121.78 | 61-20 | 90 | 32 | 2012 | 1 | 62-20 | 108.0 | 45.0 | 2517 | 3 | | | | | |
| 21 | 136.0 | 127.82 | 61-21 | 102 | 45 | 2517 | 1 | 62-21 | 108.0 | 45.0 | 2517 | 3 | 63-21 | - | 49.8 | 2517 | 9 |
| 22 | 141.8 | 133.86 | 61-22 | 102 | 45 | 2517 | 1 | 62-22 | 108.0 | 45.0 | 2517 | 3 | | | | | |
| 23 | 149.0 | 139.90 | 61-23 | 108 | 45 | 2517 | 1 | 62-23 | 108.0 | 45.0 | 2517 | 3 | 63-23 | - | 49.8 | 2517 | 9 |
| 24 | 153.9 | 145.94 | 61-24 | 108 | 46 | 2517 | 1 | 62-24 | 108.0 | 45.0 | 2517 | 3 | | | | | |
| 25 | 160.0 | 152.00 | 61-25 | 108 | 45 | 2517 | 1 | 62-25 | 108.0 | 45.0 | 2517 | 3 | 63-25 | - | 49.8 | 2517 | 9 |
| 26 | 165.9 | 158.04 | 61-26 | 108 | 45 | 2517 | 1 | 62-26 | 108.0 | 45.0 | 2517 | 3 | | | | | |
| 27 | 172.3 | 164.00 | 61-27 | 108 | 45 | 2517 | 1 | 62-27 | 108.0 | 45.0 | 2517 | 3 | 63-27 | 140.0 | 51.0 | 3020 | 7 |
| 28 | 178.0 | 170.13 | 61-28 | 108 | 45 | 2517 | 1 | 62-28 | 108.0 | 45.0 | 2517 | 3 | | | | | |
| 30 | 190.5 | 182.25 | 61-30 | 108 | 45 | 2517 | 1 | 62-30 | 108.0 | 45.0 | 2517 | 3 | 63-30 | 140.0 | 51.0 | 3020 | 7 |
| 38 | 239.0 | 230.69 | 61-38 | 108 | 45 | 2517 | 1 | 62-38 | 140.0 | 51.0 | 3020 | 3 | 63-38 | 140.0 | 51.0 | 3020 | 7 |
| 45 | 282.5 | 273.10 | 61-45 | 108 | 45 | 2517 | 2 | 62-45 | 140.0 | 51.0 | 3020 | 4 | 63-45 | 140.0 | 51.0 | 3020 | 8 |
| 57 | 355.4 | 345.81 | 61-57 | 108 | 45 | 2517 | 2 | 62-57 | 140.0 | 51.0 | 3020 | 4 | 63-57 | 140.0 | 51.0 | 3020 | 8 |
| 76 | 469.9 | 460.99 | 61-76 | 108 | 45 | 2517 | 2 | 62-76 | 140.0 | 51.0 | 3020 | 4 | 63-76 | 140.0 | 51.0 | 3020 | 8 |
| 95 | 585.1 | 576.17 | 61-95 | 108 | 45 | 2517 | 2 | 62-95 | 140.0 | 51.0 | 3020 | 4 | 63-95 | 140.0 | 76.0 | 3030 | 8 |


Every effort has been taken to ensure that the data listed in this catalogue is correct. Challenge accepts no liability for any inaccuracies or damage caused All dimensions in millimetres unless otherwise stated.

# Taper Bore Sprockets


## BS Taper Bore Sprockets

### 16B 1" x 17.02mm


| SPROCKET | mm | CHAIN | mm |
|---|---|---|---|
| Tooth Radius $r_3$ | 26.0 | Pitch | 25.400 |
| Chamfer c | 2.5 | Width Between Inner Plates | 17.020 |
| Tooth Width b1 | 15.8 | Holler Diameter | 15.880 |
| Tooth Width B1 | 16.2 | | |
| Tooth Width B2 | 47.7 | | |
| Tooth Width B3 | 79.6 | | |





Type 1 (C45)





Type 2 (GG22)





Type 5 (C45)





Type 3 (C45)





Type 4 (GG22)





Type 9 (C45)




Type 7 (C45)




Type 8 (GG22)

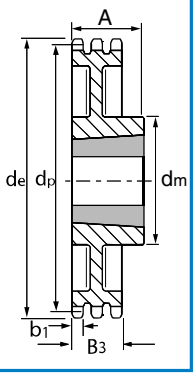


| Teeth | Outer Dia de | Pitch Dia dp | Simplex Ref | Hub Dia dm | Length thro' Bore A | Taper Bush | Type | Duplex Ref | Hub Dia dm | Length thro' Bore A | Taper Bush | Type | Triplex Ref | Hub Dia dm | Length thro' Bore A | Taper Bush | Type |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 13 | 117.0 | 106.12 | 81-13 | 73 | 38 | 1615 | 1 | | | | | | | | | | |
| 14 | 125.0 | 114.15 | 81-14 | 76 | 38 | 1615 | 1 | | | | | | | | | | |
| 15 | 133.0 | 122.17 | 81-15 | 76 | 38 | 1615 | 1 | 82-15 | - | 47.7 | 2012 | 5 | | | | | |
| 16 | 141.0 | 130.20 | 81-16 | 90 | 32 | 2012 | 1 | 82-16 | - | 47.7 | 2517 | 5 | | | | | |
| 17 | 149.0 | 138.22 | 81-17 | 90 | 32 | 2012 | 1 | 82-17 | - | 47.7 | 2517 | 5 | 83-17 | - | 79.6 | 2517 | 9 |
| 18 | 157.0 | 146.28 | 81-18 | 108 | 45 | 2517 | 1 | 82-18 | - | 47.7 | 2517 | 5 | | | | | |
| 19 | 165.2 | 154.33 | 81-19 | 108 | 45 | 2517 | 1 | 82-19 | - | 47.7 | 2517 | 5 | 83-19 | - | 79.6 | 3030 | 9 |
| 20 | 173.2 | 162.38 | 81-20 | 108 | 45 | 2517 | 1 | 82-20 | - | 47.7 | 2517 | 5 | | | | | |
| 21 | 181.2 | 170.43 | 81-21 | 110 | 45 | 2517 | 1 | 82-21 | 140.0 | 51.0 | 3020 | 3 | 83-21 | - | 79.6 | 3030 | 9 |
| 22 | 189.3 | 178.48 | 81-22 | 110 | 45 | 2517 | 1 | 82-22 | 140.0 | 51.0 | 3020 | 3 | | | | | |
| 23 | 197.5 | 186.53 | 81-23 | 110 | 45 | 2517 | 1 | 82-23 | 140.0 | 51.0 | 3020 | 3 | 83-23 | 159.0 | 89.0 | 3535 | 7 |
| 24 | 205.5 | 194.59 | 81-24 | 110 | 45 | 2517 | 1 | 82-24 | 140.0 | 51.0 | 3020 | 3 | | | | | |
| 25 | 213.5 | 202.66 | 81-25 | 110 | 45 | 2517 | 1 | 82-25 | 140.0 | 51.0 | 3020 | 3 | 83-25 | 175.0 | 89.0 | 3535 | 7 |
| 26 | 221.6 | 210.72 | 81-26 | 110 | 45 | 2617 | 1 | 82-26 | 140.0 | 51.0 | 3020 | 3 | | | | | |
| 27 | 229.6 | 218.79 | 81-27 | 110 | 45 | 2617 | 1 | 82-27 | 140.0 | 51.0 | 3020 | 3 | 83-27 | 175.0 | 89.0 | 3535 | 7 |
| 28 | 237.7 | 226.85 | 81-28 | 110 | 45 | 2517 | 1 | 82-28 | 140.0 | 51.0 | 3020 | 3 | | | | | |
| 30 | 254.0 | 243.00 | 81-30 | 140 | 51 | 3020 | 1 | 82-30 | 140.0 | 76.0 | 3030 | 3 | 83-30 | 175.0 | 89.0 | 3535 | 7 |
| 38 | 320.7 | 307.59 | 81-38 | 140 | 51 | 3020 | 2 | 82-38 | 140.0 | 76.0 | 3030 | 4 | 83-38 | 175.0 | 89.0 | 3535 | 8 |
| 45 | 377.1 | 364.13 | 81-45 | 140 | 51 | 3020 | 2 | 82-45 | 140.0 | 76.0 | 3030 | 4 | 83-45 | 215.0 | 102.0 | 4040 | 8 |
| 57 | 474.0 | 461.07 | 81-57 | 140 | 51 | 3020 | 2 | 82-57 | 175.0 | 89.0 | 3535 | 4 | 83-57 | 215.0 | 102.0 | 4040 | 8 |
| 76 | 627.0 | 614.65 | 81-76 | 140 | 51 | 3020 | 2 | 82-76 | 175.0 | 89.0 | 3535 | 4 | 83-76 | 215.0 | 102.0 | 4040 | 8 |
| 95 | 781.1 | 768.22 | 81-95 | 140 | 51 | 3020 | 2 | 82-95 | 215.0 | 102.0 | 4040 | 4 | 83-95 | 215.0 | 102.0 | 4040 | 8 |


All dimensions in millimetres unless otherwise stated. Every effort has been taken to ensure that the data listed in this catalogue is correct. Challenge accepts no liability for any inaccuracies or damage caused

# Taper Bore Sprockets

## BS Taper Bore Sprockets

### 20B 1.1/4" x 3/4"

| SPROCKET | mm | CHAIN | mm |
|---|---|---|---|
| Tooth Radius $r_3$ | 32.0 | Pitch | 31.750 |
| Chamfer c | 3.5 | Width Between Inner Plates | 19.560 |
| Tooth Width b1 | 18.2 | Roller Diameter | 19.050 |
| Tooth Width B1 | 18.5 | | |
| Tooth Width B2 | 54.6 | | |
| Tooth Width B3 | 91.0 | | |

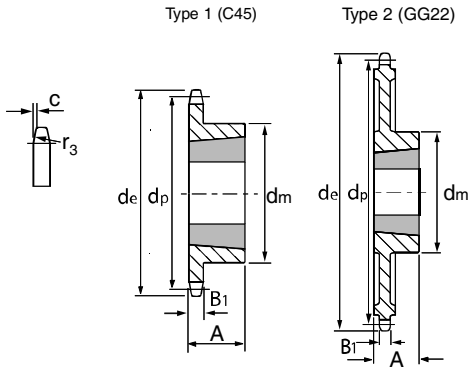


| Teeth | Outer Dia de | Pitch Dia dp | Simplex Ref | Hub Dia dm | Length thro' Bore A | Taper Bush | Type |
|---|---|---|---|---|---|---|---|
| 13 | 147.8 | 132.65 | 101-13 | 90 | 32 | 2012 | 1 |
| 14 | 157.8 | 142.68 | 101-14 | 108 | 44 | 2517 | 1 |
| 15 | 167.9 | 152.72 | 101-15 | 108 | 44 | 2517 | 1 |
| 16 | 177.9 | 162.75 | 101-16 | 108 | 44 | 2517 | 1 |
| 17 | 187.9 | 172.78 | 101-17 | 108 | 44 | 2517 | 1 |
| 18 | 198.0 | 182.85 | 101-18 | 108 | 44 | 2517 | 1 |
| 19 | 208.1 | 192.91 | 101-19 | 110 | 44 | 2517 | 1 |
| 20 | 218.1 | 202.98 | 101-20 | 110 | 44 | 2517 | 1 |
| 21 | 228.2 | 213.04 | 101-21 | 110 | 44 | 2517 | 1 |
| 22 | 238.3 | 223.11 | 101-22 | 110 | 44 | 2517 | 1 |
| 23 | 248.3 | 233.17 | 101-23 | 110 | 44 | 2517 | 1 |
| 24 | 258.4 | 243.23 | 101-24 | 110 | 44 | 2517 | 1 |
| 25 | 268.5 | 253.33 | 101-25 | 110 | 44 | 2517 | 1 |
| 26 | 278.6 | 263.40 | 101-26 | 110 | 51 | 3020 | 1 |
| 27 | 288.6 | 273.80 | 101-27 | 150 | 51 | 3020 | 1 |
| 28 | 298.7 | 283.56 | 101-28 | 150 | 51 | 3020 | 1 |
| 30 | 318.9 | 303.75 | 101-30 | 150 | 51 | 3020 | 1 |
| 38 | 399.6 | 384.49 | 101-38 | 160 | 51 | 3020 | 2 |
| 45 | 470.3 | 455.17 | 101-45 | 160 | 51 | 3020 | 2 |
| 57 | 591.5 | 576.36 | 101-57 | 160 | 51 | 3020 | 2 |
| 76 | 783.5 | 768.32 | 101-76 | 160 | 51 | 3020 | 2 |

Every effort has been taken to ensure that the data listed in this catalogue is correct. Challenge accepts no liability for any inaccuracies or damage caused All dimensions in millimetres unless otherwise stated.