



SENAI

Configurando o debug para rodar Django

Django - Debugger



Ao invés de executar o servidor pelo comando no powershell *python*

manage.py runserver podemos utilizar o debug do vscode


```
(venv) PS F:\Senai\2025 - 2\FIC\Python como framework\ProjetoDjangoPY> python manage.py runserver
System check identified no issues (0 silenced).

You have 18 unapplied migration(s). Your project may not work properly until you apply the migrations for a
pp(s): admin, auth, contenttypes, sessions.
Run 'python manage.py migrate' to apply them.
October 20, 2025 - 20:03:59
Django version 5.2.7, using settings 'projeto.settings'
Starting development server at http://127.0.0.1:8000/
Quit the server with CTRL-BREAK.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI
server instead.
For more information on production servers see: https://docs.djangoproject.com/en/5.2/howto/deployment/
```

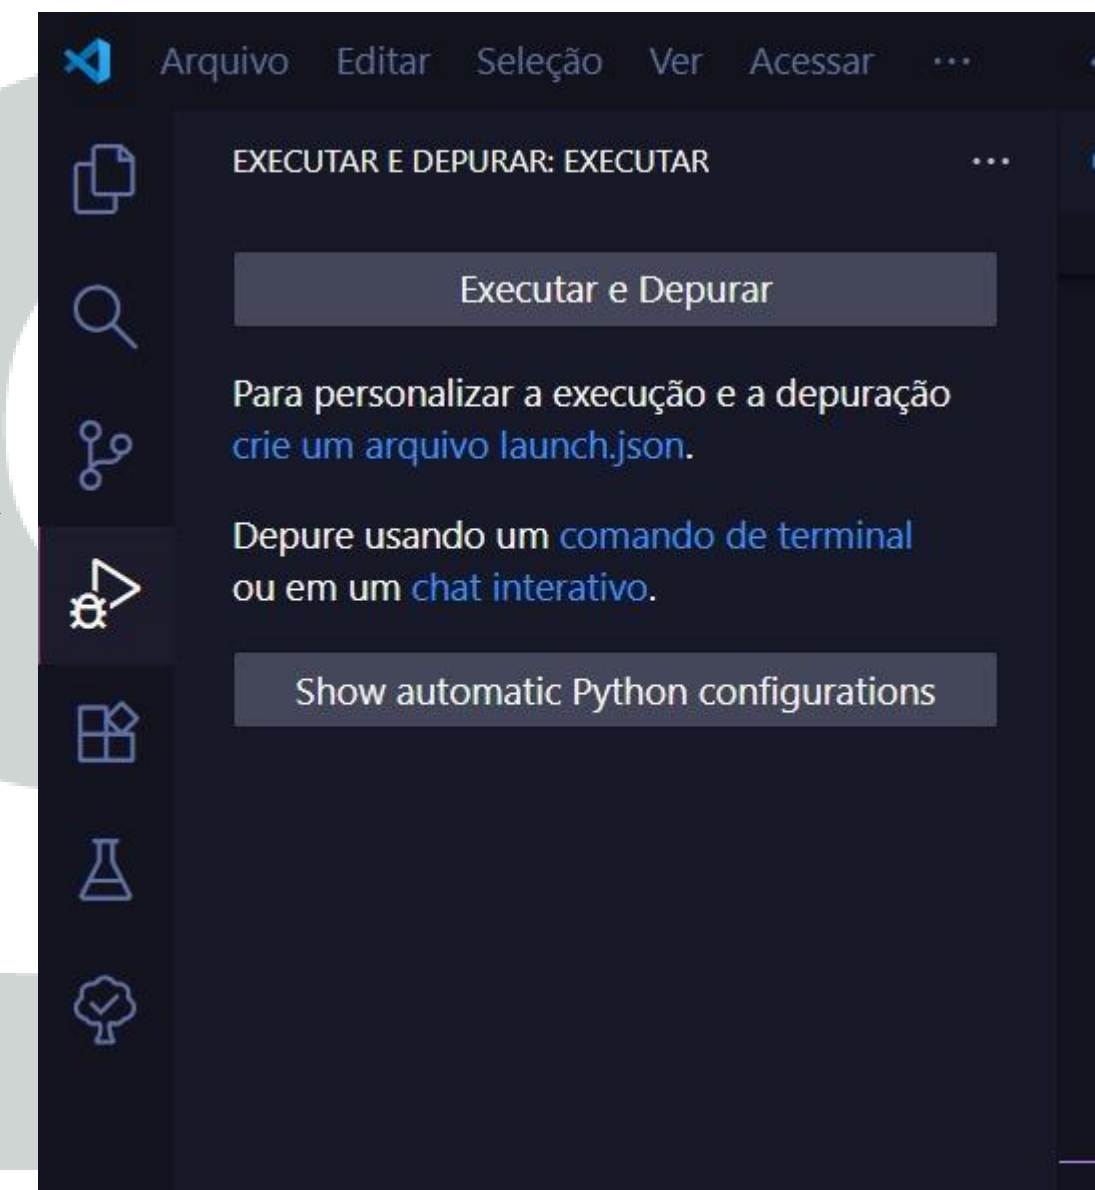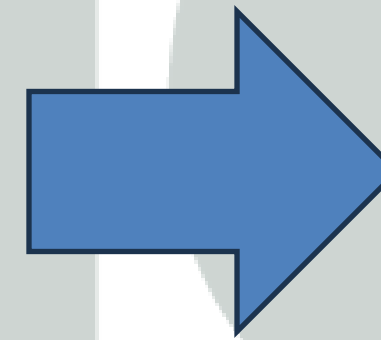

Django - Debugger

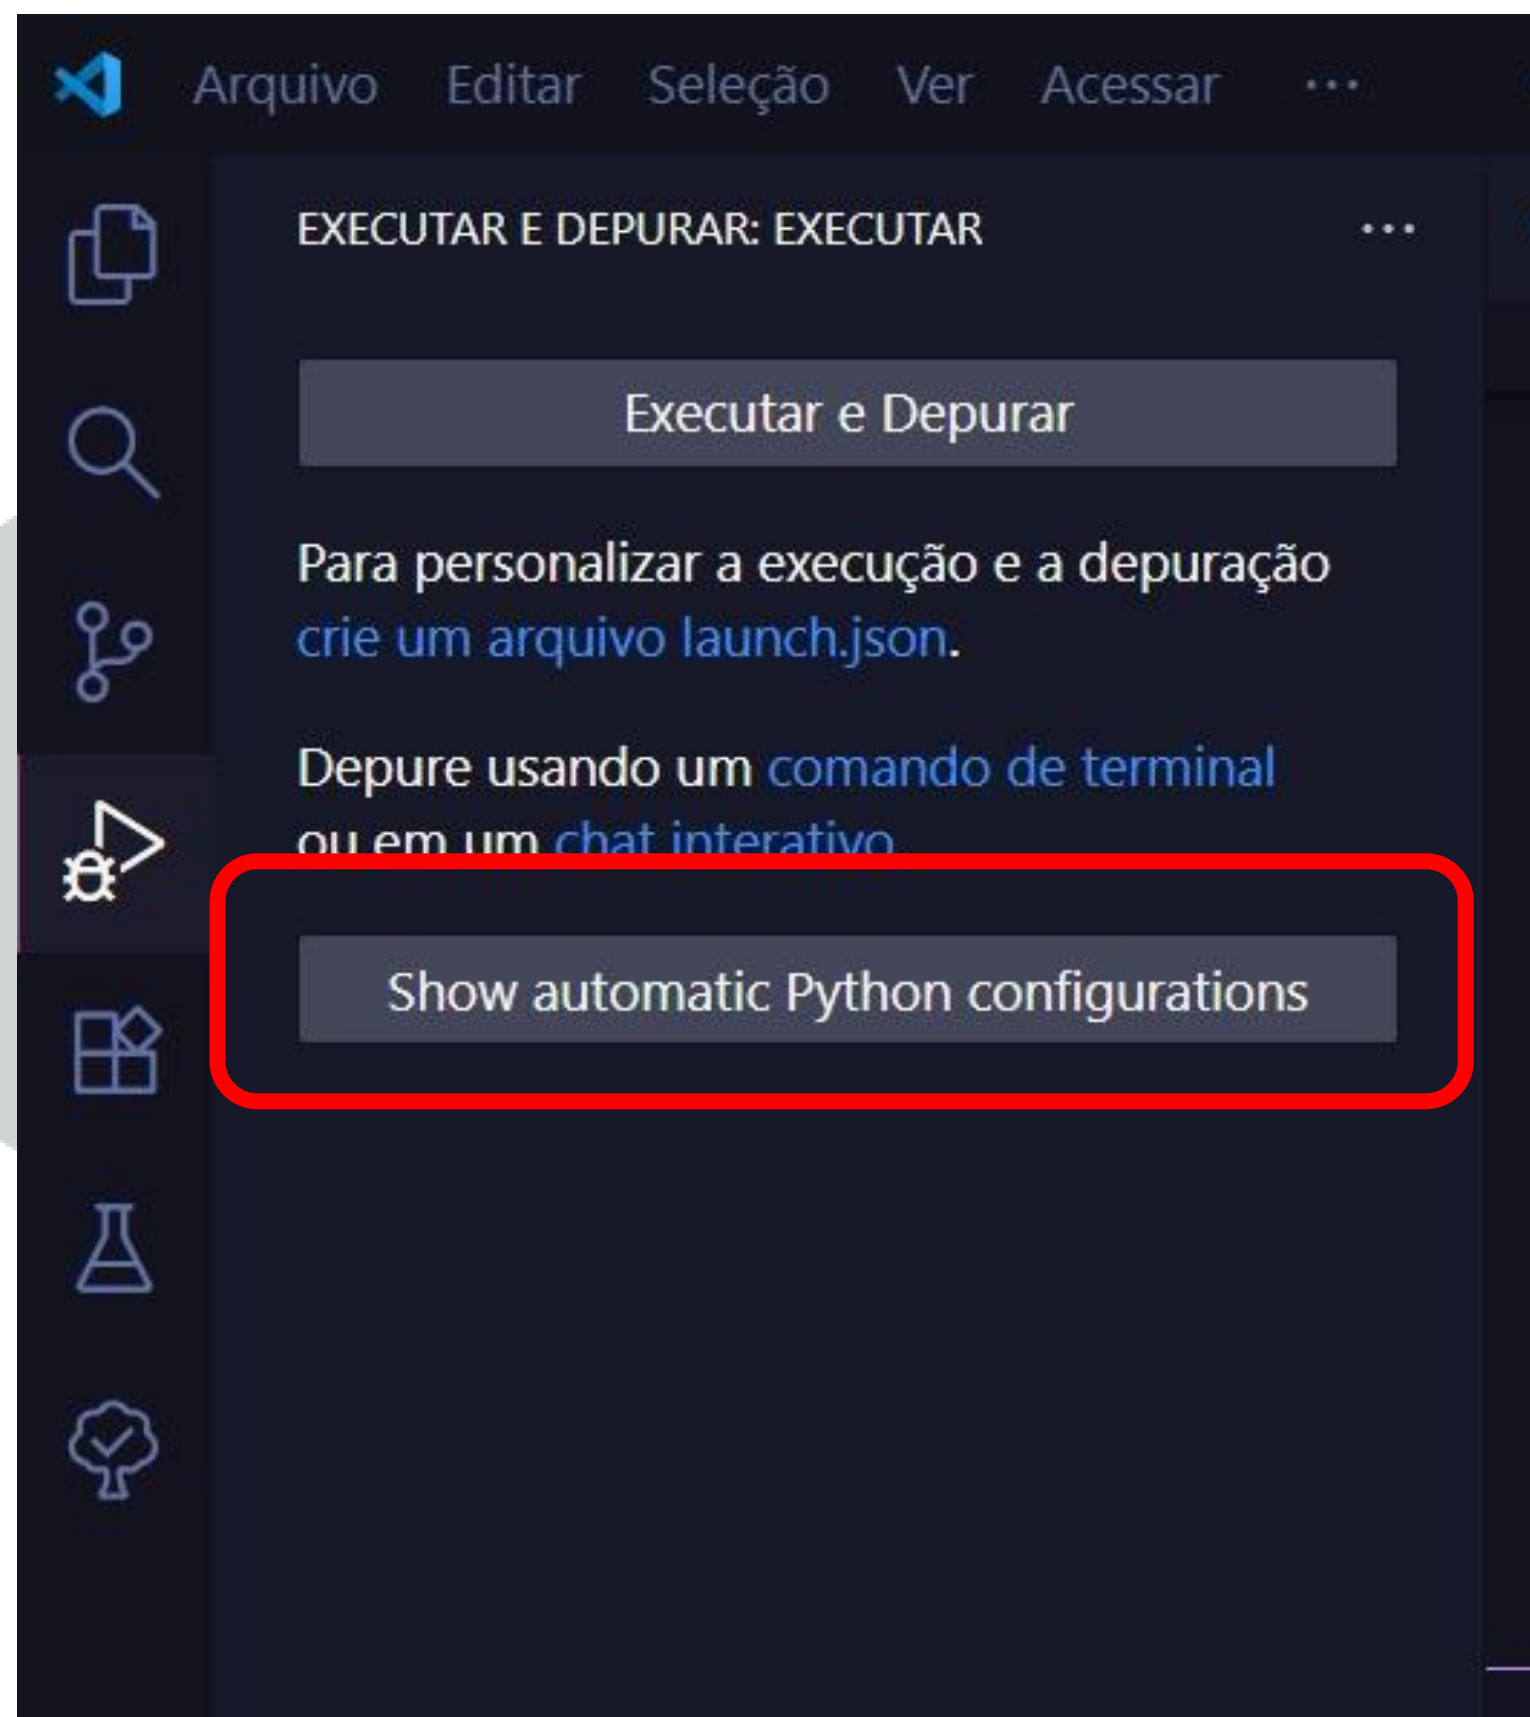


Clicar nesta opção para selecionar o depurador Django.

Com isso, o vscode roda o código sem a necessidade do terminal.

Django - Debugger


Com isso o vscode, roda direto o projeto sem precisar do terminal

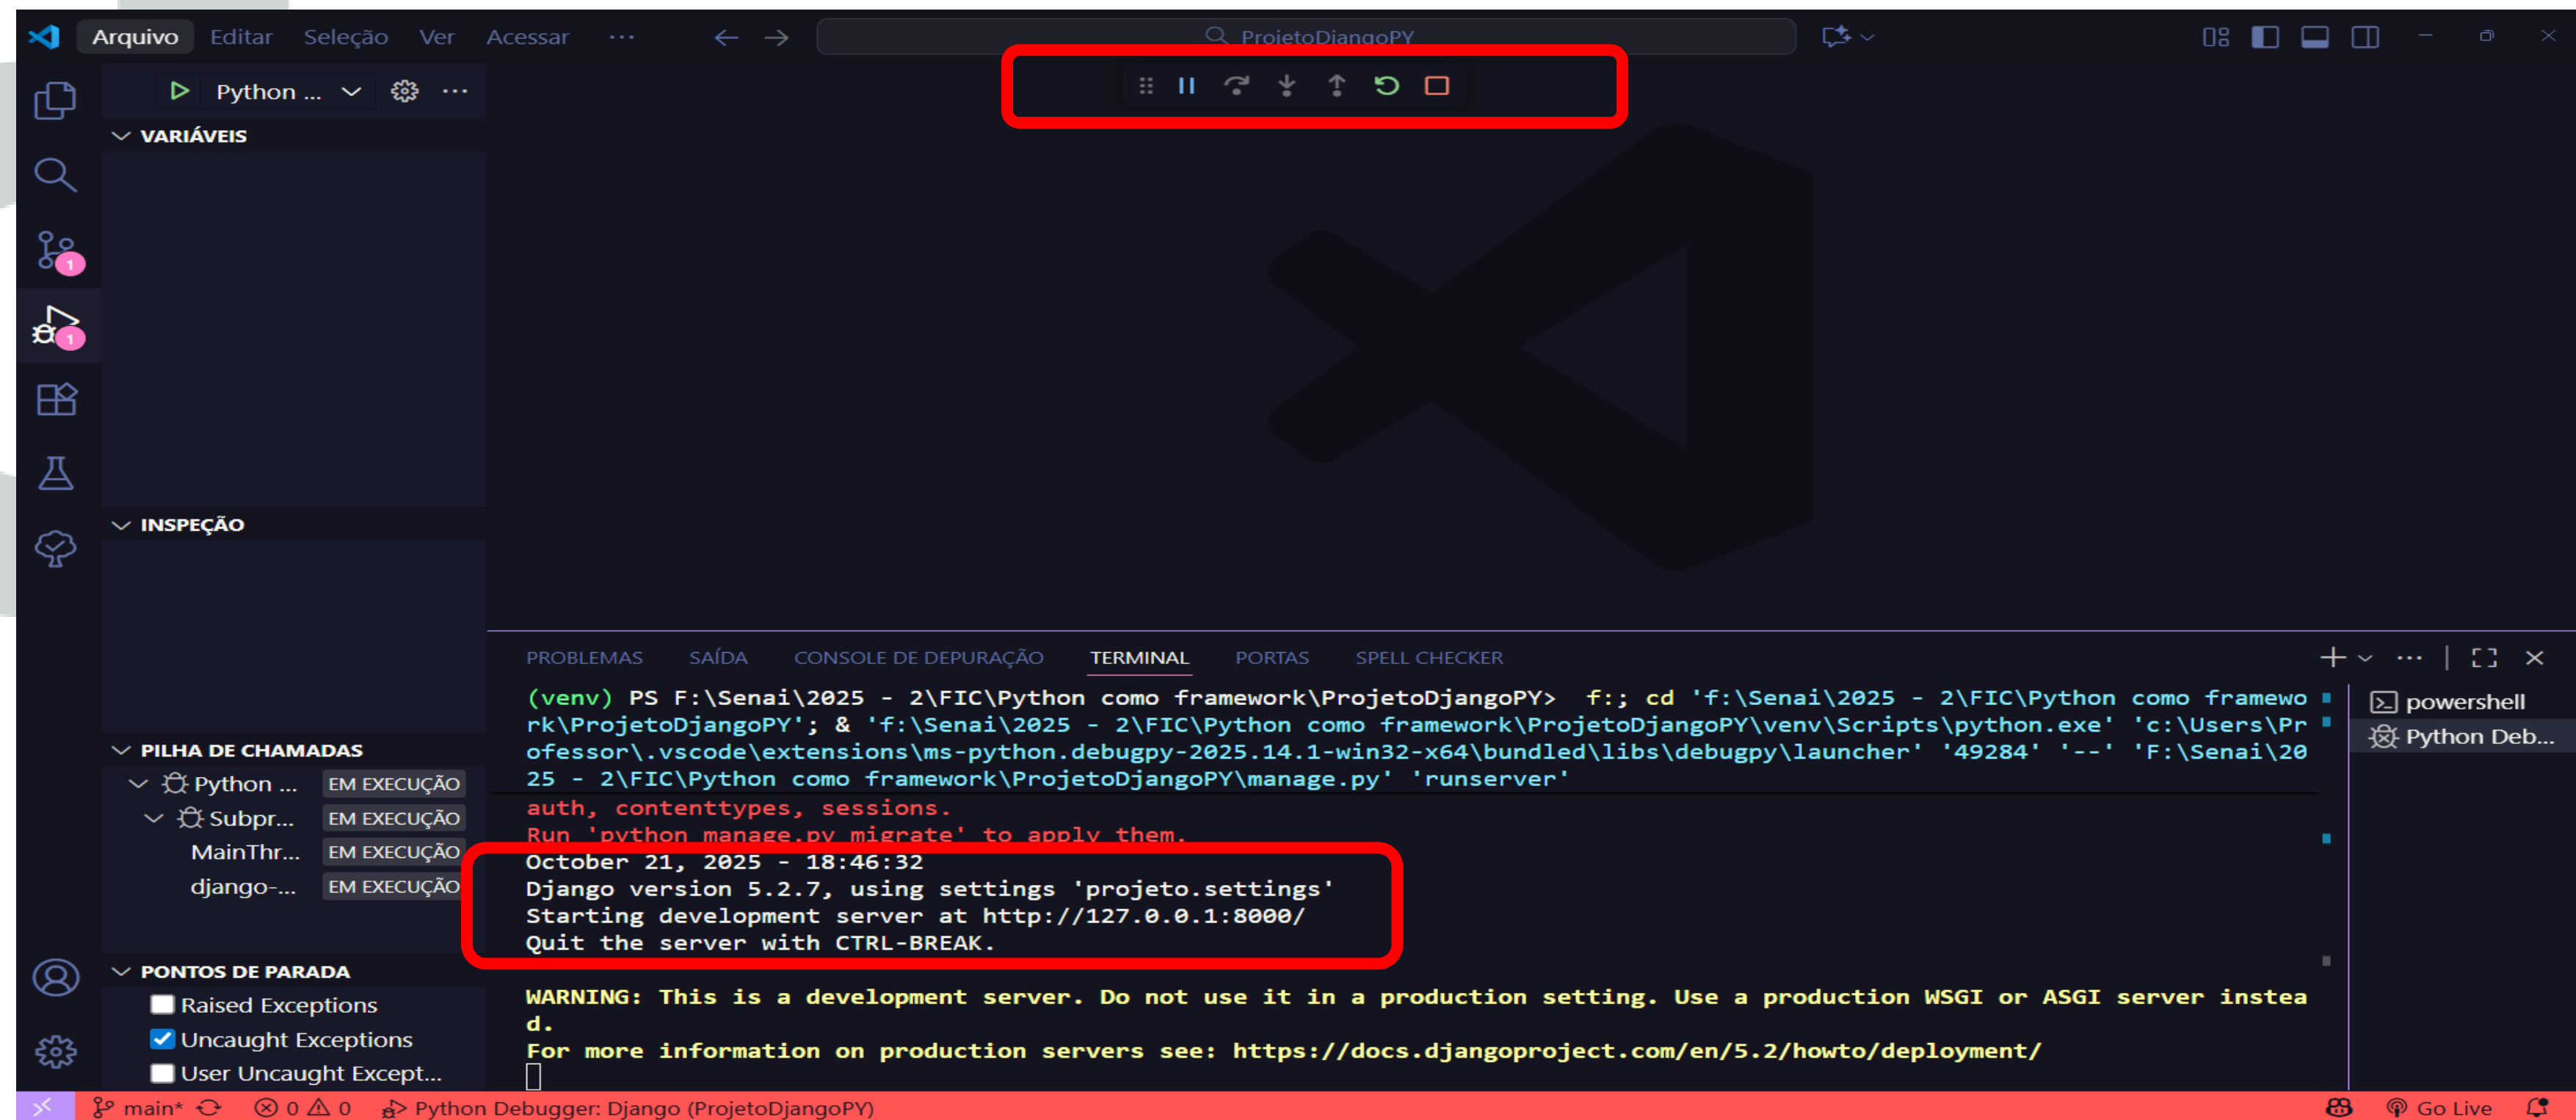

URL's


Django – URL's – o que é ?

Uma URL (Localizador Uniforme de Recursos) é um endereço único que identifica a localização de um recurso na internet, como uma página da web, imagem ou arquivo. É a sequência de caracteres que você digita na barra de endereços do navegador para acessar um site ou outro conteúdo online. A URL funciona como um endereço para o computador, dizendo a ele qual protocolo usar e onde o recurso solicitado está hospedado na rede.

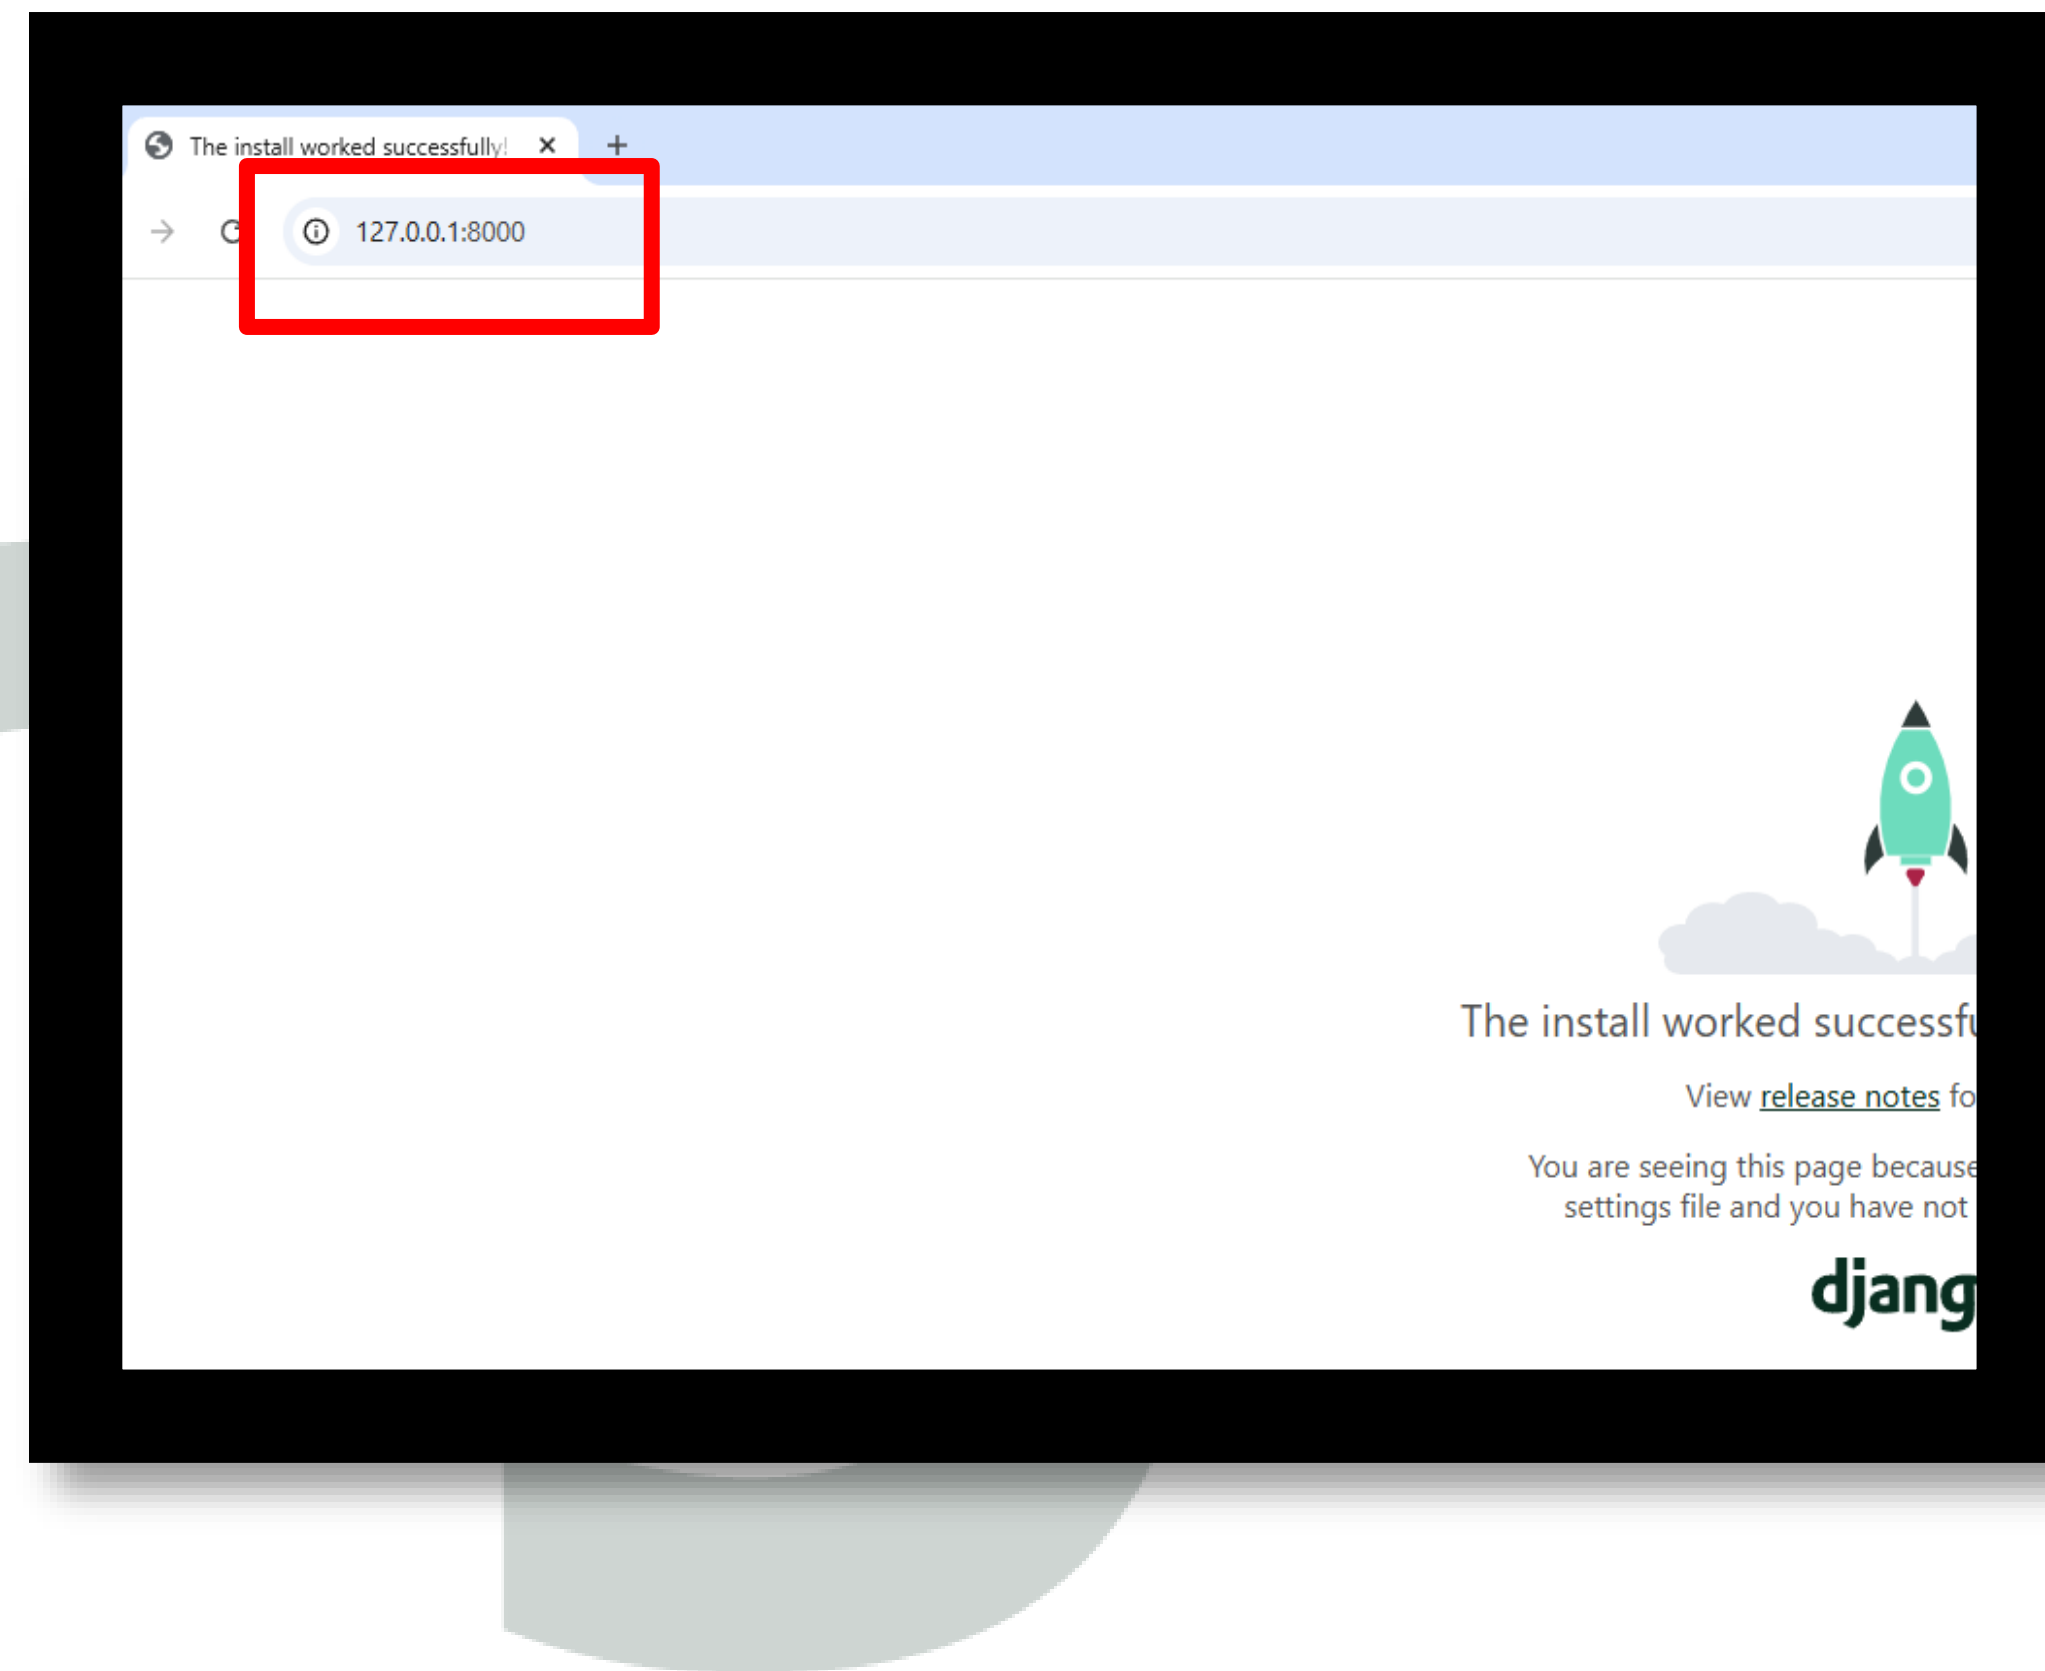

Django – URL's


O arquivo *urls.py* é a porta de entrada da nossa aplicação

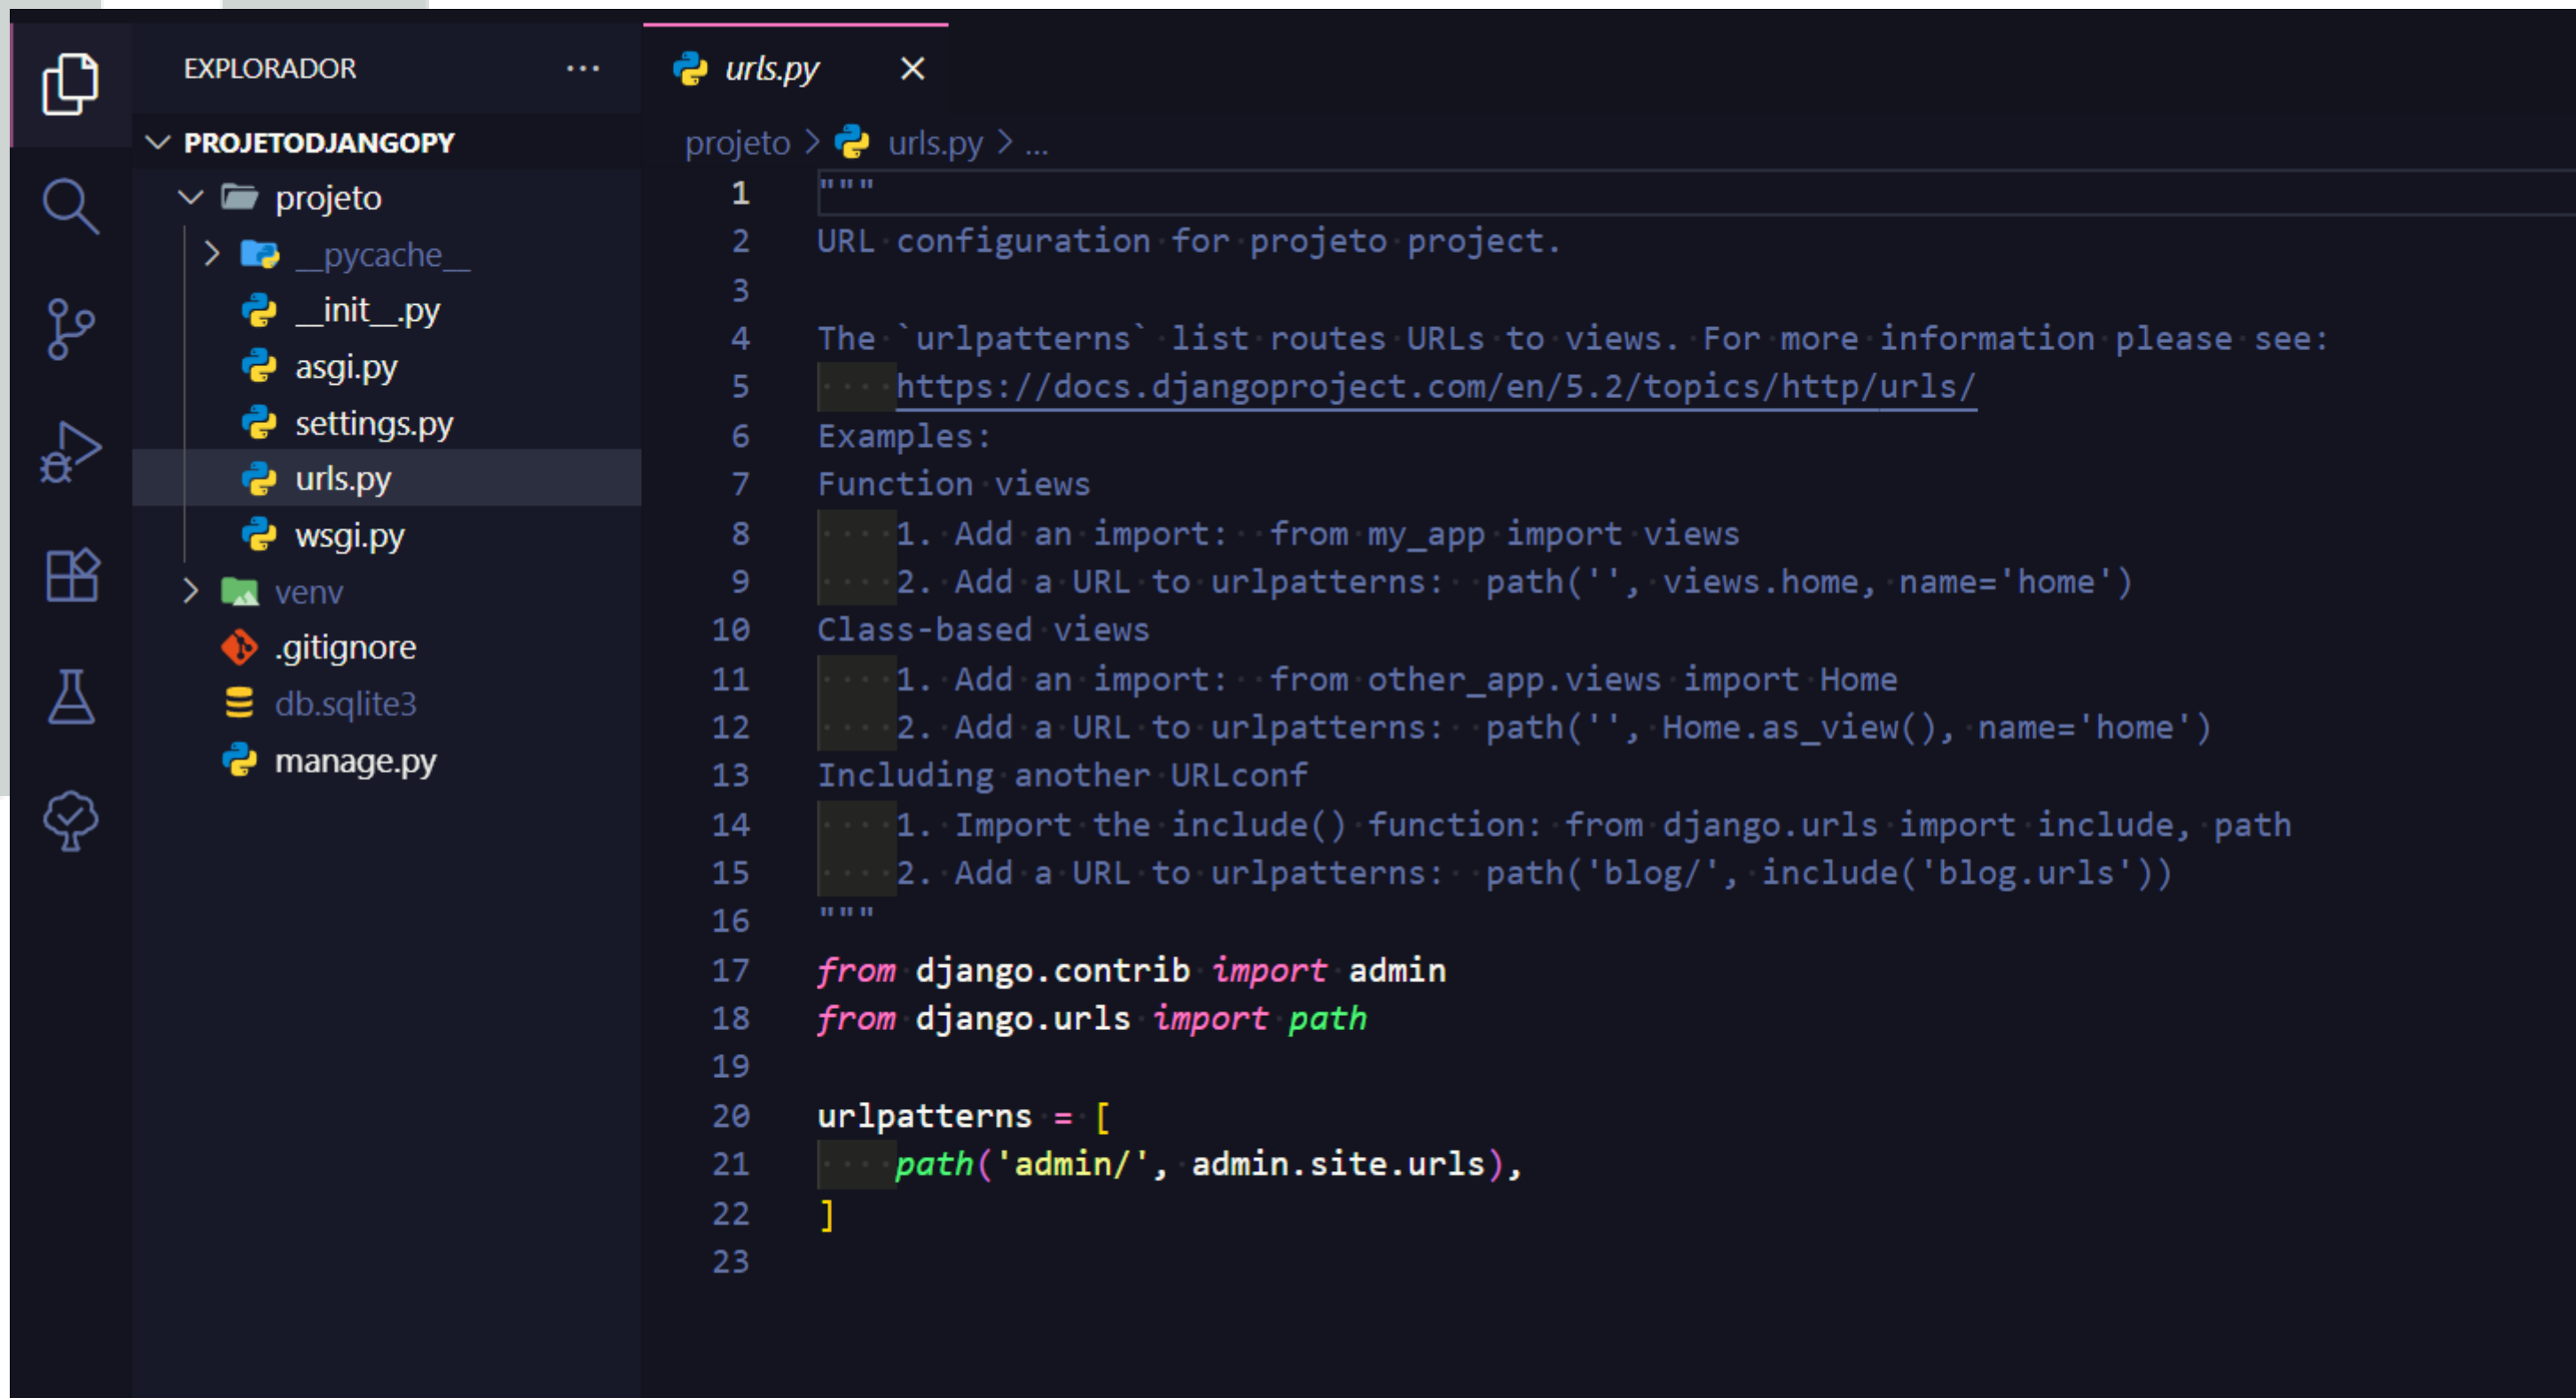

The screenshot shows a code editor with a dark theme. On the left, the 'EXPLORADOR' (Explorer) pane displays the project structure for 'PROJETODJANGOPY'. The 'projeto' folder is expanded, showing files like '__pycache__', '__init__.py', 'asgi.py', 'settings.py', 'urls.py' (selected), 'wsgi.py', and a 'venv' folder. Other files like '.gitignore', 'db.sqlite3', and 'manage.py' are also visible. The main editor pane shows the content of 'urls.py'. It starts with a docstring explaining the file's purpose and providing a link to the Django documentation. It then lists examples for function views and class-based views. Finally, it shows the imports for 'admin' and 'path' from 'django.contrib' and 'django.urls' respectively, and the 'urlpatterns' list with a single path for the admin site.


```
1 """
2 URL configuration for projeto project.
3
4 The `urlpatterns` list routes URLs to views. For more information please see:
5 https://docs.djangoproject.com/en/5.2/topics/http/urls/
6 Examples:
7 Function views
8     1. Add an import:  from my_app import views
9     2. Add a URL to urlpatterns:  path('', views.home, name='home')
10 Class-based views
11     1. Add an import:  from other_app.views import Home
12     2. Add a URL to urlpatterns:  path('', Home.as_view(), name='home')
13 Including another URLconf
14     1. Import the include() function: from django.urls import include, path
15     2. Add a URL to urlpatterns:  path('blog/', include('blog.urls'))
16 """
17 from django.contrib import admin
18 from django.urls import path
19
20 urlpatterns = [
21     path('admin/', admin.site.urls),
22 ]
23
```


Agora neste momento do curso, estamos fazendo o acesso da nossa aplicação através de um domínio, como está em desenvolvimento, o domínio é um IP.

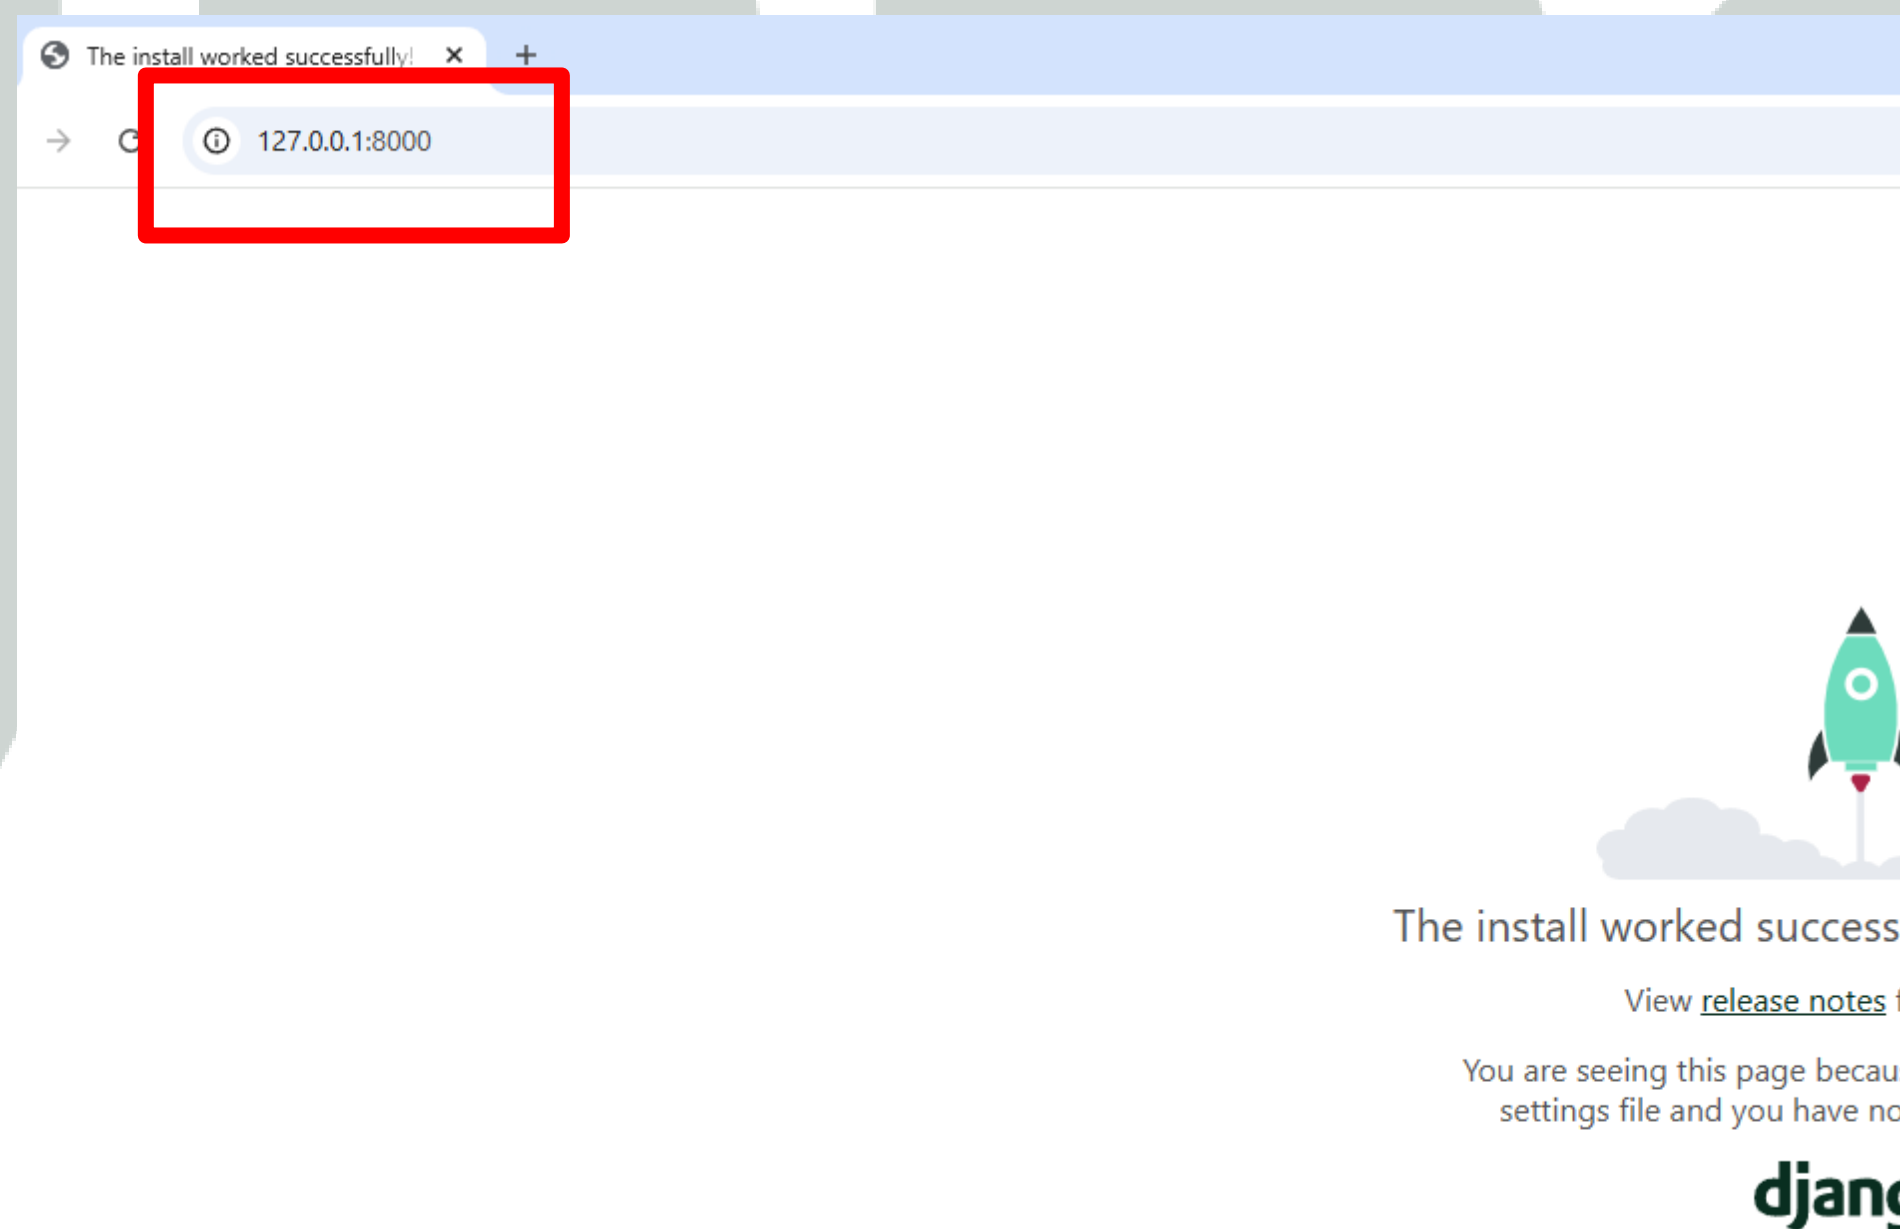


Django – URL's

Neste caso, o domínio é *http:127.0.0.1:8000/*, que é a página inicial da nossa aplicação

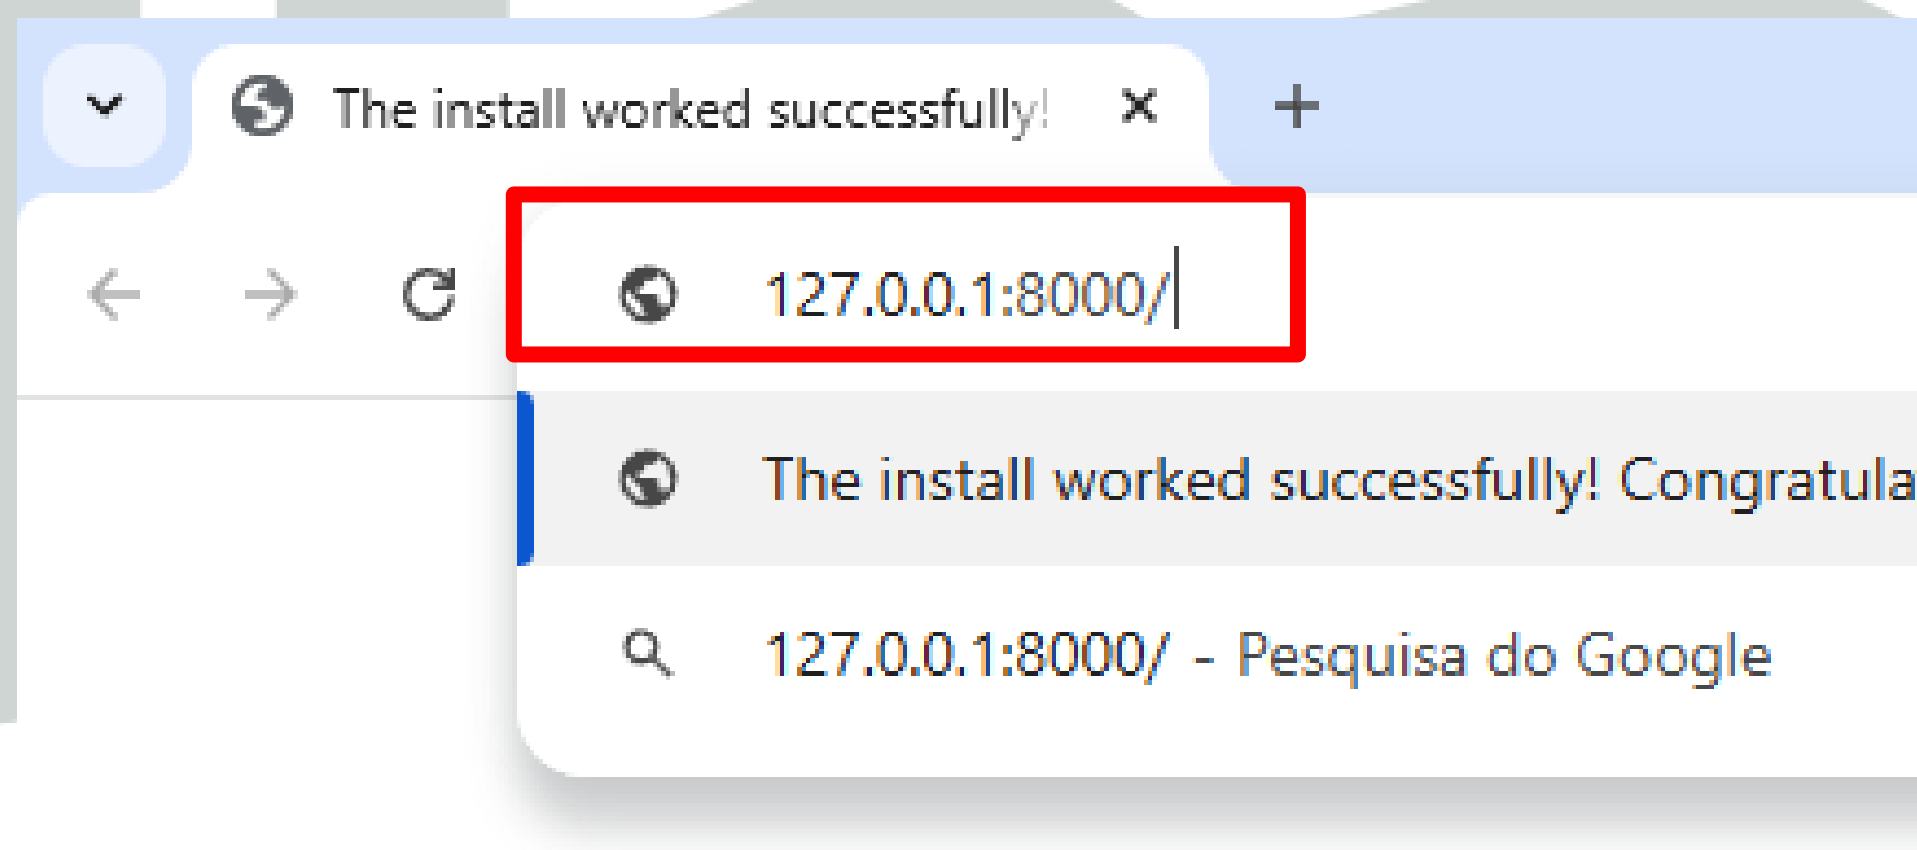

Django – URL's


É através desta barra invertida que acessamos as páginas da nossa aplicação.

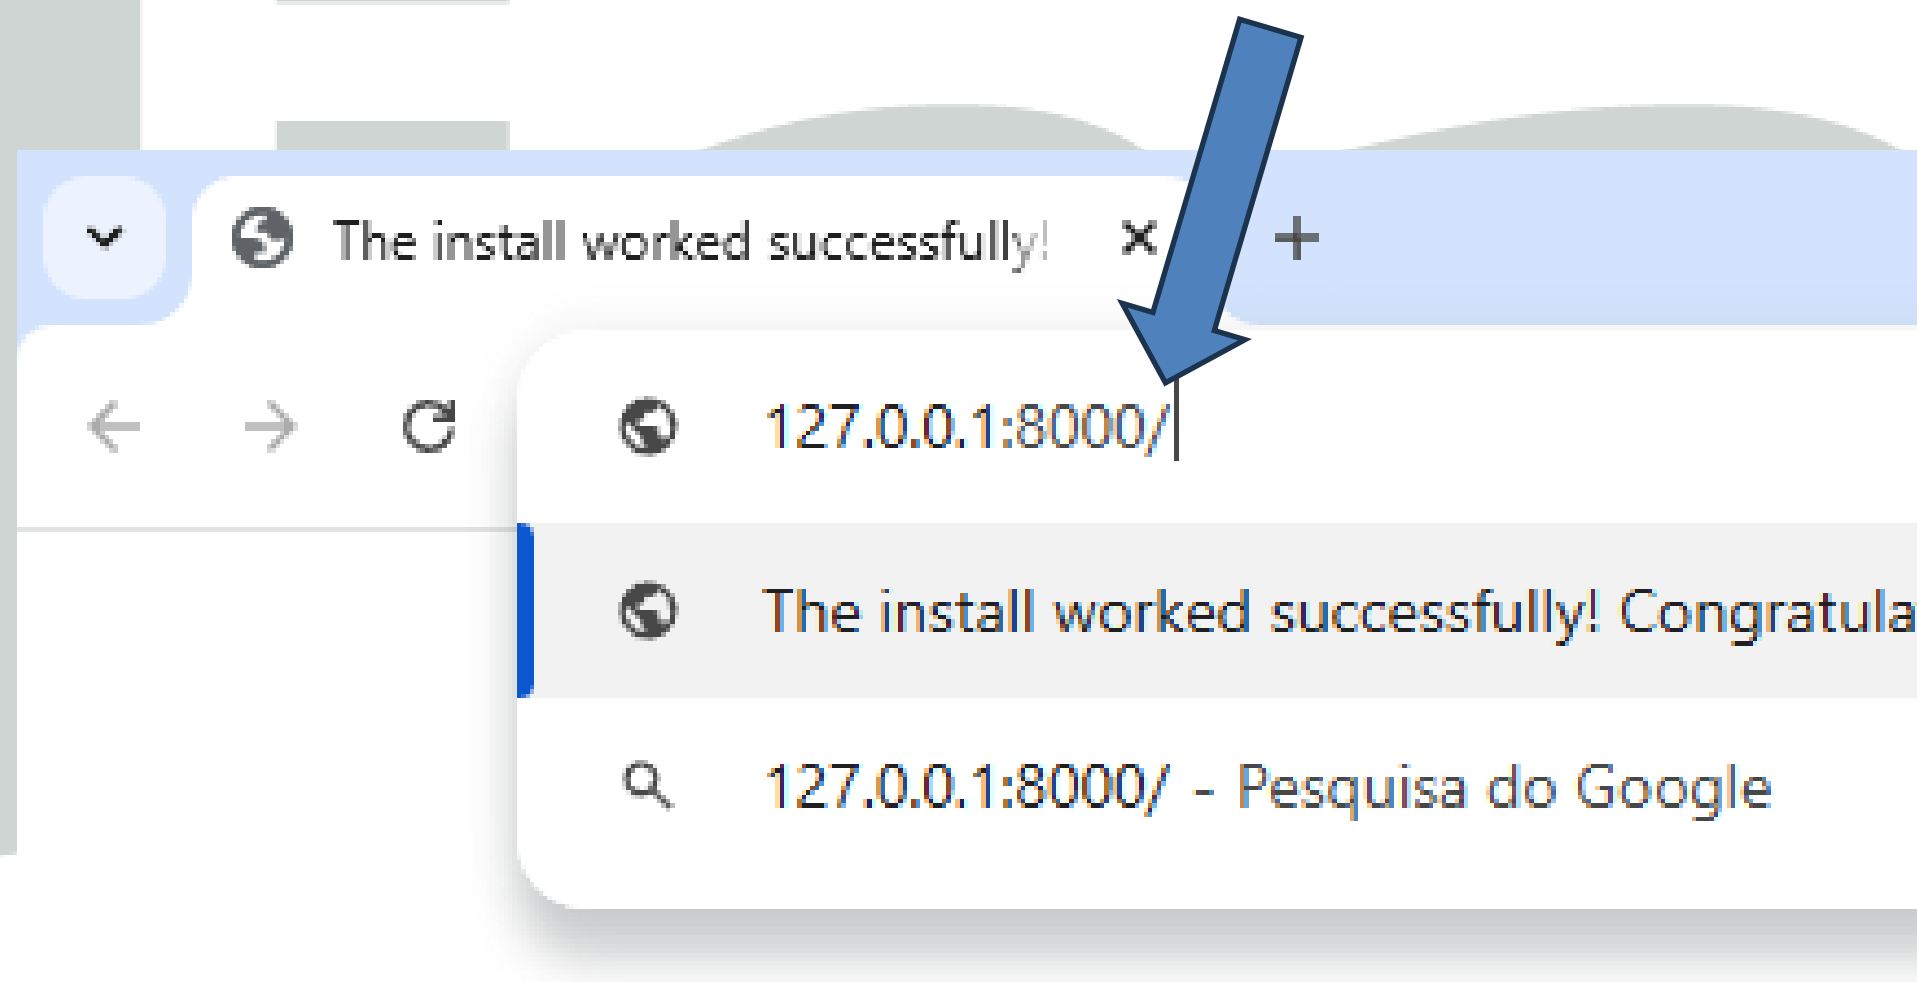


Django – URL's

Podemos acessar por exemplo:

- A página sobre `https:127.0.0.1:8000/sobrenós`

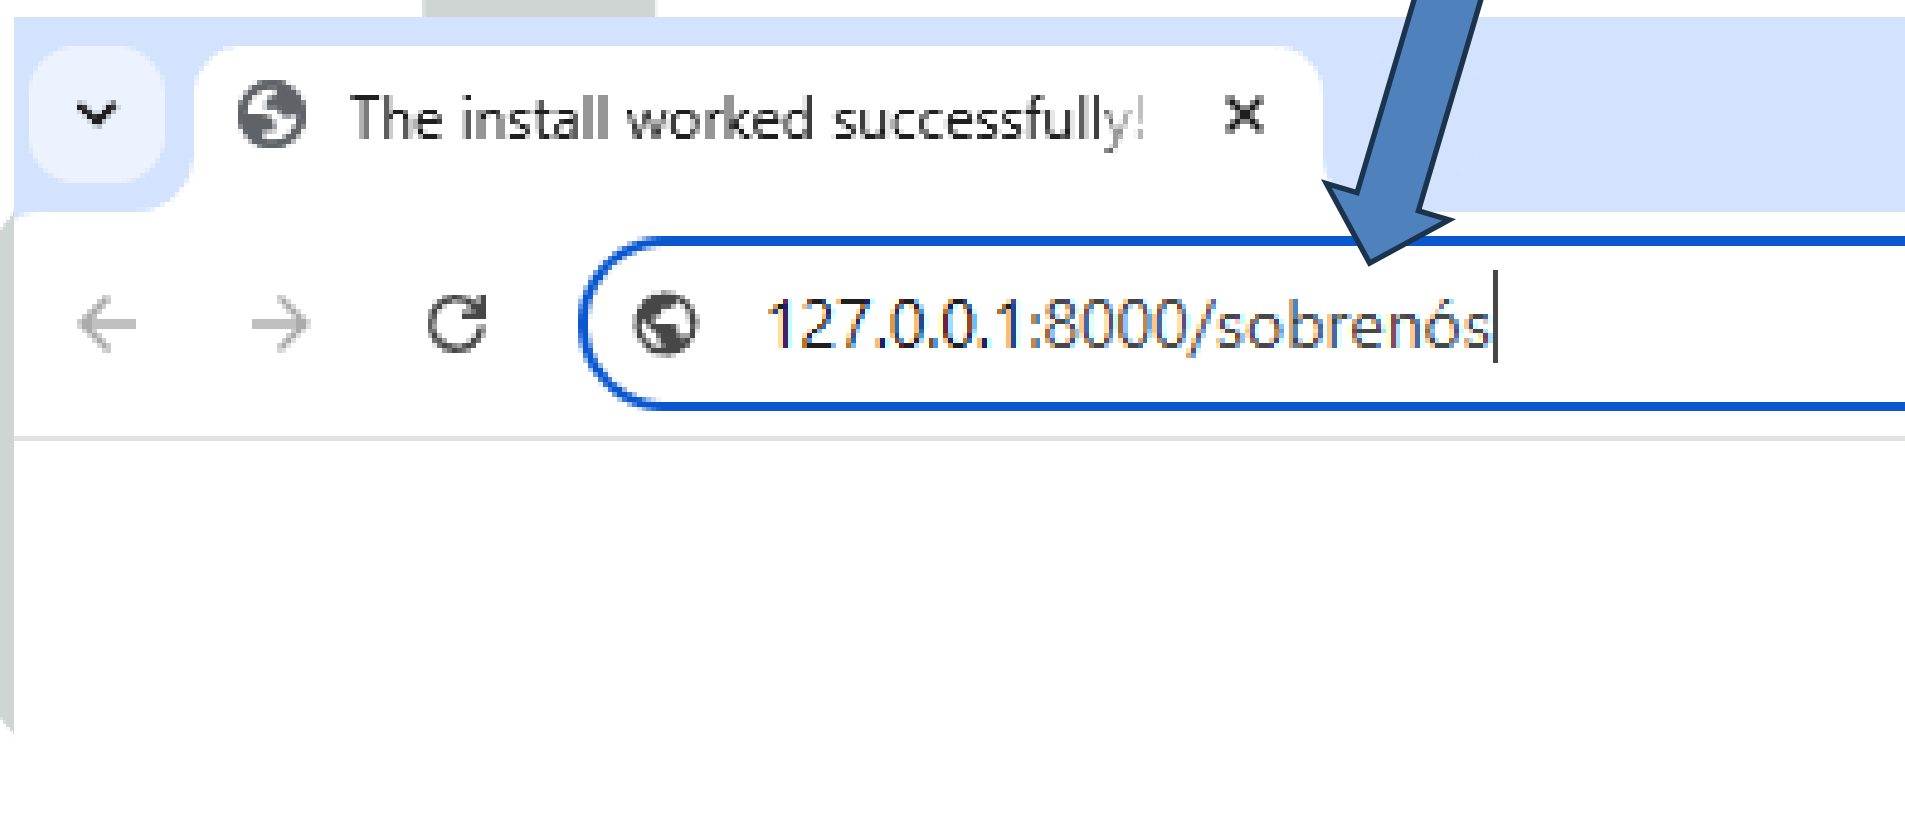


Porém não carrega a página pois ainda não criada.

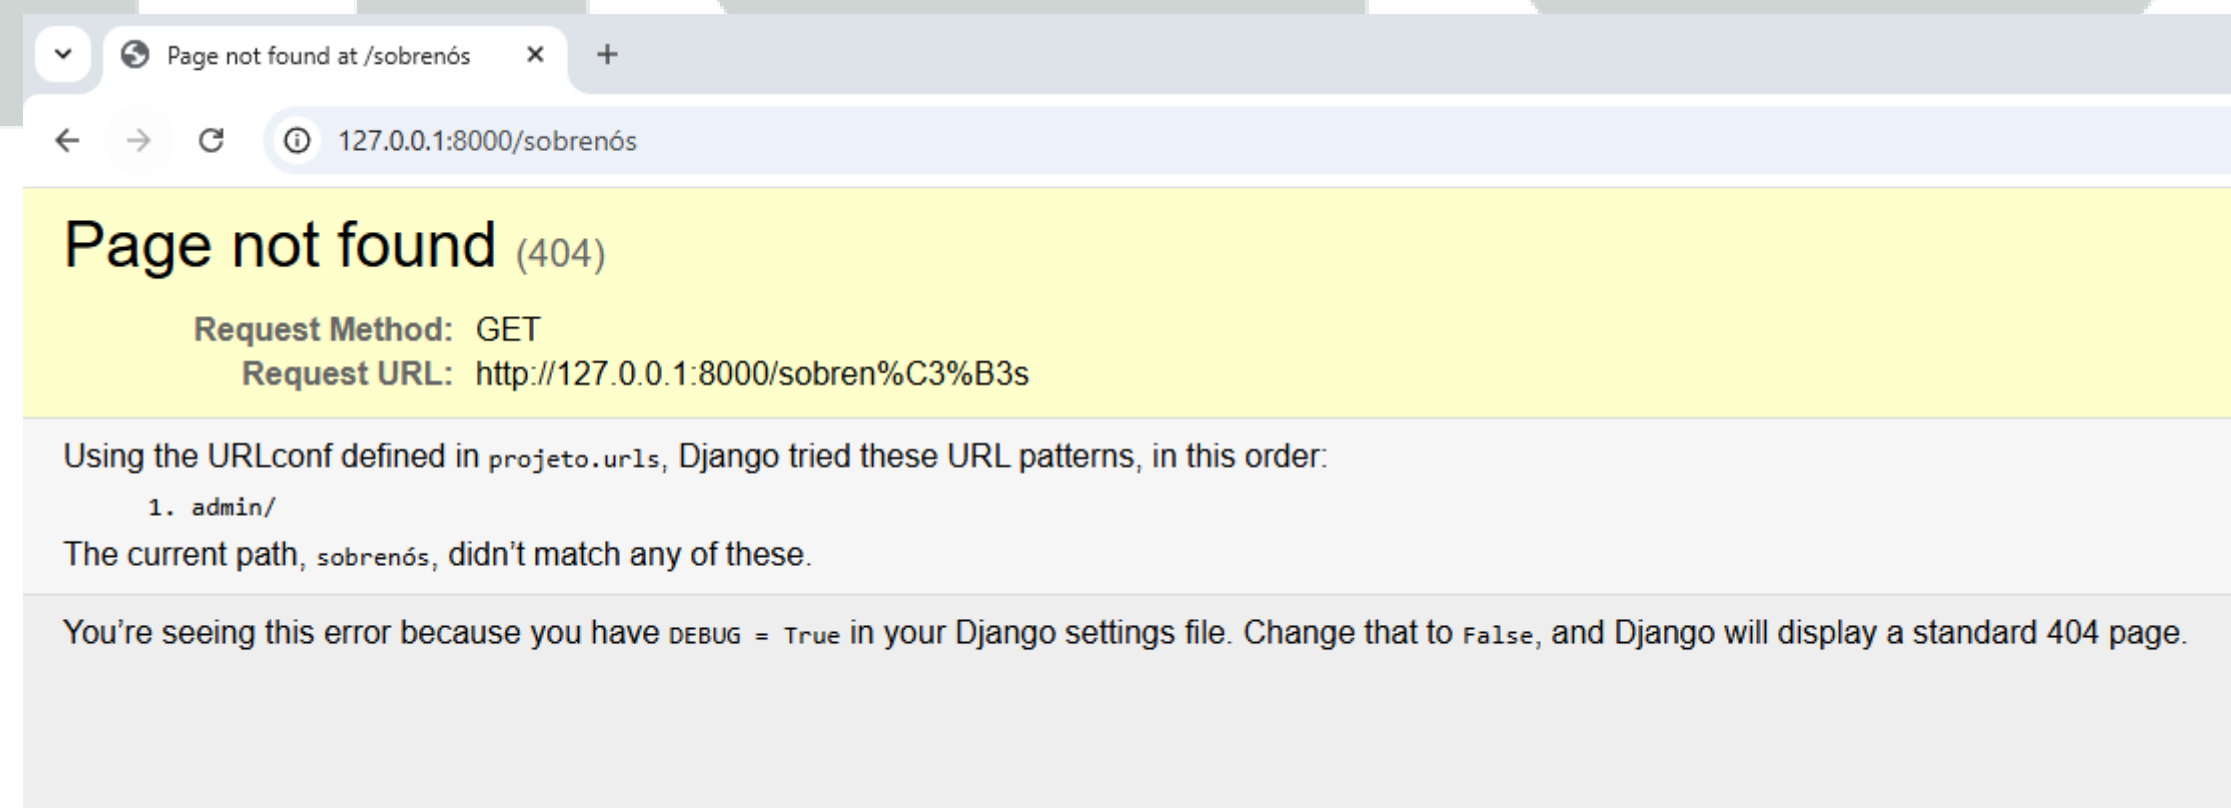

Django – URL's

Para isso é necessário codar o arquivo *urls.py*

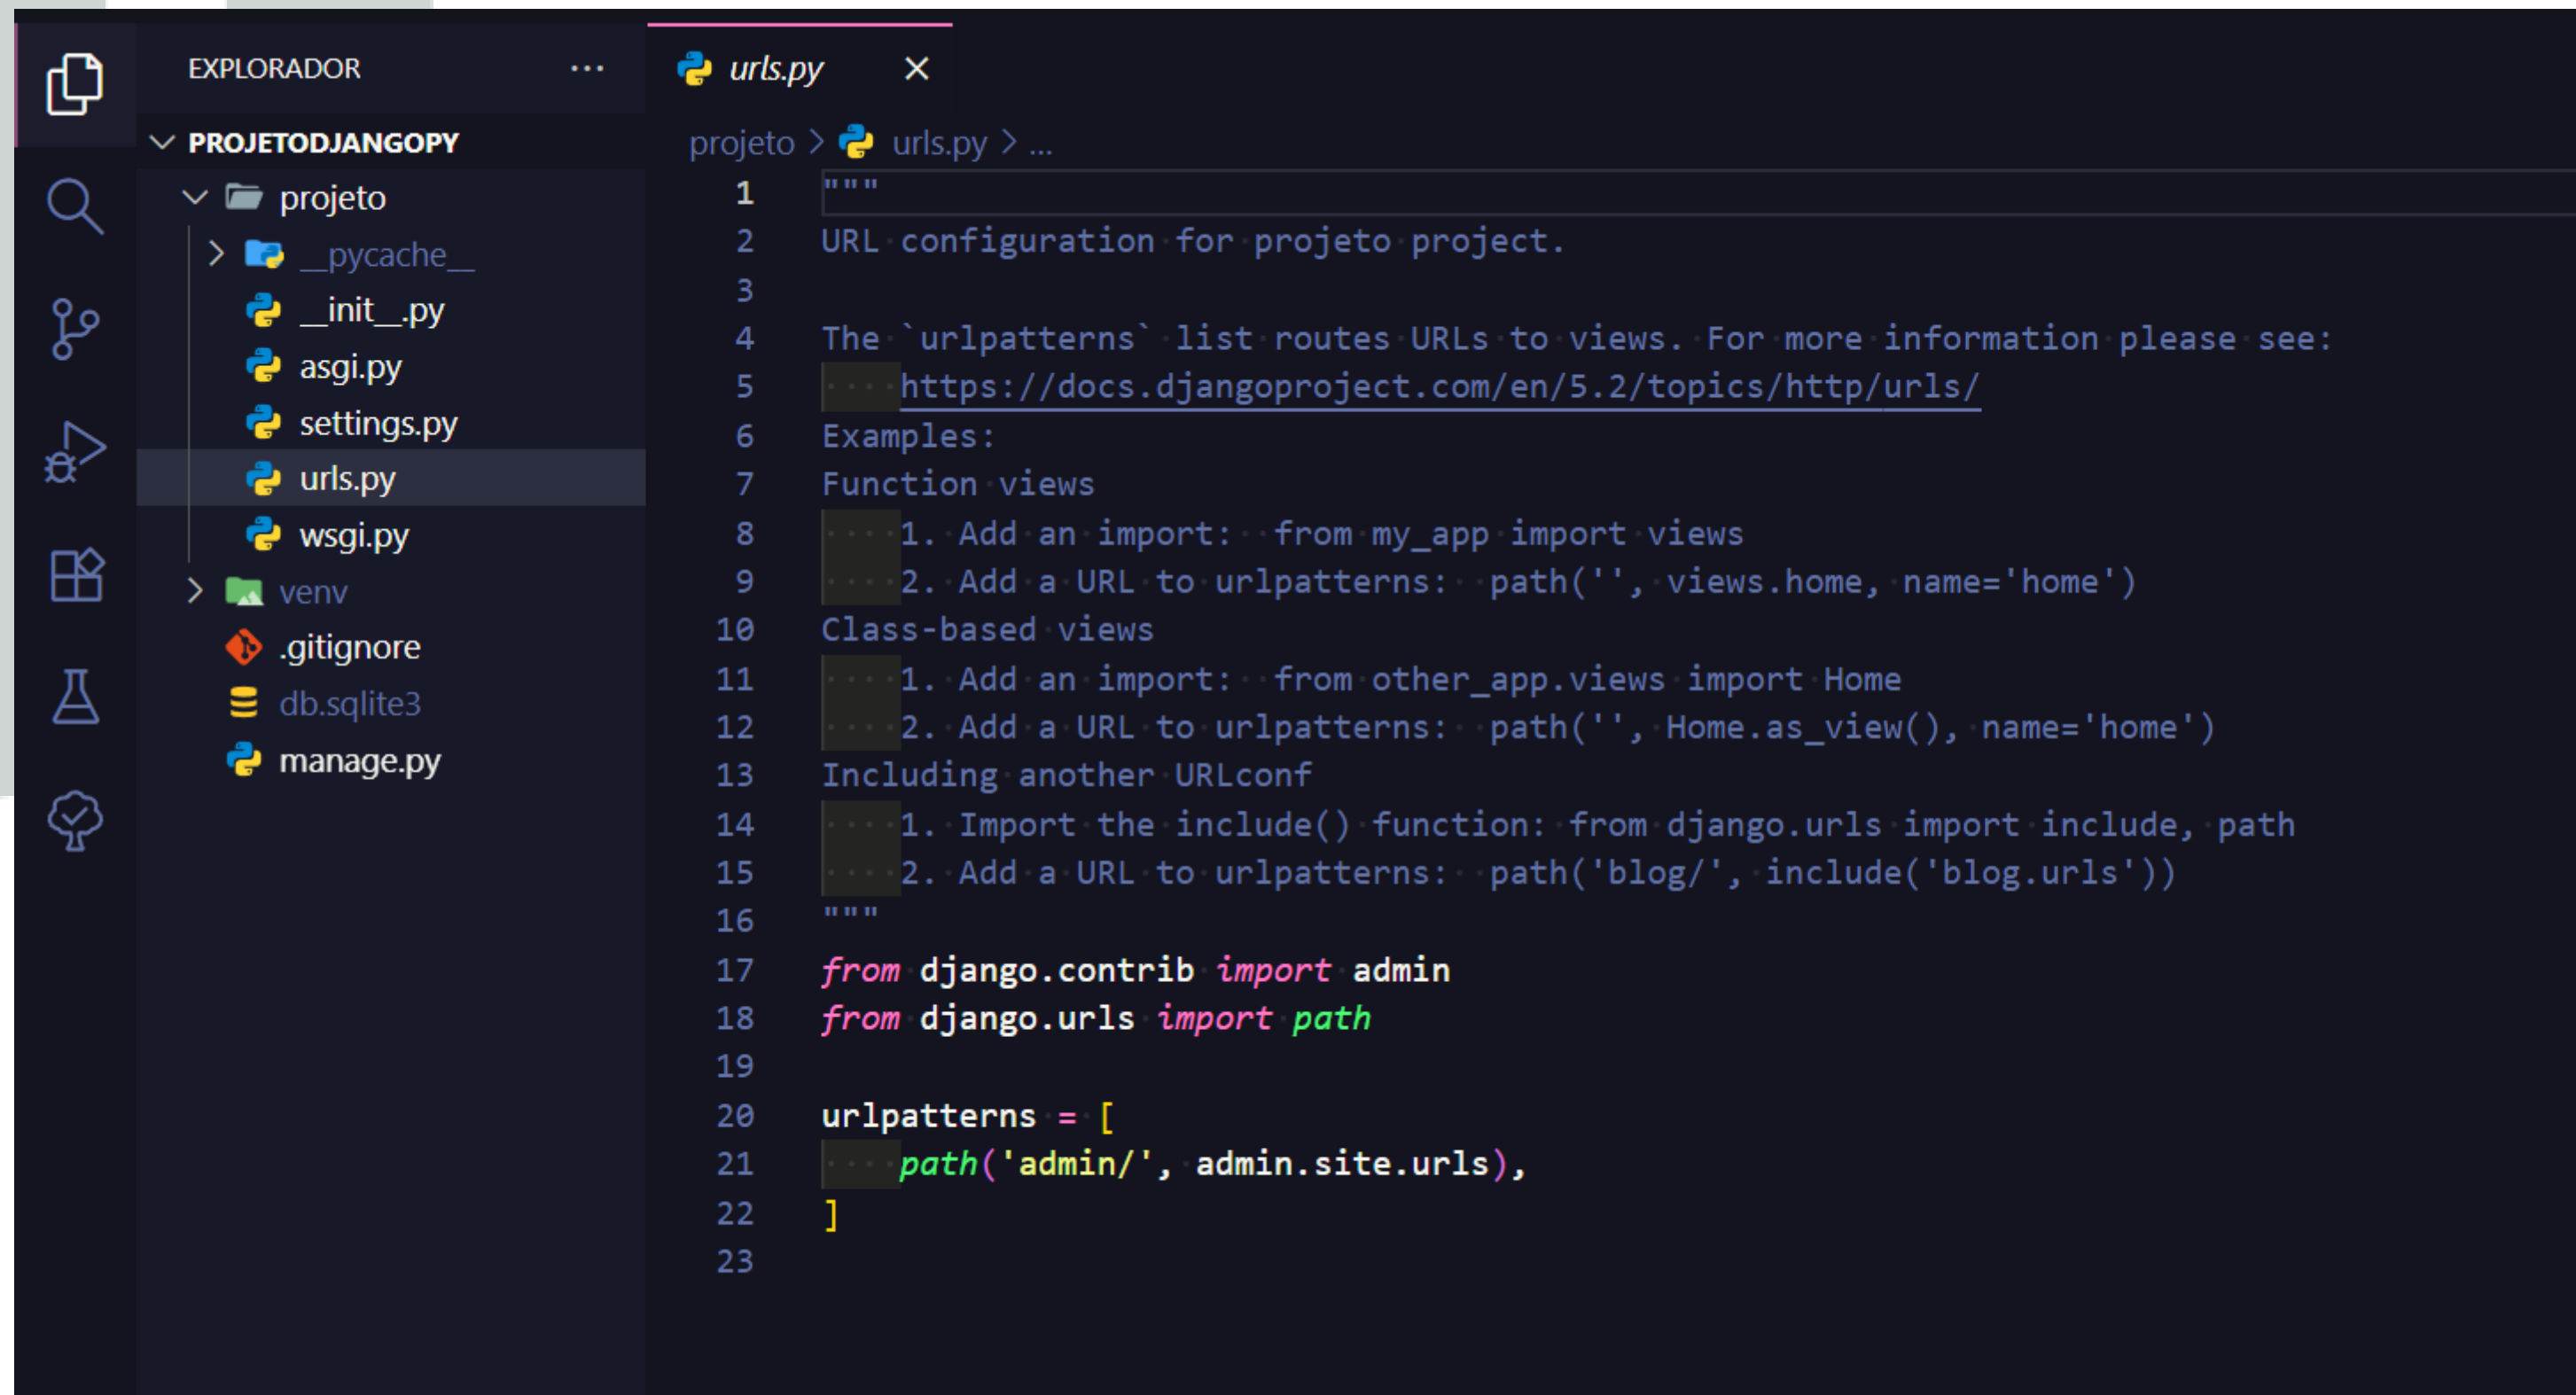


The screenshot shows a code editor with a dark theme. On the left, the 'EXPLORADOR' (Explorer) pane shows the project structure for 'PROJETODJANGOPY'. The 'projeto' folder is expanded, showing files like '__pycache__', '__init__.py', 'asgi.py', 'settings.py', 'urls.py' (selected), 'wsgi.py', and a 'venv' folder. Other files like '.gitignore', 'db.sqlite3', and 'manage.py' are also visible. The main editor pane shows the content of 'urls.py'. It starts with a docstring explaining the file's purpose and providing a link to the Django documentation. It then lists examples for function views and class-based views. Finally, it shows the imports for 'admin' and 'path' from 'django.contrib' and 'django.urls' respectively, and the 'urlpatterns' list with a single entry for the admin site.

```
1 """
2 URL configuration for projeto project.
3
4 The `urlpatterns` list routes URLs to views. For more information please see:
5 https://docs.djangoproject.com/en/5.2/topics/http/urls/
6 Examples:
7 Function views
8     1. Add an import:  from my_app import views
9     2. Add a URL to urlpatterns:  path('', views.home, name='home')
10 Class-based views
11     1. Add an import:  from other_app.views import Home
12     2. Add a URL to urlpatterns:  path('', Home.as_view(), name='home')
13 Including another URLconf
14     1. Import the include() function: from django.urls import include, path
15     2. Add a URL to urlpatterns:  path('blog/', include('blog.urls'))
16 """
17 from django.contrib import admin
18 from django.urls import path
19
20 urlpatterns = [
21     path('admin/', admin.site.urls),
22 ]
23
```


Django – URL's

Inserir o seguinte código


```
16 """
17 from django.contrib import admin
18 from django.urls import path
19 from django.http import HttpResponse
20
21 def hello_world(request):
22     return HttpResponse("Olá turma do curso de Python do Senai!")
23
24 urlpatterns = [
25     path('admin/', admin.site.urls),
26     path('', hello_world),
27 ]
28
```

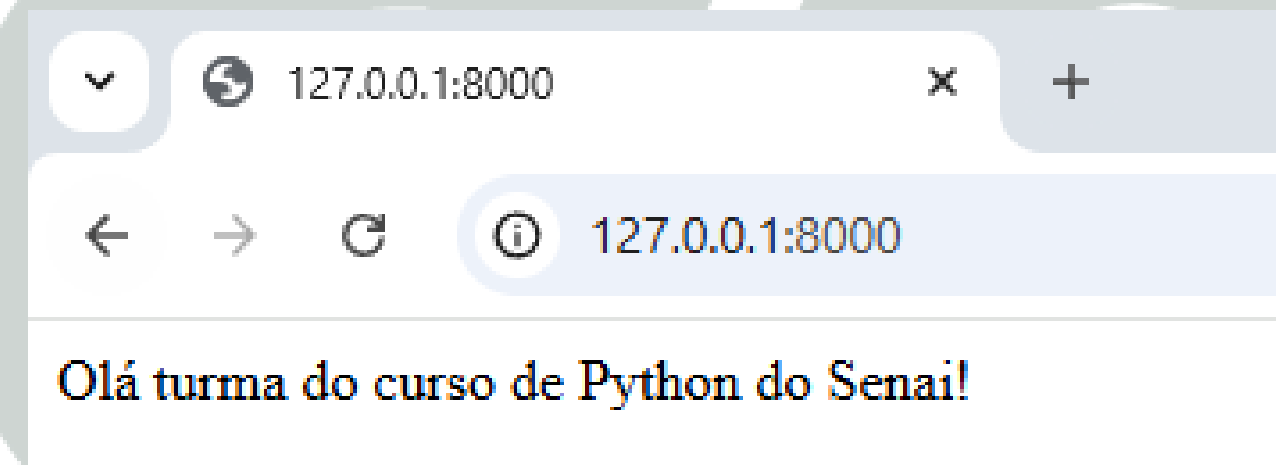

Django – URL's

Inserir o seguinte código


```
15  ...2. Add a URL to urlpatterns: path('blog/', include('blog.urls'))
16  """
17  from django.contrib import admin
18  from django.urls import path
19  from django.http import HttpResponse
20
21  def hello_world(request):
22  ...return HttpResponse("Olá turma do curso de Python do Senai!")
23
24  urlpatterns = [
25  ...path('admin/', admin.site.urls),
26  ...path('senai/', hello_world),
27  ]
28
```

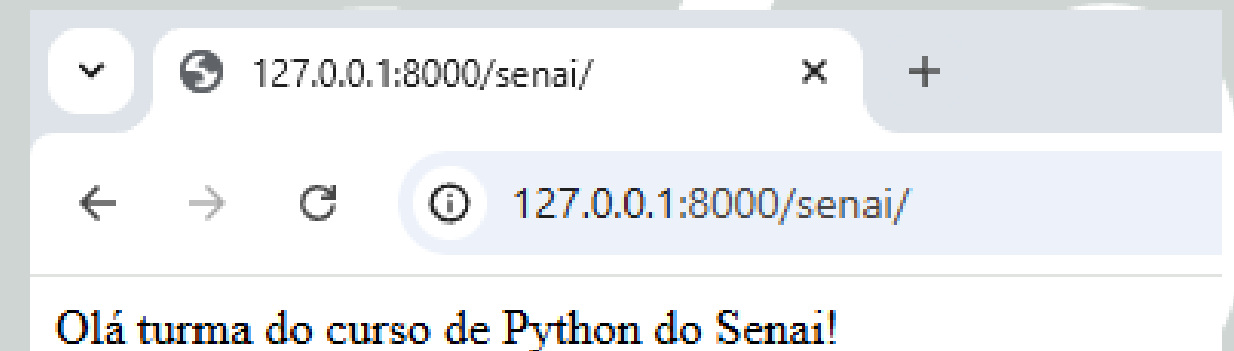

A screenshot of a web browser window. The address bar shows the URL '127.0.0.1:8000/senai/'. The page content displays the text 'Olá turma do curso de Python do Senai!'.

Django – URL's – Um pouco sobre HTTP

HttpResponse é a resposta que um servidor envia de volta ao navegador (cliente) após receber uma solicitação HTTP. Essa resposta inclui informações sobre o resultado da solicitação, como um código de status (ex: \ (200\) OK, \ (404\) Not Found), e o conteúdo (como uma página HTML, JSON ou uma mensagem de erro) solicitado pelo cliente. É um componente essencial do protocolo HTTP que permite a comunicação entre cliente e servidor na web.

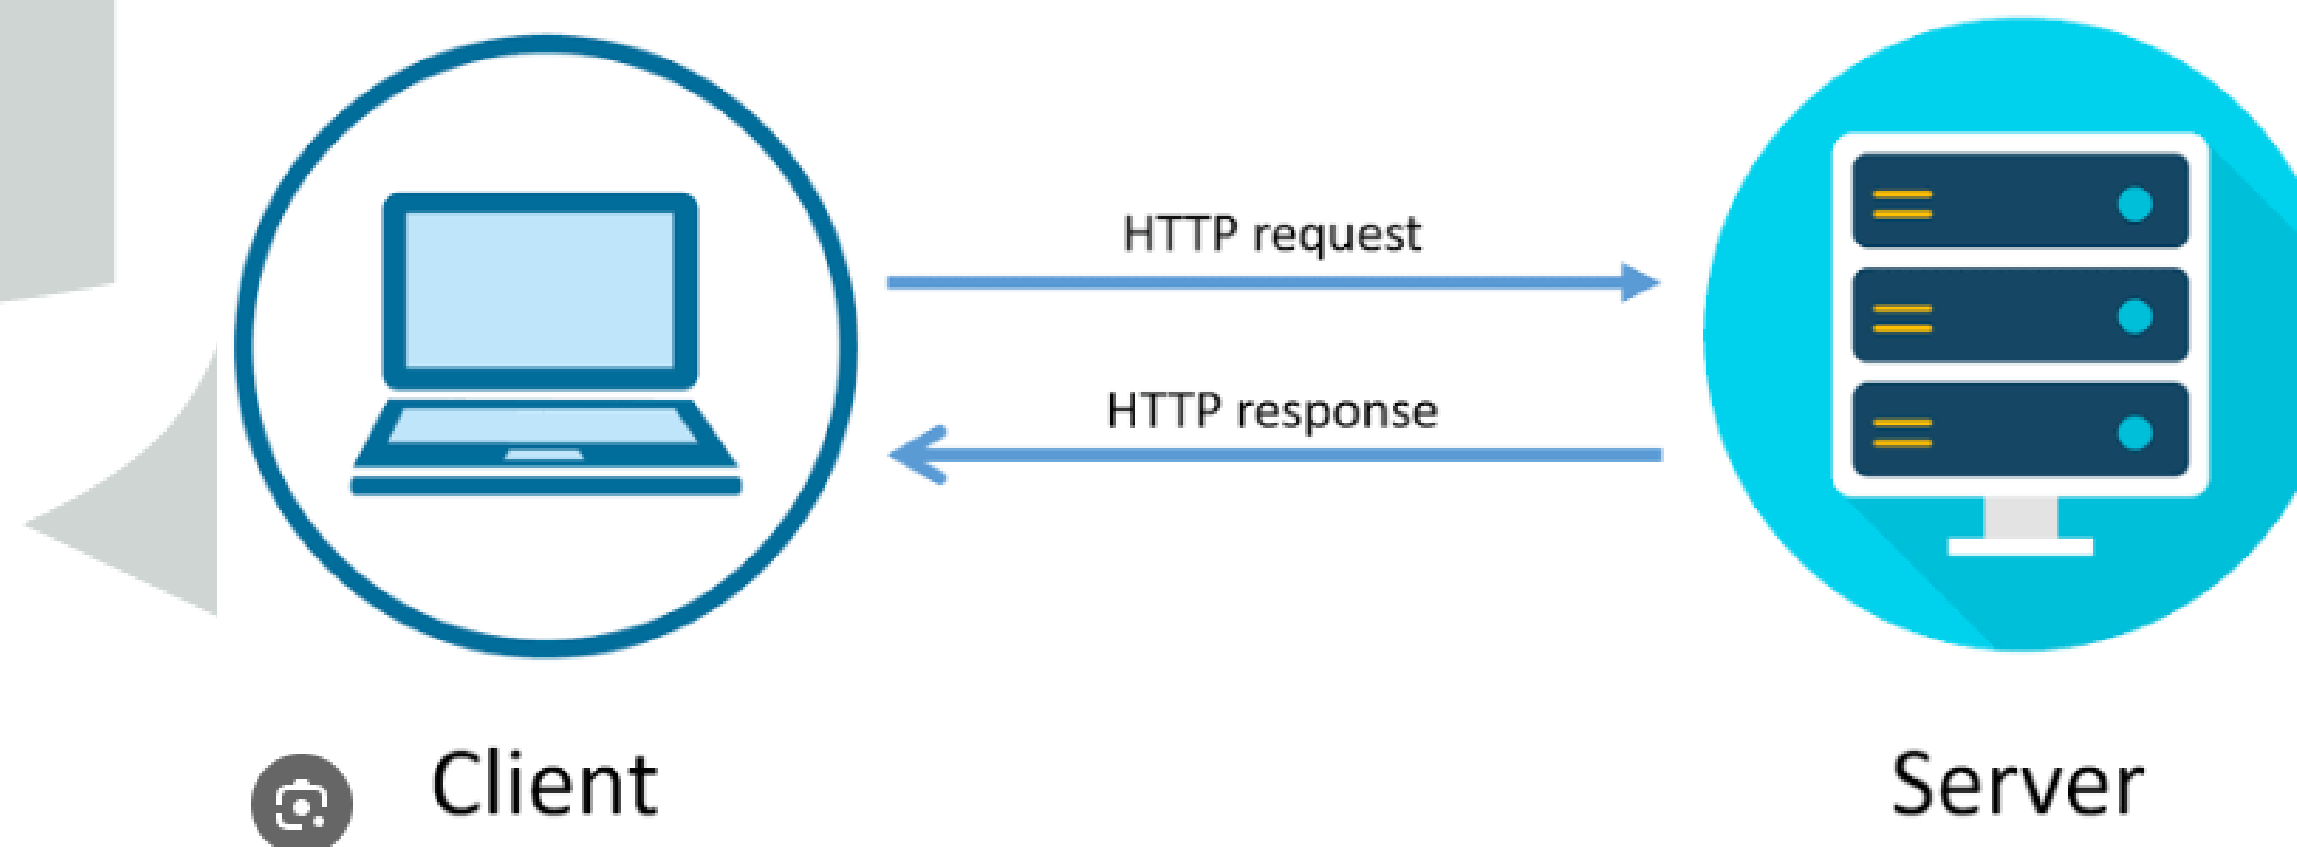

Django – URL's

Fazer isso, não é viável por vários motivos. Por isso o Django nos ajuda através do app's.

```
15 ... 2. Add a URL to urlpatterns: path('blog/', include('blog.urls'))
16 """
17 from django.contrib import admin
18 from django.urls import path
19 from django.http import HttpResponse
20
21 def hello_world(request):
22     ... return HttpResponse("Olá turma do curso de Python do Senai!")
23
24 urlpatterns = [
25     ... path('admin/', admin.site.urls),
26     ... path('senai/', hello_world),
27 ]
28
```

A nighttime photograph of a city street, likely in São Paulo, featuring light trails from moving vehicles and illuminated buildings in the background. The image is used as a background for a promotional graphic.

SENAI

DEPARTAMENTO REGIONAL
DE SÃO PAULO

www.sp.senai.br