

Luis Javier López López || 2ºDAM

Despliegue Front-End

Diseño de Interfaces


Rodrigo Bernal Gómez

Contenido

Enlace del Front-End	2
Enlace del GitHub:	2

Enlace del Front-End: <https://two-dam-1.onrender.com>

Enlace del GitHub: <https://github.com/eltitorodri/2-DAM/tree/56fb0d2ec8a74433f6f846af91653cfa7d2cb0d4/Diseno-Interfaces/swapy>

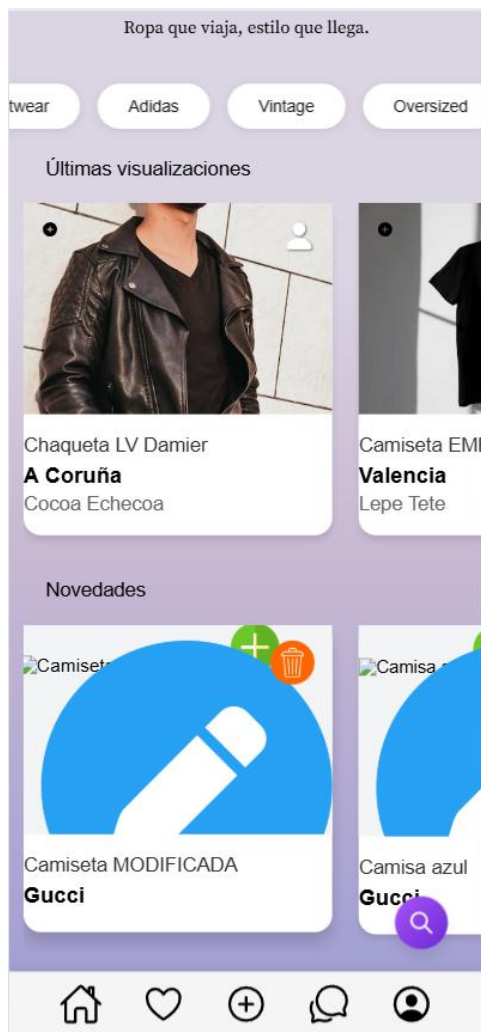

Esta es la captura de que me coge los datos desde la base de datos. Dicha base de datos esta en la nube también hecha en render.

Despliegue Front-End

PROJECT

Swapy [🔗](#)

+ Add environment

Production

All (3) Services (3) Env Groups (0) ...

Q Search resources in Production

SERVICE NAME	STATUS	RUNTIME	REGION	UPDATED
2-DAM-1	✓ Deployed	Static	Global	4d
2-DAM	✓ Deployed	Docker	Frankfurt	4d
SWAPY	✓ Available	PostgreSQL 18	Ohio	6d
+ New service				

Esto es una captura de que están hecho en Render tanto el front, back y base de datos. Esta base de datos la he tenido que migrar de MariaDB a Postgres.

Esta es la configuración del front.

Settings

General

Name
A unique name for your Static Site. 2-DAM-1 [🔗 Edit](#)

Build & Deploy

Repository
The repository used for your Static Site. [🔗 Edit](#)
https://github.com/etitoroov/2-DAM

Branch
The Git branch to build and deploy. [🔗 Edit](#)
main

Git Credentials
User providing the credentials to pull the repository. [Use My Credentials](#)
rbernalgomez@satareyes.es (you)

Root Directory Optional
If set, Render runs commands from this directory instead of the repository root. Additionally, code changes outside of this directory do not trigger an auto-deploy. Most commonly used with a [monorepo](#). [🔗 Edit](#)
Diseno-Interfaces/swapy

Build Filters
Include or ignore specific paths in your repo when determining whether to trigger an auto-deploy. Paths are relative to your repo's root directory. [Learn more](#). [🔗 Edit](#)

Included Paths
Changes that match these paths will trigger a new build.
[+ Add Included Path](#)

Ignored Paths
Changes that match these paths will not trigger a new build.
[+ Add Ignored Path](#)

Build Command
Render runs this command to build your app before each deploy. [🔗 Edit](#)
Diseno-Interfaces/swapy/ \$ npm install && ./node_modules/.bin/ng build --configuration production

Publish Directory
The relative path of the directory containing built assets to publish. Examples: ./build, dist and frontend/build. [🔗 Edit](#)
Diseno-Interfaces/swapy/ www

Auto-Deploy
By default, Render automatically deploys your service whenever you update its code or configuration. Disable to handle deploys manually. [Learn more](#). [🔗 Edit](#)
On Commit

Deploy Hook
Your private URL to trigger a deploy for this server. Remember to keep this a secret. [🔗 Regenerate hook](#)

Esta es la configuración del backend:

Settings

General

Name
A unique name for your Web Service.

Q-QAM

✎ Edit

Region
Your services in the same **region** can communicate over a **private network**.

Frankfurt (EU-Central)

Instance Type

Free 0s CPU 512 MB

Options

Please enter your payment information to select an instance type with higher limits.

See remaining free usage, or learn about free service limits.

Build & Deploy

Repository
The repository used for your Web Service.

https://github.com/willtorndt/Q-QAM

✎ Edit

Branch
The Git branch to build and deploy.

main

✎ Edit

Git Credentials
User providing the credentials to pull the repository.

thornalgonet@rednexus.es[org]

Use My Credentials

Root Directory Optional
If set, Render runs commands from this directory instead of the repository root. Additionally, code changes outside of this directory do not trigger an auto-deploy. Most commonly used with a **monorepo**.

Q-QAM - Server-Sources/Backend/Backend/entry

✎ Edit

Build Filters
Include or ignore specific paths in your repo when determining whether to trigger an auto-deploy. Paths are relative to your repo's root directory. [Learn more](#).

Included Paths
Changes that match these paths will trigger a new build.

+ Add Included Path

Ignored Paths
Changes that match these paths will not trigger a new build.

+ Add Ignored Path

Registry Credential
If your service pulls private Docker images from a registry, specify a credential that can access those images. Manage your credentials in [Settings](#).

No credential

✎ Edit

Dockerfile Path
The path to your service's Dockerfile, relative to the repo root. Defaults to `./Dockerfile`.

Q-QAM - Server-Sources/Backend/Backend/entry / Dockerfile

✎ Edit

Docker Build Context Directory
The path to your service's **Docker build context**, relative to the repo root. Defaults to the root.

Q-QAM - Server-Sources/Backend/Backend/entry / ..

✎ Edit

Docker Command
Optionally override your Dockerfile's `CMD` and `ENTRYPOINT` instructions with a different command to start your service.

✎ Edit

Pre-Deploy Command Optional
Render runs this command before the start command. Useful for database migrations and static asset uploads.

Q-QAM - Server-Sources/Backend/Backend/entry /

✎ Edit

Auto-Deploy
By default, Render automatically deploys your service whenever you update its code or configuration. Disable to handle deploys manually. [Learn more](#).

On Commit

✎ Edit

Deploy Hook
Your private URL to trigger a deploy for this service. Remember to keep this a secret.

🔑 Regenerate hook

Y esta es la de la base de datos;

Overview

Usage

Status

✓ Available

PostgreSQL Version

18

Region

Ohio (US East)

Read Replicas

+ Add Read Replica

Storage

6.64% used out of 1 GB

Storage Autoscaling

Disabled

Datadog API Key

+ Add Datadog API Key

Postgres Instance

Instance Type

Free 256 MB RAM 0.1 CPU 1 GB Storage

Update

A credit card is required to change instance types.

Add payment information

High Availability

Disabled

Run a **standby instance** of your database and automatically fail over to it if the primary encounters an issue.

See upgrade options

Only available for Pro instances and higher.

Connections

Hostname

An internal hostname used by your Render services.

dpg-d5sagcn18n1s73car3p8-a

Port

5432

Database

dbname_usapp

Username

rodri

Password

Internal Database URL

External Database URL

PSQL Command

A la hora de hacer el despliegue he tenido que crear // modificar algunos archivos tanto del backend como del front, como por ejemplo el Dockerfile o en el enviroments poner la apiUrl apuntando al render.