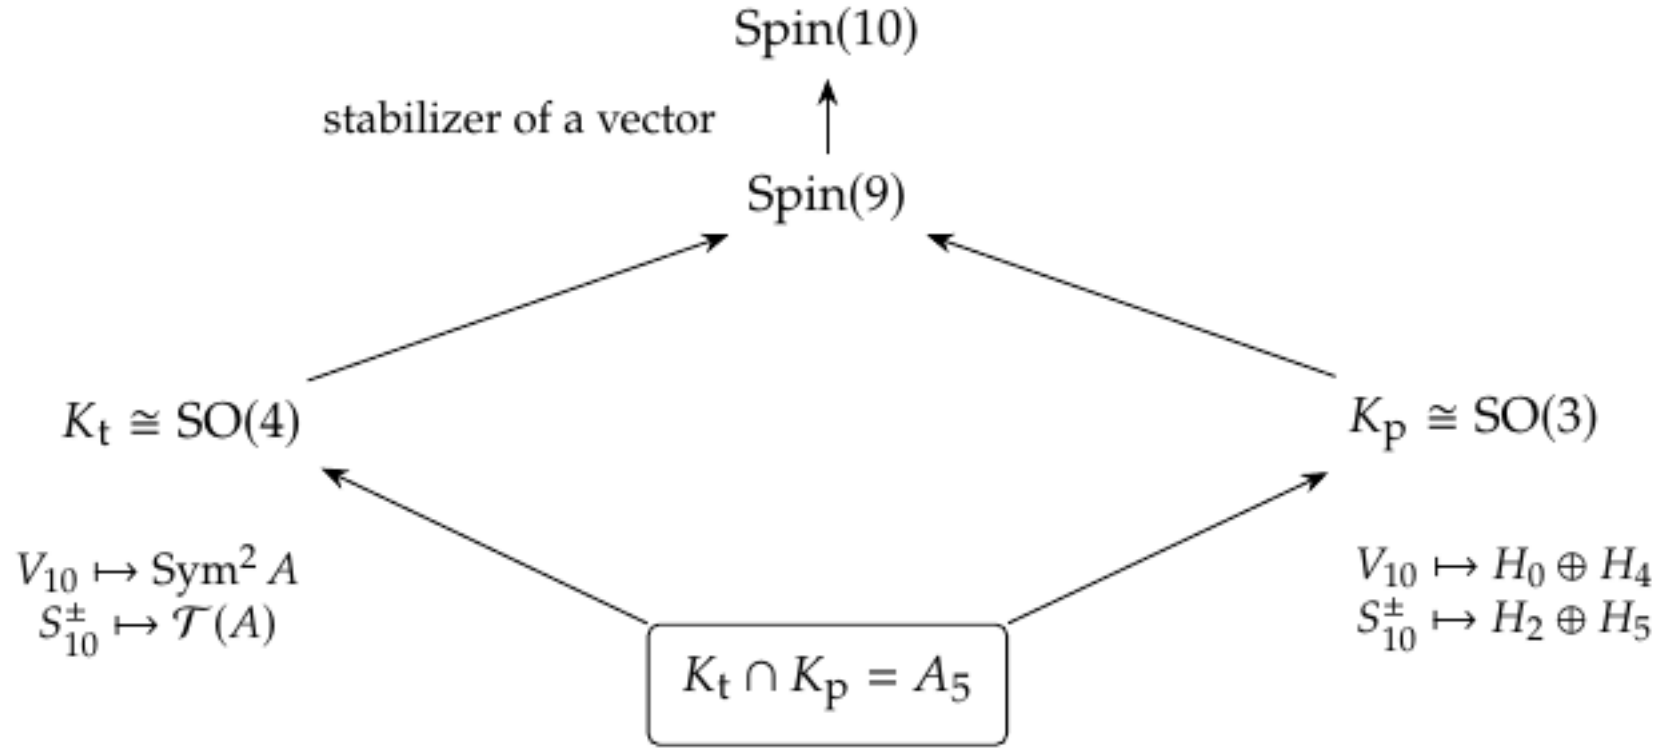


The two subgroup embeddings are chosen to contain the same copy of A_5.