

WEEKEND DISCUSSION

Discussion 1:

// SQL delete command

```
String strSQL = "DELETE FROM employs WHERE fistname = 'Alice'";
```

```
int rowsEffected = stmt.executeUpdate(strSQL);
```

```
System.out.println(rowsEffected + " rows effected");
```

Java Codes:

```
1 package josbert_new_;
2
3 import java.sql.*;
4 public class TestMySQL_3 {
5
6     public static void main(String[] args) {
7         try {
8             Class.forName("com.mysql.jdbc.Driver");
9             String connectionUrl = "jdbc:mysql://localhost/mydatabase?" +
10                "user=root&password=";
11             Connection con = DriverManager.getConnection(connectionUrl);
12             System.out.println("Connection Established!");
13             Statement stmt = null;
14             ResultSet rs = null;
15             stmt = con.createStatement();
16             // SQL delete command
17             String strSQL = "DELETE FROM students WHERE lastname = 'John'";
18             int rowsEffected = stmt.executeUpdate(strSQL);
19             System.out.println(rowsEffected + " rows effected");
20         } catch (SQLException e) {
21             System.out.println("SQL Exception: " + e.toString());
22         } catch (ClassNotFoundException cE) {
23             System.out.println("Class Not Found Exception: " + cE.toString());
24         }
25     }
26 }
27
```


Discussion 2:

// SQL update command

```
String strSQL = "UPDATE employs SET location= 'Kigali' WHERE Identification  
= '1'";
```

```
int rowsEffectd = stmt.executeUpdate(strSQL);
```


```
System.out.println(rowsEffectd + " rows effected");
```

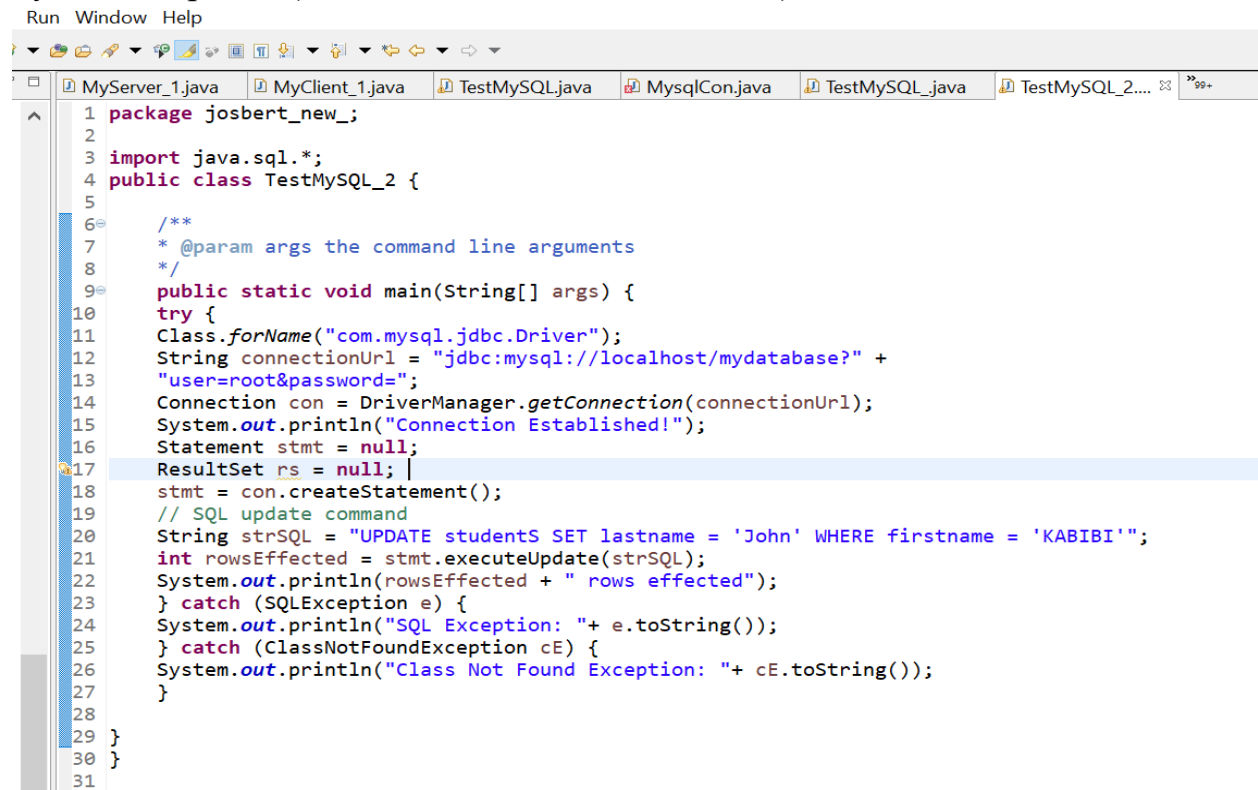

The screenshot shows an IDE window with a menu bar (Run, Window, Help) and a toolbar. Below the toolbar is a tab bar with several open files: MyServer_1.java, MyClient_1.java, TestMySQL.java, MysqlCon.java, TestMySQL_1.java, and TestMySQL_2.... The active file is TestMySQL_2.java, which contains the following Java code:

```
1 package josbert_new;  
2  
3 import java.sql.*;  
4 public class TestMySQL_2 {  
5  
6     /**  
7      * @param args the command line arguments  
8      */  
9     public static void main(String[] args) {  
10         try {  
11             Class.forName("com.mysql.jdbc.Driver");  
12             String connectionUrl = "jdbc:mysql://localhost/mydatabase?" +  
13                 "user=root&password=";  
14             Connection con = DriverManager.getConnection(connectionUrl);  
15             System.out.println("Connection Established!");  
16             Statement stmt = null;  
17             ResultSet rs = null;  
18             stmt = con.createStatement();  
19             // SQL update command  
20             String strSQL = "UPDATE students SET lastname = 'John' WHERE firstname = 'KABIBI';"  
21             int rowsEffectd = stmt.executeUpdate(strSQL);  
22             System.out.println(rowsEffectd + " rows effected");  
23         } catch (SQLException e) {  
24             System.out.println("SQL Exception: " + e.toString());  
25         } catch (ClassNotFoundException cE) {  
26             System.out.println("Class Not Found Exception: " + cE.toString());  
27         }  
28     }  
29 }  
30 }  
31
```

Discussion 3:

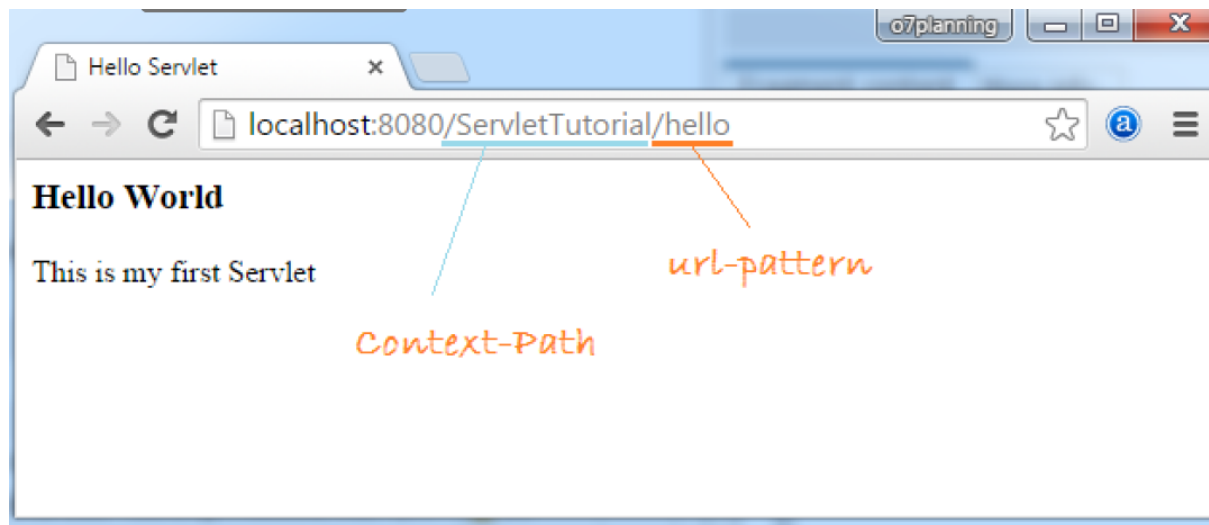

Discussion 4:



Discussion 5: Java Networking and Client/Server (Theory and Practice)

Discussion 6: Hibernate