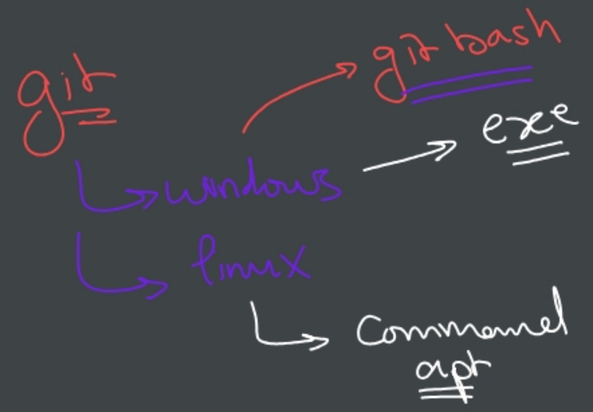
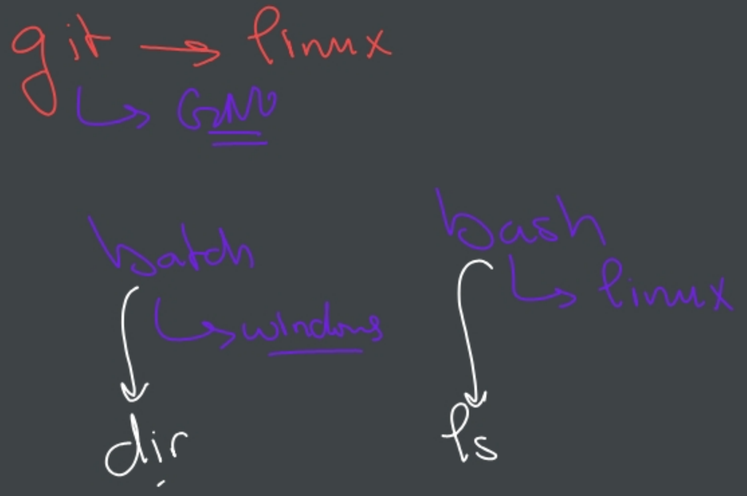
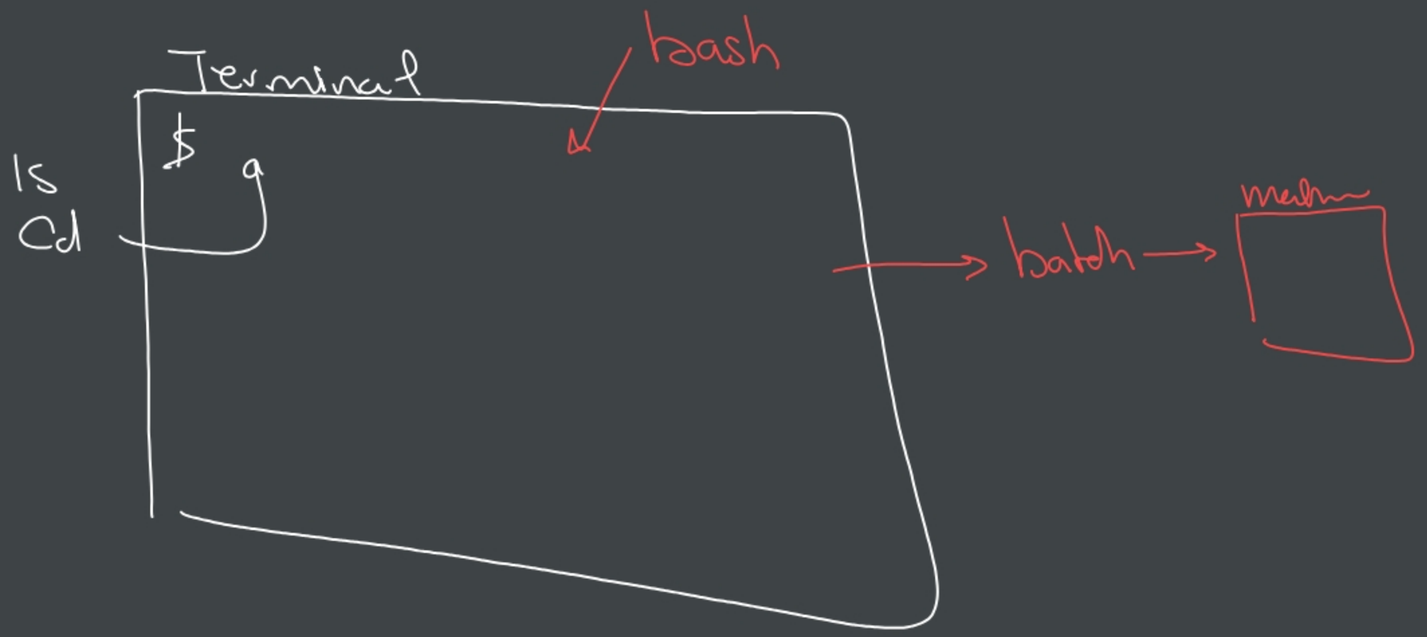
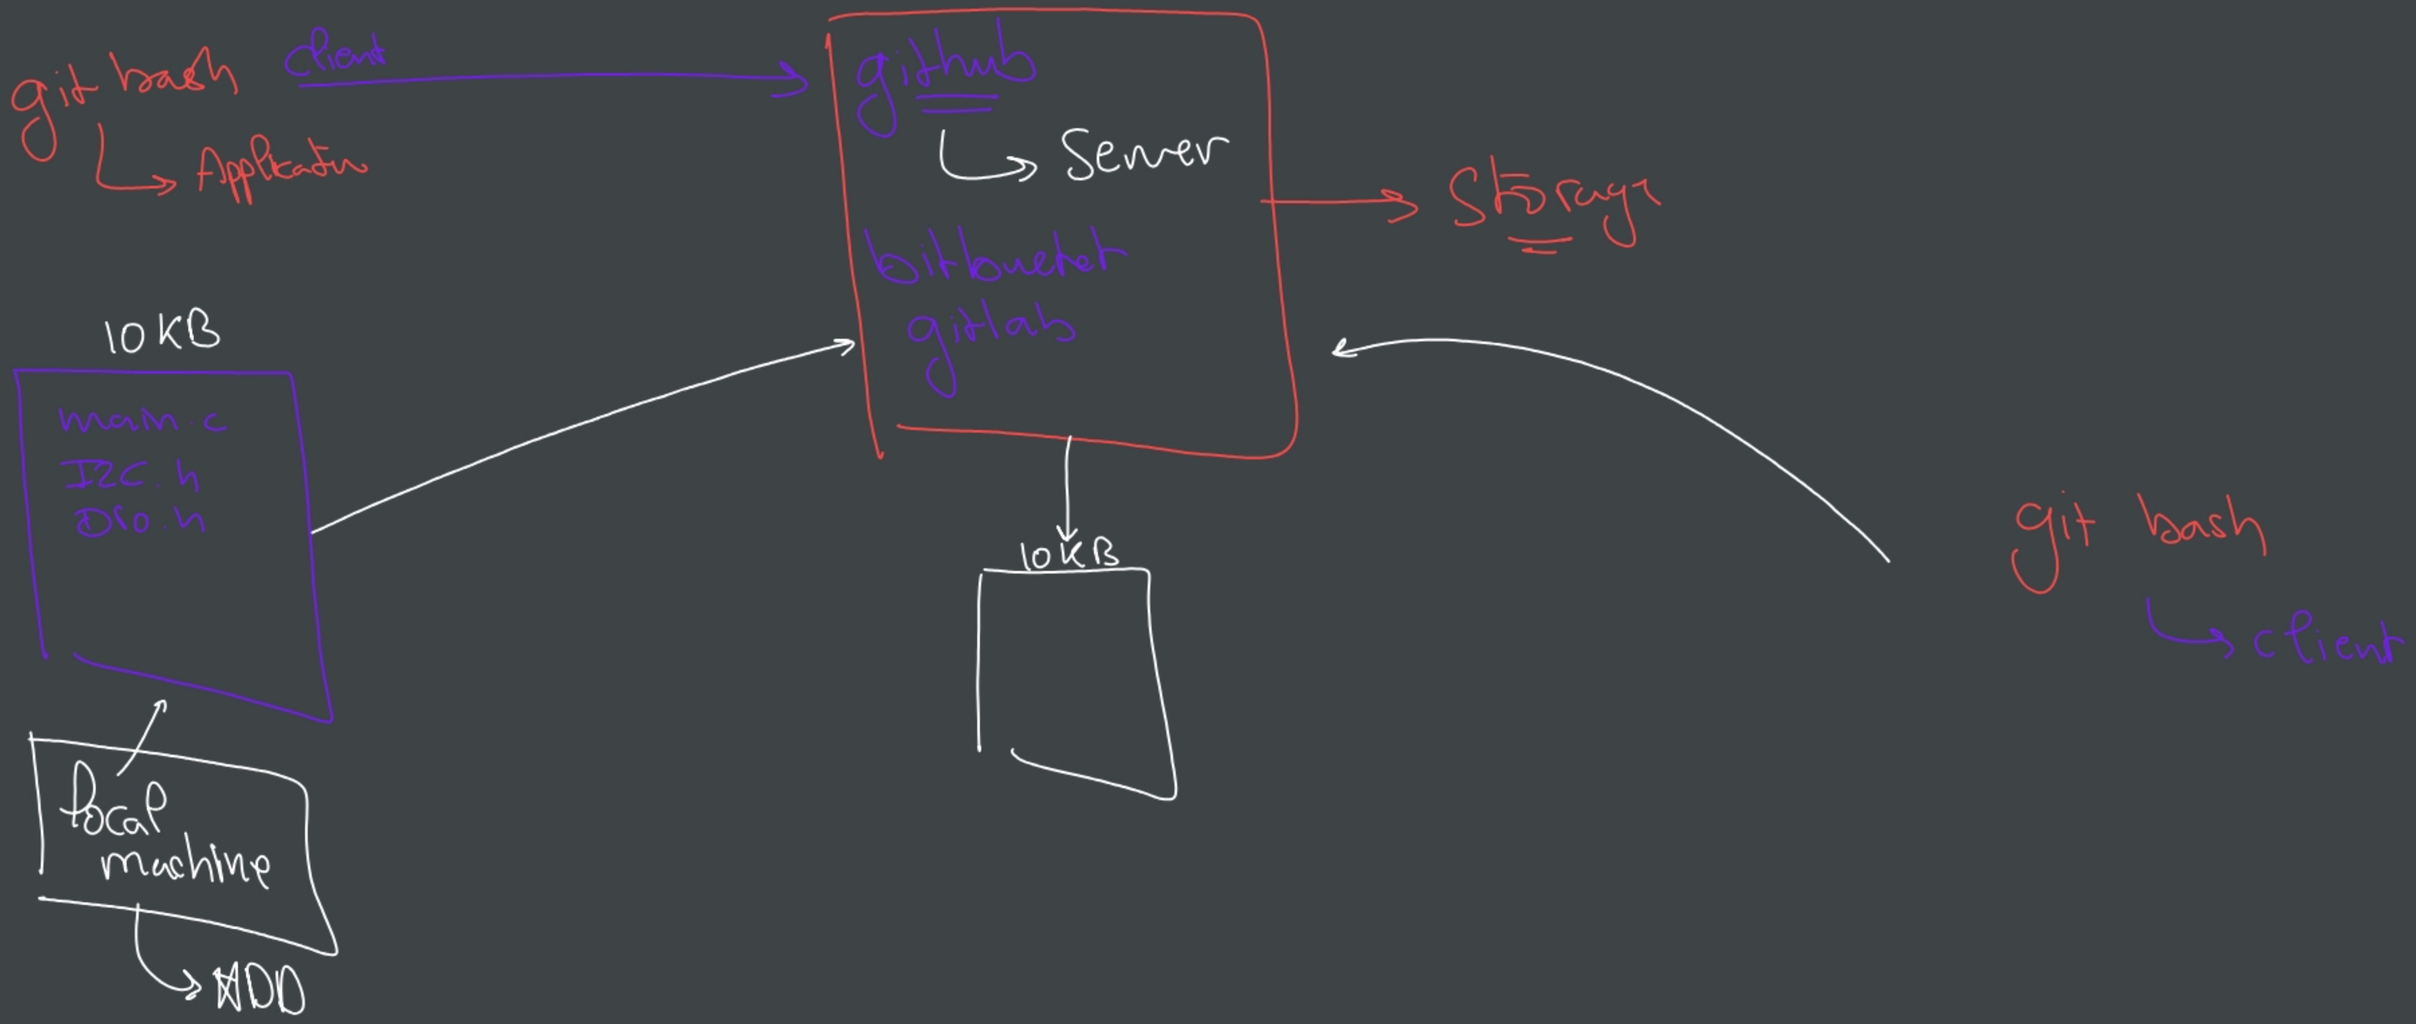
Outlines

1. git
2. C++ → SomeIP
3. Linux → Socket → Driver Ethernet
4. Embedded linux → SomeIP
   - @ Kitchen
   - 6. building tools
5. Device Drivers
6. S-Core


git
git bash
exe
windows
linux
Command apt


git
linux
GNU
batch
windows
dir
bash
linux
ls



Terminal
bash
$
ls
cd
batch
machine


git bash
client
Application
github
Server
bitbucket
gitlab
Storage
10KB
main.c
I2C.h
OLED.h
10KB
local machine
HDD
git bash
client


git


↳ tracking version System


↳ Save spaces local HDD

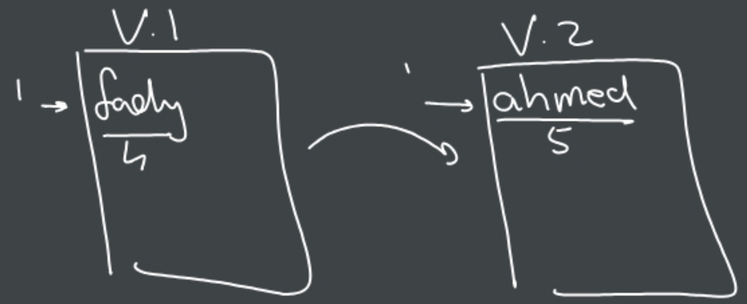



1. git application
2. Create folder
3. git init
4. your work start from here

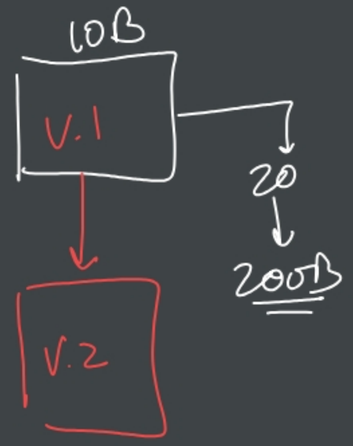

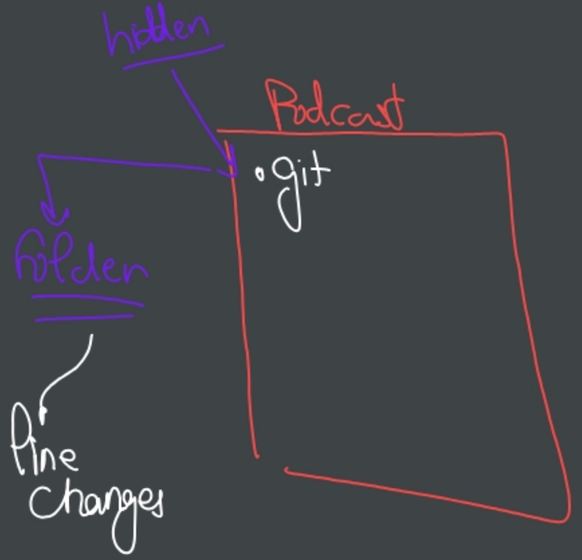

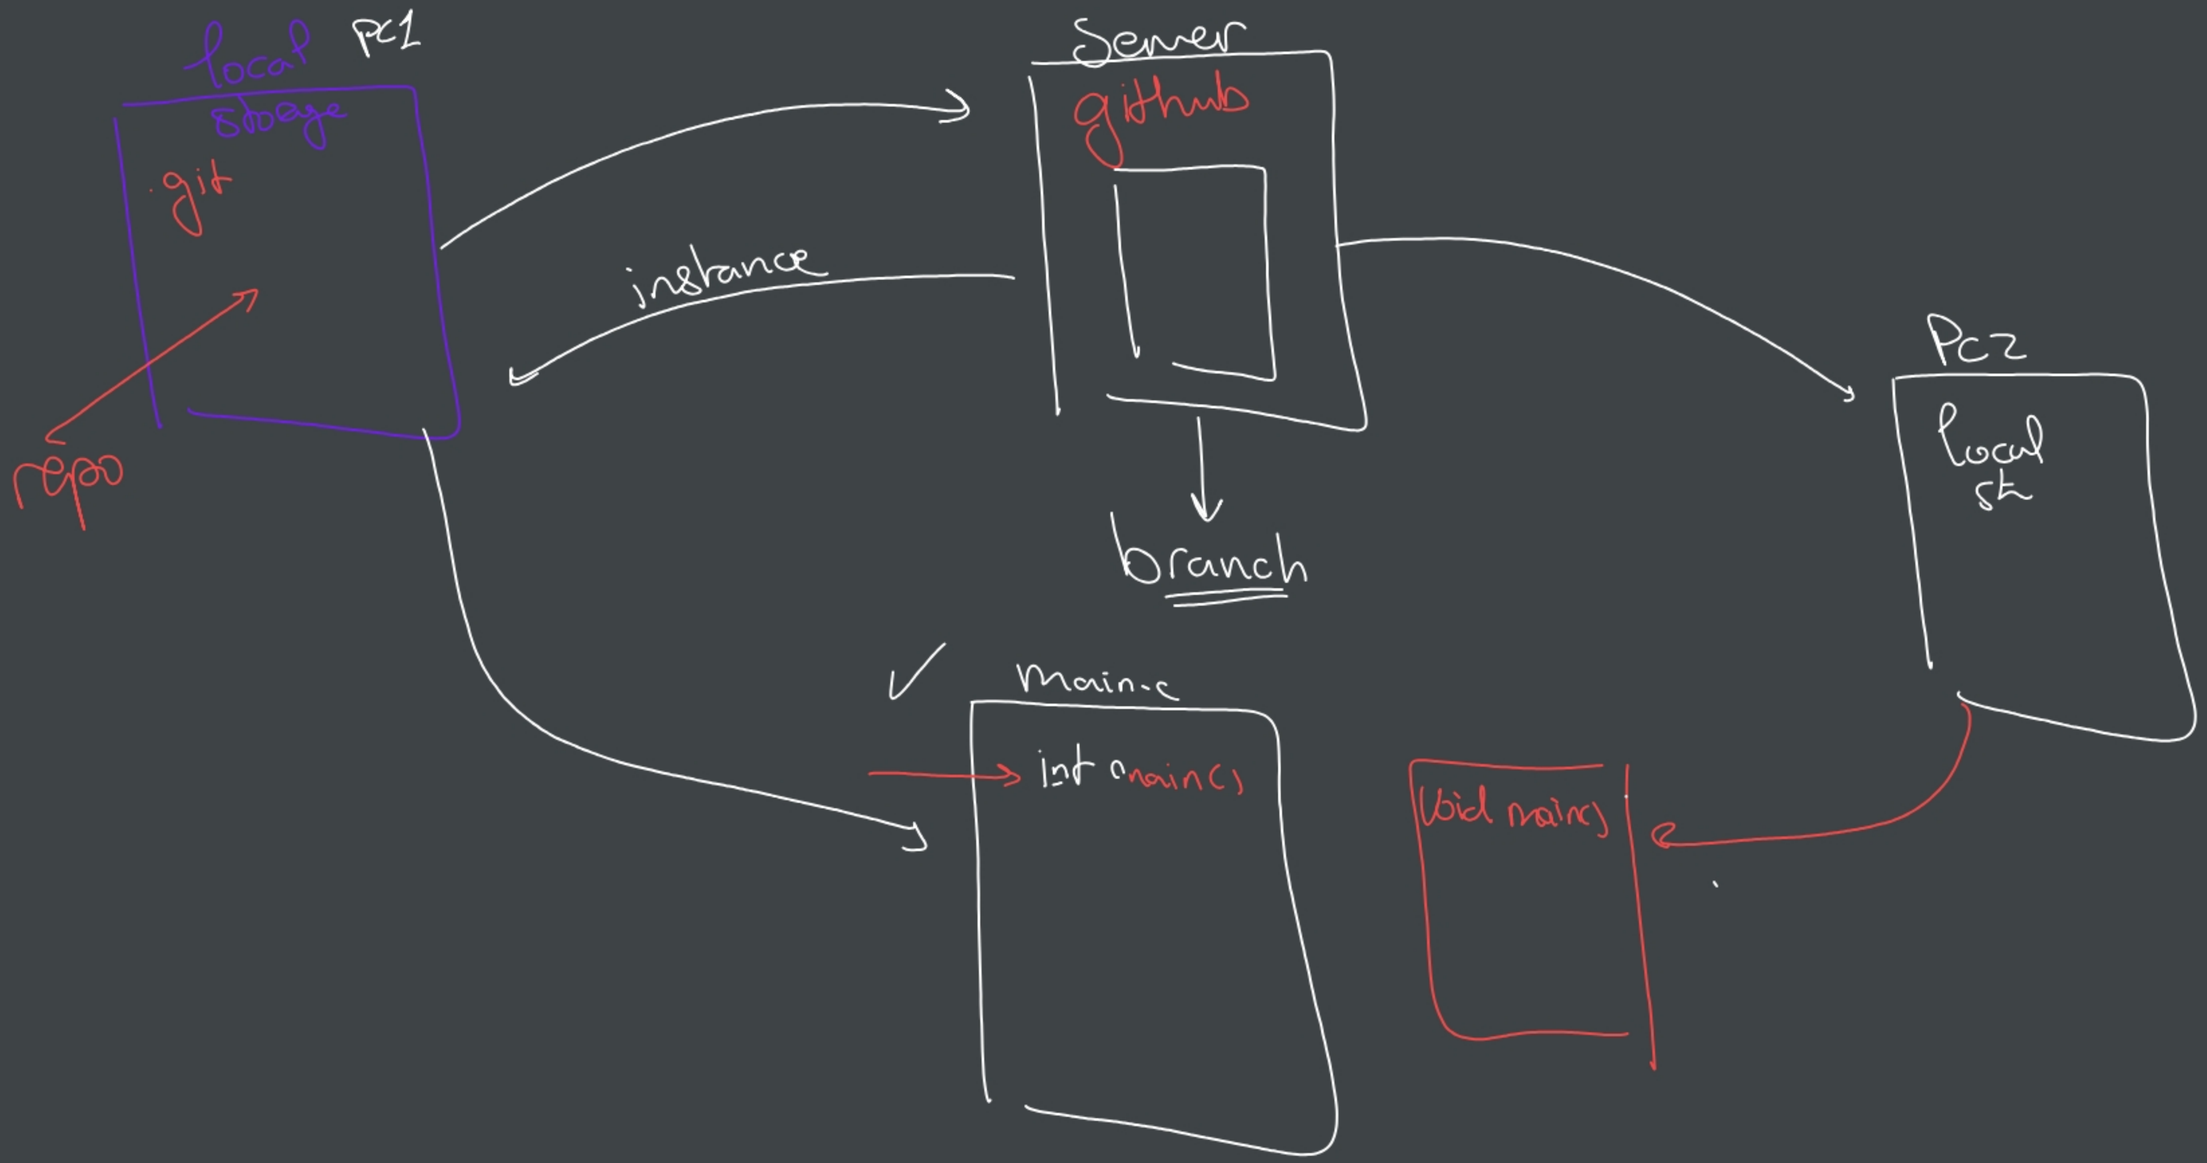
local PC1
storage
.git
repo
Server
github
instance
branch
PC2
local
st
main.c
int main()
void main()

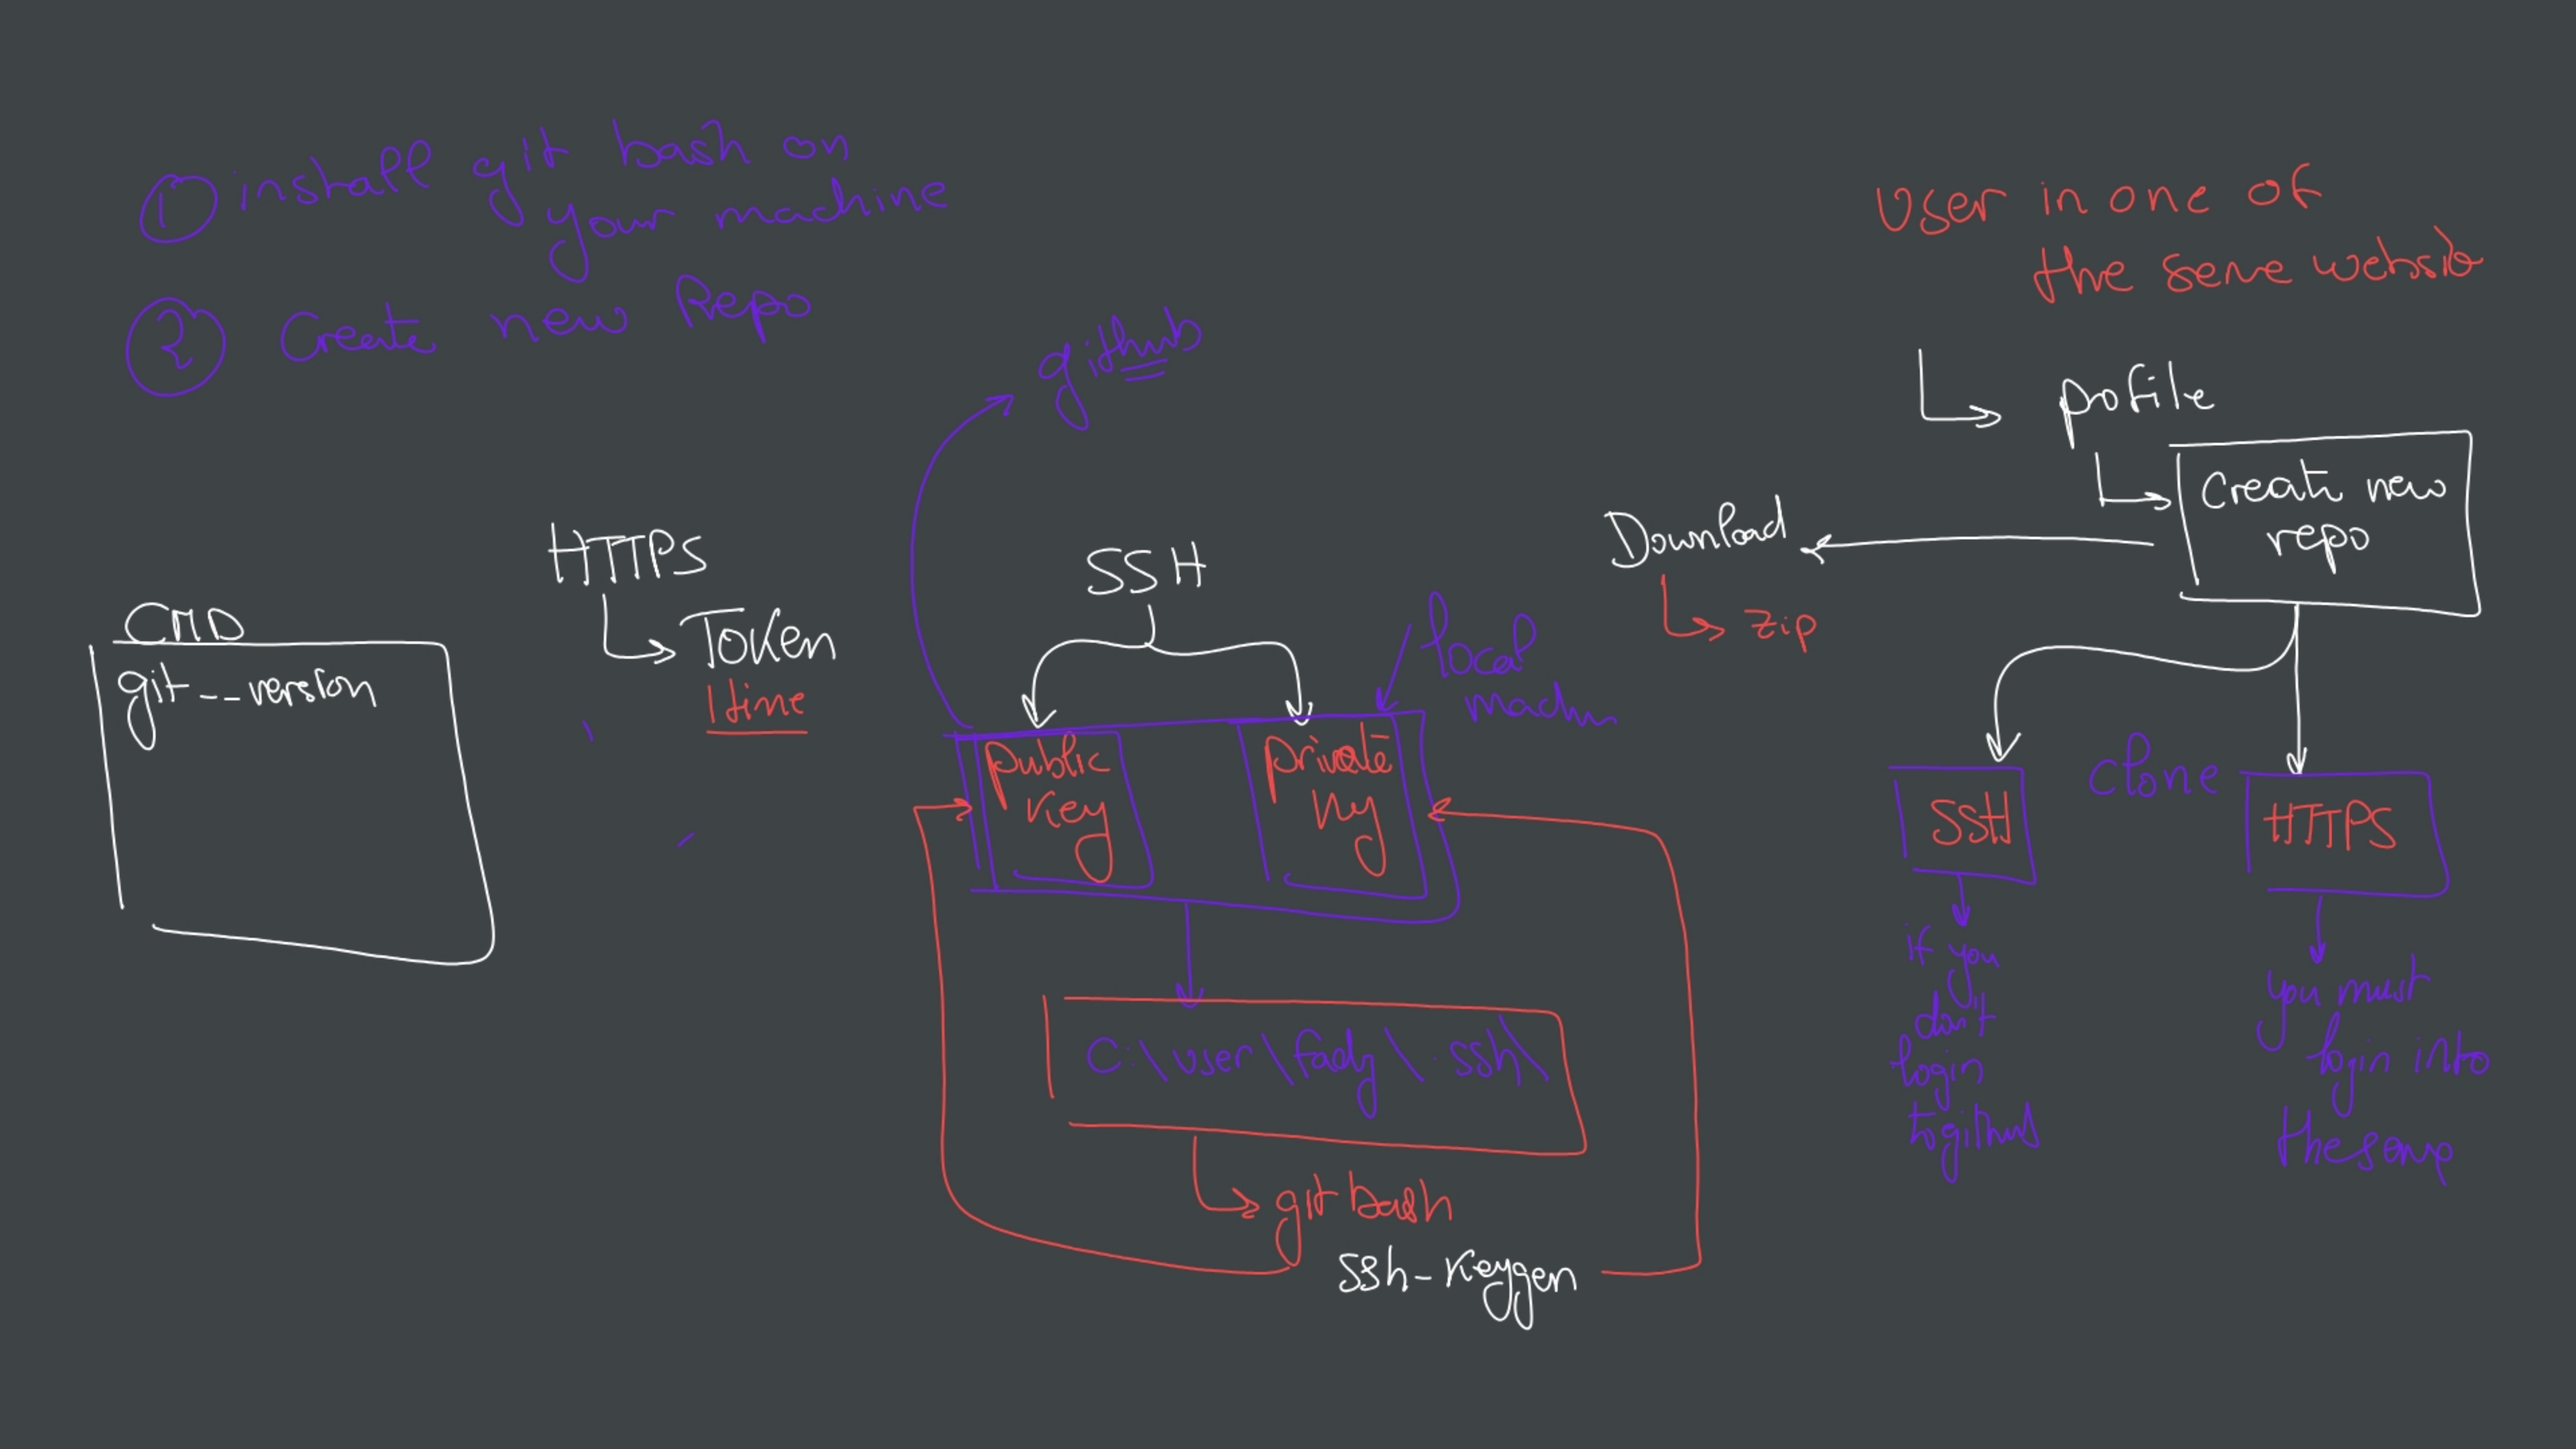
1 install git bash on your machine
2 Create new Repo
CMD
git --version
HTTPS
Token
1 time
github
SSH
local machine
Public key
Private key
C:\user\fady\.ssh\
git bash
ssh-keygen
User in one of the sene website
profile
Create new repo
Download
zip
clone
SSH
HTTPS
if you don't login to github
you must login into the sene

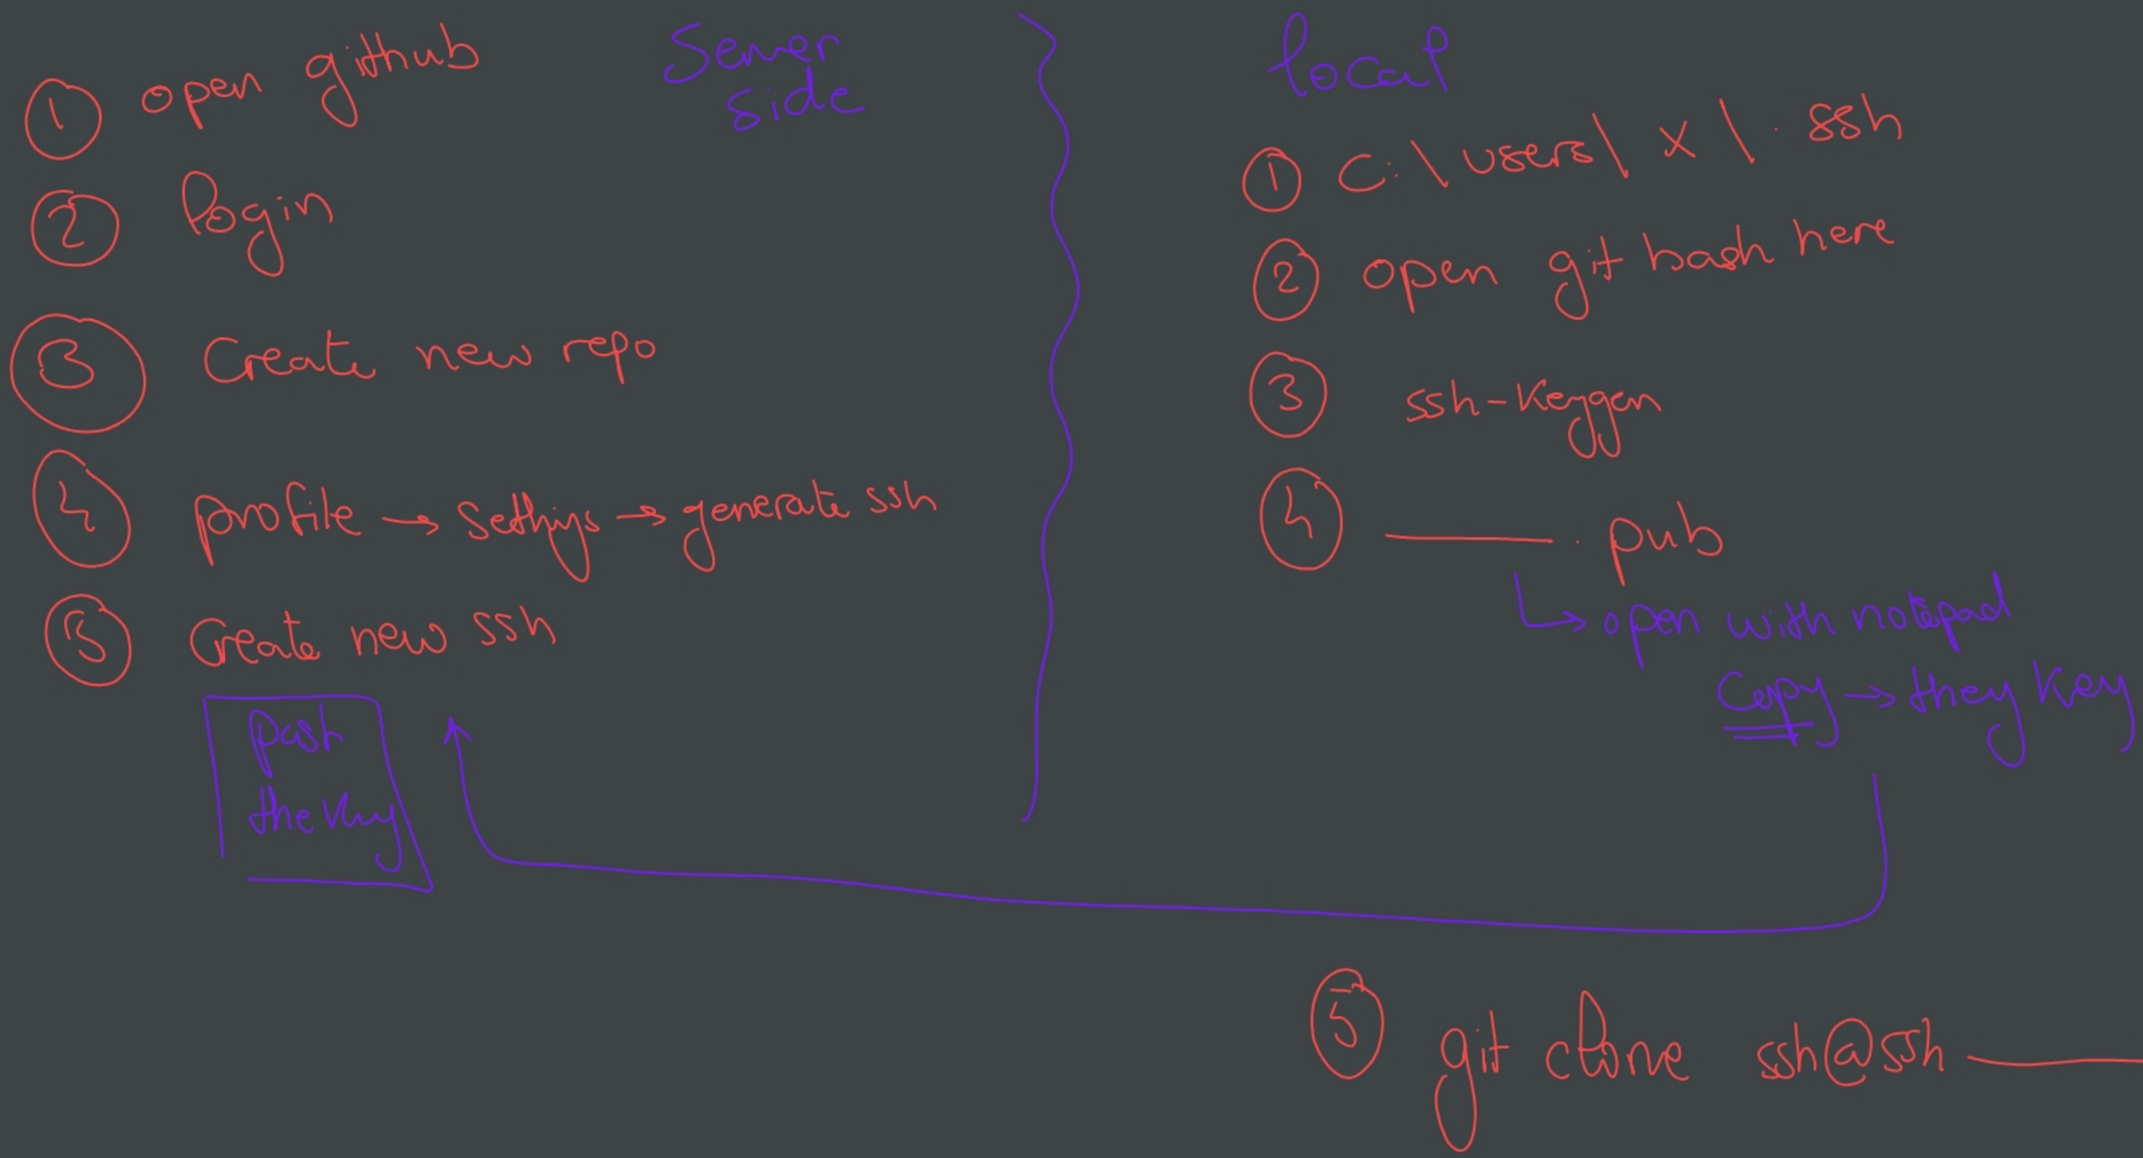
1 open github
2 login
3 Create new repo
4 profile → Settings → generate ssh
5 Create new ssh
Past the key
Server side
local
1 C:\Users\x\.ssh
2 open git bash here
3 ssh-keygen
4 ——— .pub
→ open with notepad
Copy → they key
5 git clone ssh@ssh ——— .git

VSCode
in the repo local

↳ Apply my changes

1. git clone (x1)


2. git add .

3. git commit -m "____"


4. git push



new untracked file

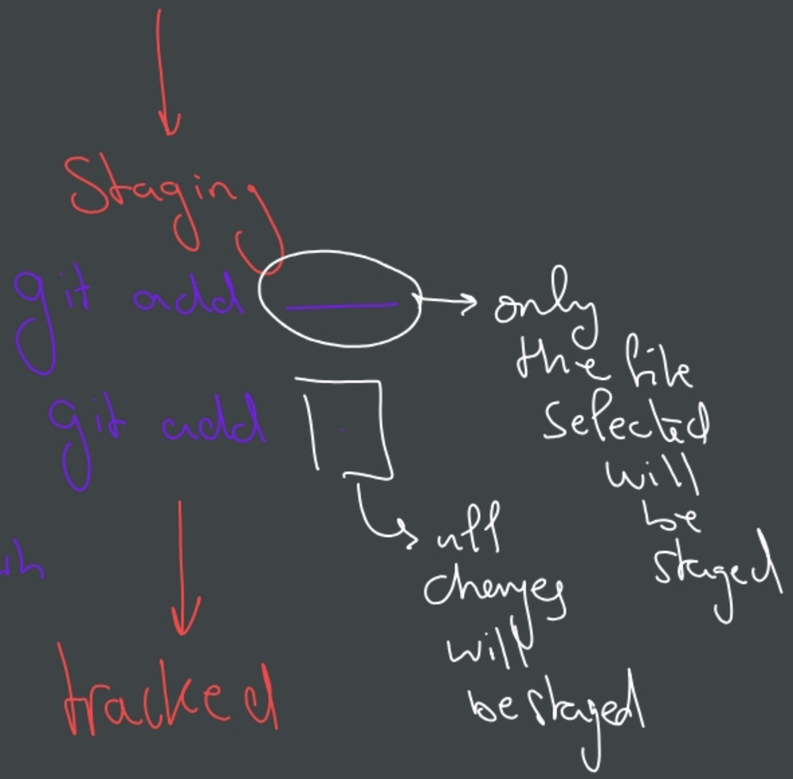

change in tracked file

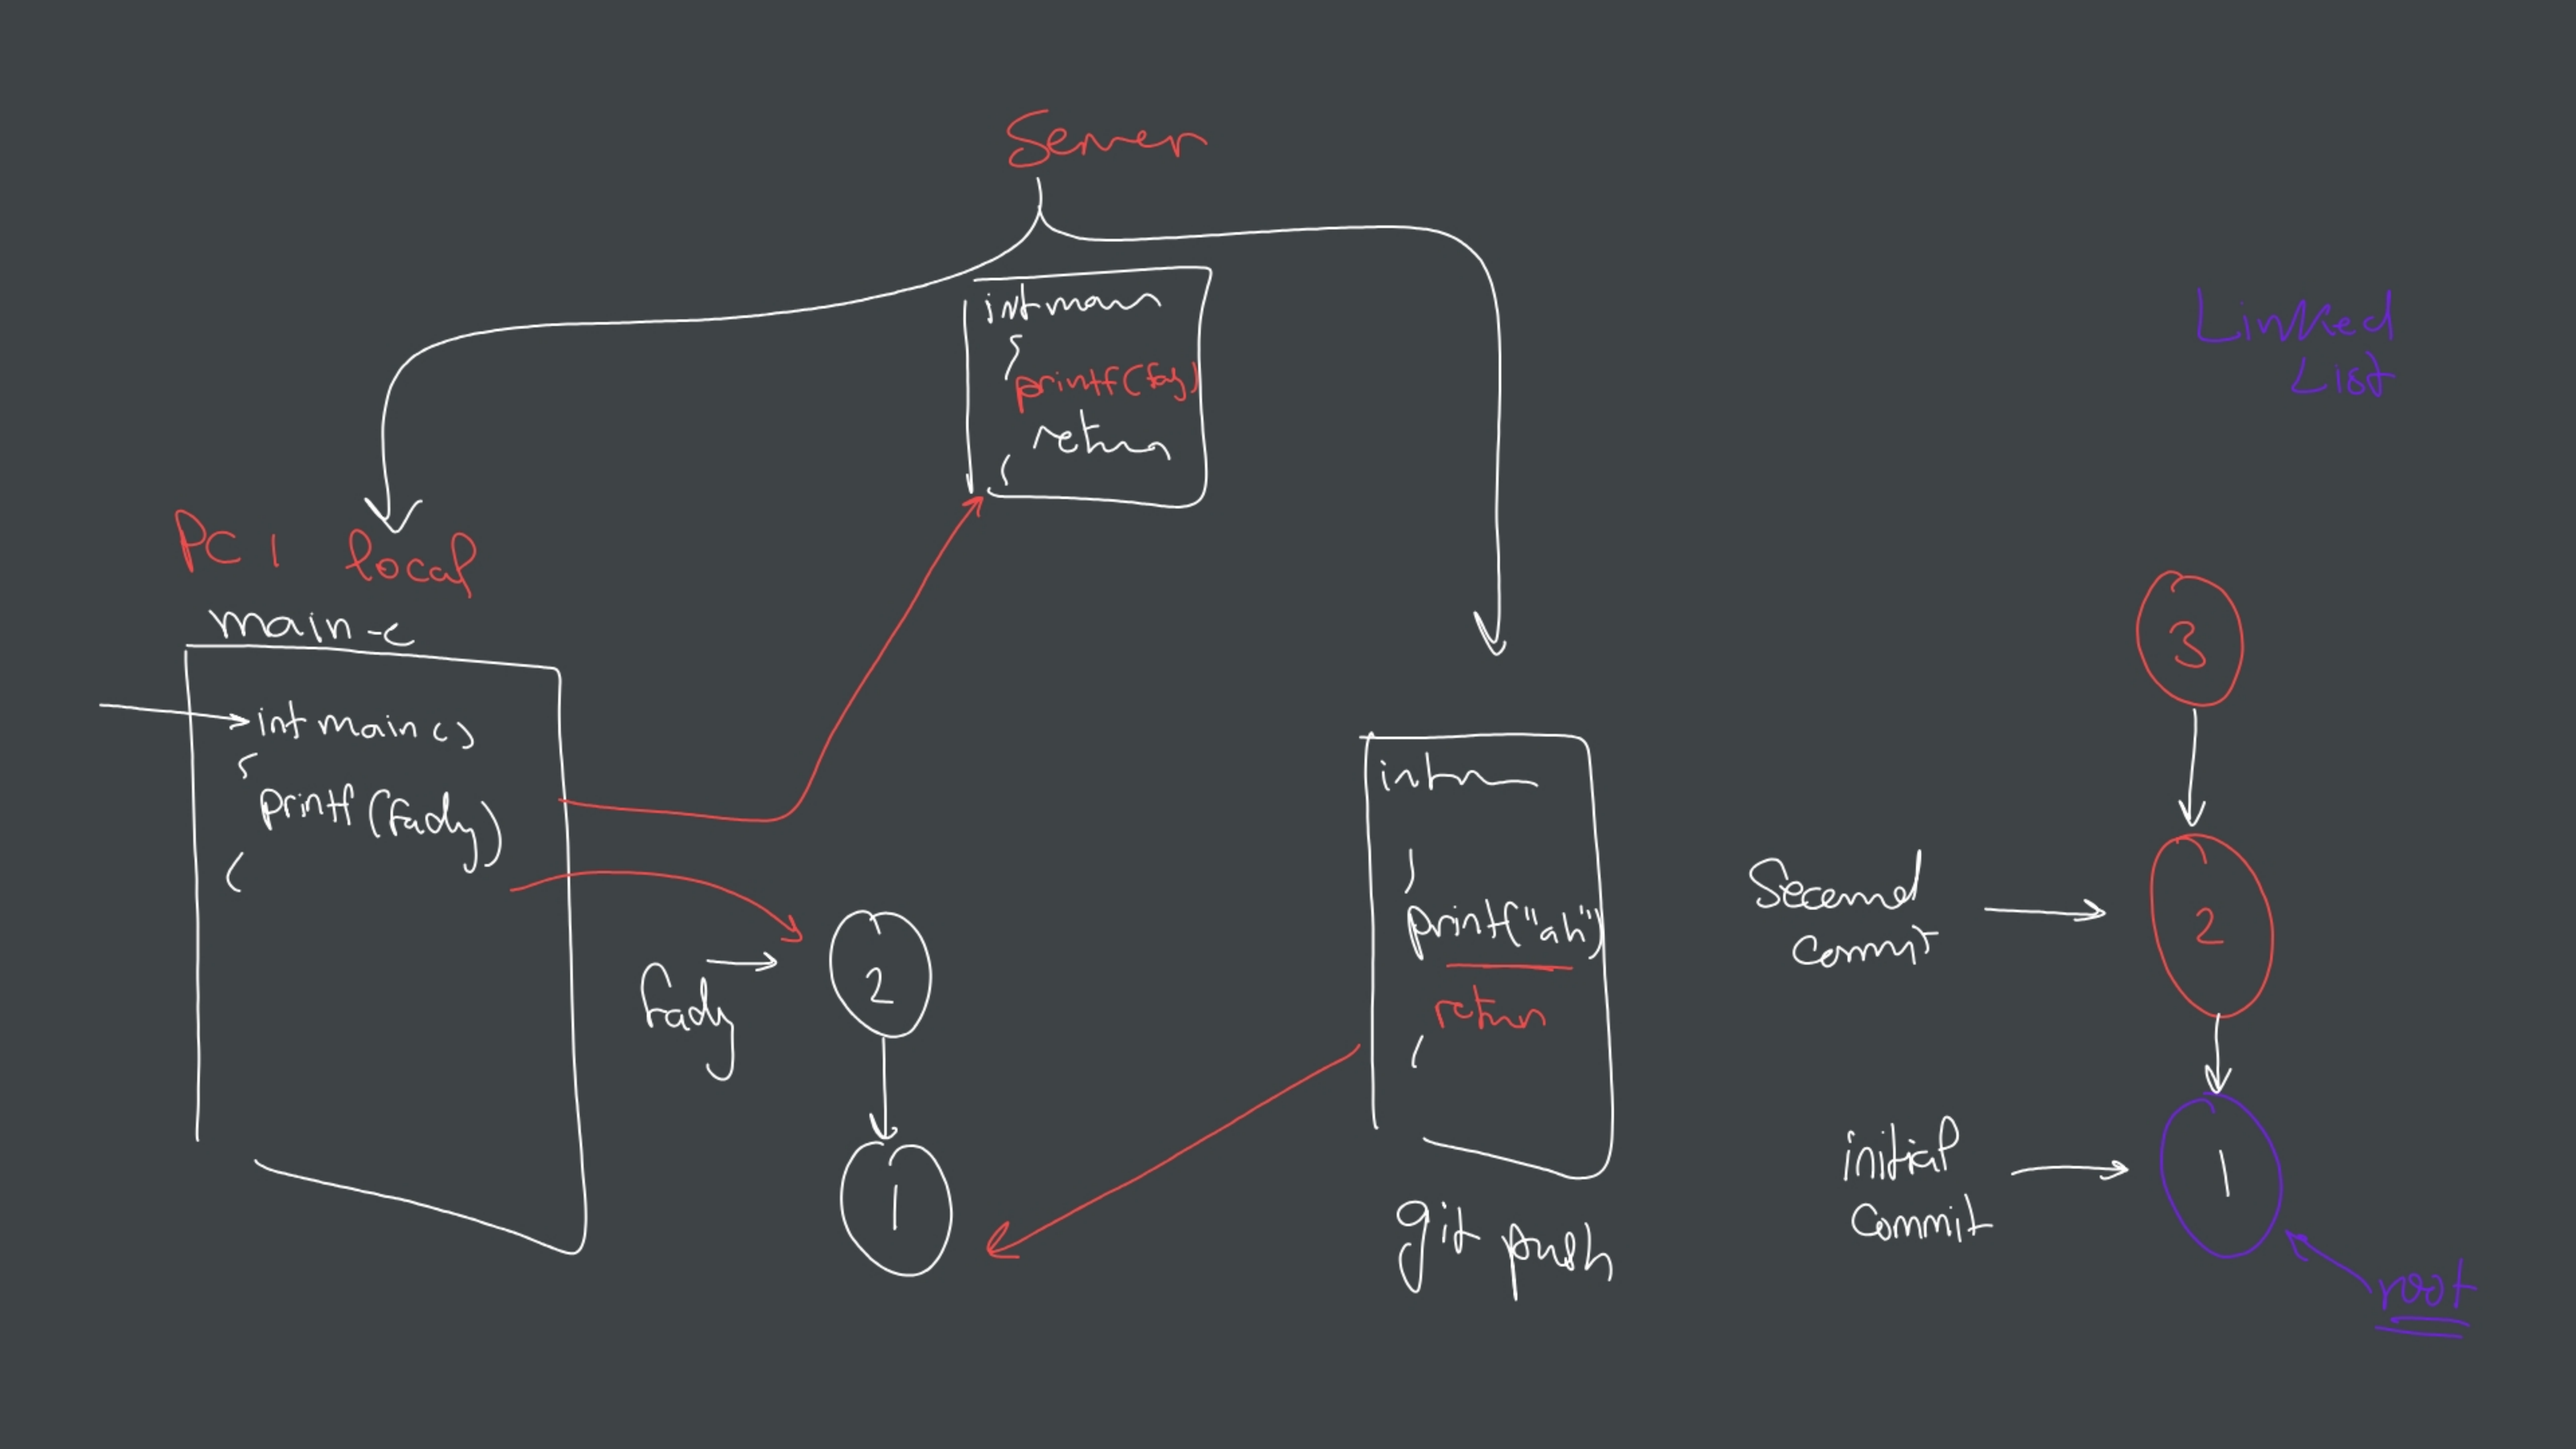

Server
int main
{
printf(fady)
return
}
PC 1 local
main.c
int main()
{
printf(fady)
{
fady
2
1
int main
{
printf("ah")
return
}
git push
Linked List
Second commit
3
2
initial commit
1
root

git push

first he run

git fetch

```
int main
{
printf("hi");
}
```

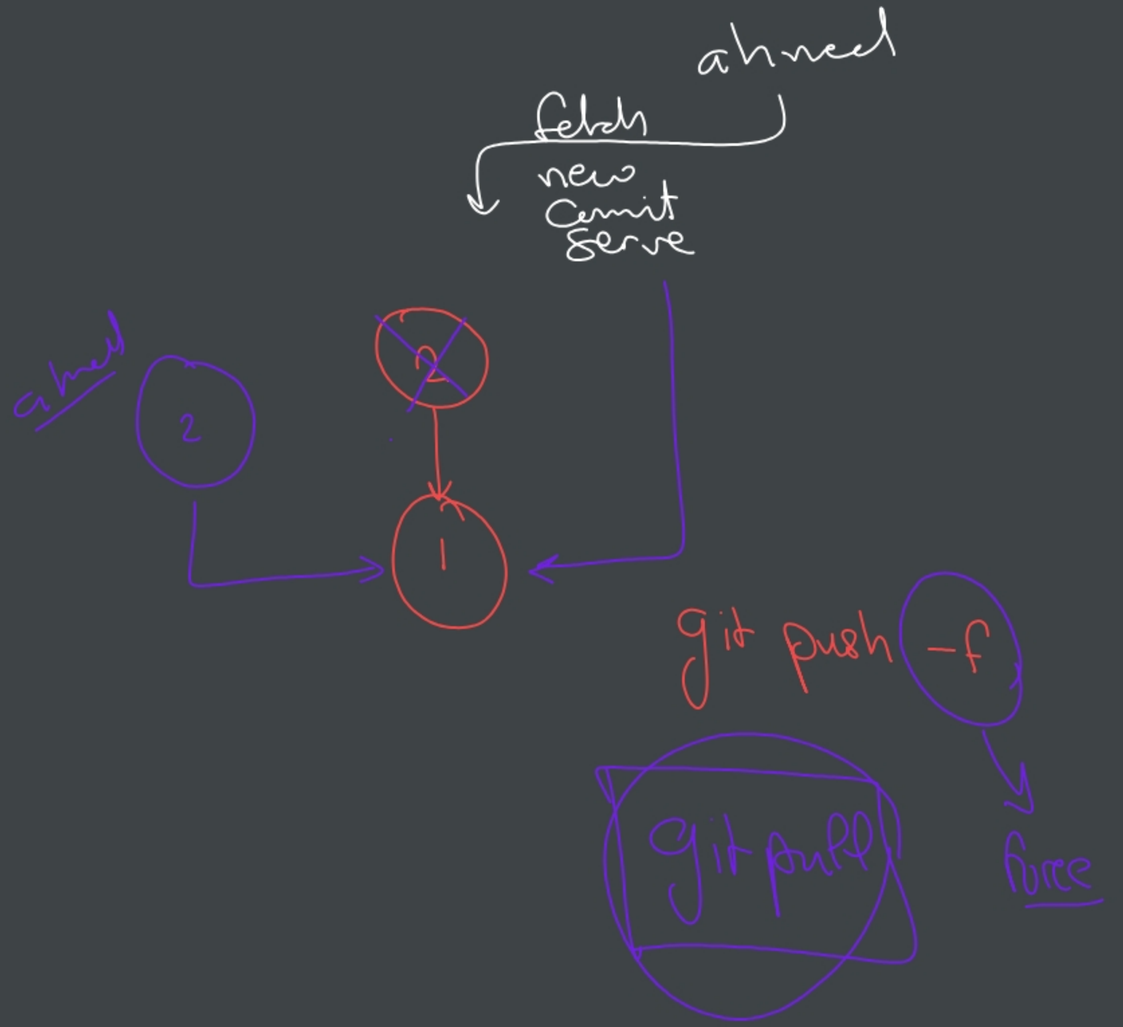


Summarize

1. git clone
2. git add
3. git commit
4. git push
5. git fetch
6. git pull


→ for the Server interact

Branch

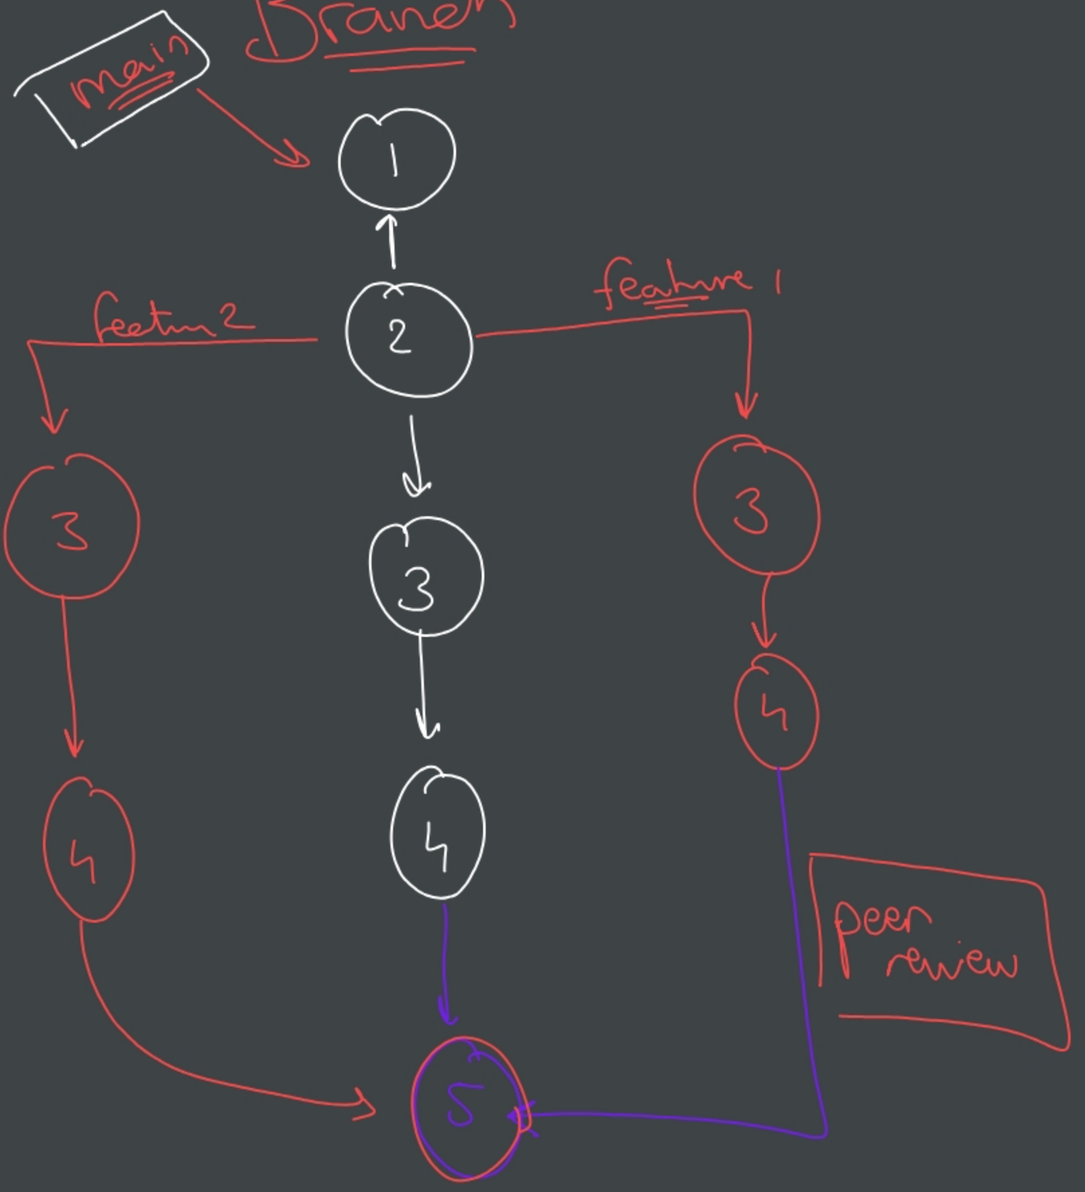


Any feature that you will create make to create a branch ✓

```
git checkout -b feature/I2C/newDesign
```

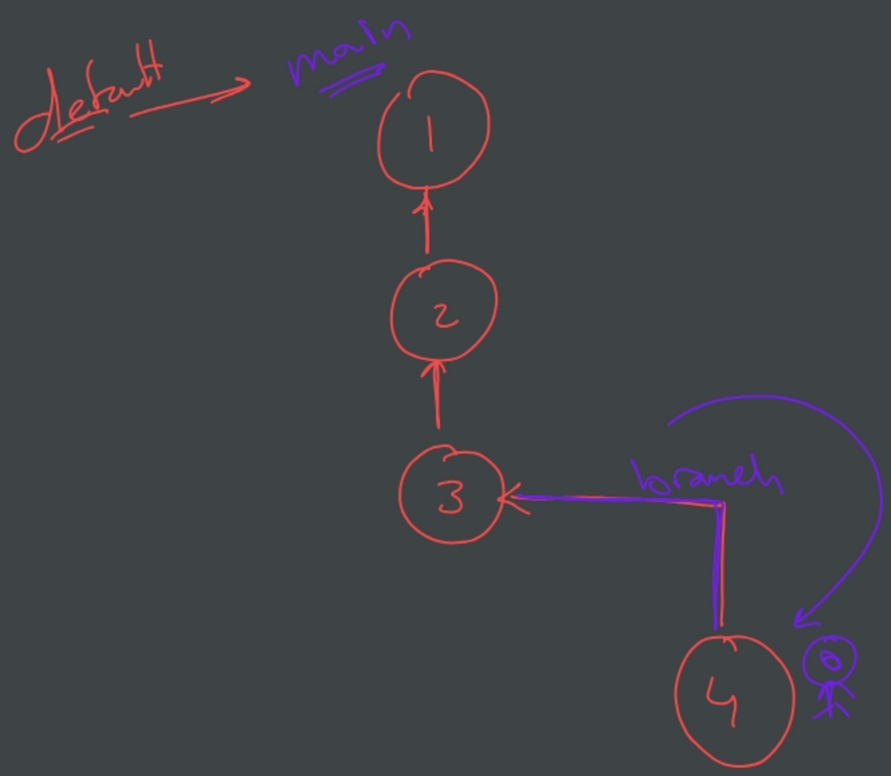


Merge Concept


- Commit

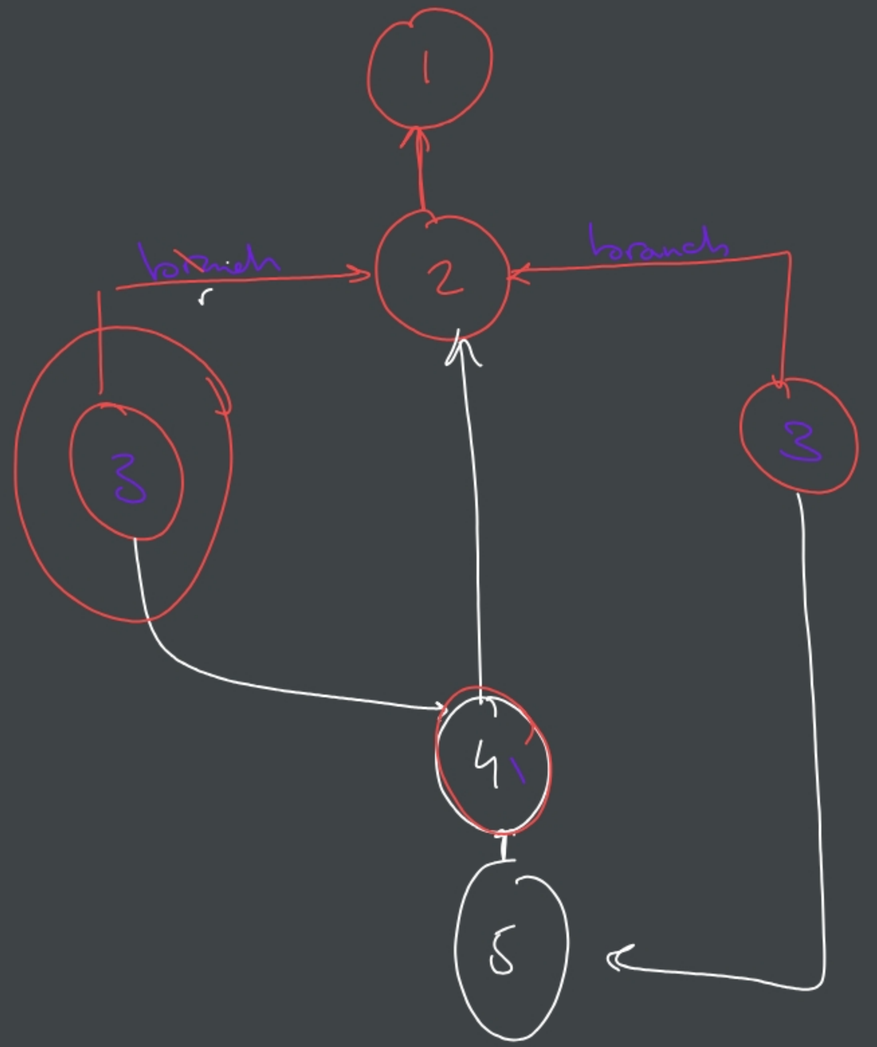



Rebase Concept


doesn't require any Commit

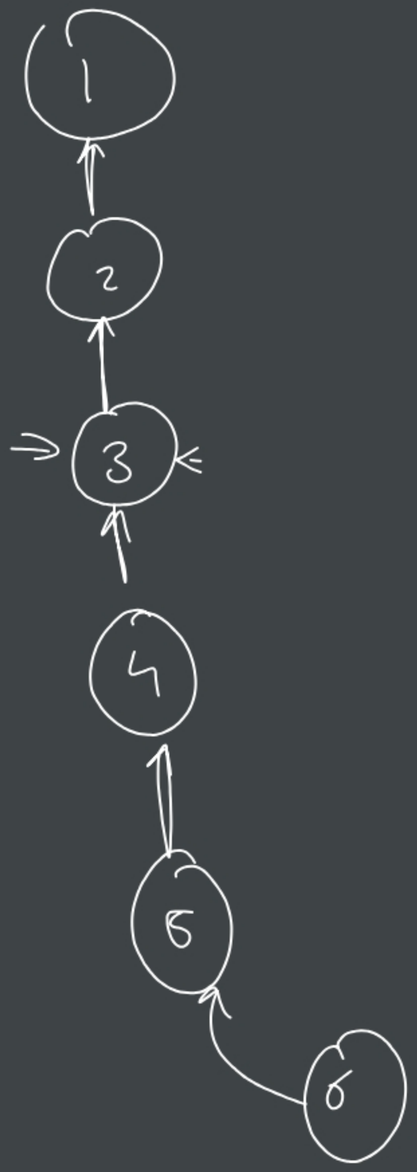

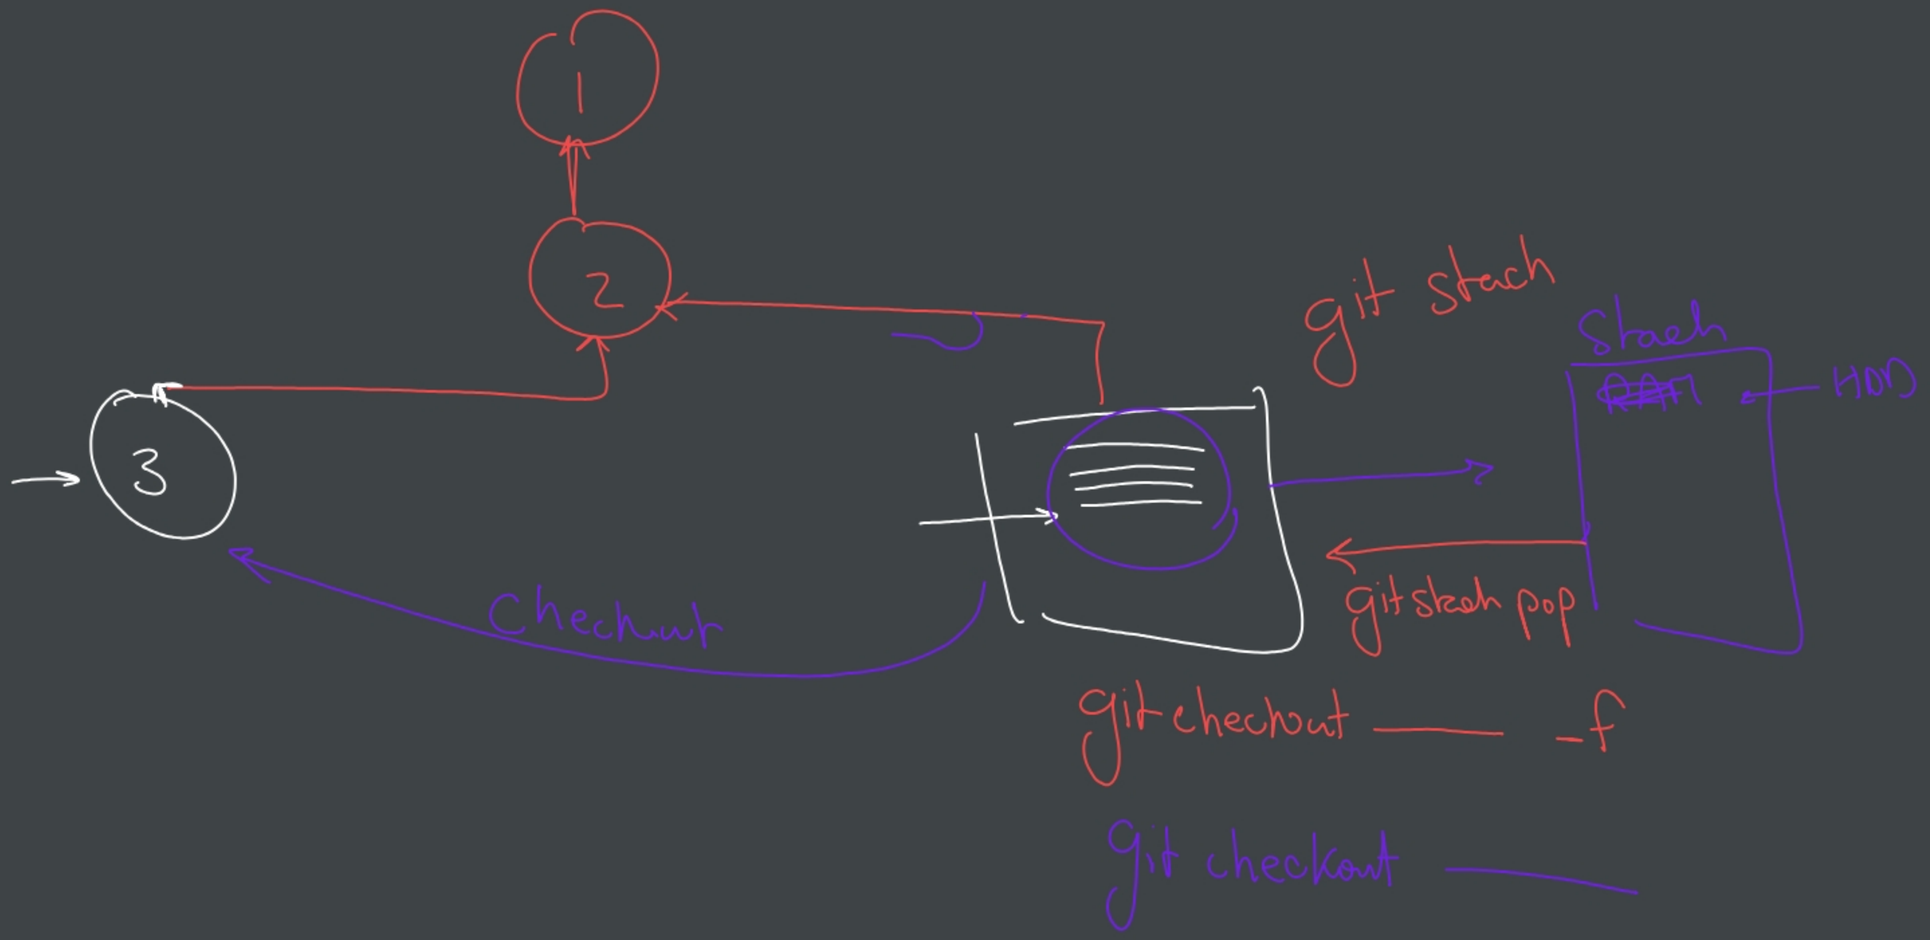
1
2
3
git stash
Stash
HDD
checkout
git stash pop
git checkout —— -f
git checkout ——

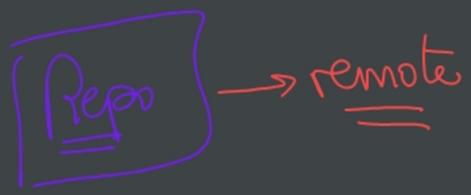

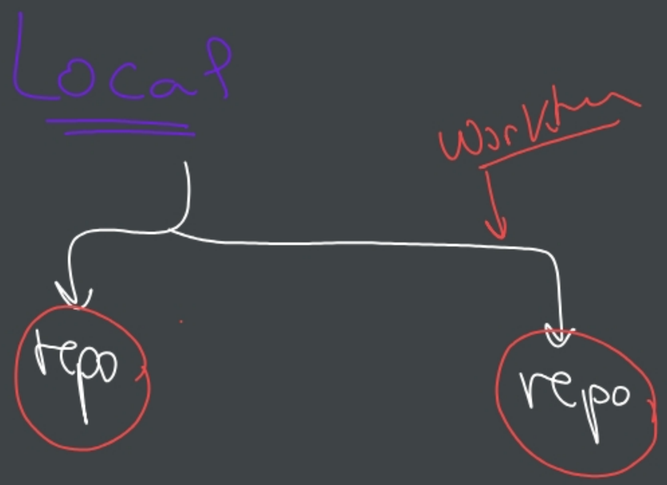

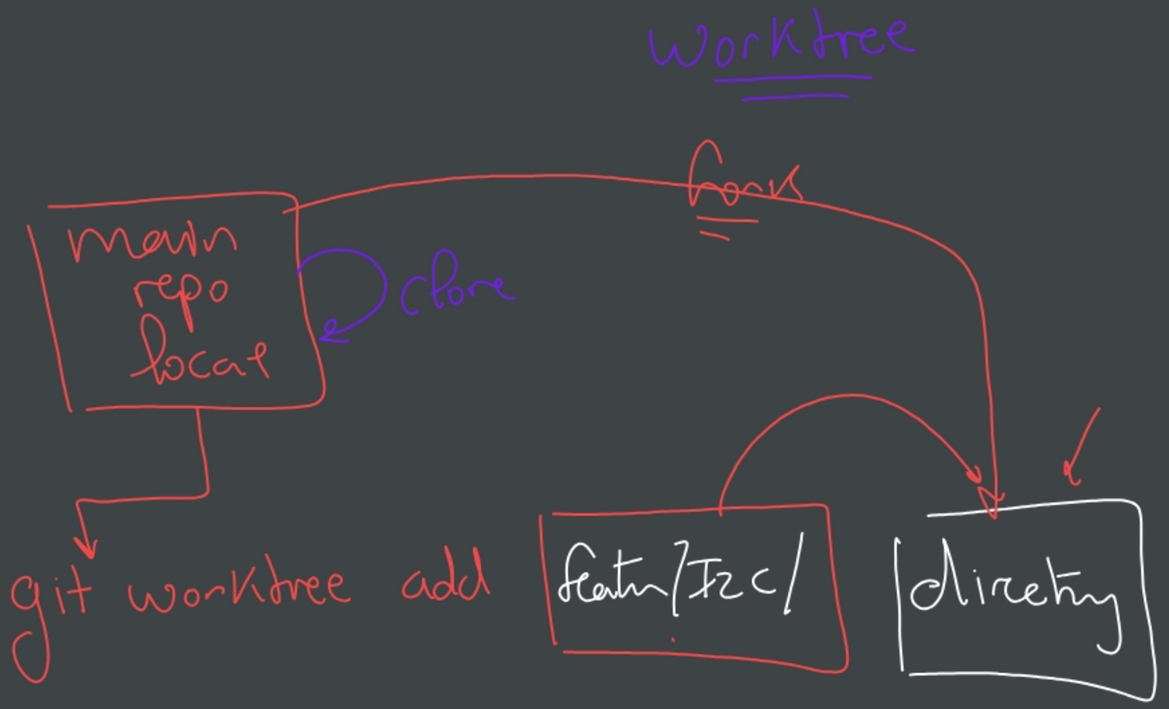

git worktree list

git worktree remove

git mainly used to track any file can view by notepad

↳ git lfs initialize

git push .pdf .png

lfs

↳ large file system

