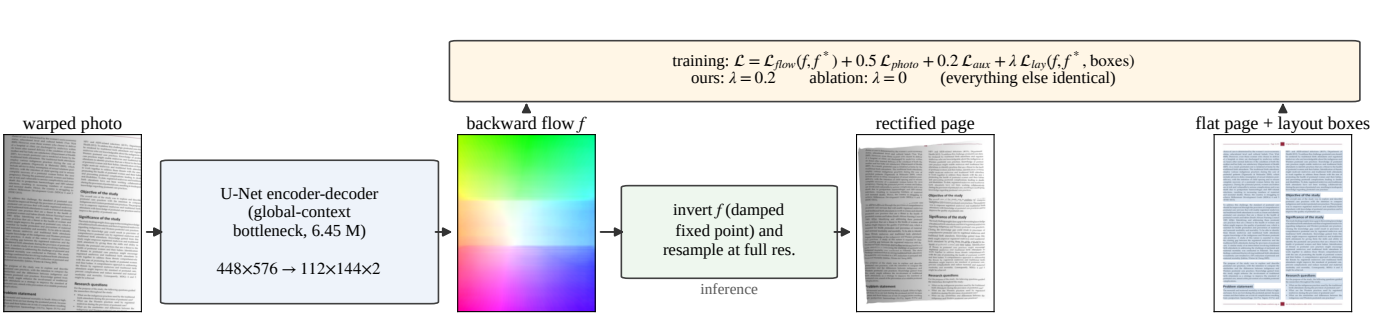

training: $\mathcal{L} = \mathcal{L}_{flow}(f, f^*) + 0.5\,\mathcal{L}_{photo} + 0.2\,\mathcal{L}_{aux} + \lambda\,\mathcal{L}_{lay}(f, f^*, \text{boxes})$
ours: $\lambda = 0.2$ ablation: $\lambda = 0$ (everything else identical)
warped photo
U-Net encoder-decoder (global-context bottleneck, 6.45 M)
448×576 → 112×144×2
backward flow f
invert f (damped fixed point) and resample at full res.
inference
rectified page
flat page + layout boxes