

Linux User & Group Management System

ITI _SYSTEM_ADMIN 46ALEXANDRIA

Prepared By
Emad ElSayed Singab

Main Menu

This screen shows the main menu of the system.

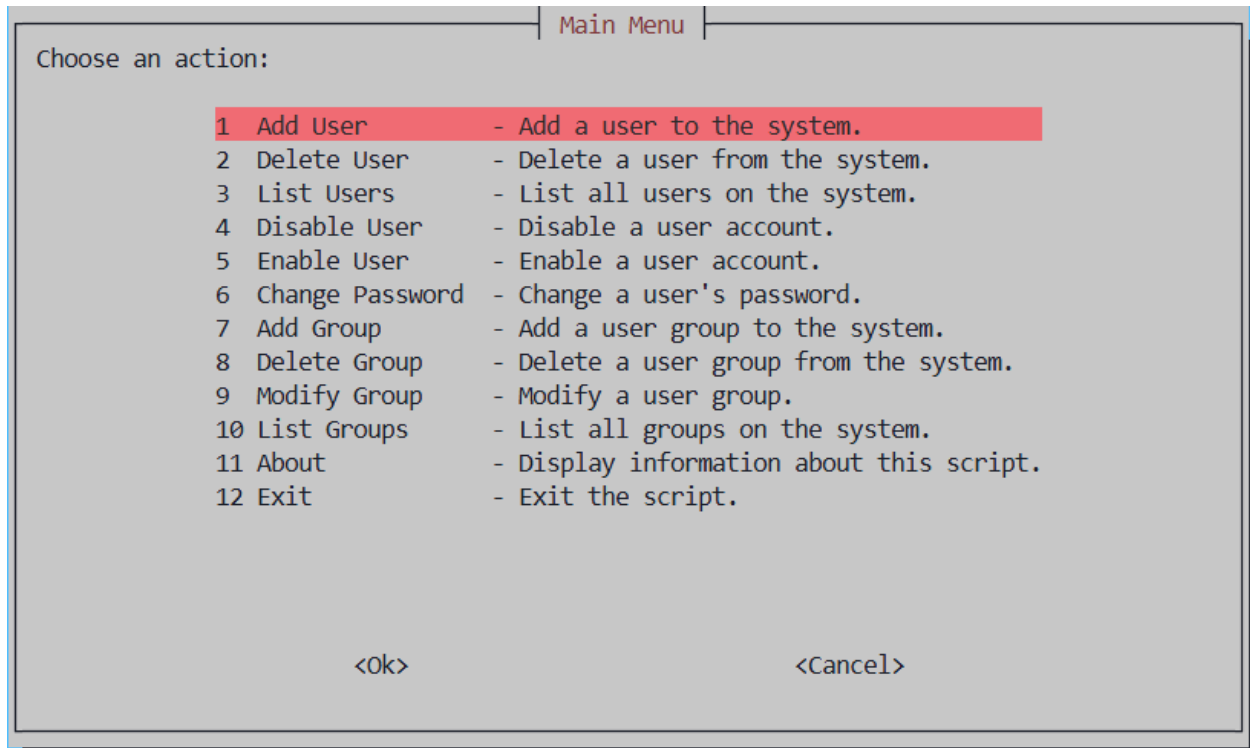

The image shows a terminal window titled "Main Menu". Inside the window, the text "Choose an action:" is displayed. Below it is a list of 12 numbered options, each with a description. The first option, "1 Add User - Add a user to the system.", is highlighted with a red background. At the bottom of the window, there are two buttons: "<Ok>" and "<Cancel>".


Number	Action	Description
1	Add User	- Add a user to the system.
2	Delete User	- Delete a user from the system.
3	List Users	- List all users on the system.
4	Disable User	- Disable a user account.
5	Enable User	- Enable a user account.
6	Change Password	- Change a user's password.
7	Add Group	- Add a user group to the system.
8	Delete Group	- Delete a user group from the system.
9	Modify Group	- Modify a user group.
10	List Groups	- List all groups on the system.
11	About	- Display information about this script.
12	Exit	- Exit the script.

It allows the administrator to select different operations such as adding users, deleting users, managing groups, and changing passwords through a simple interactive interface.

Add User Process

This sequence shows the process of adding a new user to the system.

First, the administrator enters the username.

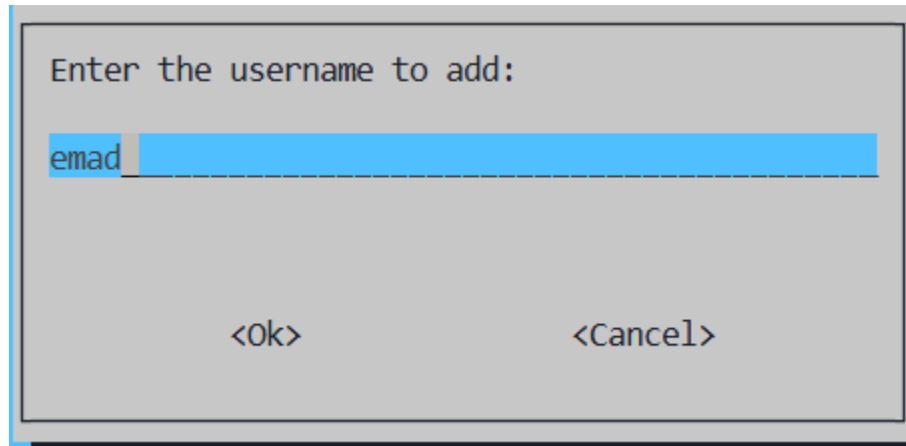


Enter the username to add:

emad


<Ok> <Cancel>

Then, the system prompts for a password and asks to confirm it.

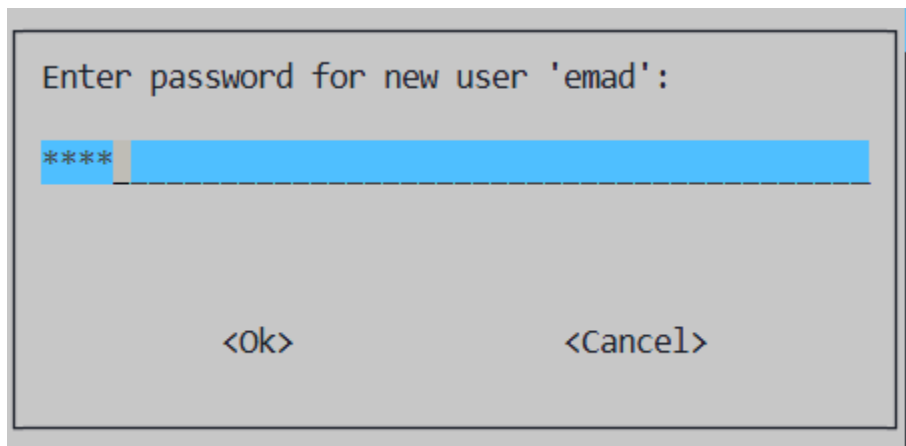

Enter password for new user 'emad':


<Ok> <Cancel>

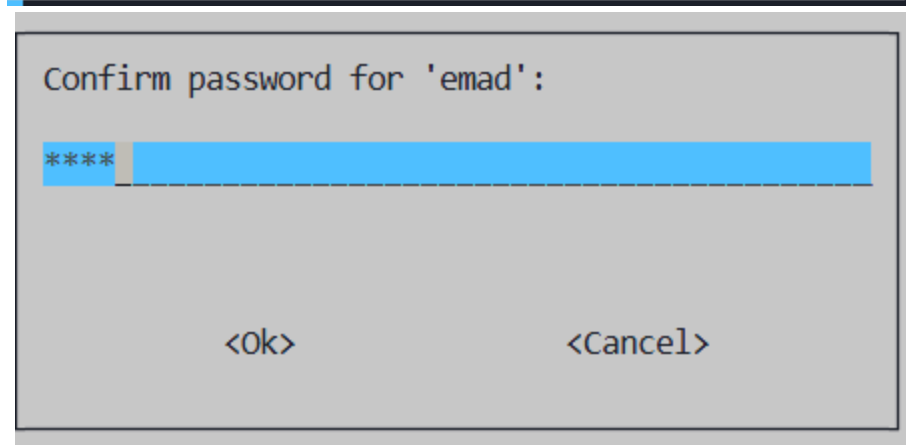

Confirm password for 'emad':


<Ok> <Cancel>

After successful validation, the user is created, and a confirmation message is displayed.

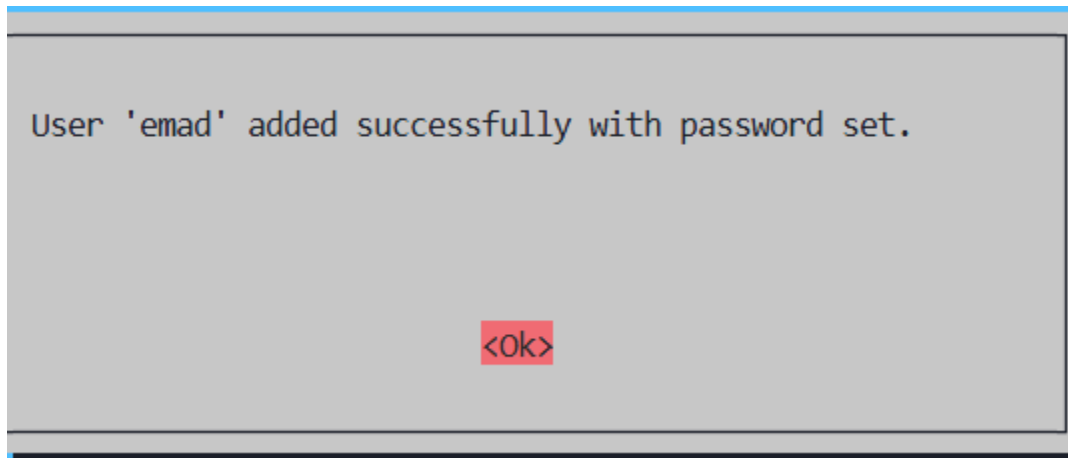

List Users

This screen displays all system users using an interactive interface powered by fzf.

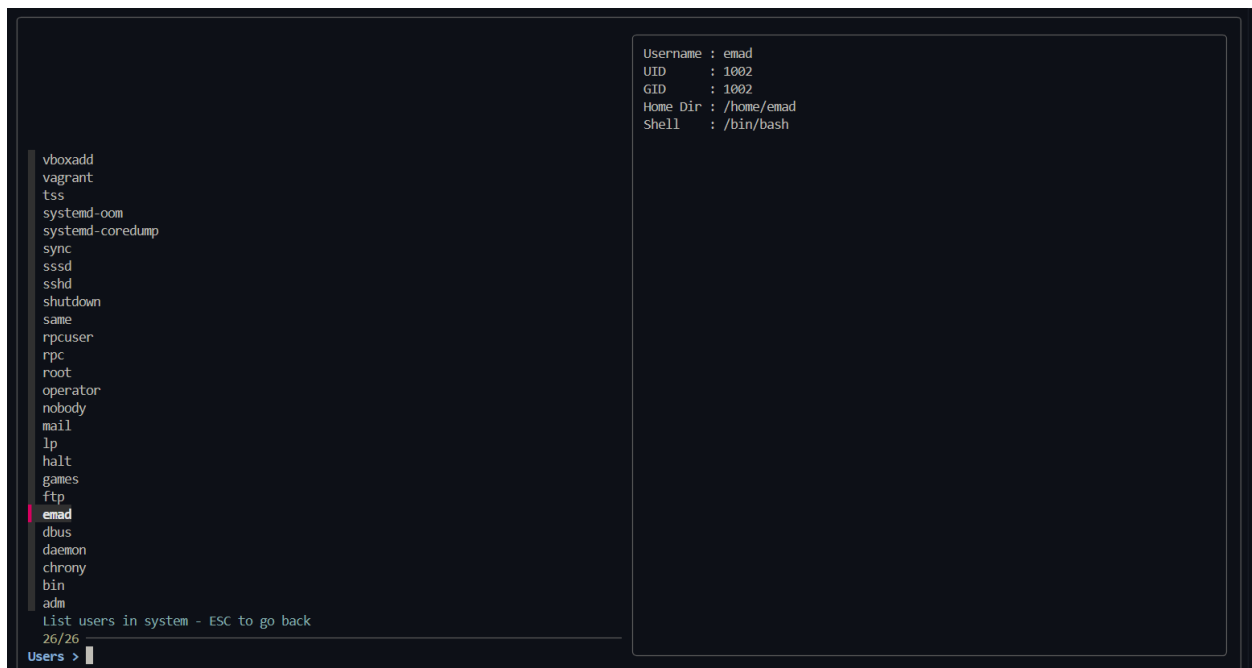


The administrator can navigate through the list and view detailed information about each user, such as UID, GID, home directory, and shell.


Delete User

This sequence shows how a user is deleted from the system.

First, the administrator selects the user from the list using an interactive interface.

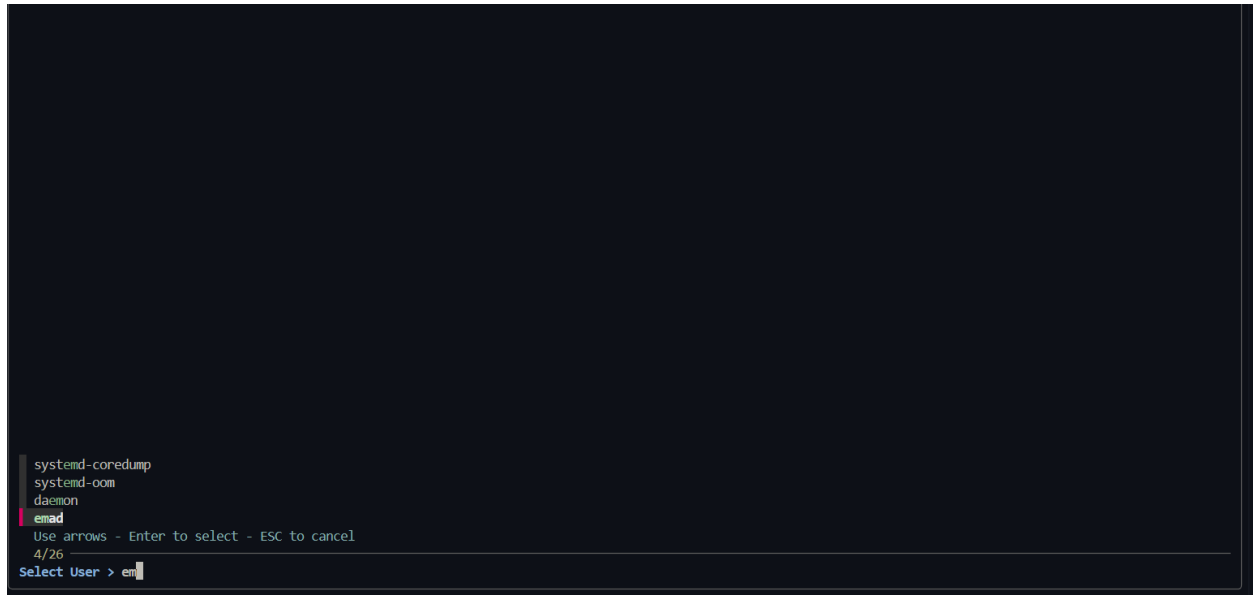

Then, the system removes the selected user and displays a confirmation message.

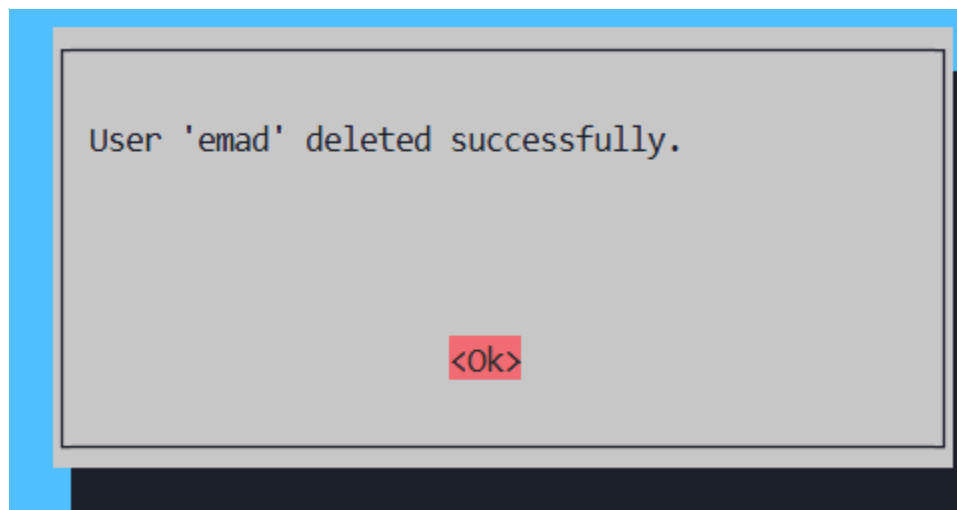

Disable User

This sequence shows how a user account is disabled in the system.

```
systemd-coredump
shutdown
vboxadd
nobody
daemon
chrony
root
systemd-com
operator
omar
Use arrows - Enter to select - ESC to cancel
10/26
Select User > o
```

User 'omar' has been disabled (locked).

<Ok>

```
[vagrant@vbox ~]$ su - omar
Password:
su: Authentication failure
[vagrant@vbox ~]$
```

The administrator selects a user from the list, and the system locks the account, preventing login. A confirmation message is then displayed.

Enable User

This sequence shows enabling a previously disabled user account.

```
systemd-coredump
systemd-oom
omar
Use arrows - Enter to select - ESC to cancel
3/26
Select User > om
```

User 'omar' has been enabled (unlocked).

<Ok>


```
[vagrant@vbox ~]$ su - omar
Password:
su: Authentication failure
[vagrant@vbox ~]$ su - omar
Password:
Last login: Mon Apr 20 04:31:27 UTC 2026 on pts/1
Last failed login: Mon Apr 20 04:31:58 UTC 2026 on pts/1
There was 1 failed login attempt since the last successful login.
[omar@vbox ~]$
```

First, the user is selected and unlocked by the administrator. After that, the user is able to log in successfully, confirming that the account is active again.

Change Password


This sequence shows how the administrator changes the password of a user.

First, the user is selected from the list.

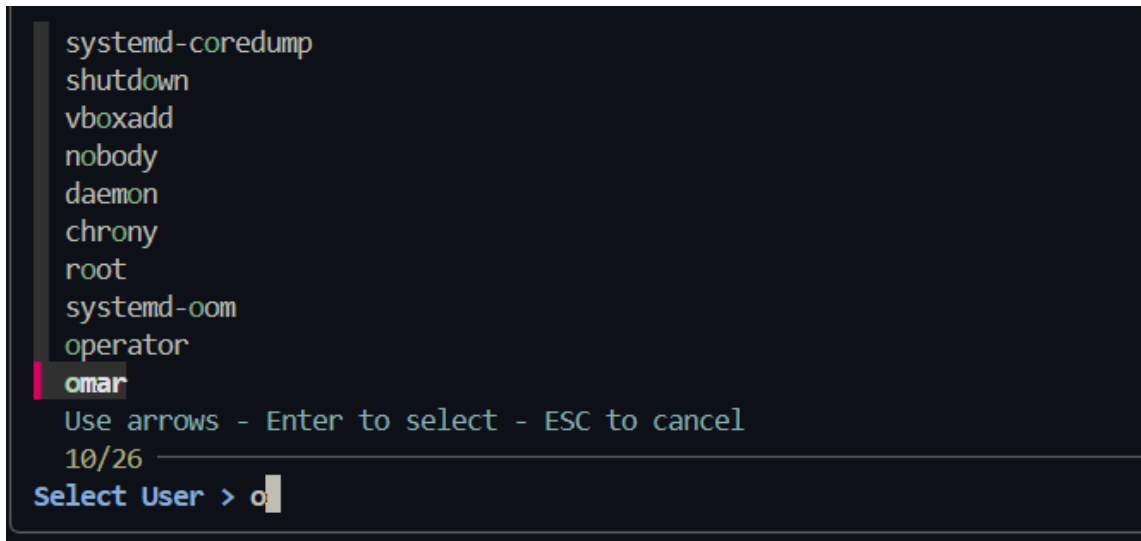A terminal window with a dark background. A list of users is displayed: systemd-coredump, shutdown, vboxadd, nobody, daemon, chrony, root, systemd-oom, operator, and omar. The user 'omar' is highlighted with a red background. Below the list, instructions read 'Use arrows - Enter to select - ESC to cancel'. At the bottom, it says '10/26' and 'Select User > o' with a cursor pointing at the 'o' in 'omar'.

```
systemd-coredump
shutdown
vboxadd
nobody
daemon
chrony
root
systemd-oom
operator
omar
Use arrows - Enter to select - ESC to cancel
10/26
Select User > o
```

Then, the system prompts for a new password and asks for confirmation.

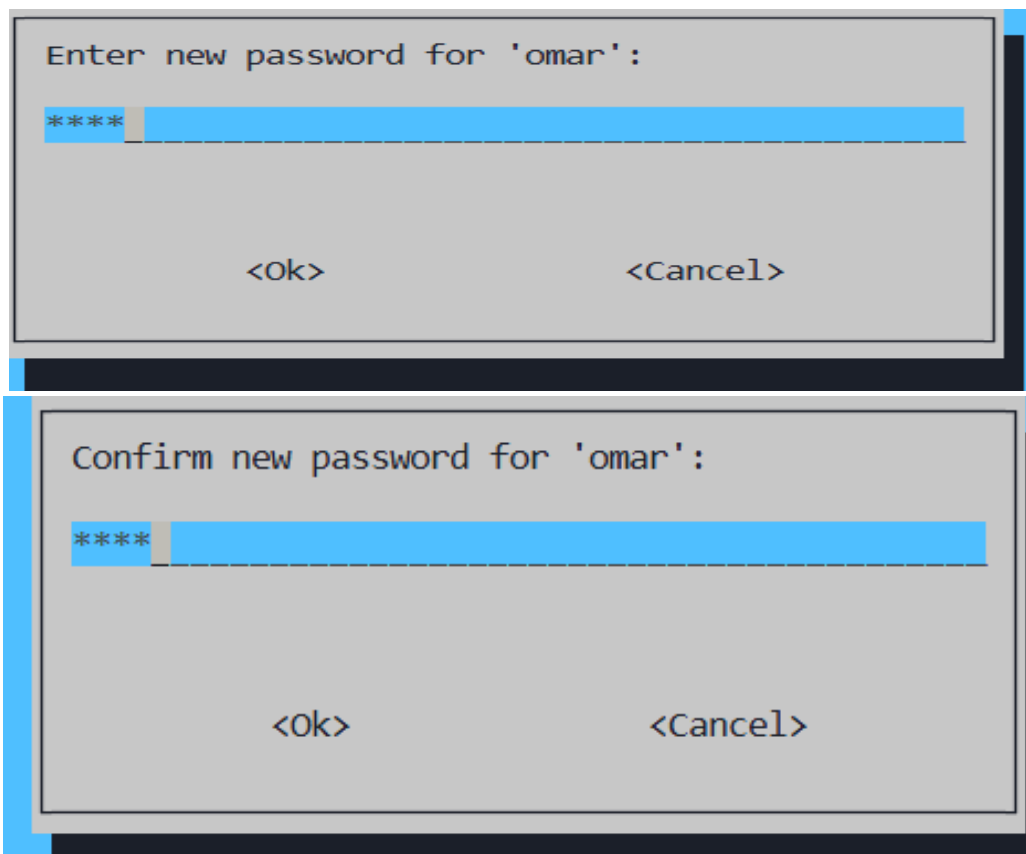Two screenshots of a graphical password change dialog. The top dialog is titled 'Enter new password for 'omar':'. It has a text input field containing five asterisks '*****'. Below the field are two buttons: '<Ok>' and '<Cancel>'. The bottom dialog is titled 'Confirm new password for 'omar':'. It also has a text input field with five asterisks '*****' and the same '<Ok>' and '<Cancel>' buttons below it.


Enter new password for 'omar':

<Ok> <Cancel>

Confirm new password for 'omar':


<Ok> <Cancel>

After validation, the password is updated successfully.

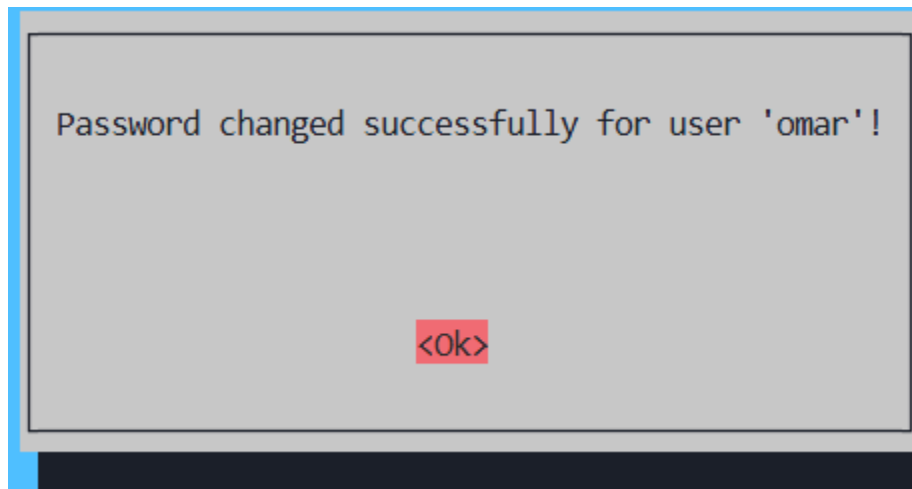

Add Group

This sequence shows how a new group is added to the system.

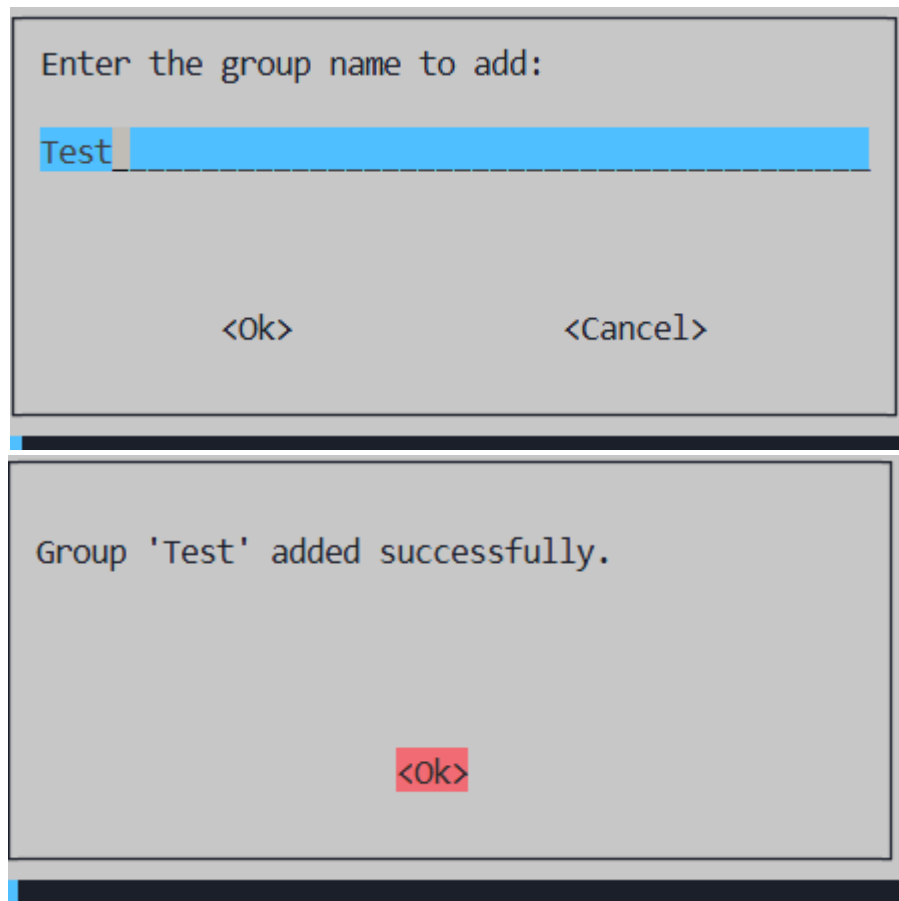

The image displays two sequential screenshots of a terminal window, illustrating the process of adding a new group to a system.

The first screenshot shows a prompt: "Enter the group name to add:". Below the prompt, the word "Test" is entered and highlighted in blue. At the bottom of the terminal window, there are two options: "<Ok>" and "<Cancel>".


The second screenshot shows the result of the action: "Group 'Test' added successfully.". At the bottom of the terminal window, there is a single option: "<Ok>".

The administrator enters the group name, and the system creates the group successfully, then displays a confirmation message.

Group management helps organize users and control permissions.

List Groups

This screen displays all system groups using an interactive interface powered by fzf.

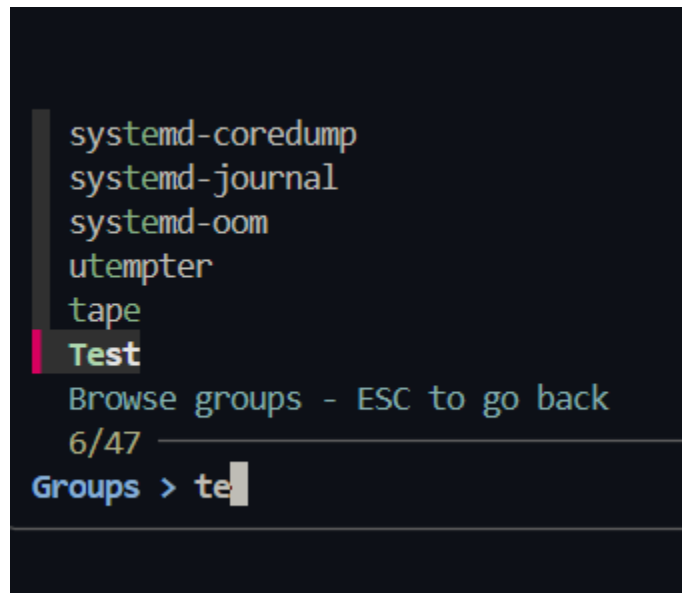


```
systemd-coredump
systemd-journal
systemd-oom
utempter
tape
Test
Browse groups - ESC to go back
6/47
Groups > te
```

The screenshot shows a terminal window with a dark background. A list of system groups is displayed in a fuzzy finder interface. The groups listed are systemd-coredump, systemd-journal, systemd-oom, utempter, tape, and Test. The group 'Test' is currently selected, indicated by a red bar to its left. Below the list, there is a prompt 'Browse groups - ESC to go back' and a progress indicator '6/47'. At the bottom, a status bar shows 'Groups > te' with a cursor at the end of the text.

The administrator can browse through the groups and easily navigate using the keyboard.

Modify Group

This sequence shows how an existing group is modified by renaming it.

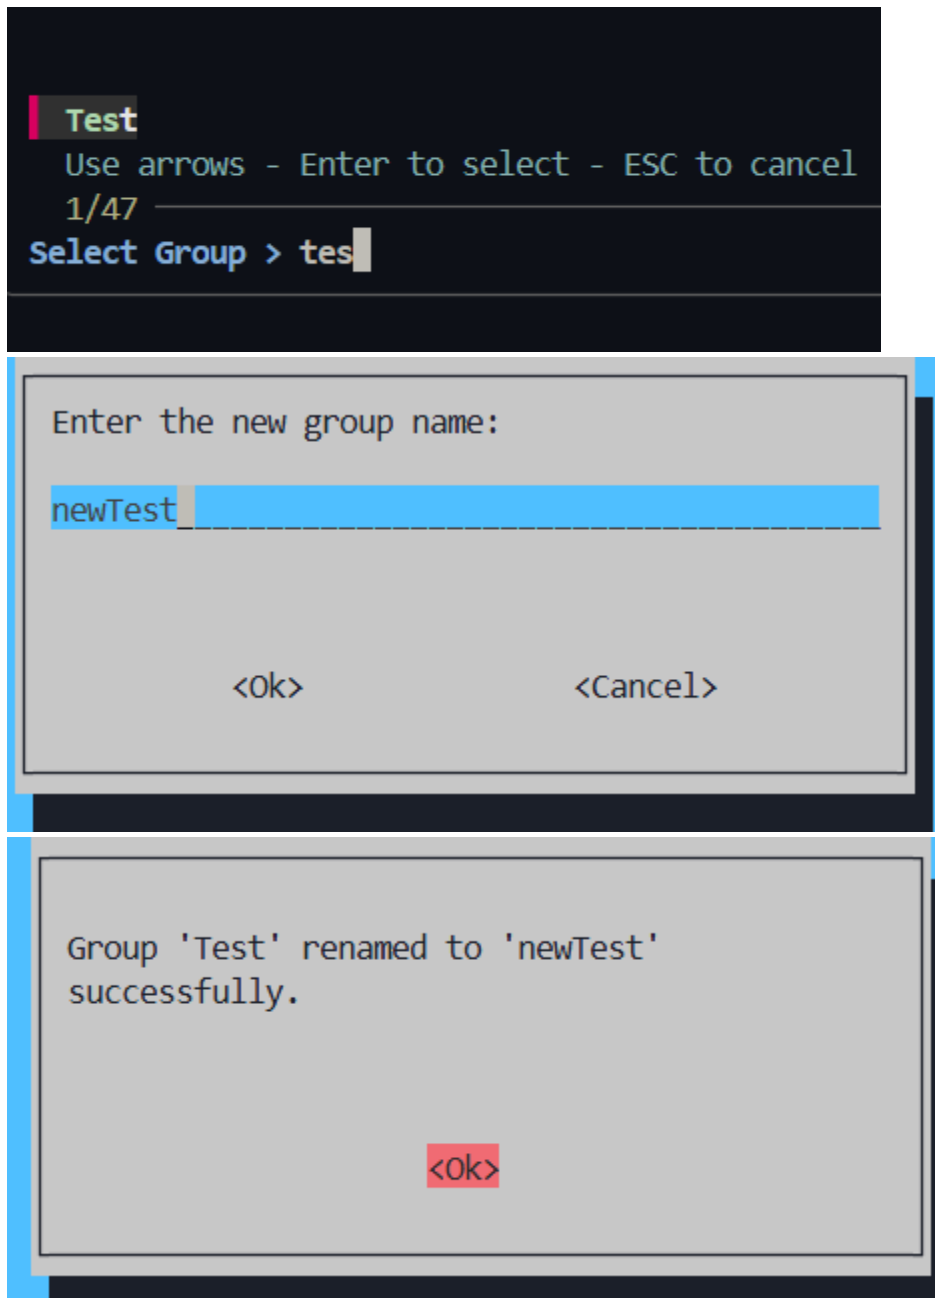

First, the administrator selects the group from the list. Then, a new name is entered, and the system updates the group name successfully with a confirmation message.

Delete Group


This sequence shows how a group is deleted from the system.



The administrator selects the group from the list, and the system removes it successfully, then displays a confirmation message.

About

This screen displays general information about the system and its features.

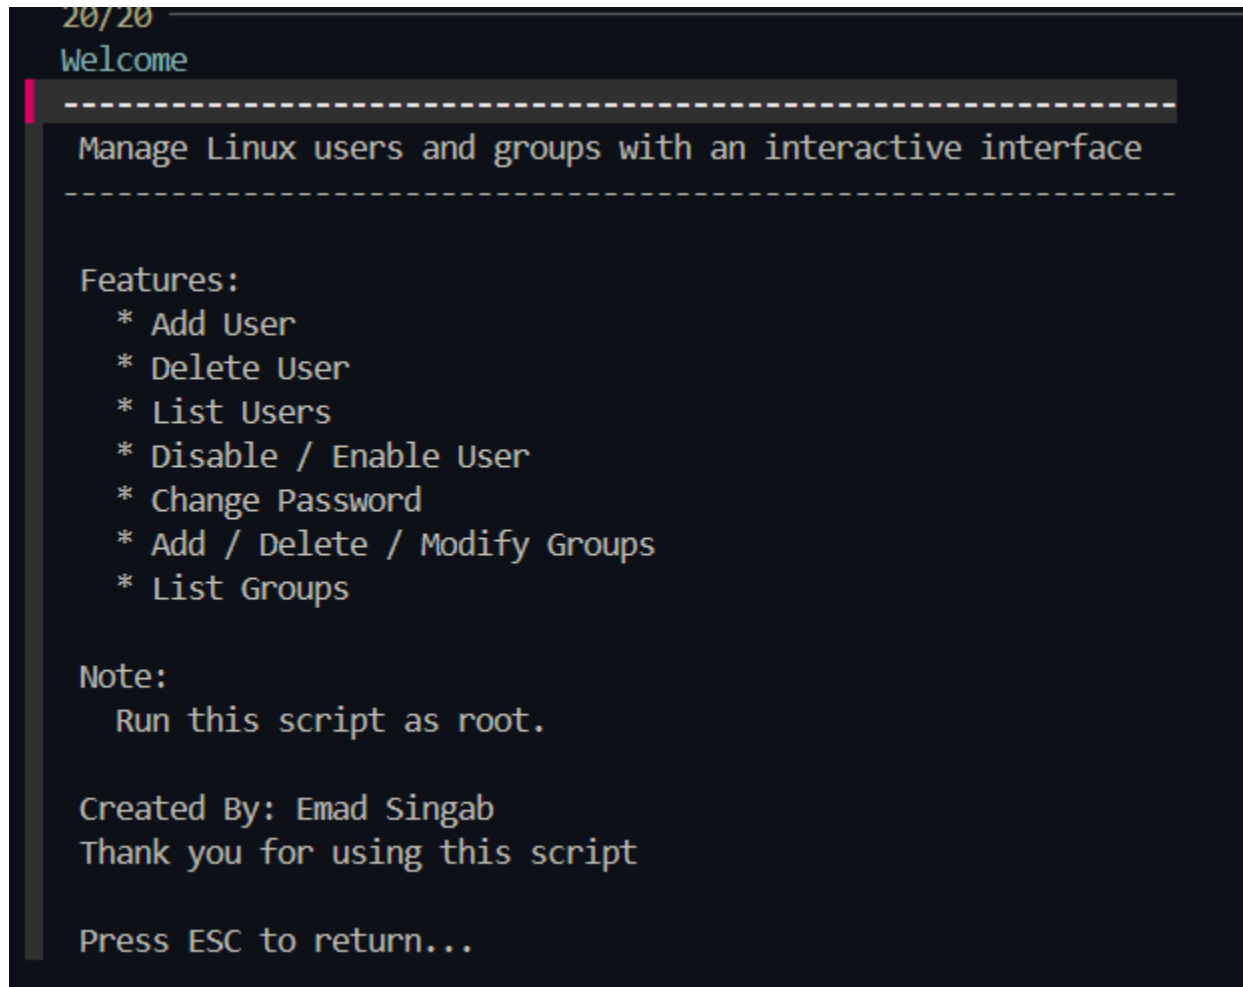

```
20/20
Welcome
-----
Manage Linux users and groups with an interactive interface
-----

Features:
* Add User
* Delete User
* List Users
* Disable / Enable User
* Change Password
* Add / Delete / Modify Groups
* List Groups

Note:
  Run this script as root.


Created By: Emad Singab
Thank you for using this script

Press ESC to return...
```

It provides an overview of the available functionalities such as user and group management, along with basic instructions for using the script.

Root Privilege Check


This screen appears when the script is executed without root privileges.

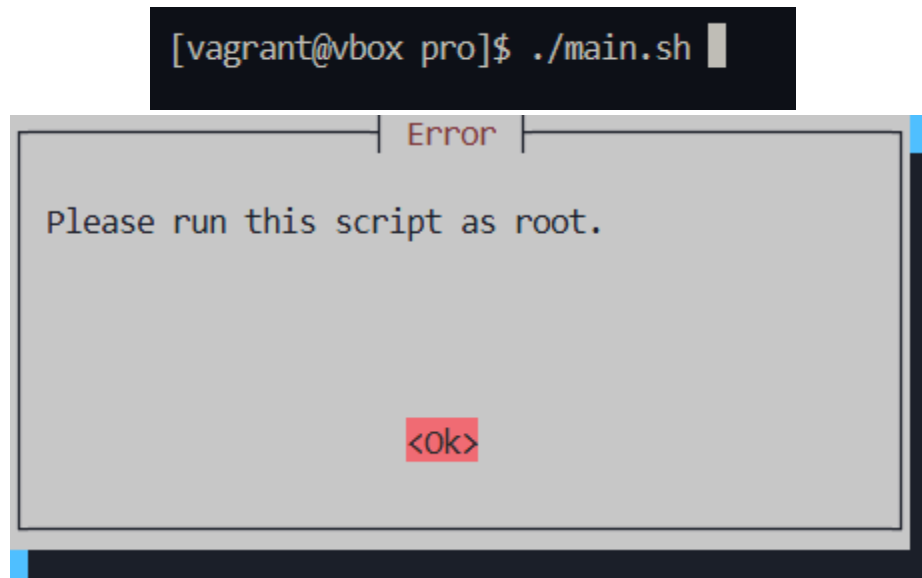

The system checks if the user has administrative permissions before running. If not, it displays an error message and prevents further execution.

Exit

This screen confirms that the system has exited successfully.

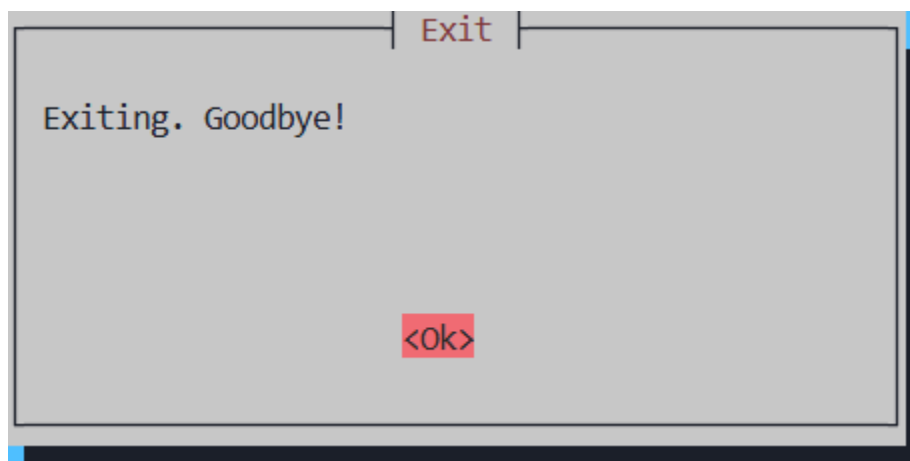

It ensures a smooth and clean termination of the program.