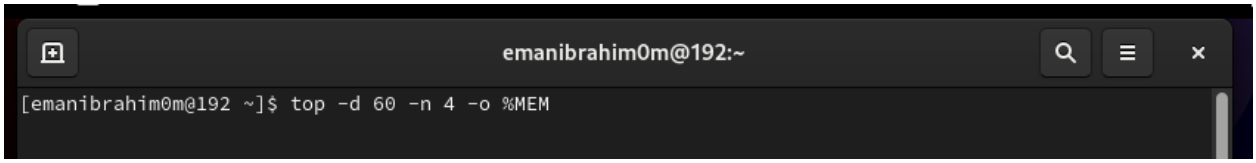
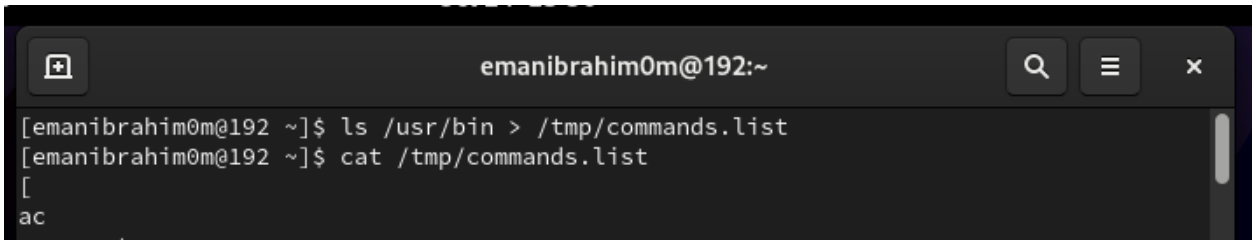
Lab 4


0.


emanibrahim0m@192:~
[emanibrahim0m@192 ~]$ top -d 60 -n 4 -o %MEM

1.


emanibrahim0m@192:~
[emanibrahim0m@192 ~]$ ls /usr/bin > /tmp/commands.list
[emanibrahim0m@192 ~]$ cat /tmp/commands.list
[
ac

2.

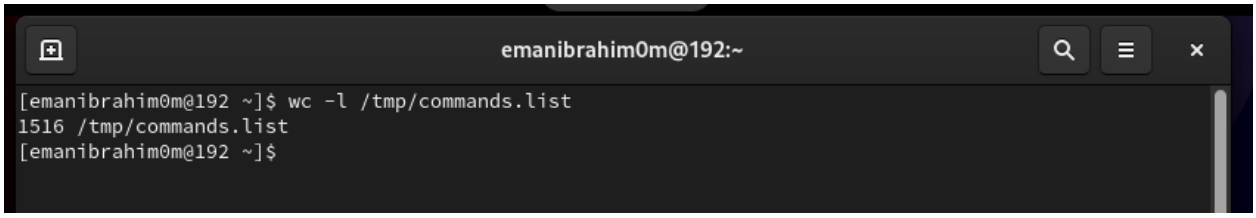
emanibrahim0m@192:~
[emanibrahim0m@192 ~]$ wc -l /tmp/commands.list
1516 /tmp/commands.list
[emanibrahim0m@192 ~]$


3.


emanibrahim0m@192:~
[emanibrahim0m@192 ~]$ cut -d: -f1 /etc/passwd | grep "^g"
games
geoclue
gdm
gnome-initial-setup
[emanibrahim0m@192 ~]$


4.


emanibrahim0m@192:~
[emanibrahim0m@192 ~]$ cut -d: -f1 -f5 /etc/passwd | grep "^g"
cut: only one type of list may be specified
Try 'cut --help' for more information.
[emanibrahim0m@192 ~]$ cut -d: -f1,5 /etc/passwd | grep "^g"
games:games
geoclue:User for geoclue
gdm:GNOME Display Manager
gnome-initial-setup:
[emanibrahim0m@192 ~]$


5.

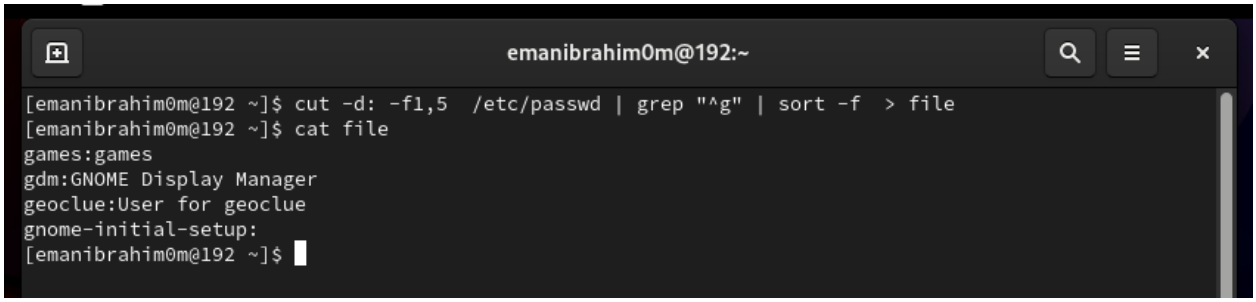

6.

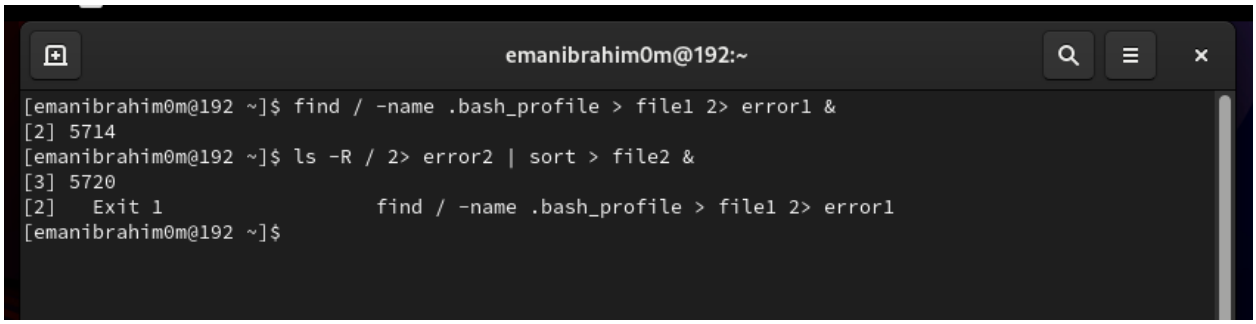


7. 8.

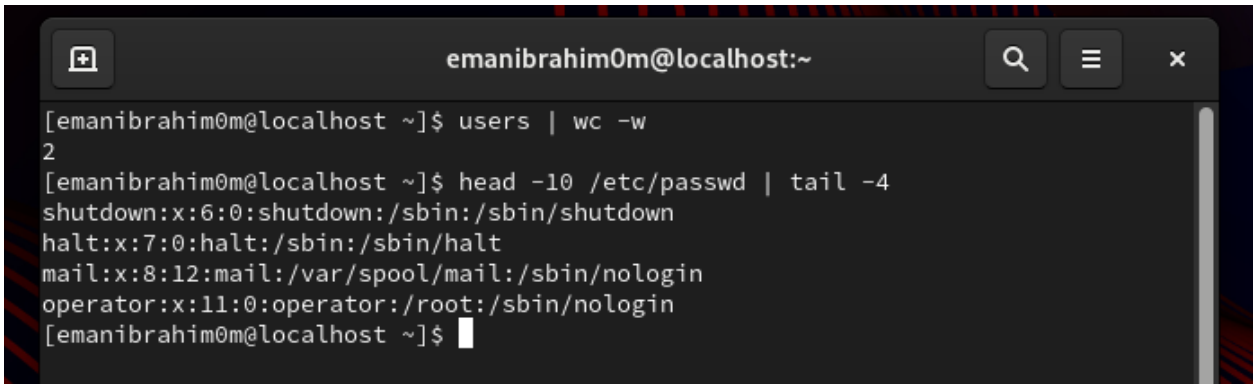


9.

– show file 2 content and the input from file1 is ignored
– nothing/fail as rm expect an argument to execute
– count no of line returned by ls


10. 11.

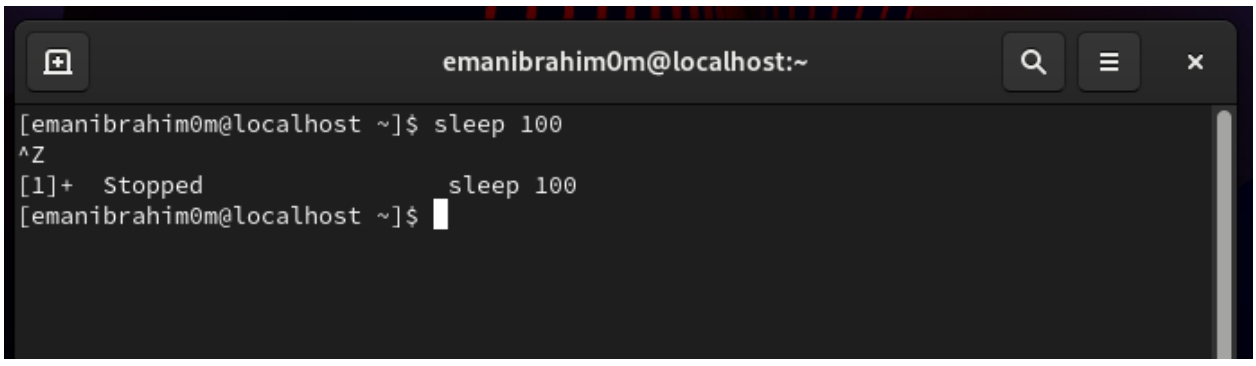


10. 11. 12. 13. 14. 15.

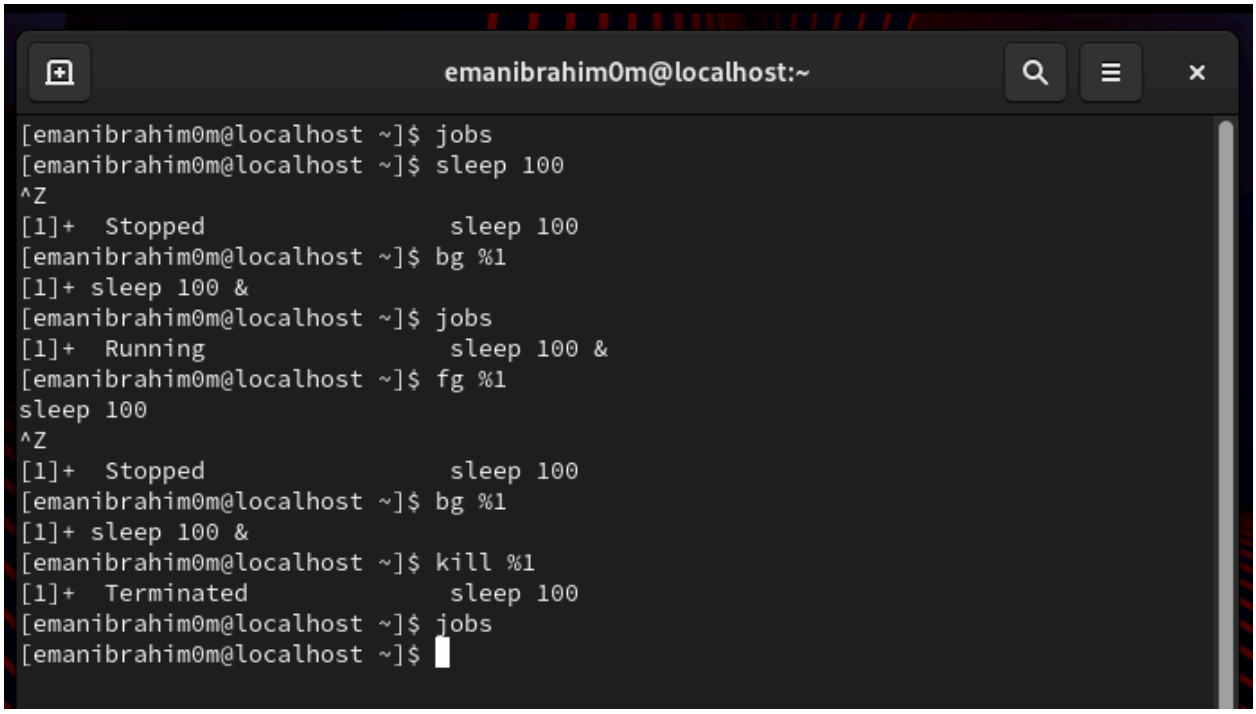


16.

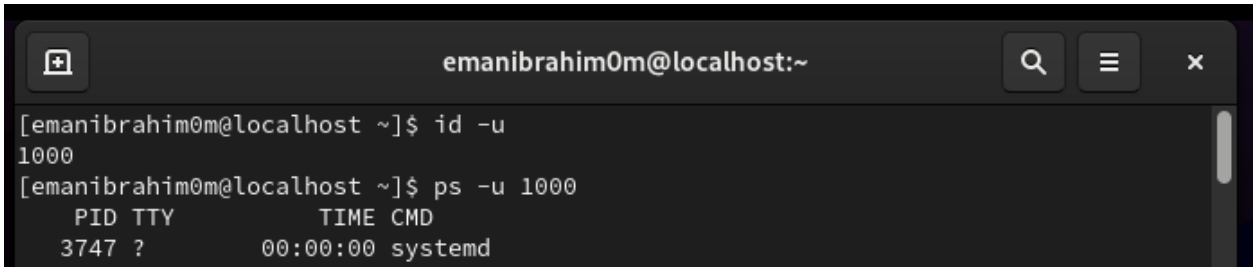


17.

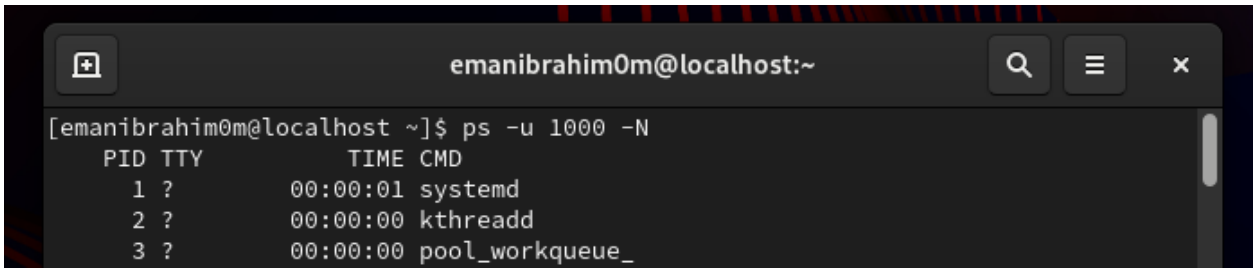

18.

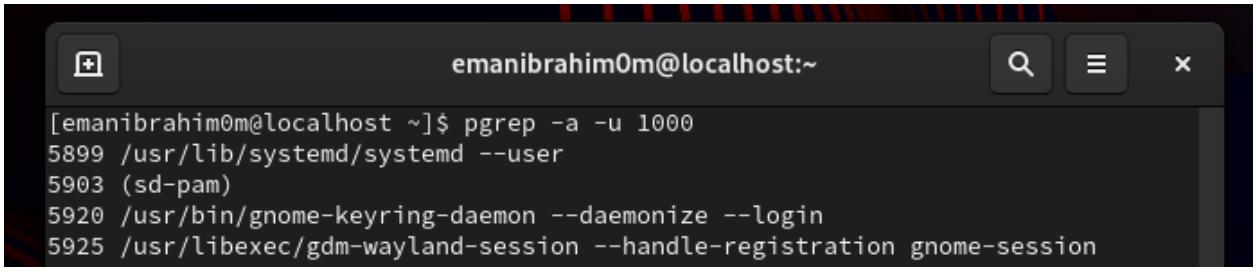

19. Log out

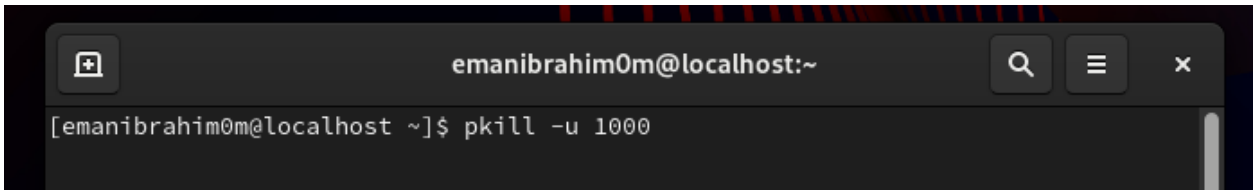
emanibrahim0m@localhost:~
[emanibrahim0m@localhost ~]$ pkill -u 1000