

Nome: Emanuelly Hanada Morino e Nicole dos Santos

Turma: 302- Informática

PRINTS:

→ Clonagem do Repositório

1. Para clonarmos o repositório do professor de início, usamos: `git clone https://gitlab.com/hvescovi/progs.git`


```
C:\Users\DELL>git clone https://gitlab.com/hvescovi/progs.git
Cloning into 'progs'...
remote: Enumerating objects: 2127, done.
remote: Counting objects: 100% (941/941), done.
remote: Compressing objects: 100% (874/874), done.
remote: Total 2127 (delta 451), reused 0 (delta 0), pack-reused 1186 (from 1)
Receiving objects: 100% (2127/2127), 5.23 MiB | 7.28 MiB/s, done.
Resolving deltas: 100% (797/797), done.
Updating files: 100% (938/938), done.
```

→ SEM definir as variáveis de ambiente:

```
Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

PS C:\Users\discente\INFO 101\1707\Imagens\progs-main\progs-main\web\react_with_next\06-complete-app\back-python> uv run
flask --app src/app run
Using CPython 3.12.8 interpreter at: C:\Users\discente\AppData\Local\Programs\Python\Python312\python.exe
Creating virtual environment at: .venv
Built back-python @ file:///C:/Users/discente/INFO%20101/1707/Imagens/progs-main/progs-main/web/react_with_next/06
Installed 23 packages in 388ms
* Serving Flask app 'src/app'
* Debug mode: off
WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead.
* Running on http://127.0.0.1:5000
Press CTRL+C to quit
127.0.0.1 - - [10/Aug/2026 11:13:32] "GET / HTTP/1.1" 200 -
127.0.0.1 - - [10/Aug/2026 11:13:32] "GET /favicon.ico HTTP/1.1" 404 -
```

Utilizando o comando: `uv run flask --app src/app run`, dentro da pasta de back-python

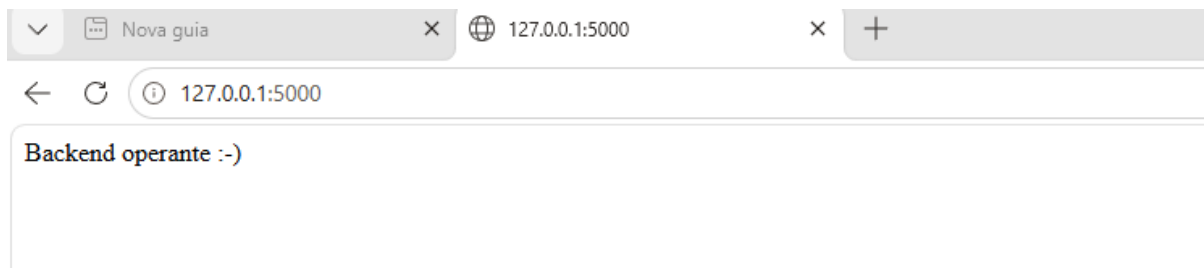

→ COM as variáveis de ambiente:

```
Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

PS C:\Users\discente\INFO 101\1707\Imagens\progs-main\progs-main\web\react_with_next\06-complete-app\back-python> uv run
flask --app src/app run
Using CPython 3.12.8 interpreter at: C:\Users\discente\AppData\Local\Programs\Python\Python312\python.exe
Creating virtual environment at: .venv
Built back-python @ file:///C:/Users/discente/INFO%20101/1707/Imagens/progs-main/progs-main/web/react_with_next/06
Installed 23 packages in 388ms
* Serving Flask app 'src/app'
* Debug mode: off
WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead.
* Running on http://127.0.0.1:5000
Press CTRL+C to quit
127.0.0.1 - - [10/Aug/2026 11:13:32] "GET / HTTP/1.1" 200 -
127.0.0.1 - - [10/Aug/2026 11:13:32] "GET /favicon.ico HTTP/1.1" 404 -
PS C:\Users\discente\INFO 101\1707\Imagens\progs-main\progs-main\web\react_with_next\06-complete-app\back-python> $env:POSTGRES_URL_NON_POOLING="postgres://postgres.jxrocbwmsarmvbedhpa:XJu7qPe8kPEnk14F@aws-0-us-east-1.pooler.supabase.com:5432/postgres?sslmode=require"
PS C:\Users\discente\INFO 101\1707\Imagens\progs-main\progs-main\web\react_with_next\06-complete-app\back-python> uv run
flask --app src/app run
* Serving Flask app 'src/app'
* Debug mode: off
WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead.
* Running on http://127.0.0.1:5000
Press CTRL+C to quit
127.0.0.1 - - [10/Aug/2026 11:45:49] "GET / HTTP/1.1" 200 -
127.0.0.1 - - [10/Aug/2026 11:45:59] "GET /pessoas HTTP/1.1" 200 -
127.0.0.1 - - [10/Aug/2026 11:46:49] "GET / HTTP/1.1" 200 -
127.0.0.1 - - [10/Aug/2026 11:46:57] "GET /pessoas HTTP/1.1" 200 -
```

```
Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

PS C:\Users\discente\INFO 101\1707\Imagens\progs-main\progs-main\web\react_with_next\06-complete-app\back-python> uv run
flask --app src/app run
* Serving Flask app 'src/app'
* Debug mode: off
WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead.
* Running on http://127.0.0.1:5000
Press CTRL+C to quit
```

Da mesma forma, fomos capazes de rodar o backend, agora com as variáveis de ambiente. Seguimos o seguinte passo a passo:

1. No mesmo terminal, encerramos o run anterior e então criaremos uma variável de ambiente temporária no Windows com este comando:
`$env:POSTGRES_URL_NON_POOLING="postgres://postgres.jxrocbwmsarmvbedhpa:XJu7qPe8kPEnk14F@aws-0-us-east-1.pooler.supabase.com:5432/postgres?sslmode=require"`
2. Em seguida, apenas retomamos aquele mesmo comando para de novo rodar o run: `uv run flask --app src/app run`

→ Teste das ROTAS (Sem as Variáveis de Ambiente):

1. Para acessarmos à rota padrão, em um segundo terminal, usamos o comando: `curl localhost:5000`
2. E para a rota de listagem das pessoas seguimos com: `curl localhost:5000/pessoas`

```
C:\Users\DELL>curl localhost:5000
Backend operante :-)
C:\Users\DELL>curl localhost:5000/pessoas
{"detalhes":[{"email":"admin@admin","id":1,"login":"admin","nome":"Administrador","senha":"$2b$12$0Cn8GIC4wemrqP/Z/FtB8e7fK34JSt0Dq0jhpkygilyjCLitBfXPG","telefone":"(00) 0 0000-0000"}, {"email":"saja@gmail.com","id":2,"login":"saja","nome":"Sara Jango","senha":"$2b$12$yXKeQh.Gj40QxsD2fh0s40LQd.TTDfeULkZTtrMKNv1.ve.6ZukCS","telefone":"47 9 1155 4376"}], "resultado": "ok"}
```

```
C:\Users\DELL>curl http://127.0.0.1:5000/login -X POST -H "Content-Type: application/json" -d '{"login":{"admin": "\s\nenhaf"\:"admin123"}","token":"eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJmcmVzaCI6ZmFsc2UsIm1hdCI6MTkxNjYyZW50LCJ1eWUiOiJ0ODMzMzMyZGIOTDYwNC00ZDVhLWIzODMtMG1lOWI4ODggyNDMA4iwiwidHlwZSI6ImFmfjY2ZyZysIiwiaWF0IjoiMTkxNTY1IGIjeILCJuYmViOjE3ODY5MzYyZmVsImNzcmlvOiJ0ODE3MzMyZSIsInR5cCI6IHRiMiJutVmNmIS03M2MzNZEZzDEWEODA4IjCLjEHAioJeJ3ODY5MzcxMzZ9.ghrJn4lERqe1AafMxWSof3BgYOhjdT-3C6-5oizJP4"},"resultado":"ok"'
```

```
C:\Users\DELL>
```

```
C:\Users\DELL>curl http://localhost:5000/pessoa -X POST -H "Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eYmcmVudCjCmZmcSc2UsImIhdCMT6MzQ4NkZkdjEwcmVuanRpIjoiaGkiOGJkZWY1NDItY2YxNmI0eWZlLTh0YyZmYTCTNDK0YmFkbnZjIiwidHlwZS16ImFjY2V2cyIsbnV1biI6IiwiaWF0IjE5OTUyMDY1OjE3ODY5MzY3NTAsImZyb2VybmV0IiwiYWxzcmY0IiwiaWF0IjE5OTUyMDY1OjE3ODY5MzY3NTAsImZyb2VybmV0IiwiaWF0IjE5OTUyMDY1OjE3ODY5MzY3NTB9.EPHGBAui1tKgGy54nEFJC0euWq0zOtrXud2ykZUK4a0" -H "Content-Type: application/json" -d '{"nome": "\Joestar\ ", \email": "\jojo@gmail.com", \telefone": "\47 9 1155 4376", \login": "\joestar", \senha": "\jojo123"}'
{"detalhes": {"email": "jojo@gmail.com", "id": 3, "login": "joestar", "nome": "Joestar", "senha": "$2b$12$Lxbtp40yS3ycPBheutkiPeIN0ujQ1iuK9y/gSY36EjSB70/GLc6ve", "telefone": "47 9 1155 4376"}, "resultado": "ok"}
```

```

C:\Users\DELL\progs\web/react_with_next>cd /c:/Users/DELL/progs/web/react_with_next/06-complete-app/back-python>uv run flask --
Using CPython 3.14.7
Creating virtual environment at: .venv
    Built back-python @ file:///C:/Users/DELL/progs/web/react_with_next/06-complete-app/back-python
Installed 23 packages in 3.55s
  * Serving Flask app 'src/app'
  * Debug mode: off
WARNING: This is a development server. Do not use it in a production deployment. Use Werkzeug's run_with_options instead.
  * Running on http://127.0.0.1:5000
Press CTRL+C to quit
127.0.0.1 - - [16/Aug/2026 23:34:40] "GET / HTTP/1.1" 200 -
127.0.0.1 - - [16/Aug/2026 23:34:40] "GET /favicon.ico HTTP/1.1" 404 -
127.0.0.1 - - [16/Aug/2026 23:47:05] "GET /pessoas HTTP/1.1" 200 -
127.0.0.1 - - [16/Aug/2026 23:47:33] "GET / HTTP/1.1" 200 -
127.0.0.1 - - [16/Aug/2026 23:48:57] "GET / HTTP/1.1" 200 -
127.0.0.1 - - [16/Aug/2026 23:49:09] "GET /pessoas HTTP/1.1" 200 -
127.0.0.1 - - [16/Aug/2026 23:55:20] "GET / HTTP/1.1" 200 -
127.0.0.1 - - [16/Aug/2026 23:55:59] "GET / HTTP/1.1" 200 -
127.0.0.1 - - [16/Aug/2026 23:56:01] "GET / HTTP/1.1" 200 -
127.0.0.1 - - [16/Aug/2026 23:56:07] "GET /pessoas HTTP/1.1" 200 -
127.0.0.1 - - [16/Aug/2026 23:55:20] "GET / HTTP/1.1" 200 -
127.0.0.1 - - [16/Aug/2026 23:55:59] "GET / HTTP/1.1" 200 -
127.0.0.1 - - [16/Aug/2026 23:56:01] "GET / HTTP/1.1" 200 -
127.0.0.1 - - [16/Aug/2026 23:56:07] "GET /pessoas HTTP/1.1" 200 -
127.0.0.1 - - [16/Aug/2026 23:57:34] "GET / HTTP/1.1" 200 -
127.0.0.1 - - [16/Aug/2026 23:57:46] "GET /pessoas HTTP/1.1" 200 -
127.0.0.1 - - [16/Aug/2026 23:58:22] "POST /login HTTP/1.1" 400 -
127.0.0.1 - - [17/Aug/2026 00:05:58] "POST /login HTTP/1.1" 400 -
127.0.0.1 - - [17/Aug/2026 00:06:19] "POST /login HTTP/1.1" 400 -
127.0.0.1 - - [17/Aug/2026 00:09:17] "POST / HTTP/1.1" 405 -
127.0.0.1 - - [17/Aug/2026 00:10:36] "POST /login HTTP/1.1" 200 -
127.0.0.1 - - [17/Aug/2026 00:17:41] "POST /pessoa HTTP/1.1" 401 -
127.0.0.1 - - [17/Aug/2026 00:19:10] "POST /login HTTP/1.1" 200 -
127.0.0.1 - - [17/Aug/2026 00:19:21] "POST /pessoa HTTP/1.1" 401 -
127.0.0.1 - - [17/Aug/2026 00:21:15] "POST /pessoas HTTP/1.1" 405 -
127.0.0.1 - - [17/Aug/2026 00:21:33] "POST /pessoas HTTP/1.1" 201 -

```

```
C:\Users\discente>cd C:\Users\discente\progs\web\react_with_next\06-complete-app\back-python

C:\Users\discente\progs\web\react_with_next\06-complete-app\back-python>curl localhost:5000
Backend operante :-)
```

1. Entramos na pasta na qual estamos trabalhando e o pdf está localizado, com um cd e o caminho dele, nesse caso: `cd C:\Users\DELL\progs`
2. Com o comando: `git commit -m "Adicionando o PDF do trabalho AVA4"`, somos capazes de “salvar” o que queremos enviar para o git.

CA Prompt de Comando

```
C:\Users\DELL>cd C:\Users\DELL\progs
```

```
C:\Users\DELL\progs>git add "AVA4- Tópicos de Web.pdf"
```

```
C:\Users\DELL\progs>git commit -m "Adicionando o PDF do trabalho AVA4"
```

```
[main e5e2c03] Adicionando o PDF do trabalho AVA4
```

```
1 file changed, 0 insertions(+), 0 deletions(-)
```

```
create mode 100644 "AVA4- T\303\263picos de Web.pdf"
```

3. E finalmente, para enviar esse arquivo para o git usamos: `git push`

`https://github.com/emanuelly-morino/progs-test.git main`

```
C:\Users\DELL\progs>git push https://github.com/emanuelly-morino/progs-test.git main
info: please complete authentication in your browser...
```

```
Enumerating objects: 2139, done.
```

```
Counting objects: 100% (2139/2139), done.
```

```
Delta compression using up to 4 threads
```

```
Compressing objects: 100% (1101/1101), done.
```

```
Writing objects: 100% (2139/2139), 5.65 MiB | 4.29 MiB/s, done.
```

```
Total 2139 (delta 810), reused 2118 (delta 797), pack-reused 0 (from 0)
```

```
remote: Resolving deltas: 100% (810/810), done.
```

```
To https://github.com/emanuelly-morino/progs-test.git
```

```
* [new branch]      main -> main
```