


OnBeat — Storyboard

Core user flow: set up and play a rhythm exercise

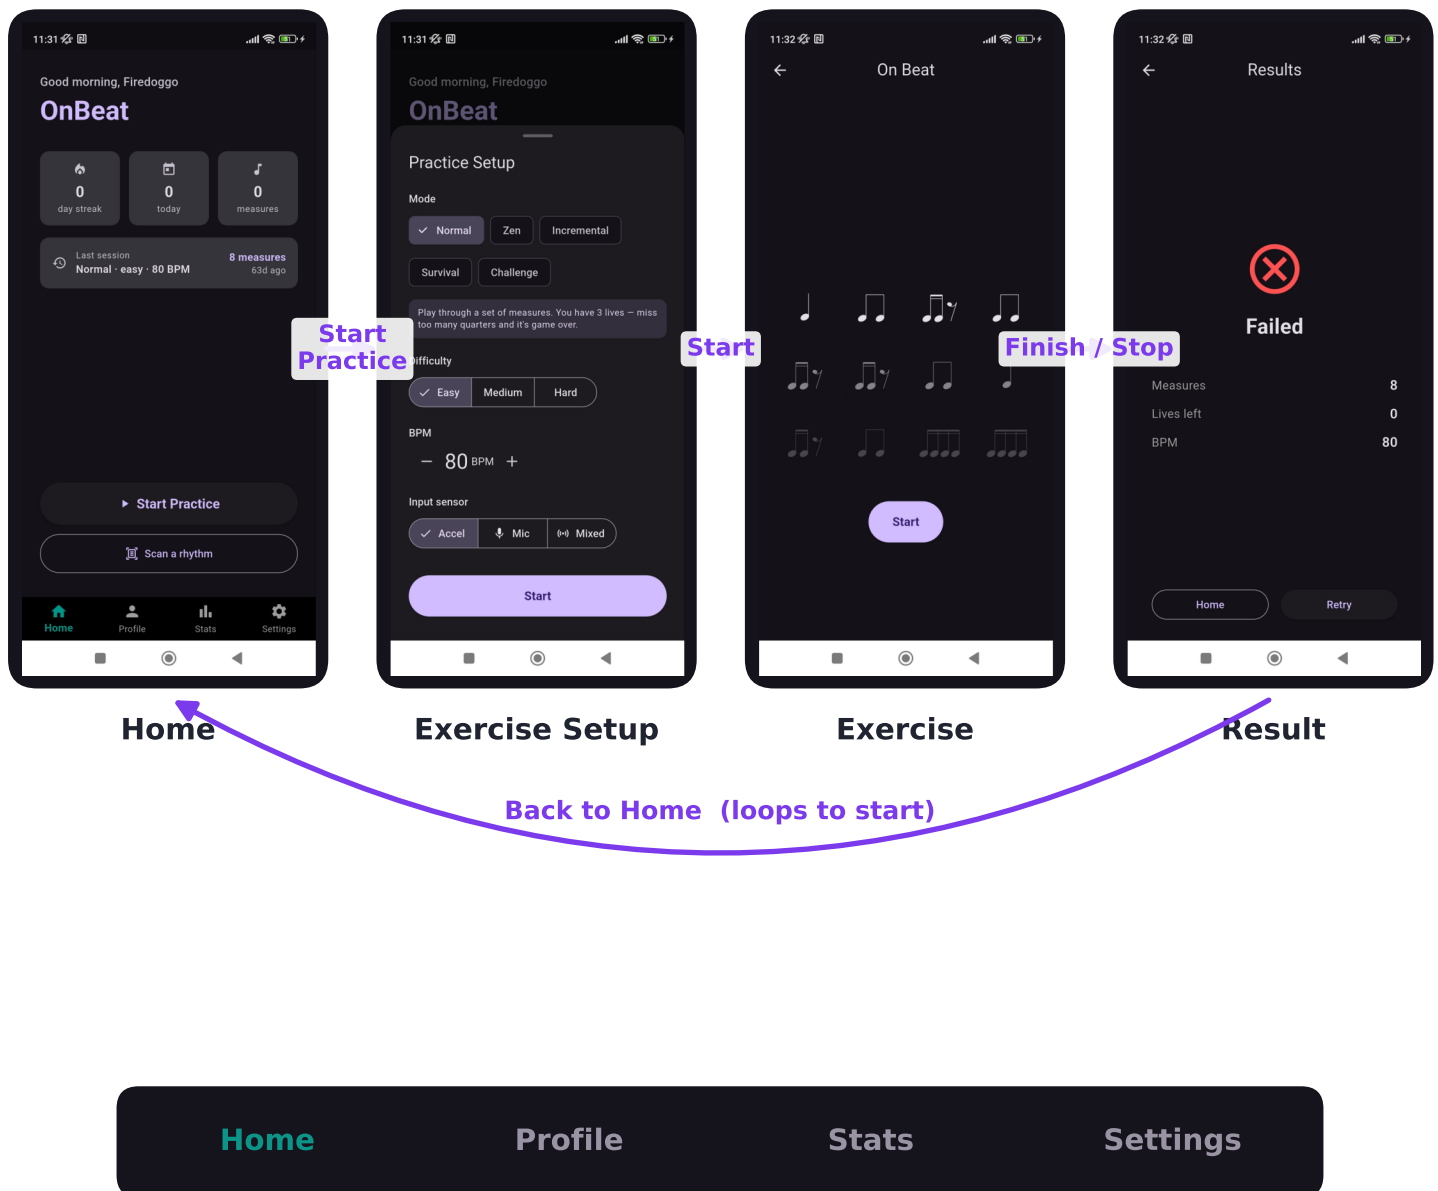


App shell: a 4-tab bottom navigation bar (tab state is preserved). Home hosts the practice flow above.

Home also offers "Scan a rhythm" (photo → playable exercise). Every screen and branch is mapped on page 3.


All screens

The remaining screens and how each one is reached

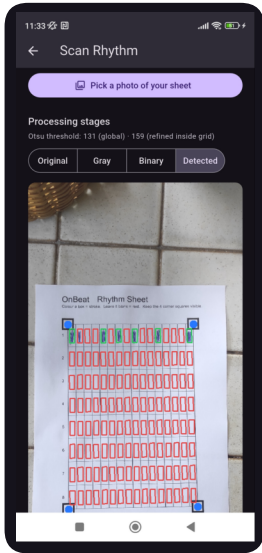


Scan Rhythm

Home > Scan a rhythm

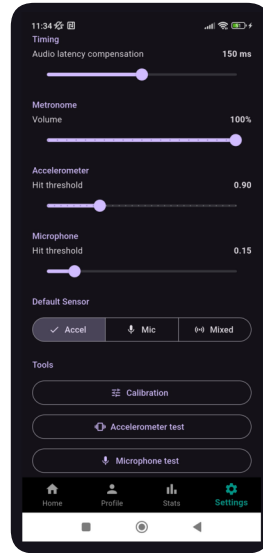


Settings

Bottom nav > Settings

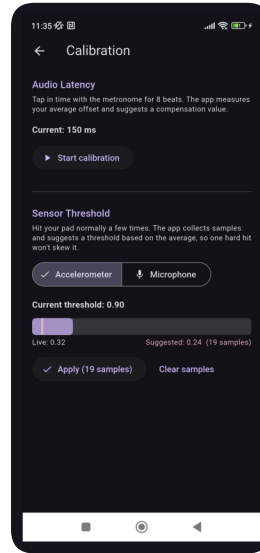


Calibration

Settings > Calibration

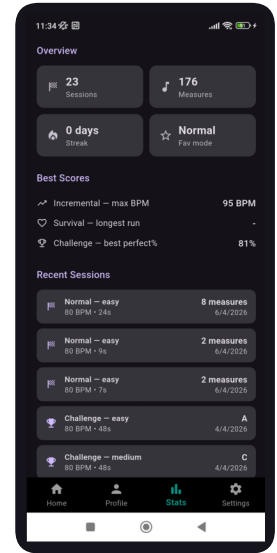


Stats

Bottom nav > Stats

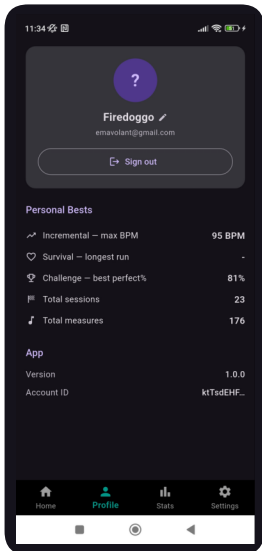


Profile

Bottom nav > Profile

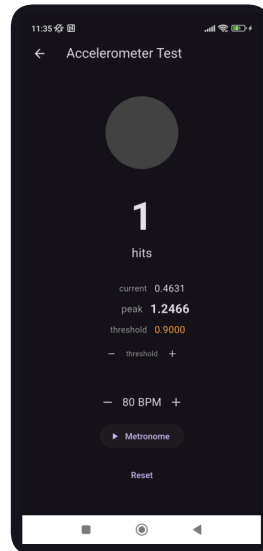

Accelerometer Test

Settings > Accelerometer test

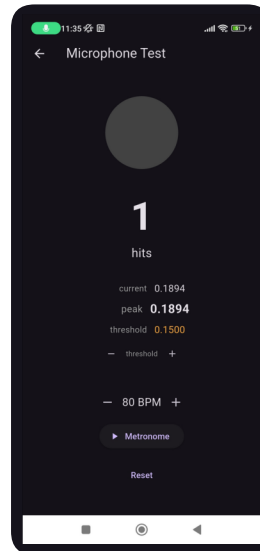


Microphone Test

Settings > Microphone test


Navigation graph

Routes, tabs and screen transitions

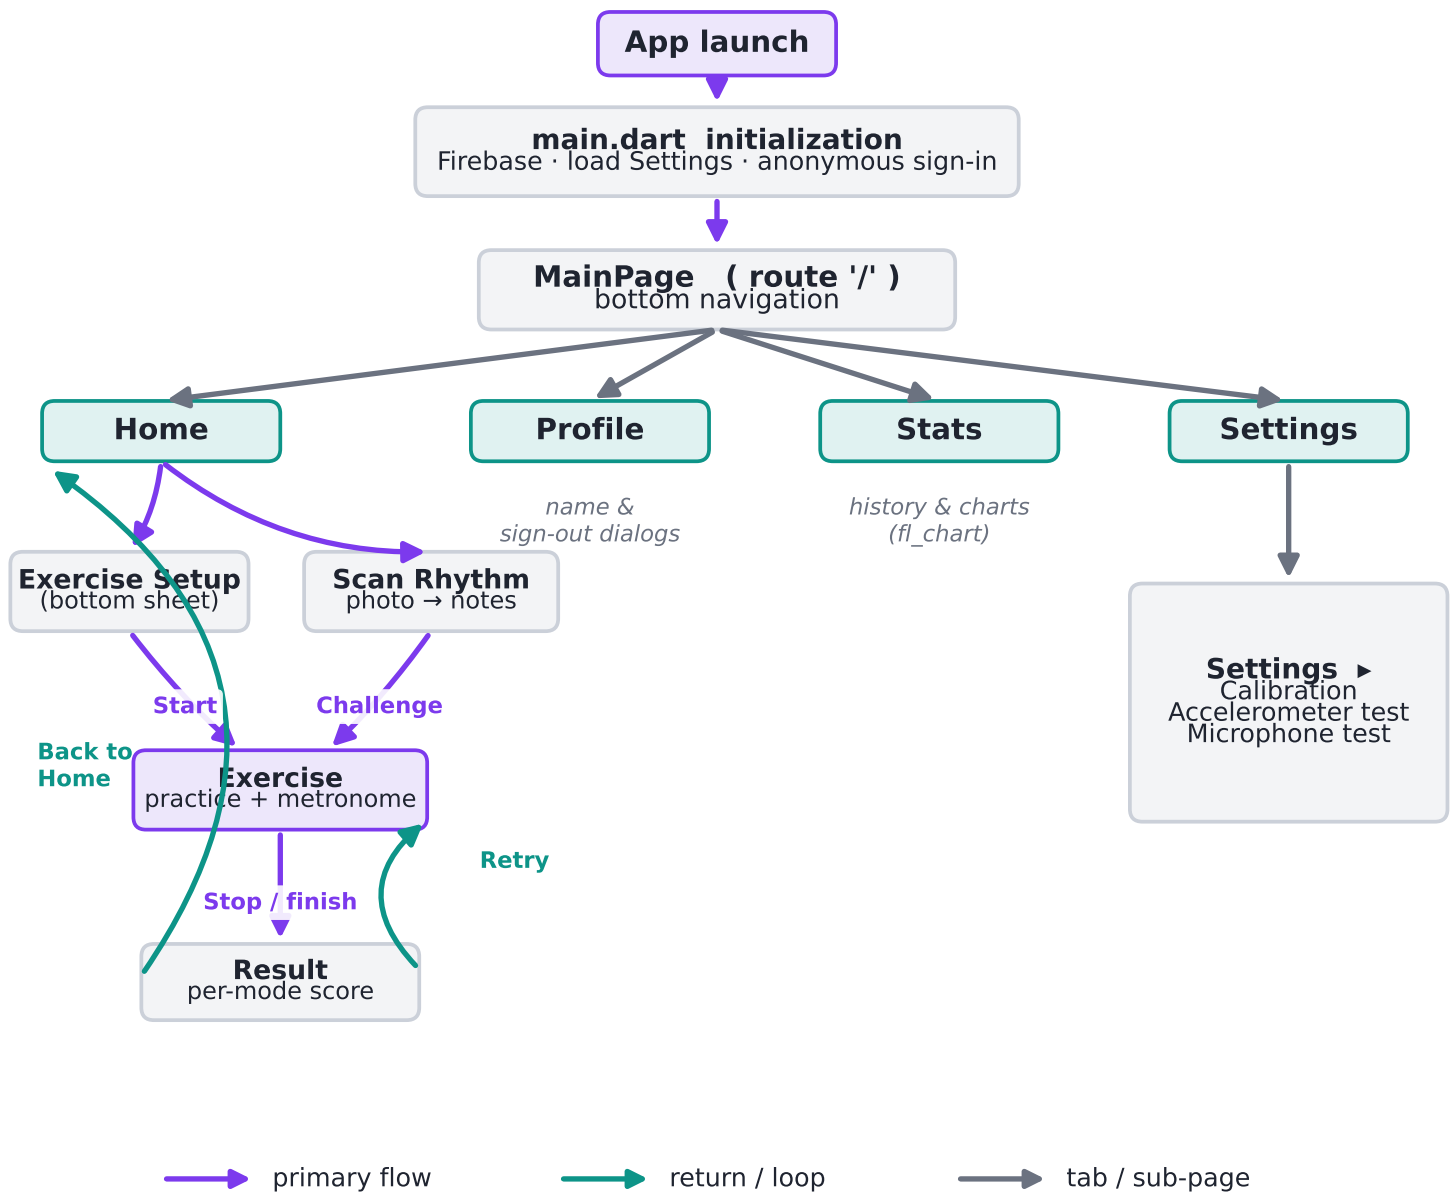

Application architecture

Layered: UI → Controllers → Services → Models, with platform edges

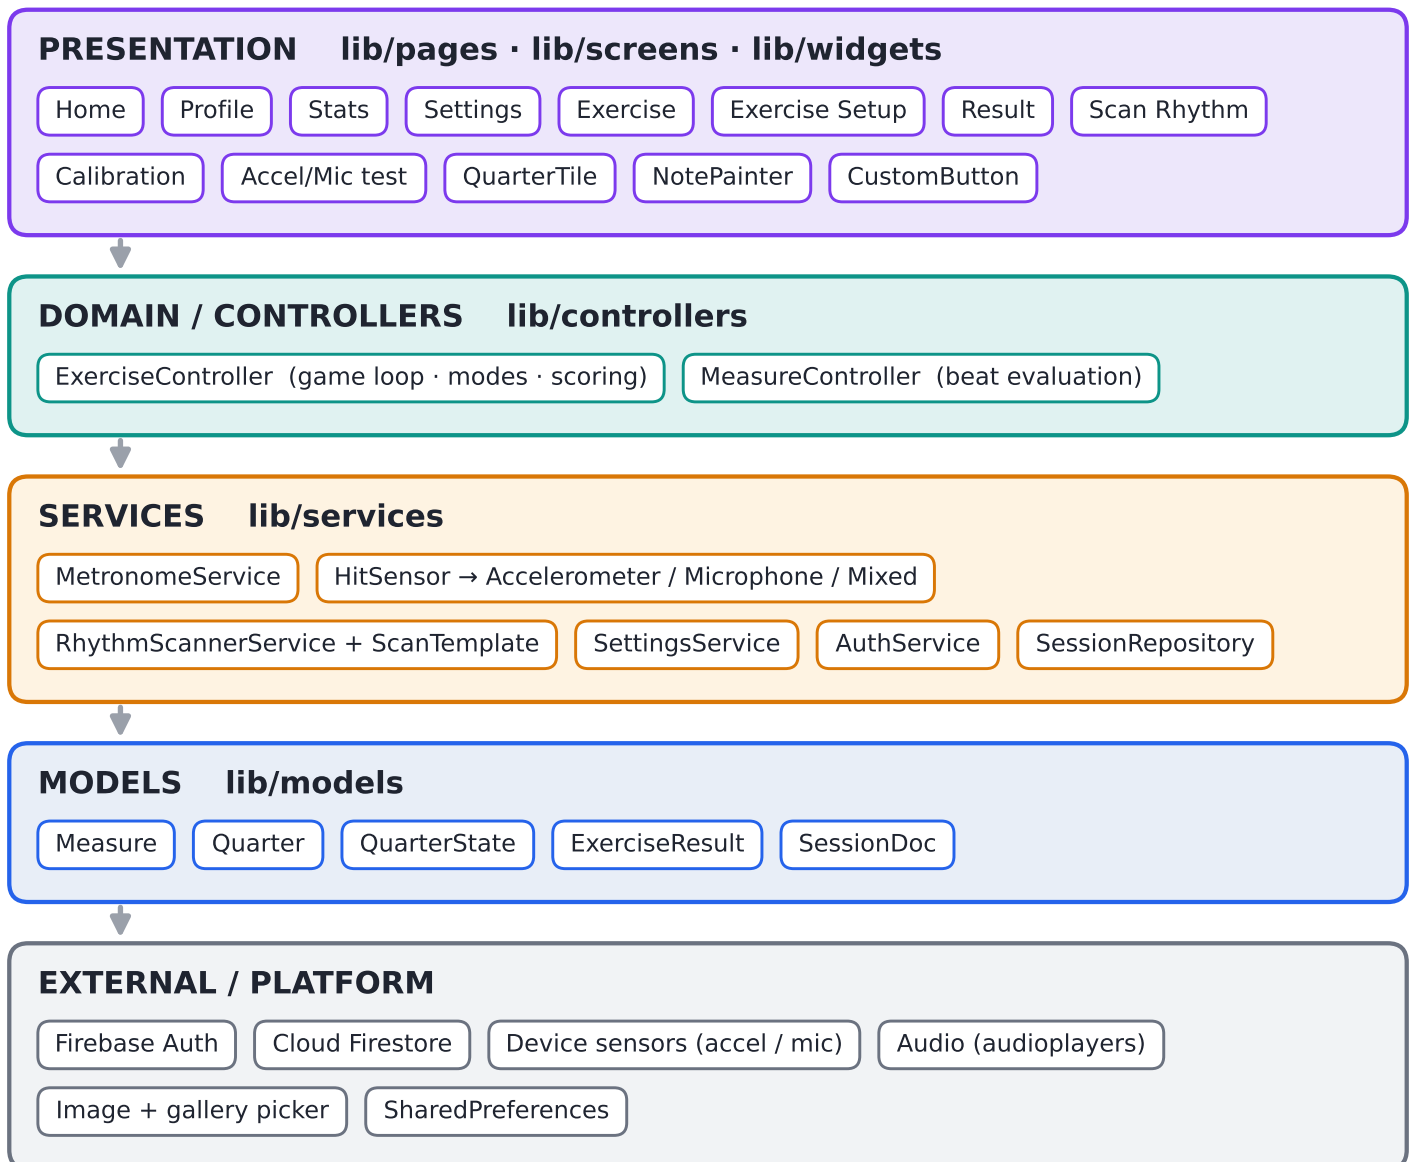

Reads top-to-bottom: each layer depends only on the one below. The UI never touches a sensor or the database directly — it goes through controllers and services. HitSensor is a Strategy: accelerometer, microphone and mixed inputs are interchangeable.