
[MP2] 應該如何解讀test的報錯

何易儒 (HO, YI-JU)

All Sections

2 2


如題
謝謝助教或同學的回覆
附上報錯和我的輸出(太長了截不到)

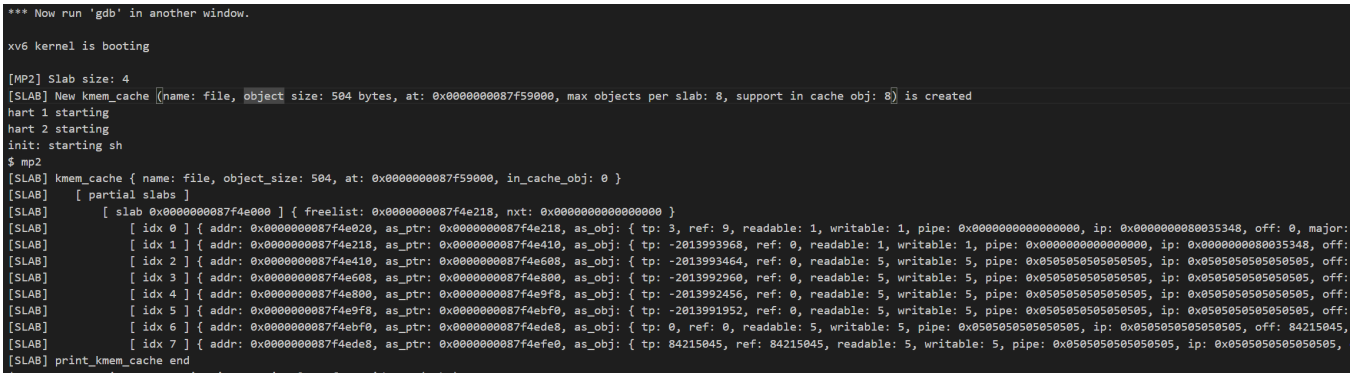

```
*** Now run 'gdb' in another window.

xv6 kernel is booting

[MP2] Slab size: 4
[SLAB] New kmem_cache (name: file, object size: 504 bytes, at: 0x0000000087f59000, max objects per slab: 8, support in cache obj: 8) is created
hart 1 starting
hart 2 starting
init: starting sh
$ mp2
[SLAB] kmem_cache { name: file, object_size: 504, at: 0x0000000087f59000, in_cache_obj: 0 }
[SLAB]    [ partial slabs ]
[SLAB]       [ slab 0x0000000087f4e000 ] { freelist: 0x0000000087f4e218, nxt: 0x0000000000000000 }
[SLAB]           [ idx 0 ] { addr: 0x0000000087f4e020, as_ptr: 0x0000000087f4e218, as_obj: { tp: 3, ref: 9, readable: 1, writable: 1, pipe: 0x0000000000000000, ip: 0x0000000080035348, off: 0, major:
[SLAB]           [ idx 1 ] { addr: 0x0000000087f4e218, as_ptr: 0x0000000087f4e410, as_obj: { tp: -2013993968, ref: 0, readable: 1, writable: 1, pipe: 0x0000000000000000, ip: 0x0000000080035348, off:
[SLAB]           [ idx 2 ] { addr: 0x0000000087f4e410, as_ptr: 0x0000000087f4e608, as_obj: { tp: -2013993464, ref: 0, readable: 5, writable: 5, pipe: 0x0505050505050505, ip: 0x0505050505050505, off:
[SLAB]           [ idx 3 ] { addr: 0x0000000087f4e608, as_ptr: 0x0000000087f4e800, as_obj: { tp: -2013992960, ref: 0, readable: 5, writable: 5, pipe: 0x0505050505050505, ip: 0x0505050505050505, off:
[SLAB]           [ idx 4 ] { addr: 0x0000000087f4e800, as_ptr: 0x0000000087f4e9f8, as_obj: { tp: -2013992456, ref: 0, readable: 5, writable: 5, pipe: 0x0505050505050505, ip: 0x0505050505050505, off:
[SLAB]           [ idx 5 ] { addr: 0x0000000087f4e9f8, as_ptr: 0x0000000087f4ebf0, as_obj: { tp: -2013991952, ref: 0, readable: 5, writable: 5, pipe: 0x0505050505050505, ip: 0x0505050505050505, off:
[SLAB]           [ idx 6 ] { addr: 0x0000000087f4ebf0, as_ptr: 0x0000000087f4ede8, as_obj: { tp: 0, ref: 0, readable: 5, writable: 5, pipe: 0x0505050505050505, ip: 0x0505050505050505, off: 84215045,
[SLAB]           [ idx 7 ] { addr: 0x0000000087f4ede8, as_ptr: 0x0000000087f4efe0, as_obj: { tp: 84215045, ref: 84215045, readable: 5, writable: 5, pipe: 0x0505050505050505, ip: 0x0505050505050505,
[SLAB] print_kmem_cache end
```

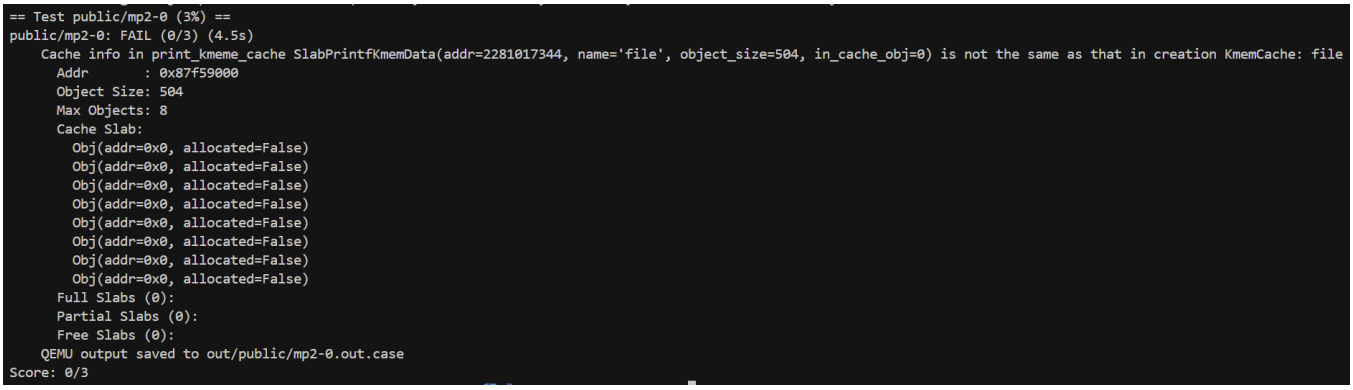

```
== Test public/mp2-0 (3%) ==
public/mp2-0: FAIL (0/3) (4.5s)
    Cache info in print_kmeme_cache SlabPrintfKmemData(addr=2281017344, name='file', object_size=504, in_cache_obj=0) is not the same as that in creation KmemCache: file
      Addr       : 0x87f59000
      Object Size: 504
      Max Objects: 8
      Cache Slab:
        Obj(addr=0x0, allocated=False)
        Obj(addr=0x0, allocated=False)
        Obj(addr=0x0, allocated=False)
        Obj(addr=0x0, allocated=False)
        Obj(addr=0x0, allocated=False)
        Obj(addr=0x0, allocated=False)
        Obj(addr=0x0, allocated=False)
        Obj(addr=0x0, allocated=False)
      Full Slabs (0):
      Partial Slabs (0):
      Free Slabs (0):
    QEMU output saved to out/public/mp2-0.out.case
Score: 0/3
```

Search entries or author | Unread | Subscribe

Reply

(https:/ 張凱翔 (ZHANG,KAI-XIANG) (https://cool.ntu.edu.tw/courses/46296/users/188795)

Mar 27, 2025

看起來是因為你在輸出 New kmem_cache 那行的時候不小心把 in cache obj 設成 8 了
從你的 printfslab 看出你還沒有實作 cache slab 碎裂優化的，這樣 in cache obj 應該保持在 0

(http

楊子慶 (YANG, TZU-CHING) (https://cool.ntu.edu.tw/courses/46296/users/229158)

Mar 27, 2025

同學您好

是的，張同學的回答完全正確。

子慶

Reply