



## Mod 4 Chapter 10


### Creating an issue

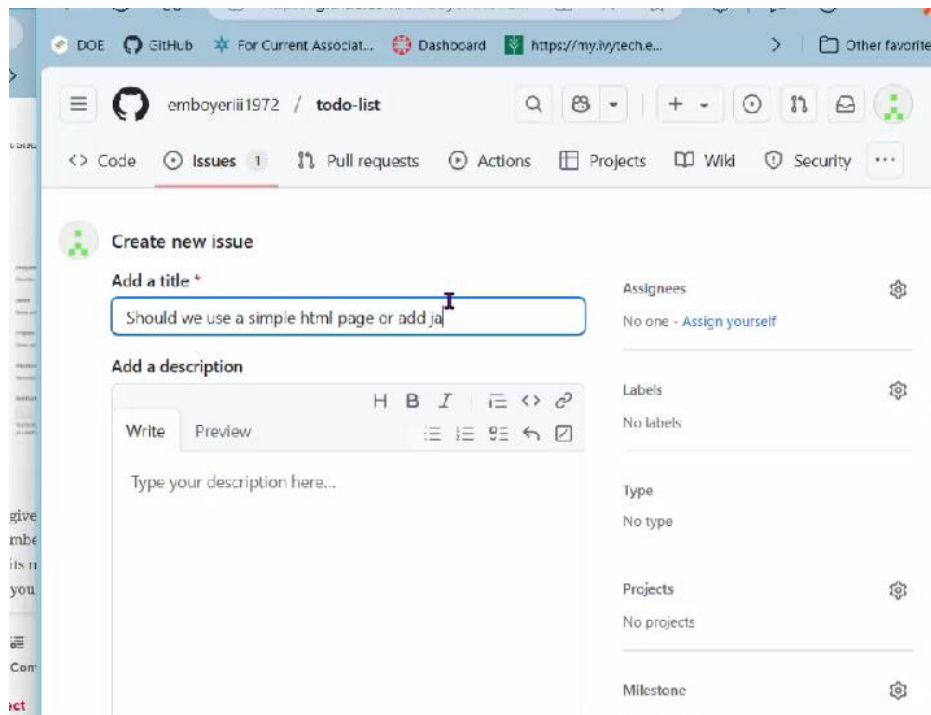


### Interacting with an issue (making a comment)

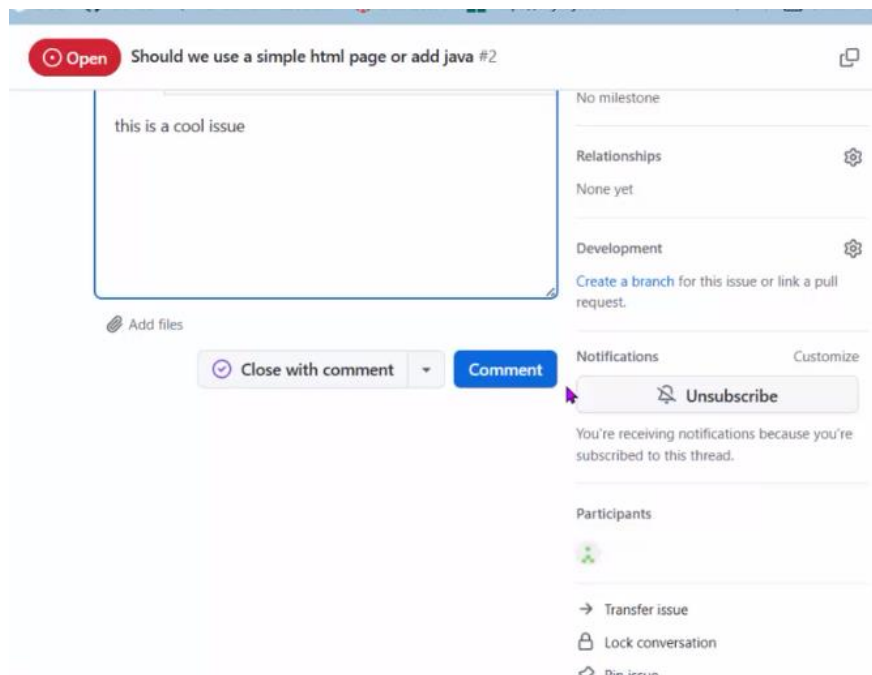


## Labeling an issue

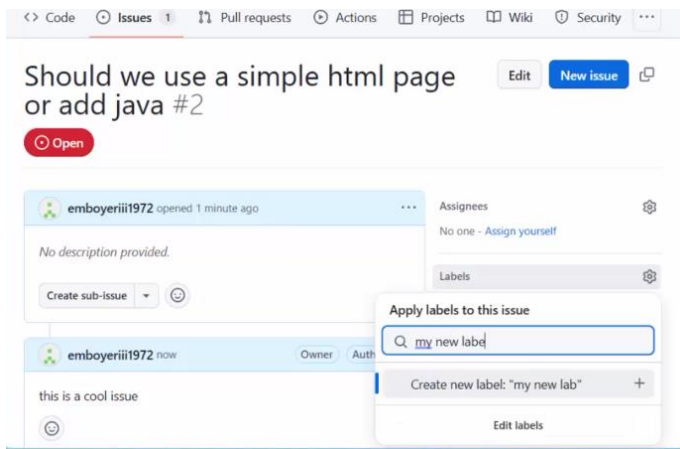

## Assigning someone to an issue

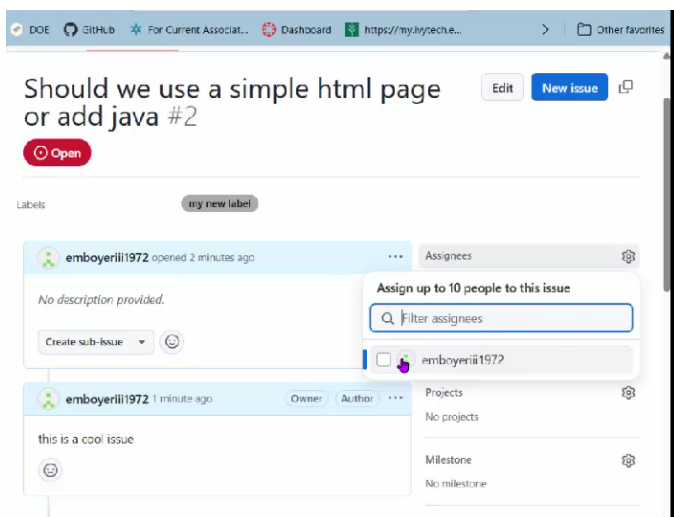

## Linking issues with commits

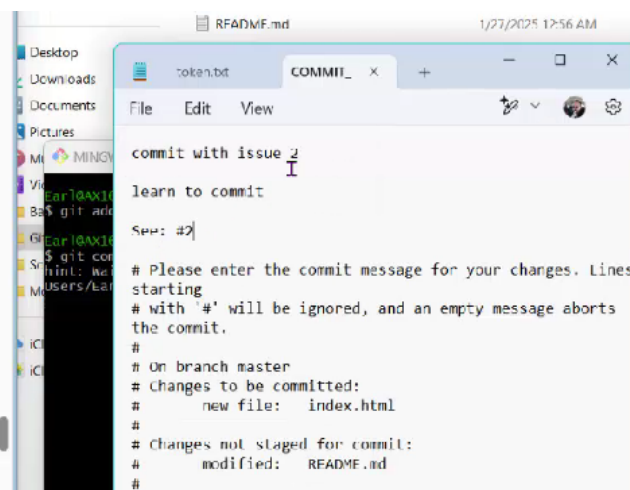

The screenshot shows a dual-monitor setup. The left monitor displays a code editor with a file named 'index.html'. The code in the editor is as follows:

```

<doctype html>
<html>
<head>
<meta charset="utf-8">
<title>TODO list</title>
</head>
<body>
<h1>TODO list</h1>
<h2>TODOs</h2>
<ol>
<li>Buy a hat for the bat</li>
<li>Clear the tags for the frog</li>
<li>Bring a box to the fox</li>
</ol>
</body>
</html>

```

The right monitor displays a web browser showing the rendered HTML output of the 'index.html' file. The browser window has a title bar with 'index.html' and a tab with 'index.html'. The rendered page shows a list of items: 'Buy a hat for the bat()', 'Clear the tags for the frog()', 'Bring a box to the fox()', 'Done!', 'Module-2', 'The mittens on the mittens()', and 'The mittens on the mittens()'. The code in the browser's developer tools shows the corresponding HTML structure:

```

<doctype html>
<head>
<meta charset="utf-8">
<title>TODO list</title>
</head>
<body>
<h1>Buy a hat for the bat</h1>
<h2>Clear the tags for the frog</h2>
<h3>Bring a box to the fox</h3>
</li>
<h3>Done</h3>
<h3>Module-2</h3>
<h3>The mittens on the mittens</h3>
</body>
</html>

```

The screenshot shows a web browser window with the address bar displaying 'embycrili1972 / todo-list'. The page title is 'Should we...'. The commit message is 'closing up shop', 'changed html code', and 'close #2'. The commit status is 'Please enter the commit message for your changes. # with \'#\' will be ignored, and an empty message aborts the commit.'