

# 1 Automated iterative forecasting for the 2 Portal Project

## 3 **Introduction**

4 Forecasting the future state of ecological systems is important for management,  
5 conservation, and evaluation of our fundamental understanding of ecology (Clark et al.  
6 2001, Tallis and Kareiva 2006, Díaz et al. 2015, Dietze 2017). Since Clark et al.  
7 [-clark2001] called for a more central role of forecasting in ecology, an increasing  
8 number of ecological forecasts are being published. However, most of these forecasts  
9 are made once, published, and never assessed or updated. Without assessment, we have  
10 limited information on how much confidence to place in our predictions; without  
11 regular updates, forecasts lack the most up-to-date information as conditions change  
12 (Dietze et al. 2016). This lack of both regular assessment and active updating has  
13 limited the progress of ecological forecasting and hindered our ability to make useful  
14 and reliable predictions. For ecological forecasting to mature as a field, we need to  
15 change how we produce and interact with forecasts, creating a more dynamic interplay  
16 between model development, prediction generation, and incorporation of new data and  
17 information (Dietze et al. 2016).

18 With the goal of making ecological forecasting more dynamic and responsive, Dietze et  
19 al [-dietze2018] recently called for an increase in iterative near-term forecasting.  
20 Iterative near-term forecasting means making forecasts for the near future and making  
21 these forecasts repeatedly through a cycle of forecast evaluation, integration of updated  
22 data, and generation of new forecasts. This approach to forecasting has a number of  
23 advantages. Because forecasts are made ‘near-term’—daily to annual forecasting

24 instead of multi-decadal—predictions can be assessed more quickly and frequently,  
25 leading to more rapid model improvements (Dietze et al. 2016, Tredennick et al. 2016).  
26 Because the forecasts are made repeatedly through time, new data can be integrated with  
27 each new forecast cycle. This iterative approach to forecasting allows any changes in  
28 the state of the system that have occurred since the previous forecast to be incorporated  
29 and accounted for (Dietze et al. 2016). Iterative near-term forecasting has the potential  
30 to promote rapid improvement in the state of ecological forecasting by quickly  
31 identifying how models are failing, facilitating rapid testing of improved models, and  
32 incorporating updated data so models run with the most up-to-date information on the  
33 system available. While use of iterative near-term forecasting is often contextualized as  
34 a management tool, this approach to model testing can also be used to improve our  
35 basic understanding of ecological systems. For example, alternative mechanistic models  
36 can be competed to see which model provides the best forecasts for near-term dynamics,  
37 thus providing insights into the relative importance of different processes driving  
38 dynamics of ecological systems (Dietze et al. 2016). Whether deployed for basic or  
39 applied uses, iterative near-term forecasting incorporates a more dynamic interplay  
40 between models, predictions, and data that is clearly needed to improve ecological  
41 forecasting and our understanding of ecological systems more broadly.

42 Because iterative near-term forecasting requires a dynamic interplay of models,  
43 predictions, and data, Dietze et al [-dietze2018] highlight approaches to data  
44 management, model construction and evaluation, and cyberinfrastructure that are  
45 necessary to effectively implement this type of forecasting (Box 1). Data to be used for  
46 iterative near-term forecasting needs to be widely accessible, which requires data to be  
47 released quickly under open licenses (Dietze et al. 2016, Vargas et al. 2017) and  
48 structured so that it can be used easily by a variety of researchers and in multiple  
49 modeling approaches (Borer et al. 2009, Strasser et al. 2011). Models need to be able to  
50 deal with uncertainty, in both the predictors and the predictions, to properly convey

51 uncertainty in the resulting forecasts. Multiple models should be compared to assess  
52 which models are performing best and to allow for combining models to form ensemble  
53 predictions. Ensuring that data and models are regularly updated and new forecasts are  
54 made requires cyberinfrastructure to automate data processing, model fitting, prediction,  
55 model evaluation, forecast visualization, and archiving. In combination, these  
56 approaches should allow forecasts to be easily rerun and evaluated as new data becomes  
57 available (Box 1; Dietze et al. 2016).

58 While iterative near-term forecasting is an important next step in the evolution of  
59 ecological forecasting, the requirements outlined by Dietze et al (Box 1) are not trivial  
60 to implement; few of their recommendations are in widespread use in ecology today.  
61 We examined what it would entail to operationalize Dietze et al's recommendations by  
62 constructing our own iterative near-term forecasting pipeline for an on-going long-term  
63 (~40 year) ecological study that collects high-frequency data on desert rodent  
64 abundances. We constructed our forecasting pipeline with the goal of being able to  
65 forecast rodent abundances and evaluate our predictions on a monthly basis. In this  
66 paper, we discuss our approach for creating this iterative near-term forecasting pipeline,  
67 the challenges we encountered, the tools we used, and the lessons we learned that may  
68 help others to create their own iterative forecasting systems.

## 69 **System Background**

70 Iterative forecasting requires data that is collected repeatedly, and it benefits most from  
71 data that is collected frequently, as this provides more opportunities for updating model  
72 results and assessing (and potentially improving) model performance (Box 1; Dietze et  
73 al. 2016). The Portal Project is a long-term ecological study situated in the Chihuahuan  
74 Desert (2 km north and 6.5 km east of Portal, Arizona, US). Researchers have been  
75 continuously collecting data at the site since 1977, including data on the abundance of

76 rodent and plant species (monthly and twice yearly, respectively) and climactic factors  
77 such as air temperature and precipitation (daily). The site consists of 24 50m x 50m  
78 experimental plots. Each plot contains 49 permanently marked trapping stations laid out  
79 in a 7 x 7 grid, and all plots are trapped with Sherman live traps for one night each  
80 month. For all rodents caught during a trapping session, information on species identity,  
81 size, and reproductive condition is collected, and new individuals are given  
82 identification tags. We use the data from the control plots at this site, where rodent  
83 populations are not experimentally manipulated. This data on rodent populations is  
84 high-frequency, uses consistent trapping methodology, and has an extended time-series  
85 (469 monthly samples and counting), making this study an ideal case for near-term  
86 iterative forecasting.

## 87 **Implementing an automated iterative forecasting system**

88 Implementation of iterative forecasting requires the regular rebuilding of models with  
89 new raw data as it becomes available and the presentation of those forecasts in usable  
90 forms; in our case, this occurs monthly. Doing this in an efficient and maintainable way  
91 relies on developing an automated pipeline to handle the six stages of converting raw  
92 data into new forecasts: data collection, data sharing, data manipulation, modeling and  
93 forecasting, archiving, and presentation of the forecasts (Figure 1). We implemented  
94 this pipeline using a “continuous analysis” framework (*sensu* Beaulieu-Jones and  
95 Greene 2017) that automatically processes the most up-to-date data, refits the models,  
96 makes new forecasts, archives the forecasts, and updates a website with analysis of  
97 current and previous forecasts. In this section we describe our approach to streamlining  
98 and automating the multiple components of the forecasting pipeline.

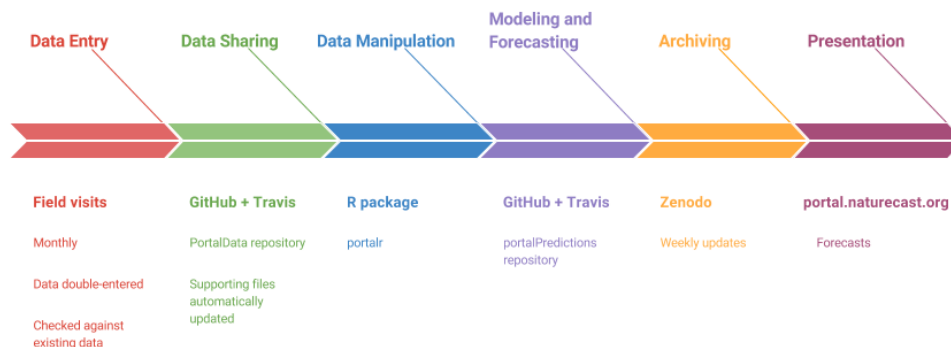


Figure 1: Figure 1. Forecasting pipeline

## Continuous Analysis Framewor

A core component of iterative near-term forecasting is the regular rerunning of forecasting pipeline. This can be conducted manually - with a human making sure all code is run and all tables and files are updated - or automatically by having the computer conduct those tasks. We chose to have the computer run our pipeline and employed “continuous analysis” (*sensu* Beaulieu-Jones and Greene 2017) to drive the automation of both the full pipeline and a number of its individual components. Continuous analysis uses a set of tools originally designed for software development called “continuous integration” (CI). CI combines computing environments for running code with monitoring systems to identify changes in data or code. Essentially, CI is a computer helper whose job is to watch the pipeline and, when it sees a change in the code or data, it runs all the tasks needed to ensure that the forecasting pipeline runs from beginning to end. This is useful for iterative near-term forecasting because it does not rely on humans to remember to create forecasts when new models or data are added. These tools are common in the area of software development where they are used to

114 automate software testing and integrate work by multiple software developers working  
 115 on the same software. However, these tools can be used for any computational task that  
 116 needs to be regularly repeated or run after changes to code or data (Beaulieu-Jones and  
 117 Greene 2017). Because of the widespread use of CI in software development, several CI  
 118 services already exist. Our forecasting pipeline currently runs on a publicly available  
 119 continuous integration service (Travis CI; <https://travis-ci.org/>) that is free for open  
 120 source projects (up to a limited amount of computing time); alternative services that can  
 121 be used to run code on local or cloud-based computational infrastructure are available,  
 122 such as Drone (<http://try.drone.io/>) (Beaulieu-Jones and Greene 2017). As detailed  
 123 below, we use CI to quality check data, test code using “unit tests” (Wilson et al. 2014),  
 124 build models, make forecasts, and publicly present and archive the results (Figure 2).

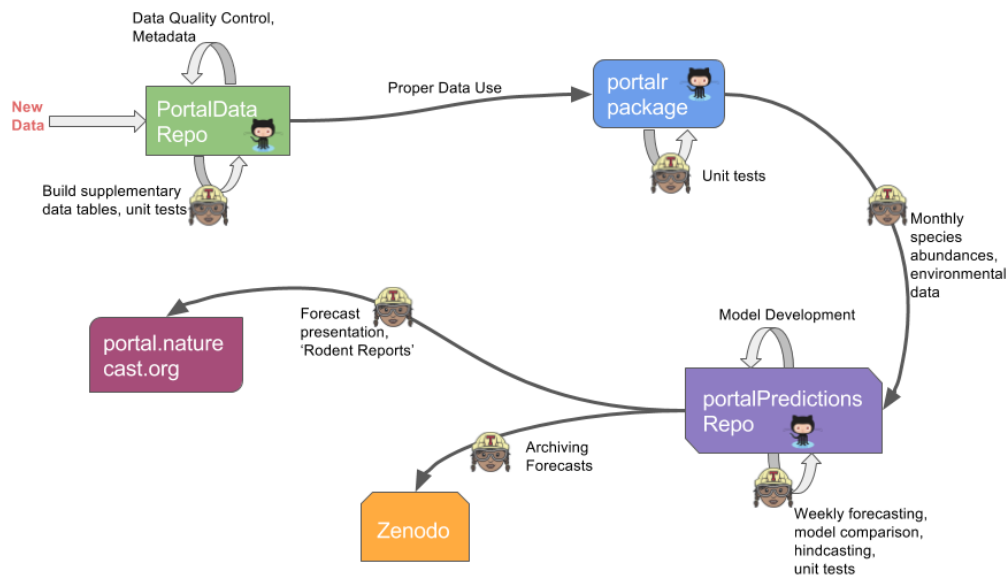


Figure 2: Figure 2. Continuous integration system.

125 In addition to automatically running software pipelines, the other key component of  
 126 “continuous analysis” is making sure that the pipelines will continue to run even as  
 127 software dependencies change (Beaulieu-Jones and Greene 2017). Many of us have  
 128 experienced the frustrations that can occur when software updates (e.g., changes in R  
 129 package versions) create errors in previously functional code. We experienced this issue

130 when a package one of our models relies on, `tscount` [liboschik2015], was  
131 temporarily removed from CRAN (the R package repository) and, therefore, could not  
132 be installed in the usual way. This broke our forecasting pipeline because we could no  
133 longer run models that used that package. To minimize issues with changes in software  
134 dependencies, we follow Beaulieu and Green’s (2017) recommendation to use software  
135 containers. Software containers are standalone packages that contain copies of  
136 everything you need to run some piece of software. Once created, a software container  
137 is basically a time capsule, it contains all the software dependencies in the exact state  
138 used to develop and run the software. If those dependencies change (or disappear) in the  
139 wider world, they still exist, unchanged, in your container. We use an existing platform,  
140 Docker, to store an exact image of the complete software environment for running the  
141 forecasts. Docker also allows a specified set of packages to be used consistently across  
142 different computer and server environments. Using containers allows us to update to  
143 new package versions after testing and making any necessary changes to the data  
144 processing and analysis code. We use a container created by the Rocker project which is  
145 a Docker image with many important R packages (i.e. tidyverse) pre-installed (Boettiger  
146 and Eddelbuettel 2017). We use add our code and dependencies to this existing Rocker  
147 image to create a software container for our forecasting pipeline. In combination, the  
148 automated running of the pipeline (continuous integration) and the guarantee it will not  
149 stop working unexpectedly due to software dependencies (via a software container)  
150 allows continuous analysis to serve as the glue that connects all stages of the forecasting  
151 pipeline.

## 152 **Data Collection, Entry, and Processing**

153 Iterative forecasting benefits from frequently updated data on the state of the system so  
154 that state changes can be quickly incorporated into new forecasts (Dietze et al. 2016).  
155 Frequent data collection and rapid entry and processing of data are both important for

156 providing the most up-to-date data for forecasting. Since our data is collected monthly,  
157 ensuring that the models have access to the newest data requires a data latency period of  
158 less than 1 month from collection to availability for modeling. To accomplish this, we  
159 automated components of the data processing and quality assurance/quality control  
160 (QA/QC) process to reduce the time needed to add new data to the database.

161 New data is double-entered into Excel using the “data validation” feature. The two  
162 versions are then compared in an R script to control for errors in data entry. Quality  
163 control (QC) checks written in R using the `testthat` R package (Wickham 2011) are  
164 run on the data to test for validity and consistency both within the new data (e.g. sexual  
165 characteristics of an animal match M/F designation) and between the new and archived  
166 data (e.g. species and sex are consistent for recaptures of the same animal based on tag  
167 number). The local use of the QC scripts to flag problematic data greatly reduces the  
168 time spent error-checking and ensures that the quality of data is consistent. The data is  
169 then submitted to a GitHub-based data repository. GitHub is a software development  
170 tool for managing computer code development, but we have also found it useful for data  
171 management. Changes to data can be tracked through version control, and additions and  
172 changes to the data can be monitored through pull requests (notifications that someone  
173 has a modified version of the data to contribute). QA/QC checks are automatically rerun  
174 on the submitted data using continuous integration to ensure that these checks have been  
175 run and that no avoidable errors reach the official version of the dataset.

176 We also automated the updating of supplementary data tables, including information on  
177 weather and trapping history, that were previously updated manually. As soon as new  
178 field data is merged into the repository, continuous integration updates all  
179 supplementary files. Weather data is automatically fetched from our cellular-connected  
180 weather station, cleaned, and appended to the weather data table. Supplementary data  
181 tables related to trapping history are updated based on the data added to the main data  
182 tables. Using CI for this ensures that all supplementary data tables are always



183 up-to-date with the core data.

## 184 **Data Sharing**

185 The Portal Project has a long history of making its data publicly available, which means  
186 that anyone can use it for forecasting or other projects. Historically the publication of  
187 the data was conducted through data papers, the most common approach in ecology;  
188 however, this approach caused years of data latency. Recently, the project has switched  
189 to posting data directly to a public GitHub repository with a CC0 license. This  
190 immediate posting reduces that data latency to less than one month and, therefore,  
191 makes meaningful iterative near-term forecasting possible for not only our group but  
192 other interested parties, as well.

## 193 **Data Manipulation**

194 Once data is available, it needs to be processed into a form appropriate for modeling. In  
195 many ecological datasets, this requires not only simple data manipulation but also a  
196 good understanding of the dataset to allow data to be aggregated appropriately. These  
197 data manipulation steps are often conducted using custom one-off code to convert the  
198 data into the desired form (Morris and White 2013), but this approach has several  
199 limitations. First, each researcher must develop their own data manipulation code,  
200 which is inefficient and can result in different decisions by different researchers about  
201 the details of data cleaning and aggregation. Subtle differences in data processing  
202 decisions have lead to confusion when reproducing results for the Portal data in the past.  
203 Second, this kind of code is rarely robust to changes in data structure and location.  
204 Based on our experience developing and maintaining the Data Retriever (Morris and  
205 White 2013, Senyondo et al. 2017), these kinds of changes are common. Finally, this  
206 kind of code is generally poorly tested, which can lead to errors based on mistakes in

207 data manipulation. To avoid these issues for the Portal Project data, the Portal team has  
208 been developing an R package (portalR; <http://github.com/weecology/portalr>) for  
209 acquiring the data and handling common data cleaning and aggregation tasks. As a  
210 result, our modeling and forecasting code only needs to install this package and run the  
211 data manipulation and summary functions to get the appropriate data. The package  
212 undergoes thorough automated unit tests to ensure that data manipulations are achieving  
213 the desired results. Having data manipulation code maintained in a separate package  
214 that focuses on consistently providing properly summarized forms of the most recent  
215 data has made maintaining the forecasting code itself much more straightforward.

## 216 **Modeling and Forecasting**

217 Ideally, iterative near-term forecasting involves regularly refitting a variety of different  
218 models. New models should be easy to incorporate to allow for iterative improvements  
219 to the general modeling structure and approach. We use CI to refit the models and make  
220 new forecasts each time the modeling code changes and when new data becomes  
221 available. We use a plugin infrastructure to allow new models to be easily added to the  
222 system. Each model is a script that takes in standardized inputs and returns standardized  
223 outputs (Figure 3). All models are run by the main forecasting code at each update, and  
224 the standardized outputs are combined to store the results of the different models’  
225 forecasts. A weighted ensemble model is then added with weights based on how well  
226 individual models fit the training data. This plugin infrastructure allows flexibility in all  
227 aspects of the modeling process, making it easier to explore new modeling approaches,  
228 and allows new models that fit the data well to immediately improve the ensemble  
229 forecast.

230 To allow flexibility in what the models predict, we designed a forecast output format  
231 that allows us to store relatively generic forecasts. Each forecast output file contains the  
232 date being forecast, the collection date of the data used for fitting the models, the date

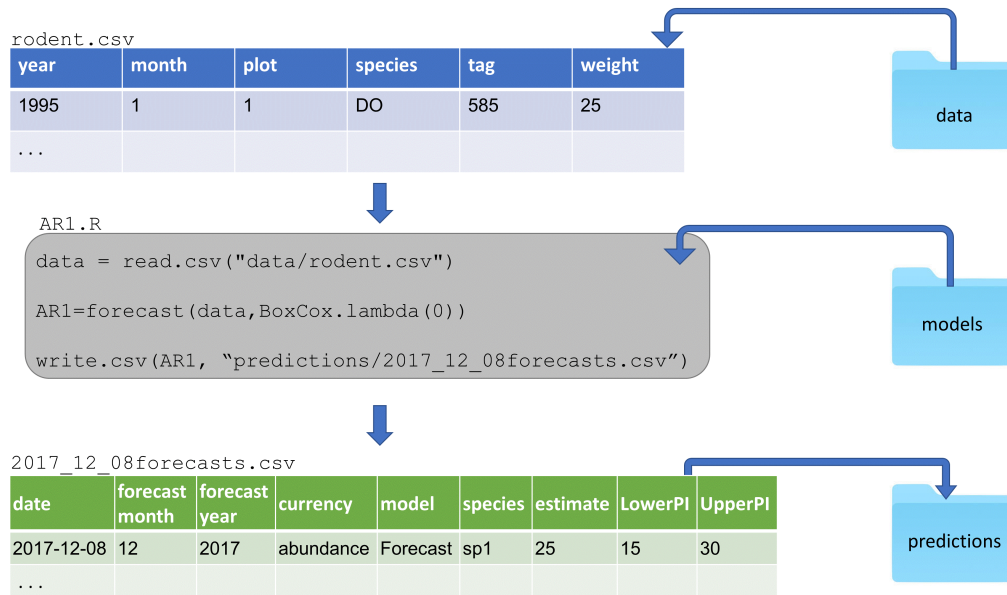


Figure 3: Figure 3. Demonstration of plugin infrastructure where each model script uses data provided by the core forecasting code and returns its forecasts in a predefined structure.

the forecast was made, the state variable being forecast (e.g., rodent biomass, the abundance of a species), and the forecast value and associated uncertainty of that forecast (Figure 3). This allows a variety of different forecasts to be stored in a common format and may serve as a useful starting point for developing a standard for storing ecological forecasts more generally.

## Evaluation and Hindcasting

Forecasts are currently evaluated using root mean square error (RMSE) to evaluate point forecasts and coverage to evaluate uncertainty. We plan to add additional metrics in the future. In addition to evaluating the actual forecasts, we also use hindcasting (forecasting on already collected data) to gain additional insight into the methods that work best for forecasting this system. For example a model is fit using rodent observations up to June 2005, then used to make a forecast 12 months out to May 2006. The observations of that 12 month period can immediately be used to evaluate the

246 model. Hindcasting can be conducted using all months from the beginning of the study,  
247 thus allowing model comparison of large numbers of hindcasts and giving insight into  
248 which models make the best forecasts. It can also be used to quickly evaluate new  
249 models instead of waiting for an adequate amount of data to accumulate.

## 250 **Archiving**

251 Publicly archiving forecasts before new data is collected allows the field to assess,  
252 compare, and build on forecasts made by different groups (???, McGill 2012,  
253 Tredennick et al. 2016, Dietze 2017). This archiving serves as a form of pre-registration  
254 for model predictions, helping facilitate unbiased interpretation of model performance.  
255 We explored three major repositories for archiving our forecasts: FigShare, Zenodo, and  
256 Open Science Framework. While all three repositories allowed for easy manual  
257 submissions (i.e., a human uploading files after each forecast), automating this process  
258 was substantially more difficult. Various combinations of repositories, APIs and  
259 associated R packages had issues with: 1) integrating authorization with continuous  
260 integration; 2) automatically making archived files public; 3) adding new files to an  
261 existing location; or 4) automatically permanently archiving the files. Our eventual  
262 solution was to leverage the GitHub-Zenodo integration  
263 (<https://guides.github.com/activities/citable-code/>) and automatically push forecasts to  
264 the GitHub repository from the CI server. The GitHub-Zenodo integration is designed  
265 to automatically create versioned archives of GitHub repositories. There is an existing  
266 one-time process for linking our forecasting repository on GitHub with Zenodo. Once  
267 this link is created, each time a new forecast is created, our pipeline adds the new  
268 forecasts to the GitHub repository and uses the GitHub API to create a new “release” of  
269 our repository. This triggers the Zenodo-GitHub integration, which automatically  
270 archives the resulting forecasts and the code that generated them under a top-level DOI  
271 that refers to all archived forecasts (<https://doi.org/10.5281/zenodo.833438>). Through

272 this process, we automatically archive every forecast made with a documented history  
273 of the archive. While this approach is functional because everything in the repository is  
274 archived when a new forecast is made, these archives are complicated, making it more  
275 complicated than necessary to find and access the forecasting results.

## 276 **Presentation**

277 In addition to archiving the results of each forecast, we present them on a website that  
278 displays monthly rodent forecasts, model evaluation metrics, monthly reports, and  
279 information about the study site (Figure 4; <http://portal.naturecast.org>). The website  
280 includes a graphical presentation of the most recent month's forecasts (including  
281 uncertainty) and compares the latest data to the previous forecasts. Information on the  
282 the species and the field site targeted to a general audience are also included. The site is  
283 built using Rmarkdown (Allaire et al. 2017), which naturally integrates into the pipeline,  
284 and is automatically updated after each forecast. The `knitr` R package (Xie 2015)  
285 compiles the code into HTML, which is then published using Github Pages  
286 (<https://pages.github.com/>). The files for the website are stored in a subdirectory of the  
287 forecasting repository. As a result, the website is also archived automatically as part of  
288 the forecast archiving.

## 289 **Discussion**

290 Following the recommendations of Dietze et al [-dietze2018], we developed an  
291 automated iterative forecasting system to support repeated forecasting of an ecological  
292 system. Our forecasting system automatically acquires and processes the newest data,  
293 refits the models, makes new forecasts, publicly archives those forecasts, and presents  
294 both the current forecast and information on how previous forecasts performed. Every  
295 week our forecasting system generates a new set of forecasts with no human

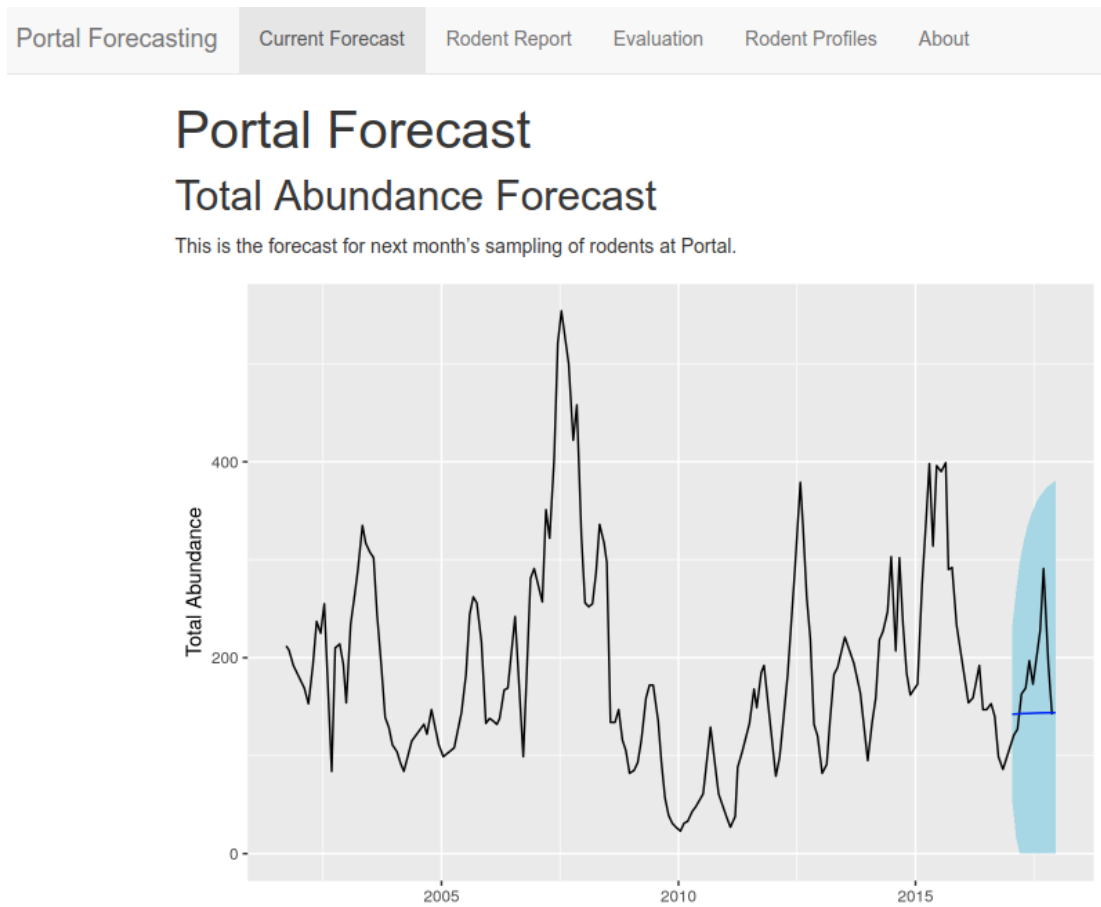


Figure 4: Figure 4. Screen capture of the homepage of the Portal Forecasting website; <http://portal.naturecast.org>

intervention, except for the entry of new field data. This ensures that forecasts based on the most recent data are always available and allows us to rapidly assess the performance of multiple forecasting models for a number of different states of the system, including the abundances of individual species and community-level variables such as total abundance. To create this iterative near-term forecasting system, we used R to process data and conduct analyses, and we leveraged already existing services (i.e. GitHub, Travis, Docker) for more complicated cyberinfrastructure tasks. Thus, our approach to developing iterative near-term forecasting infrastructure provides an example for how short-term ecological forecasting systems can be initially developed.

We designed this forecasting system with the goal of making it relatively easy to build, maintain, and extend. We used existing technology for both running the pipeline and building individual components, which allowed the system to be built relatively cheaply in terms of both time and money. This included the use of tools like Docker for reproducibility, the Travis CI continuous integration system for automatically running the pipeline, Rmarkdown and `knitr` for generating the website, and the already existing integration between Github and Zenodo to archive the forecasts. By using this “continuous analysis” approach (Beaulieu-Jones and Greene 2017), where analyses are automatically rerun when changes are made to data, models, or associated code, we have reduced the time required by scientists to run and maintain the forecasting pipeline. To make the system extensible so that new models could be easily incorporated, we use a plugin-based infrastructure so that adding a new model to the system is as easy as adding a single file to the ‘models’ folder in our repository (Figure 3). This should substantially lower the barriers to other scientists contributing models to this forecasting effort. We also automatically archive the resulting forecasts publicly so that, as new data is collected, the performance of these forecasts can be assessed by both us and other researchers. This serves as a form of “pre-registration” by providing a quantitative record of the forecast before the data being predicted were collected.

323 While building this system was facilitated by the use of existing technological solutions,  
324 there were still a number of challenges in making existing tools work for automated  
325 iterative forecasting. Continuous integration is designed primarily for running  
326 automated tests on software, not for running a coordinated forecasting pipeline. As a  
327 result, extra effort was sometimes necessary to figure out how to get these systems to  
328 work properly in non-standard situations, like running code that was not part of a  
329 software package. In addition, hosted continuous integration solutions, like Travis,  
330 provide only limited computational resources. As the number and complexity of the  
331 models we fit has grown, we have had to continually invest effort in reducing our total  
332 compute time so we can stay within these limits. Finally, we found no satisfactory  
333 existing solution for archiving our results. All approaches we tried had limitations when  
334 it came to automatically generating publicly versioned archives of forecasts on a  
335 repeated basis. Overall, we found existing technology to be sufficient to the task, but it  
336 required greater expertise and a greater investment of time than is ideal. Tool  
337 development to reduce the effort required for scientists to set up their own short-term  
338 forecasting systems would clearly be useful, but our efforts show that it is still currently  
339 possible for scientists using existing tools to develop initial iterative systems as a  
340 method for both advancing scientific understanding and developing proof of concept  
341 forecasting systems. By developing these systems so that they already produce  
342 automated iterative forecasts, it will be easier to convert these systems into fully  
343 operationalized forecasting systems that are relied on for decision making (Dietze et al.  
344 2016, other paper by operationalization co-authors).

345 Because of the breadth of expertise needed to set up our forecasting pipeline, our effort  
346 required a team with diverse skills and perspectives, ranging from software  
347 development to field site expertise. It is rare to find such breadth within a single  
348 research group, and our system was developed as a collaboration between the lab  
349 collecting the data and a computational ecology lab. When teams have a breadth of



350 expertise, communication can be challenging. We found a shared base of knowledge  
351 related to both the field research and fundamental computational skills was important  
352 for the success of the group. Everyone on the team had received training in fundamental  
353 data management and computing skills through a combination of university courses,  
354 Software and Data Carpentry workshops (???), and informal lab training efforts. In  
355 addition, everyone was broadly familiar with the study site and methods of data  
356 collection, and most team members had participated in field work at the site on multiple  
357 occasions. This provided a shared set of knowledge and vocabulary that actively  
358 facilitated interdisciplinary interactions. Given the current state of existing tools for  
359 forecasting, forecasting teams will need people with significant experience in working  
360 with continuous integration and APIs, which means interdisciplinary teams will  
361 generally be required for creating these pipelines until tool development improves.

362 We developed this infrastructure for automatically making iterative forecasts with the  
363 goals of making accurate forecasts for this well-studied system, learning what methods  
364 work well for ecological forecasting more generally, and improving our understanding  
365 of the processes driving ecological dynamics. The most obvious application of  
366 automated iterative ecological forecasting is for speeding up development of forecasting  
367 models by providing the most recent data available to models and by quickly iterating to  
368 improve the models used for forecasting. By learning what works best for forecasting in  
369 this and other ecological systems, we will better understand what the best approaches  
370 are for ecological forecasting more generally. By designing the pipeline so that it can  
371 forecast many different aspects of the ecological community, we also hope to learn  
372 about what aspects of ecology are more forecastable. Finally, automated forecasting  
373 infrastructures like this one also provide a core foundation for faster scientific inquiry  
374 more broadly because new models can quickly be applied to data and compared to  
375 existing models. The forecasting infrastructure does the time-consuming work of data  
376 processing, data integration, and model assessment, allowing new research to focus on

the models being developed and the inferences about the system that can be drawn from them (Dietze et al. 2016). We plan to use this pipeline to drive future research into understanding the processes that govern the dynamics of individual populations and the community as a whole. By regularly running different models for population and community dynamics, a near-term iterative pipeline such as ours should also make it possible to rapidly detect changes in how the system is operating, which should allow the rapid identification of ecological transitions or even possibly allow them to be prevented (??? example). By building an automated iterative near-term forecasting infrastructure we can improve our ability to forecast natural systems, our understanding of the biology driving ecological dynamics, and detect or even predict changes in system state that are important for conservation and management.

## **Acknowledgements**

This research was supported by the National Science Foundation through grant 1622425 to S.K.M. Ernest and by the Gordon and Betty Moore Foundation's Data-Driven Discovery Initiative through grant GBMF4563 to E.P. White. We thank all of the graduate students, postdocs, and volunteers who have collected the Portal Project over the last 40 years and the developers of all of the software and tools that made this project possible.

## **Box 1. Key practices for automated iterative near-term ecological forecasting**

A list of some of the key practices developed by Dietze et al [-dietze2018] for facilitating iterative near-term ecological forecasting and discussion of why these practices are important.

## 400 **Data**

### 401 **1. Frequent data collection**

402 Frequent data collection allows models to be regularly updated and forecasts to be  
403 frequently evaluated (Dietze et al. 2016). Depending on the system being studied, this  
404 frequency could range from sub-daily to annual, but typically the more frequently the  
405 data is collected the better.

### 406 **2. Rapid data release under open licenses**

407 Data should be released as quickly as possible (low latency) under open licenses so that  
408 forecasts can be made frequently and data can be accessed by a community of  
409 forecasters (Dietze et al. 2016, Vargas et al. 2017).

### 410 **3. Best practices in data structure**

411 To reduce the time and effort needed to incorporate this data into models, best practices  
412 in data structure need to be employed for managing and storing collected data to ensure  
413 it is easy to integrate into other systems (interoperability) (Borer et al. 2009, Strasser et  
414 al. 2011, White et al. 2013).

## 415 **Models**

### 416 **4. Focus on uncertainty**

417 Understanding the uncertainty of forecasts is crucial to interpreting the forecasts and  
418 understanding their utility. Models used for forecasting should be probabilistic to  
419 properly quantify uncertainty and to convey how this uncertainty increases through time.  
420 Evaluation of forecast models should include assessment of how accurately they  
421 quantify uncertainty as well as point estimates. This can be done using “proper and  
422 local” scores (Hooten and Hobbs 2015).

## 423 **5. Compare forecasts to simple baselines**

424 Understanding how much information is present in a forecast requires comparing its  
425 accuracy to simple baselines to see if the models yield improvements over the naive  
426 expectation that the system is static (???).

## 427 **6. Compare and combine multiple modeling approaches**

428 To quickly learn about the best approaches to forecasting different aspects of ecology,  
429 multiple modeling approaches should be compared for forecasting tasks (???).  
430 Different modeling approaches should also be combined into ensemble models, which  
431 are known to outperform single models for many forecasting and prediction tasks  
432 (Weigel et al. 2008).

## 433 **Cyberinfrastructure**

434 In addition to improvements in data and models, iterative near-term forecasting requires  
435 improved infrastructure and approaches to support continuous model development and  
436 iterative forecasting (Dietze et al. 2016).

## 437 **7. Best practices in software development**

438 Best practices should be followed in the development of scientific software and  
439 modeling to make it easier to maintain, integrate into pipelines, and build on by other  
440 researchers. Key best practices include using open licenses, good documentation,  
441 version control, and cross-platform support (Wilson et al. 2014, Hampton et al. 2015).

## 442 **8. Support easy inclusion of new models**

443 To facilitate the comparison and ensembling of different modeling approaches, code for  
444 fitting models and making forecasts should be easily extensible, allowing models  
445 developed by different groups to be easily integrated into a single framework (Dietze et  
446 al. 2016).

## 447 **9. Automated end-to-end reproducibility**

448 Iteratively making forecasts requires that acquiring the newest data, refitting the models,  
449 and making new forecasts is simple. Ideally, this should be done automatically without  
450 requiring human intervention. Therefore, the process of making forecasts should  
451 emphasize end-to-end reproducibility, including data, models, and evaluation (Stodden  
452 and Miguez 2014), to allow the forecasts to be easily rerun as new data becomes  
453 available (Dietze et al. 2016). Ideally, the entire forecasting pipeline will be rerun  
454 automatically as new data becomes available.

## 455 **10. Publicly archive forecasts**

456 Forecasts should be openly archived to demonstrate that the forecasts were made  
457 without knowledge of the outcomes (i.e., as a form of pre-registration *sensu*) and to  
458 allow the community to assess and compare the performance of different forecasting  
459 approaches both now and in the future (???, McGill 2012, Dietze et al. 2016,  
460 Tredennick et al. 2016). Ideally, the forecasts and evaluation of their performance  
461 should be automatically posted publicly in a manner that is understandable by both  
462 interested scientists and other stakeholders.

463 Allaire, J., J. Cheng, Y. Xie, J. McPherson, W. Chang, J. Allen, H. Wickham, A. Atkins,  
464 R. Hyndman, and R. Arslan. 2017. Rmarkdown: Dynamic documents for r.

465 Beaulieu-Jones, B. K., and C. S. Greene. 2017. Reproducibility of computational  
466 workflows is automated using continuous analysis. *Nature Biotechnology* 35:342–346.

467 Boettiger, C., and D. Eddelbuettel. 2017. An introduction to rocker: Docker containers  
468 for r. arXiv preprint arXiv:1710.03675.

469 Borer, E. T., E. W. Seabloom, M. B. Jones, and M. Schildhauer. 2009. Some simple  
470 guidelines for effective data management. *The Bulletin of the Ecological Society of*

471 America 90:205–214.

472 Clark, J. S., S. R. Carpenter, M. Barber, S. Collins, A. Dobson, J. A. Foley, D. M.  
 473 Lodge, M. Pascual, R. Pielke, W. Pizer, and others. 2001. Ecological forecasts: An  
 474 emerging imperative. *science* 293:657–660.

475 Dietze, M. C. 2017. Ecological forecasting. Princeton University Press.

476 Dietze, M. C., A. Fox, J. L. Betancourt, M. B. Hooten, C. S. Jarnevich, T. H. Keitt, M.  
 477 Kenney, C. Laney, L. Larsen, H. W. Loescher, and others. 2016. Iterative ecological  
 478 forecasting: Needs, opportunities, and challenges. *Proceedings of the National*  
 479 *Academy of Sciences*.

480 Díaz, S., S. Demissew, J. Carabias, C. Joly, M. Lonsdale, N. Ash, A. Larigauderie, J. R.  
 481 Adhikari, S. Arico, A. Báldi, and others. 2015. The ipbes conceptual  
 482 framework—connecting nature and people. *Current Opinion in Environmental*  
 483 *Sustainability* 14:1–16.

484 Hampton, S. E., S. S. Anderson, S. C. Bagby, C. Gries, X. Han, E. M. Hart, M. B. Jones,  
 485 W. C. Lenhardt, A. MacDonald, W. K. Michener, and others. 2015. The tao of open  
 486 science for ecology. *Ecosphere* 6:1–13.

487 Hooten, M. B., and N. Hobbs. 2015. A guide to bayesian model selection for ecologists.  
 488 *Ecological Monographs* 85:3–28.

489 McGill, B. J. 2012. Ecologists need to do a better job of prediction – part ii – partly  
 490 cloudy and a 20% chance of extinction (or the 6 p’s of good prediction).

491 Morris, B. D., and E. P. White. 2013. The ecodata retriever: Improving access to  
 492 existing ecological data. *PloS one* 8:e65848.

493 Senyondo, H., B. D. Morris, A. Goel, A. Zhang, A. Narasimha, S. Negi, D. J. Harris, D.  
 494 Gertrude Digges, K. Kumar, A. Jain, K. Pal, K. Amipara, and E. P. White. 2017.

495 Retriever: Data retrieval tool. *The Journal of Open Source Software* 2:451.

496 Stodden, V., and S. Miguez. 2014. Best practices for computational science: Software  
497 infrastructure and environments for reproducible and extensible research. *Journal of*  
498 *Open Research Software* 2.

499 Strasser, C., R. Cook, W. Michener, A. Budden, and R. Koskela. 2011. Promoting data  
500 stewardship through best practices. *in* *Proceedings of the environmental information*  
501 *management conference 2011 (eim 2011)*. Oak Ridge National Laboratory (ORNL).

502 Tallis, H. M., and P. Kareiva. 2006. Shaping global environmental decisions using  
503 socio-ecological models. *Trends in Ecology & Evolution* 21:562–568.

504 Tredennick, A. T., M. B. Hooten, C. L. Aldridge, C. G. Homer, A. R. Kleinhesselink,  
505 and P. B. Adler. 2016. Forecasting climate change impacts on plant populations over  
506 large spatial extents. *Ecosphere* 7.

507 Vargas, R., D. Alcaraz-Segura, R. Birdsey, N. A. Brunsell, C. O. Cruz-Gaistardo, B. de  
508 Jong, J. Etchevers, M. Guevara, D. J. Hayes, K. Johnson, and others. 2017. Enhancing  
509 interoperability to facilitate implementation of redd+: Case study of mexico. *Carbon*  
510 *Management* 8:57–65.

511 Weigel, A. P., M. Liniger, and C. Appenzeller. 2008. Can multi-model combination  
512 really enhance the prediction skill of probabilistic ensemble forecasts? *Quarterly*  
513 *Journal of the Royal Meteorological Society* 134:241–260.

514 White, E. P., E. Baldrige, Z. T. Brym, K. J. Locey, D. J. McGlinn, and S. R. Supp.  
515 2013. Nine simple ways to make it easier to (re) use your data. *Ideas in Ecology and*  
516 *Evolution* 6.

517 Wickham, H. 2011. Testthat: Get started with testing. *The R Journal* 3:5–10.

518 Wilson, G., D. A. Aruliah, C. T. Brown, N. P. C. Hong, M. Davis, R. T. Guy, S. H.  
519 Haddock, K. D. Huff, I. M. Mitchell, M. D. Plumbley, and others. 2014. Best practices

520 for scientific computing. PLoS biology 12:e1001745.

521 Xie, Y. 2015. Dynamic documents with r and knitr. CRC Press.