

From infrastructure signal to verified action

TriageNorth turns evidence into controlled response; an independently installed platform supplies shared services.

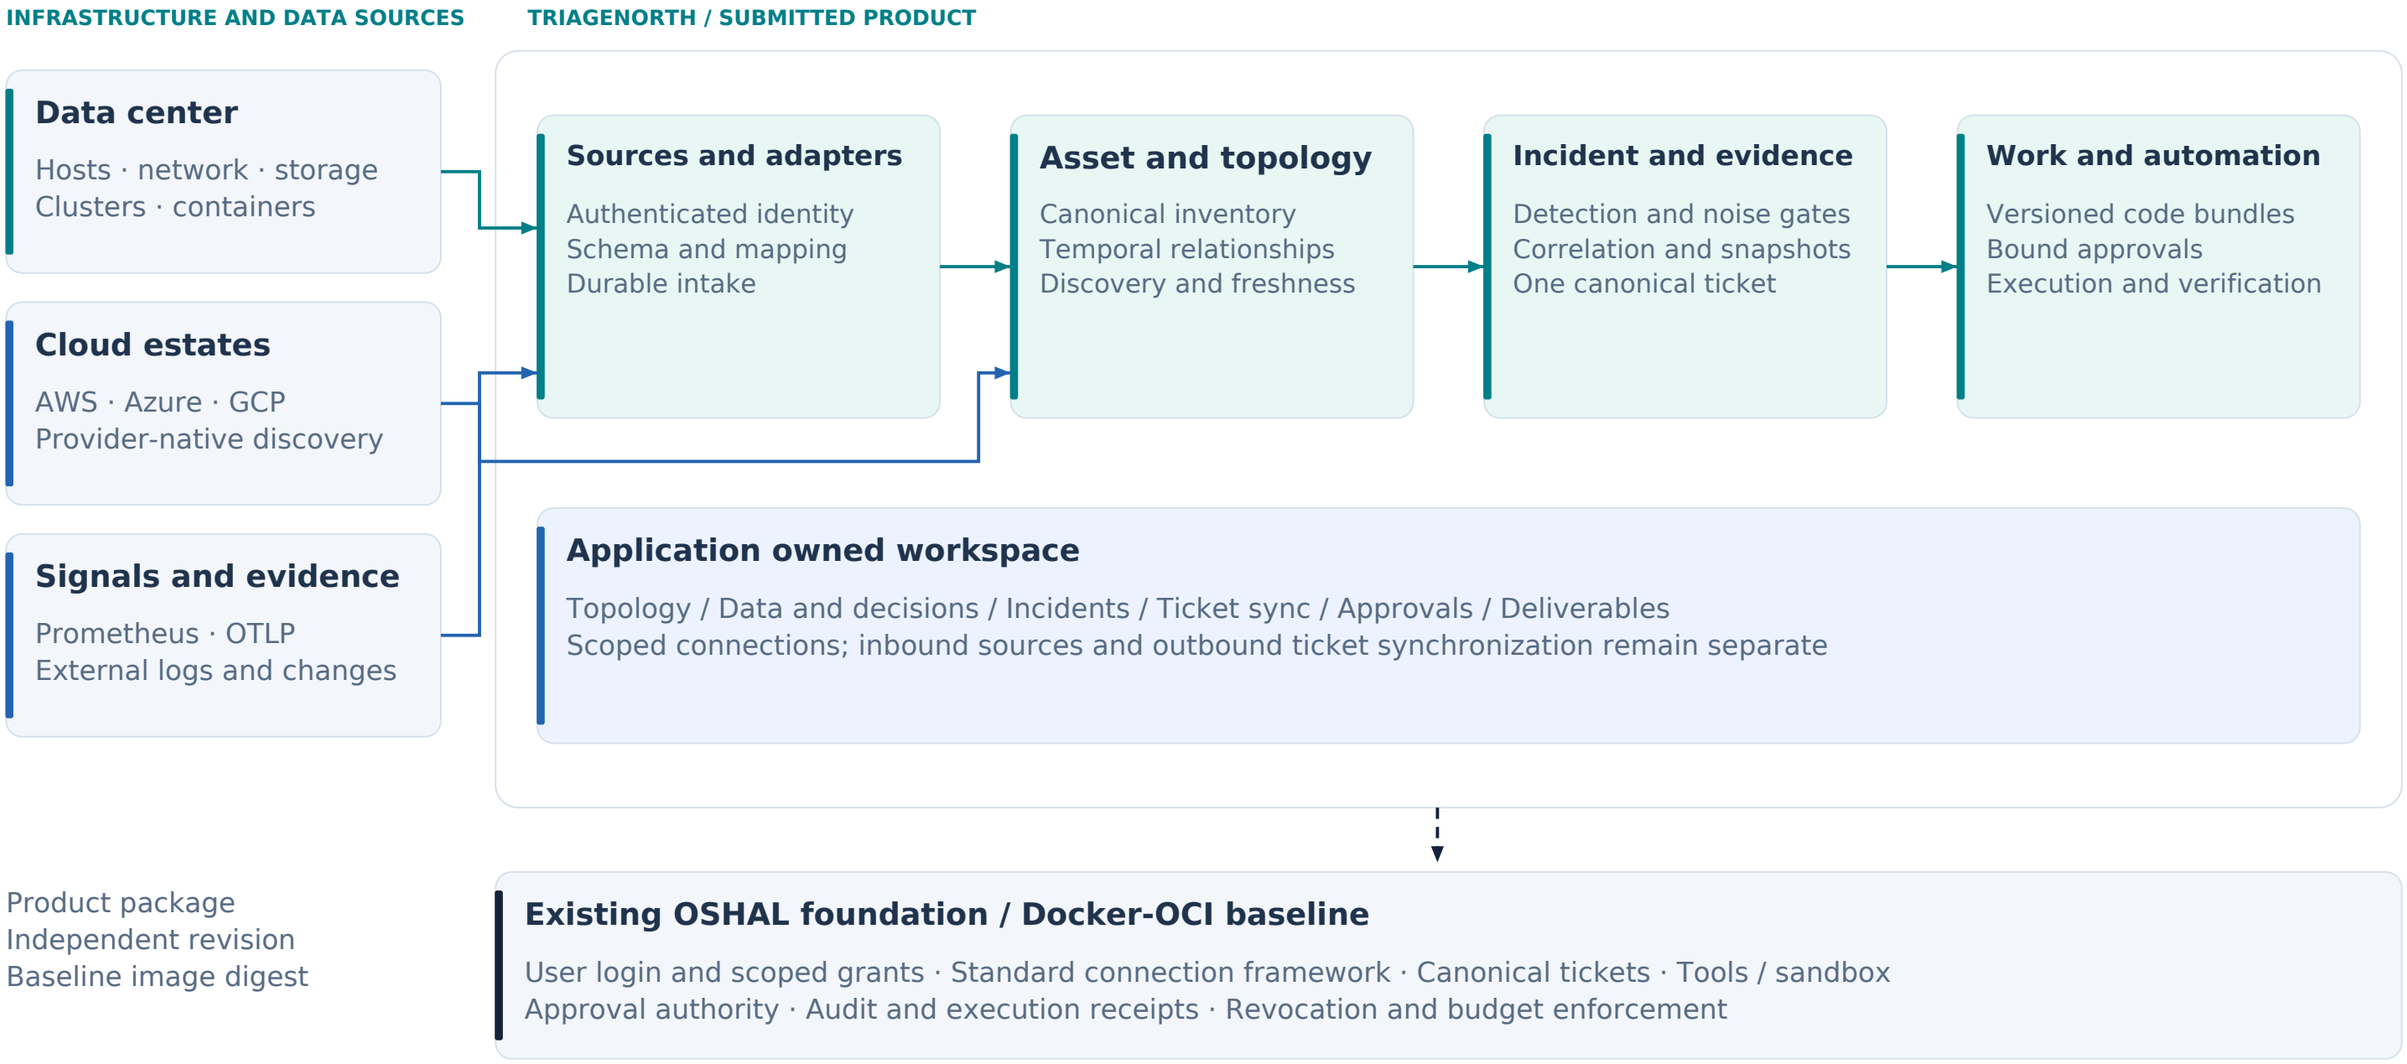

One estate across physical and virtual layers

The map distinguishes containment, network links, placement and dependencies. Health always includes freshness.

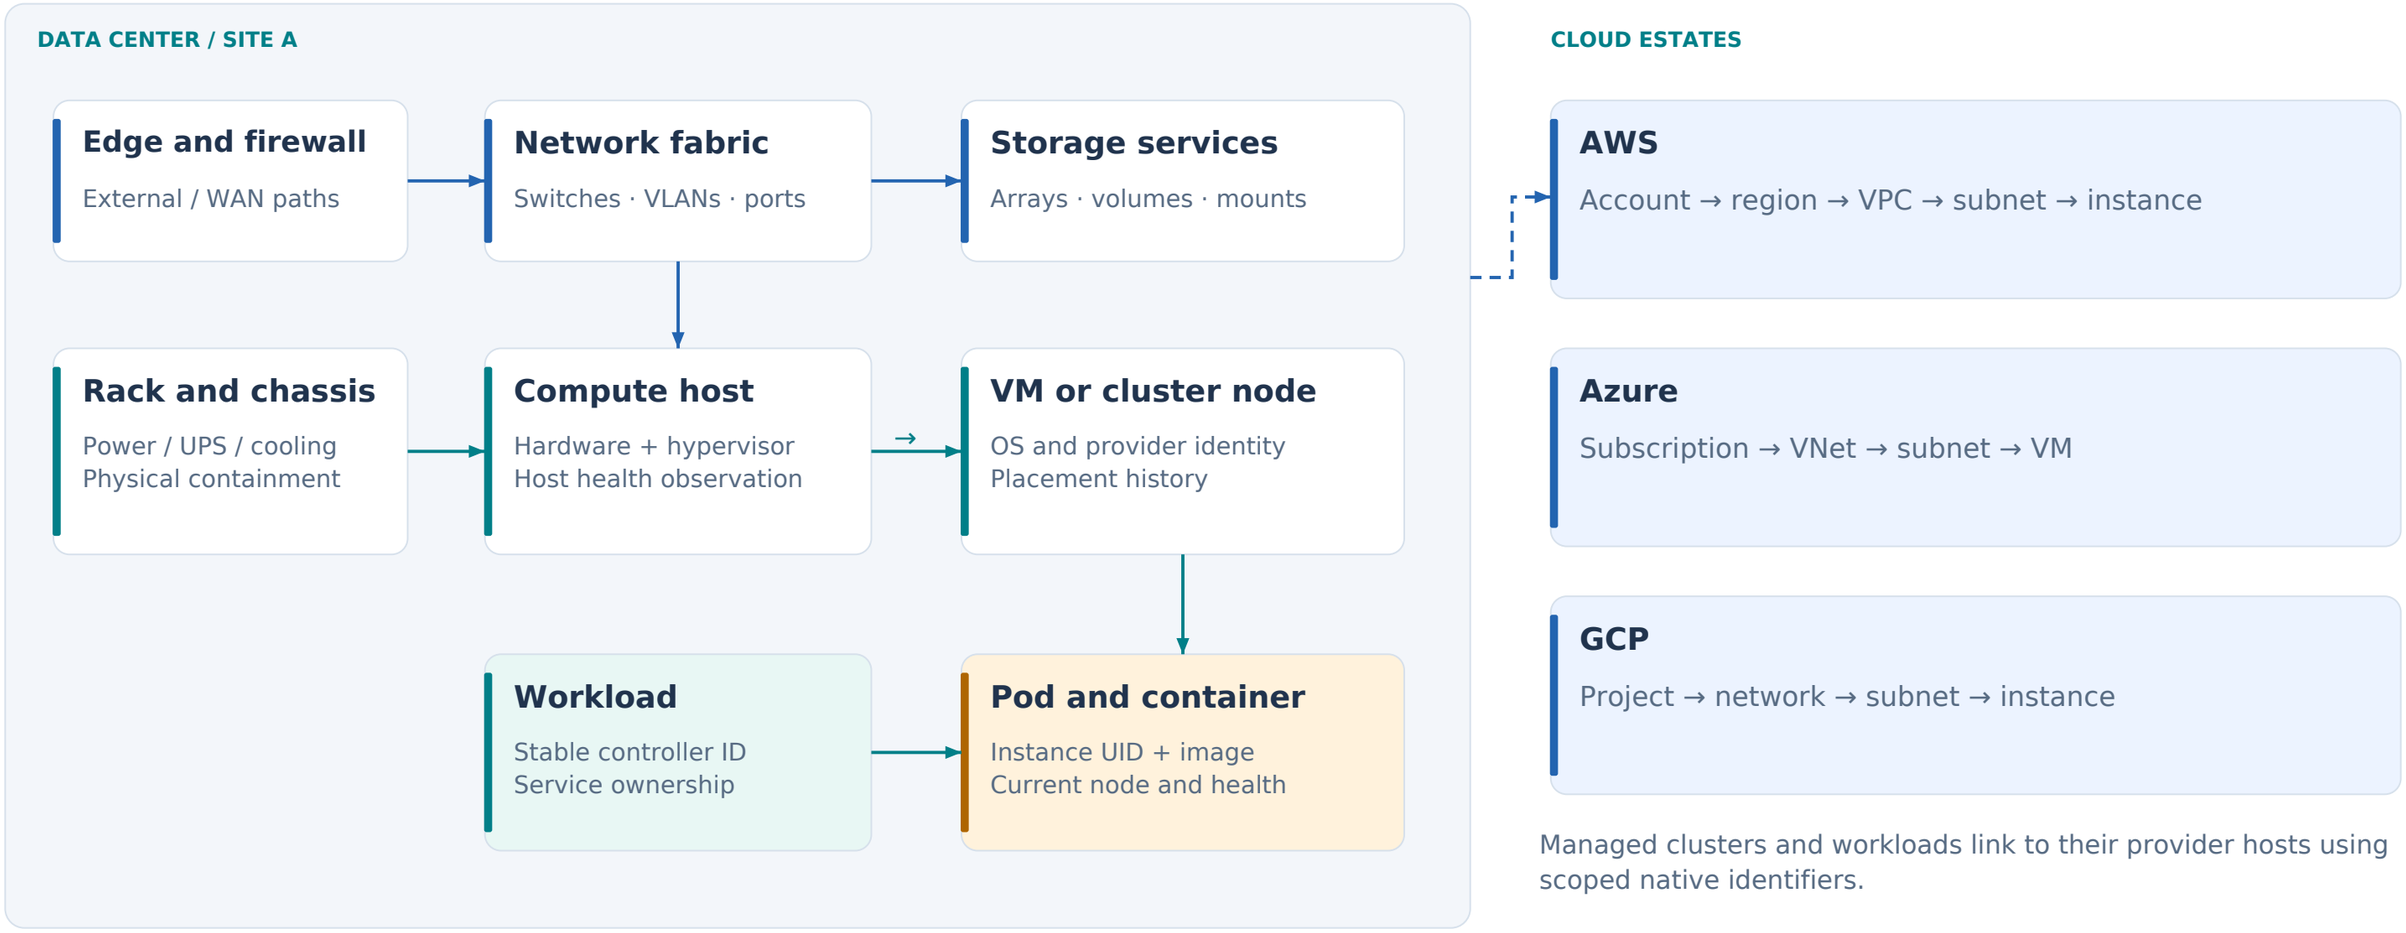

Managed clusters and workloads link to their provider hosts using scoped native identifiers.

Map controls: current or incident time · environment · layer · source · observed health · stale/unknown

Durable processing and information packets

Capture disappearing evidence promptly; repeated symptoms update an incident before they incur another investigation.

INGEST AND DETECT

1 Authenticate

Named source + schema
Scope and required IDs

2 Land and resolve

Separate raw / telemetry
Map to canonical asset

3 Evaluate rules

Versioned filter reasons
Percolation + windows

4 Reduce noise

Stable incident keys
Reserve before dispatch

5 Correlate

Open incident + graph
Record membership

INDEPENDENT DURABLE RECORDS

Raw deliveries

Accepted content and replay lineage

Telemetry

Signals, times, units and resource IDs

Alerts and decisions

Rule version, reason and incident link

CAPTURE AND ACT

Evidence policy

First occurrence / escalation
Bounded collection

Information packet

State + topology + signals
Optional external evidence

Ticket and proposal

Investigation and review
Versioned work bundle

Authorized execution

Exact approval or delegation
Recheck before running

Verify and record

Effect, not just exit status
Receipt / reopen / escalate

Every stage records its decision. Invalid identity, unmatched rules, partial evidence, unknown outcomes and stalled stages remain visible.

Authority is checked at every transition

Collecting evidence, approving a proposal and changing infrastructure are separate capabilities.

Observe and investigate

Read assets and signals
Collect allowed evidence
Generate a proposal

Approve concrete work

Inspect exact version and targets
Check evidence and preconditions
Approve once or reject

Execute and verify

Registered action or supported runner
Recheck current authority
Verify effect and record receipt

One time approval binds

Artifact digest + action version + exact targets + parameters
Principal + connection version + scope + expiry
Changed artifact, incarnation or precondition → new decision

Delegation authorizes a known action

Explicit policy + allowed template + constrained parameters
Environment / targets + time / cost / concurrency limits
Pause, revoke and stop conditions remain visible

Execution boundary

Installation grants no unattended changes. An administrator does not automatically become a production executor.
Newly generated scripts must pass tool registration and review before automated execution. Downloading is separate from running.
Successful command exit does not close the incident: the postcondition must pass, otherwise reopen or escalate within bounds.

Experience layout / Overview and topology

Application owned navigation makes operations feel complete while shared services remain underneath.

TriageNorth | Environment: Demo DC | Search assets and incidents | Access: scoped operator

- **Overview**
- Topology
- Assets
- Data decisions
- Incidents
- Ticket sync
- Approvals
- Automation
- Deliverables
- Administration

TriageNorth overview

Coverage, freshness, current incidents and the next decision in one place.

Coverage
5 sources · 1 stale

Incidents
2 active · 1 correlated

Approvals
1 needs review

Automation
Demo scope · paused

Estate topology

Network
Configured paths

→

Node 01
Observed healthy

→

Payments API
Crash loop · 100 hits

Select a resource to inspect its identity, current health, last observation and incident-time relationships.

Legend: healthy · degraded · critical · stale / unknown

Next decision

INC-0042 · Payments API
Evidence captured · proposal ready
Review requested action →

Coverage needs attention

Azure discovery is stale
Last successful scan is visible
Review connection and scope →

Experience layout / Connections and source mapping

Credential references, discovery scope and identifier mappings are visible together; write grants remain separate.

TriageNorth | Environment: Demo DC | Search assets and incidents | Access: scoped operator

- Overview
- Topology
- Assets
- Data decisions
- Incidents
- Ticket sync
- Approvals
- Automation
- Deliverables
- **Administration**

Connections and credentials

Tabs: Connections | Sources and mappings | Discovery | Access | Audit

Named connections

- Demo cluster
- AWS discovery
- Azure discovery
- GCP discovery
- External logs

Demo cluster connection

SCOPE
Demo DC / cluster-01

CREDENTIAL REFERENCE
vault://operations/demo-reader [masked]

CAPABILITIES
Inventory read · evidence read

DISCOVERY
Watch enabled · reconcile every 5 min

Test authentication | Test inventory
Test evidence access | Save configuration

Effective access

Caller: signed-in demo user
Account: explicitly selected
Writes: not granted
Auth / reads tested separately

Mapping preview

Source → authenticated ID
Resource ID → asset-009
Alert type → CrashLoop
Unmapped / conflicting IDs
Inspect incident-key preview

Experience layout / Incident and approval

Evidence and proposed work stay beside the exact authority requested from the operator.

TriageNorth | Environment: Demo DC | Search assets and incidents | Access: scoped operator

- Overview
- Topology
- Assets
- Data decisions
- **Incidents**
- Ticket sync
- Approvals
- Automation
- Deliverables
- Administration

INC-0042 Payments API restart loop

Demo DC / cluster-01 / payments · Open · 100 occurrences · Evidence captured

Asset and impact

Workload: payments-api
Instance: pod UID ...91
Node: node-01

Affected service
Payments API

Current placement
Different from first failure

View incident-time map →

Evidence | Timeline | Proposed work

Captured before replacement

Previous logs · pod state · node conditions
Topology at failure · collection manifest
External logs: unavailable, explicitly shown

Proposed action / version 3

Registered action: restart demo workload
Preflight and verification included
Inspect report, plan and file diff →

Editing the work creates a new version and invalidates its earlier approval.

Approve this version

Targets: payments-api / demo
Bundle: SHA256 ...6b3f
Principal: demo executor
Expiry: 15 minutes
Limits: 1 execution
Rollback: declared limitation
Postcheck: service readiness

Approve version 3

Reject | Request revision

Experience layout / Generated work and receipts

A deliverable is inspectable and downloadable; execution requires a separate valid authorization.

TriageNorth | Environment: Demo DC | Search assets and incidents | Access: scoped operator

- Overview
- Topology
- Assets
- Data decisions
- Incidents
- Ticket sync
- Approvals
- Automation
- **Deliverables**
- Administration

INC-0042 Work bundle version 3

Tabs: Files | Validation | Approvals | Execution receipts | Version history

Bundle files

report.md
evidence-manifest.json
plan.json
preflight.sh
diagnose.sh
remediate.sh
verify.sh
rollback.md
validation.json
SHA256SUMS

plan.json / inspect the exact approved target

action: restart-demo-workload
target: workload asset-009 / namespace demo
preconditions: expected incarnation, current grant, active approval
verify: readiness check passes; no repeated restart symptom

Validation and delivery

Schema + secret + parameter checks
Fixture validation result attached
Download version 3 ZIP →

Execution control

Approved registered action only
Recheck scope and authority
Run approved version →

Receipt: action + target + principal + digest + output + verified effect

Experience layout / Data and processing decisions

An explanation belongs to every record; raw deliveries and native OTLP observations have separate views.

TriageNorth | Environment: Demo DC | Search assets and incidents | Access: scoped operator

- Overview
- Topology
- Assets
- **Data decisions**
- Incidents
- Ticket sync
- Approvals
- Automation
- Deliverables
- Administration

Follow an input to its decision

Synthetic replay / Current-caller scope / Raw deliveries | Telemetry | Decisions | Replay history

Named source

Authenticated source
Committed receipt

→

Normalize and filter

Mapping + rule version
Reason and identity

→

Reduce and correlate

Delivery / symptom key
Suppression + membership

→

Capture and dispatch

Conditional packet
Canonical platform ticket

Decision inspector

Delivery retry: same source and event ID
Symptom update: independent delivery, same scoped key
Filtered / quarantined / unmatched: explain why
Snapshot: first occurrence or escalation policy

Identity and provenance


Source + environment + resource kind/scope/native ID
Alert type; preserve tuple boundaries and case
Mapping/rule version + input time + receipt + replay
Cross-source correlation stays a separate decision

Production acceptance

Reuse established windows, reservation and release-on-failure semantics; the local severity/tuple demo is not that algorithm.

Inbound alerts and outbound ticket synchronization

One platform login and standard connections; TriageNorth supplies operational meaning and the investigation experience.

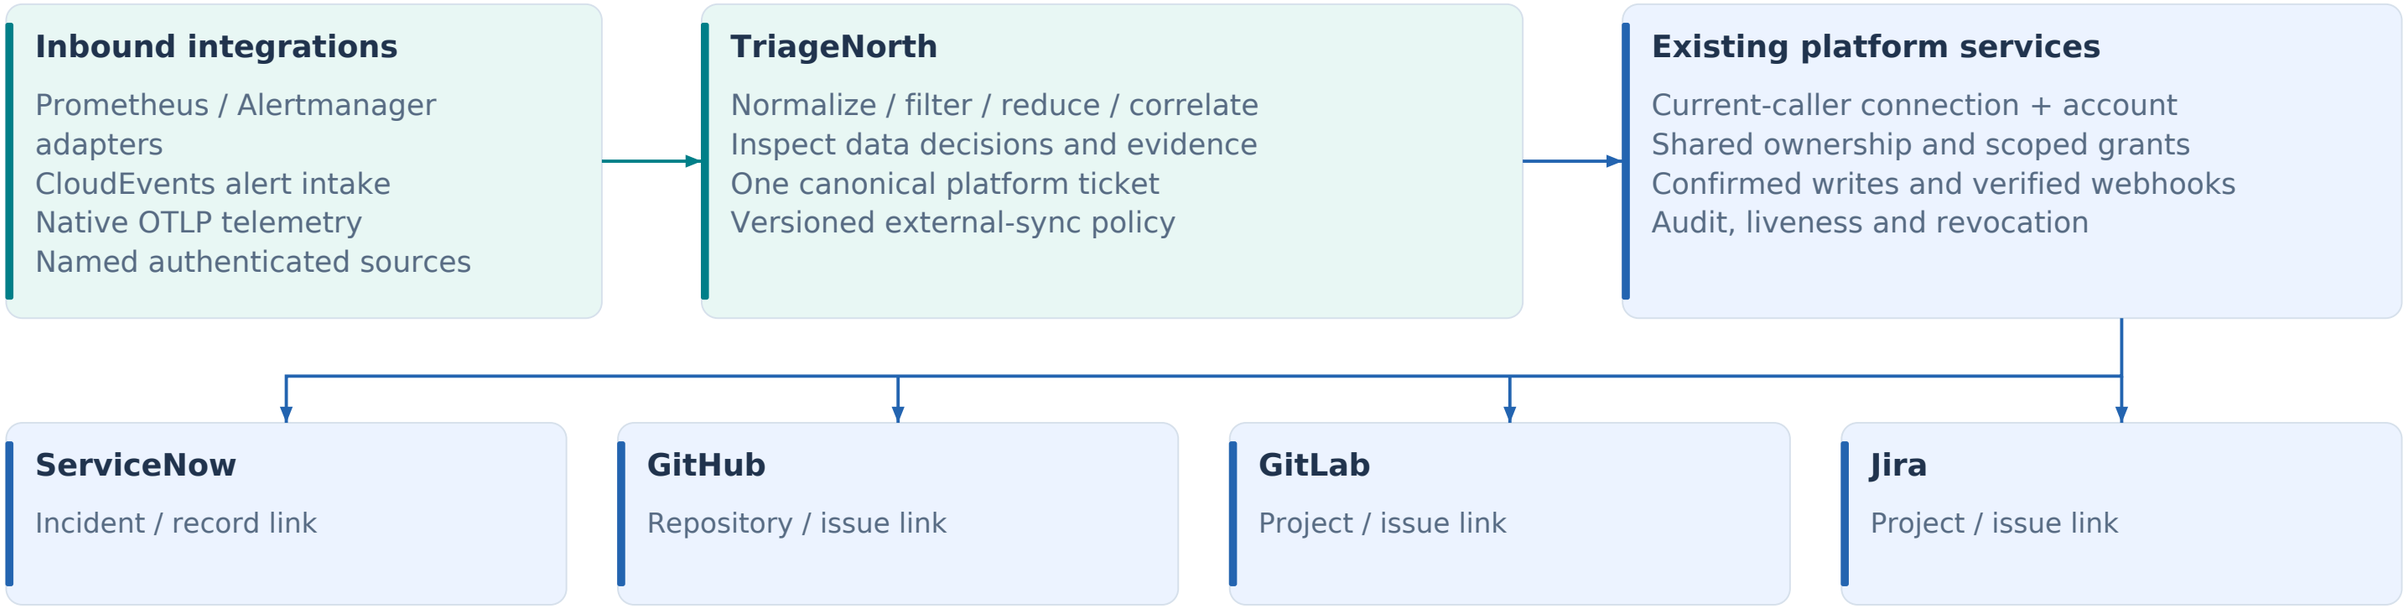

Sync contract

Field direction / ownership + status mapping
Record IDs + local / remote revision + origin
Durable operation reservation and feedback suppression
Unknown create: reconcile before retry

Shared capability gate

Declarations differ; complete two-way sync is not live.
ServiceNow currently reads only in reviewed source.
Extend standard operations, confirmations and webhooks.
Remote closure never proves infrastructure recovery.

Experience layout / User identity and CLI connections

TriageNorth uses scoped connections; signing in does not automatically grant unattended or write authority.

TriageNorth | Environment: Demo DC | Search assets and incidents | Access: scoped operator

- Overview
- Topology
- Assets
- Data decisions
- Incidents
- Ticket sync
- Approvals
- Automation
- Deliverables
- **Administration**

Connections, runner identity and effective access

Current caller / Named account / Interactive operator or explicitly activated background principal

Named connections

Kubernetes / kubectl
AWS / aws
Azure / az
Google Cloud / gcloud
Data center / SSH
Splunk / API

Tool available on selected runner
No global shell-cache import

Verify actual identity

Provider account / tenant / project
Cluster API and incarnation UID
Host fingerprint / allowed commands
Explicit target and configuration

Independent capability probes

Authentication result and time
Inventory read result and scope
Evidence read result and scope
Writes require separate confirmed authority
Expired / revoked / wrong target: stop

Shared framework boundary

Personal connection: its owner
Shared connection: explicit grants
Secrets: managed references only
Refresh preserves bound identity

Background work needs activation
No browser token as service identity

Platform-managed sign-in

Detection is a service, not an alert label

Anomaly candidates use the same identity, filtering and reduction path as inbound alerts.

Separate telemetry store

Resource IDs, units and event time
Bounded history and retention

Versioned anomaly detector

Baseline / warm-up / missing samples
Score, confidence and window
Known shift versus normal control

Canonical candidate

Detector and entity identity
Stable window ID; original evidence
No automatic infrastructure action

Durable processing

Compound cursor and overlap
Retry failed items without losing ties
Record replay and partial outcomes

Filter and reduce first

Published query and policy revision
Atomic incident-revision reservation
Retain occurrence counts

Correlate and collect

Bounded event-time graph
Explicit degraded fallback
Only then capture and investigate

Service acceptance required

Cold / stale / unavailable is not healthy. Prove baseline and injected shift, false positives, late data, two workers, crash recovery and bounded collection.
A fixed threshold or imported score does not prove an anomaly engine.

Temporal graph / source implementation

Immutable scans preserve evidence. The current implementation is bounded and manually invoked.

Named source + collection

Native provider / scope / kind / ID
Actual owner and endpoint references
Only explicit inventory facts

Scoped SQL scan journal

Immutable scan ID + payload hash
Observed time and completeness
Caller isolation; retry reconciliation

Reconstruct at a chosen time

Complete: replace this collection
Partial: keep prior observations
Never refresh unobserved facts

Estate experience

Explore directed links from a selected asset
Native IDs, health timestamps and source provenance
Unknown and partial remain visible

Data correlation decision


Affected dependency paths; no common-hub assumption
Policy + delivery IDs + graph revision + exact scan IDs
Stale, incomplete or over budget: explicit fallback

Remaining delivery gates

Scheduled least-privilege collection, cloud scanners, retention/checkpoints and cross-source conflict resolution remain open.
Manual correlation does not consume the processing queue, dispatch tickets or authorize remediation.
The guarded local Kubernetes capture is separate from the isolated investigation worker.

Retained context / the first fifteen minutes

Three logical banks, bounded growth and a separate durable packet preserve the facts behind an alert.

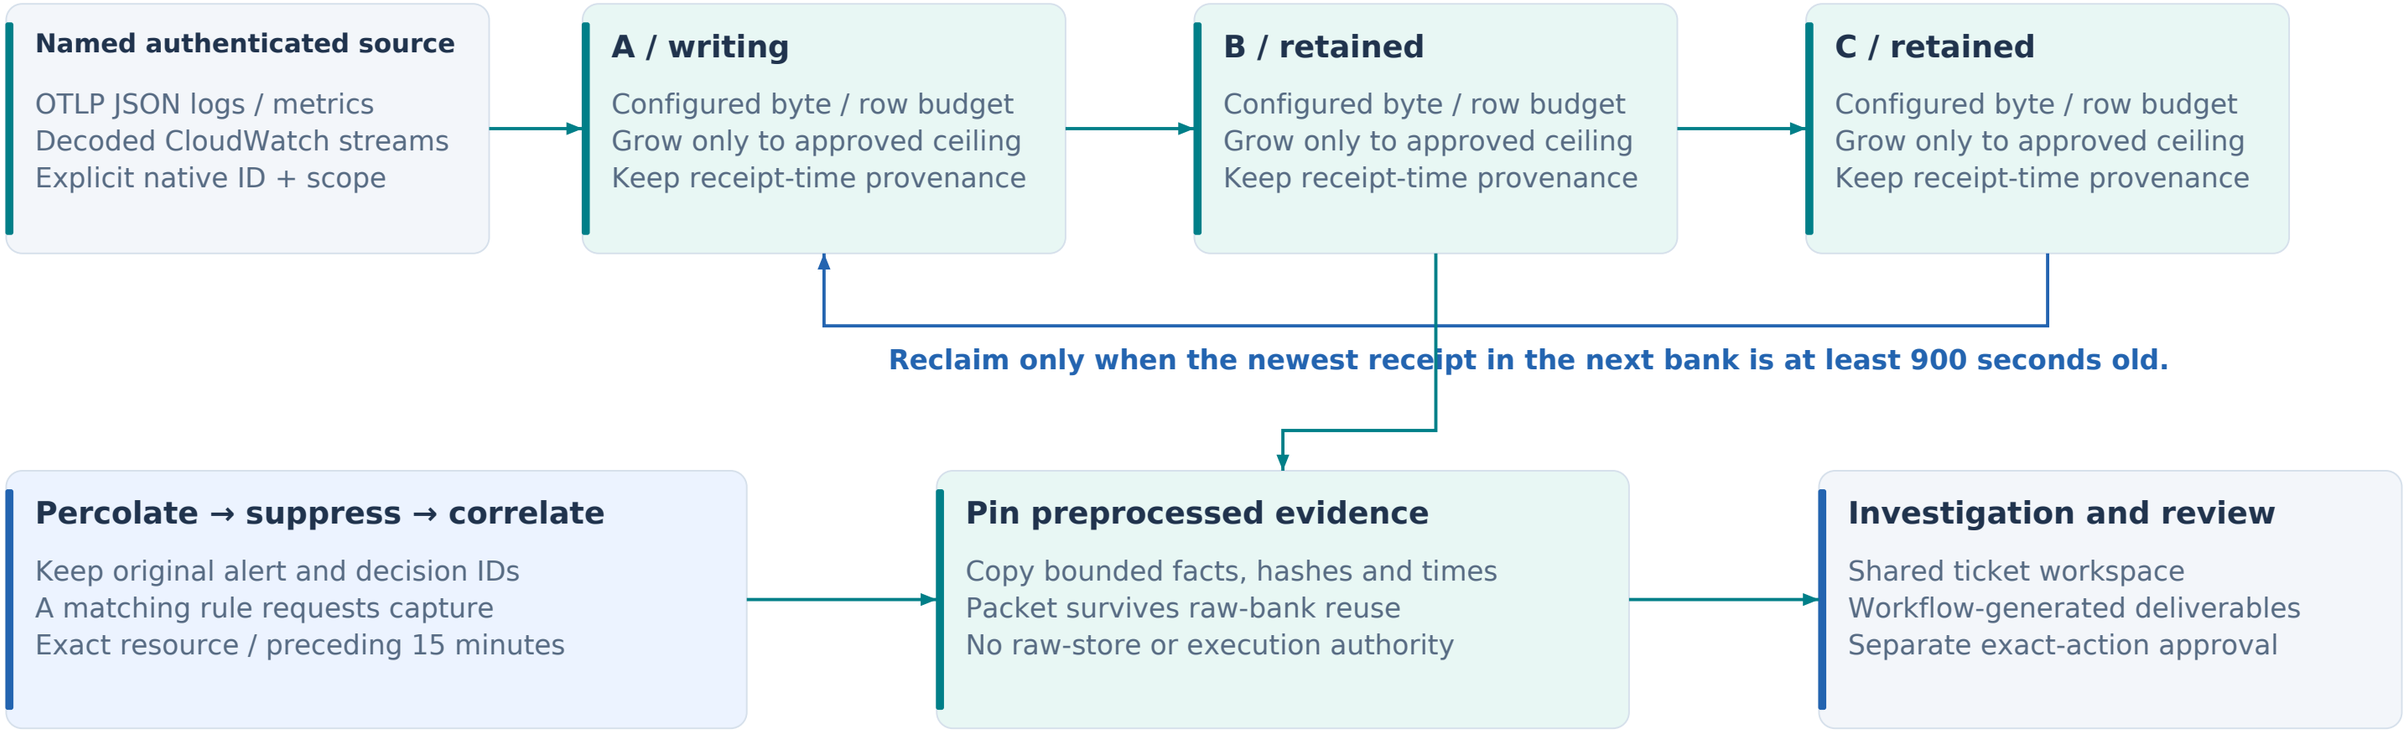

No silent overwrite at the ceiling

If all banks still contain protected context, reject and retry the entire incoming batch. A full bank does not authorize data loss.
Native replay: 100 occurrences → 40 rule matches → 4 symptoms → 2 dependency groups → 4 persistent context packets.

Explore the estate in three dimensions

Installed and accepted: CPU perspective, exact snapshot identities and six bounded predefined queries.

Choose a recorded snapshot


Collection + ISO observation time
Focus asset + type + text search
Preserve source / scope / native ID
Health: captured, not a live probe

Inspect without losing context

Orbit / pan / zoom / reset
Keyboard controls + equivalent node list
2D display remains available
100 nodes / 500 visible edges
Refresh or refusal clears private content

Predefined queries

Estate overview | Dependencies | Impact on dependents
Placement | Observed degraded assets | Older than fifteen minutes

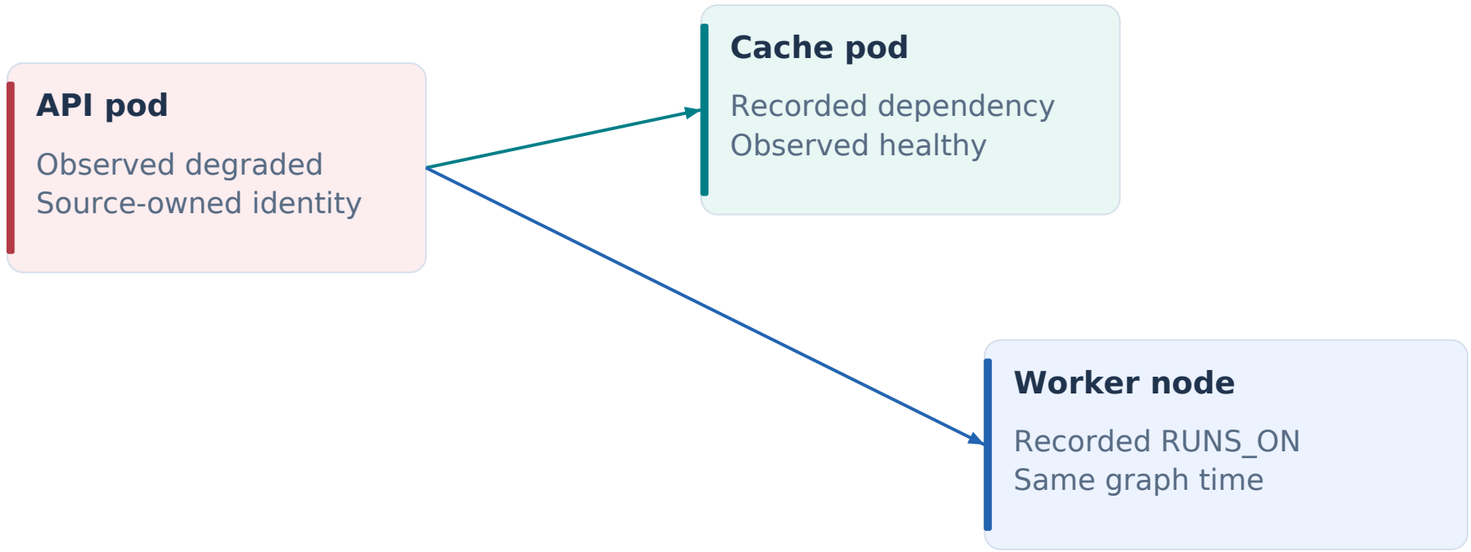

Native proof and interpretation

Six queries, orbit pixels and phone layout accepted at a8697163. Edges describe observed relationships; paths show potential impact, not proven causation.

Follow the evidence into accountable work

Measured native workflow: a sealed packet, three completed model phases and three verified shared-workspace files.

100 events
Synthetic recorded cohort

→

40 matches
Actual stored queries

→

4 symptoms
Repeated keys suppressed

→

2 groups
Dependency correlation

The 100-event replay above and the one-packet native workflow acceptance below are separate cohorts; do not combine their counts.

One pinned packet
Normalized identity + OTLP fact
Fixed input path + SHA256
No raw-store / cluster access

→

Three completed phases
Investigate → review → revise
Actual inference receipts
Workflow generates answer.md

→

Three verified files
Authenticated PVC downloads
Sizes + SHA256 matched
No operator-authored reports

→

Awaiting report approval
Human gate in canonical ticket
No infrastructure action taken
Recovery: not connected

Current-user shared services

Shared HTTP and SMS/phone/Telegram services are development-installed. Three one-time notification tests are transport-accepted. Jira profile read returns404; live account validation and full kernel certification remain open.

Next executable acceptance

Continuous source → automatic investigation → generated remediation bundle → exact-action approval → bounded execution → fresh recovery check. These gates remain open.

Keep the workflow and external issue aligned

Development-installed shared services; original-person authority and transport acceptance remain separate from release certification.

Canonical workflow

Owned ticket + exact revision
Status + phase trigger
No second ticket engine

Immutable mapping

Personal named account
Selected endpoint revision
Explicit provider state IDs

Review and confirm

Show proposed operation
Reserve before dispatch
Recheck authority + revision

Standard connector action

Jira transition / GitLab state
ServiceNow incident state
Read before + read after

Unknown response: hold the attempt

No automatic transition retry. Read remote state to reconcile without another write. The durable readback is an operator report; server-attested delivery, webhooks and two-way conflict handling remain open.

Native acceptance and current limits

Installed controls and owner-scoped records pass native login. Jira profile read returns404, so live-provider validation remains open. No issue was changed. SQL/browser tests cover confirmation and lost acknowledgements.

Shared alert services

Original-person topic routes use SMS, brief phone or Telegram. Phone is explicit opt-in: speak and hang up, thirty-second ceiling, no recording. Service configuration alone sends nothing.

Three transport tests accepted once

One SMS, one brief call and one Telegram. Reservations precede sends; test topics are muted. The operator confirmed the call. SMS later failed with Twilio30034 (unregistered A2P sender). Telegram acceptance was reconciled; human receipt is unverified.

Jarvis to Jarvis: prove below, promote above

PROPOSED ROADMAP · Distinct identities, exact artifacts and separate deployment authority

Upper / production Jarvis

Own incident + production policy
Select repository, scope and lower swarm
Keep production credentials local

Lower / development Jarvis

Receive sealed evidence + bounded task
Reproduce → patch → test
Return linked ticket and test receipts

Standard Git connection

Original-user grants
Branch + PR / MR + required CI
Immutable commit and build digest

Upper promotion gate

Approve this artifact and target
Recheck current authority and revision
A child result never grants deployment

Evidence returned to the parent

Commit + artifact + test results
Explicit uncertainty and rollback plan
Durable correlated delegation receipt

Delivery gates H1–H5

H1: scoped Git operations
H2: bounded durable delegation
H3: lower reproduction + verification
H4: exact-change promotion + rollback
H5: independent upper recovery

Prove duplicate, revoked, expired and lost-response cases. No hierarchy is implemented by this diagram.

Deploy → observe → reconcile

Scope execution to the approved plan. Verify sustained health. Roll back only with current authority. Preserve the independent recovery path if upper Jarvis is unavailable.

Fast mitigation and durable repair

PROPOSED DESIGN · One incident, linked change records, evidence-based recovery

Mitigate + fix below

Restore a known safe state
Delegate permanent correction
Separate later promotion approval

Standard lower fix

Reproduce and test below
Run CI/CD and return receipts
Promote the exact approved artifact

Emergency runtime patch

One reversible scoped change
Capture prior state + review deadline
Mandatory Git reconciliation

Expedited Git hotfix

Reviewed production artifact
Minimum checks + explicit waiver
Back-merge and full validation

Exact-change execution

Target + plan + artifact digests
Current approval and authorization
Record receipt and previous state

Read-only verification branch

Versioned signals + baseline
Freshness + sustained healthy window
Bounded duration; no LLM polling loop

Healthy window complete

Record service recovery. Keep permanent fix and drift reconciliation open until proven.

Regression

Follow conditional rollback only if already authorized and still valid; otherwise request approval.

Missing telemetry / timeout


Hold verification and escalate. Silence never establishes recovery.

Track two outcomes

Service status: degraded / observing / recovered. Change status: temporary / permanent fix pending / reconciled. A successful command alone closes neither.

Investigate a pod without handing AI the cluster

IMPLEMENTED SOURCE · Original-person connector and bounded evidence; runtime checks have separate receipts

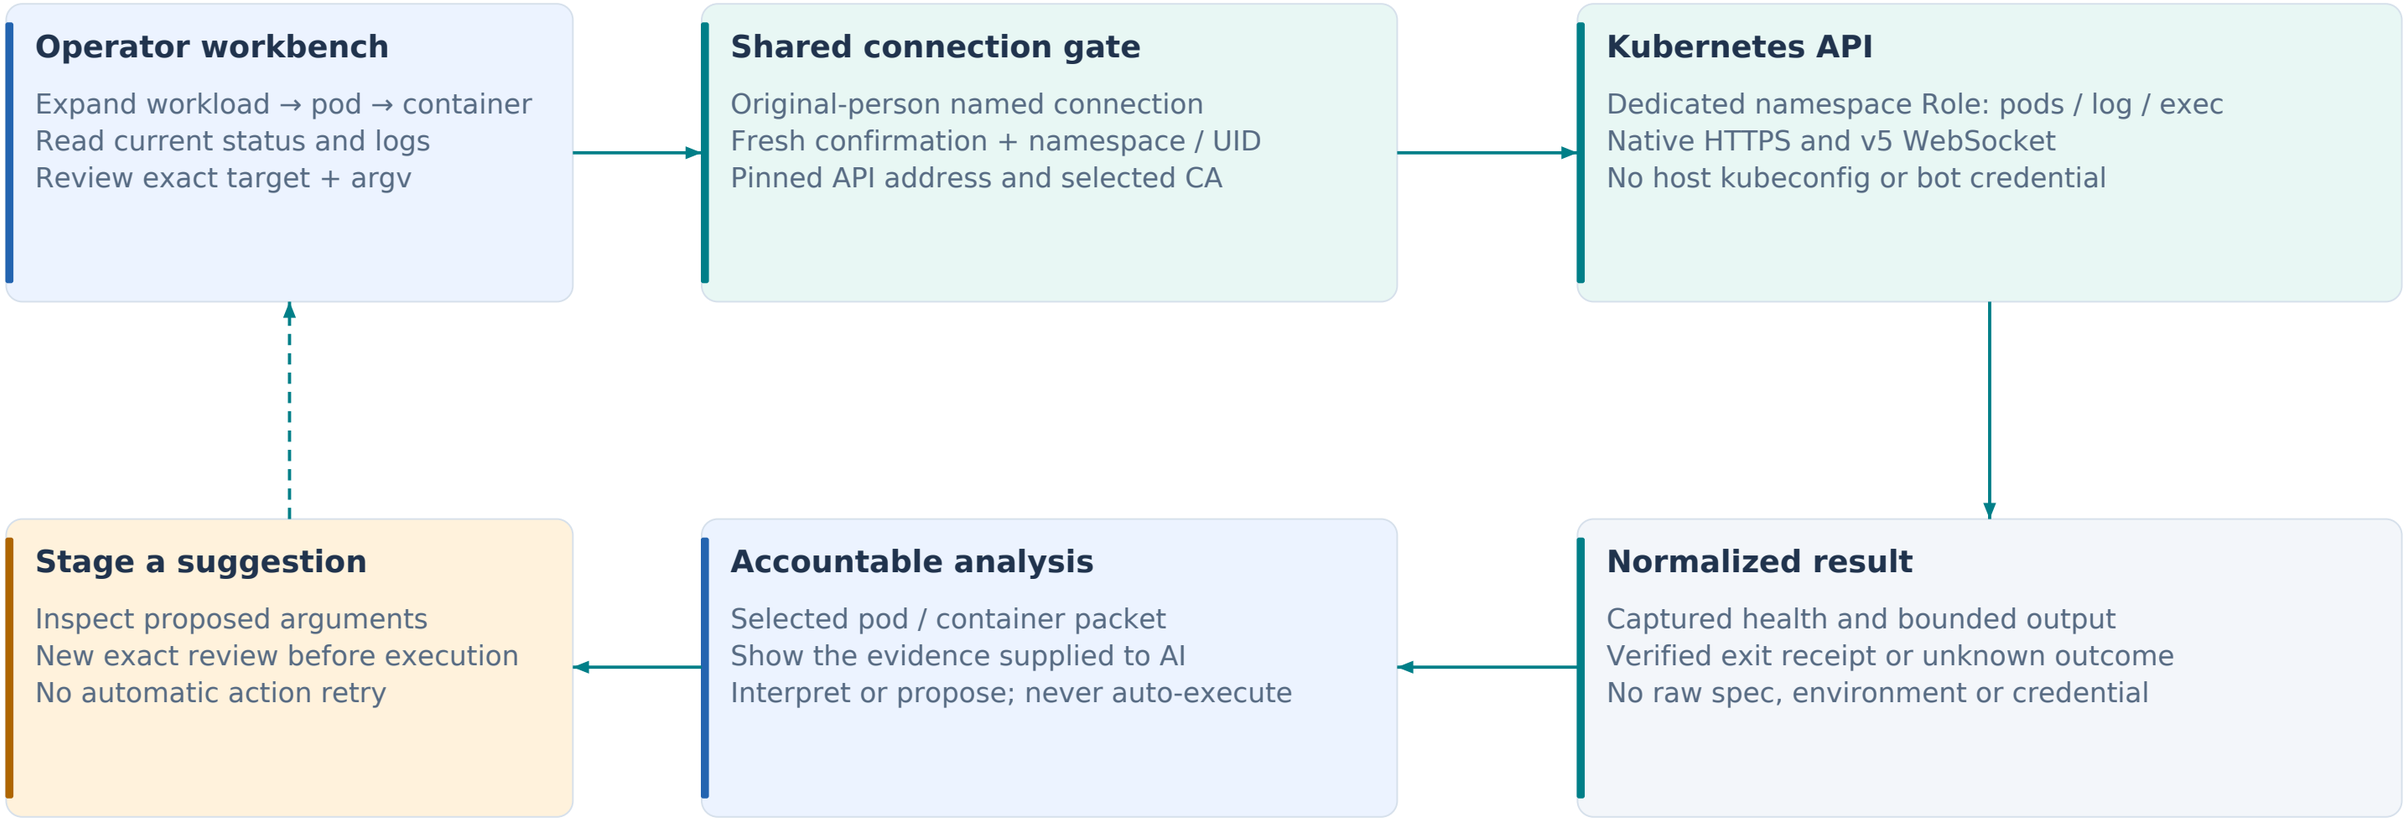


Operational limits

Initial console: bounded single commands, no stdin/TTY. Check UID before and after; this is not an atomic exec precondition. A client timeout does not prove remote termination or service recovery.

Historical RCA with original source citations

IMPLEMENTED SOURCE · Read current-user canonical records; preserve one report store and explicit uncertainty

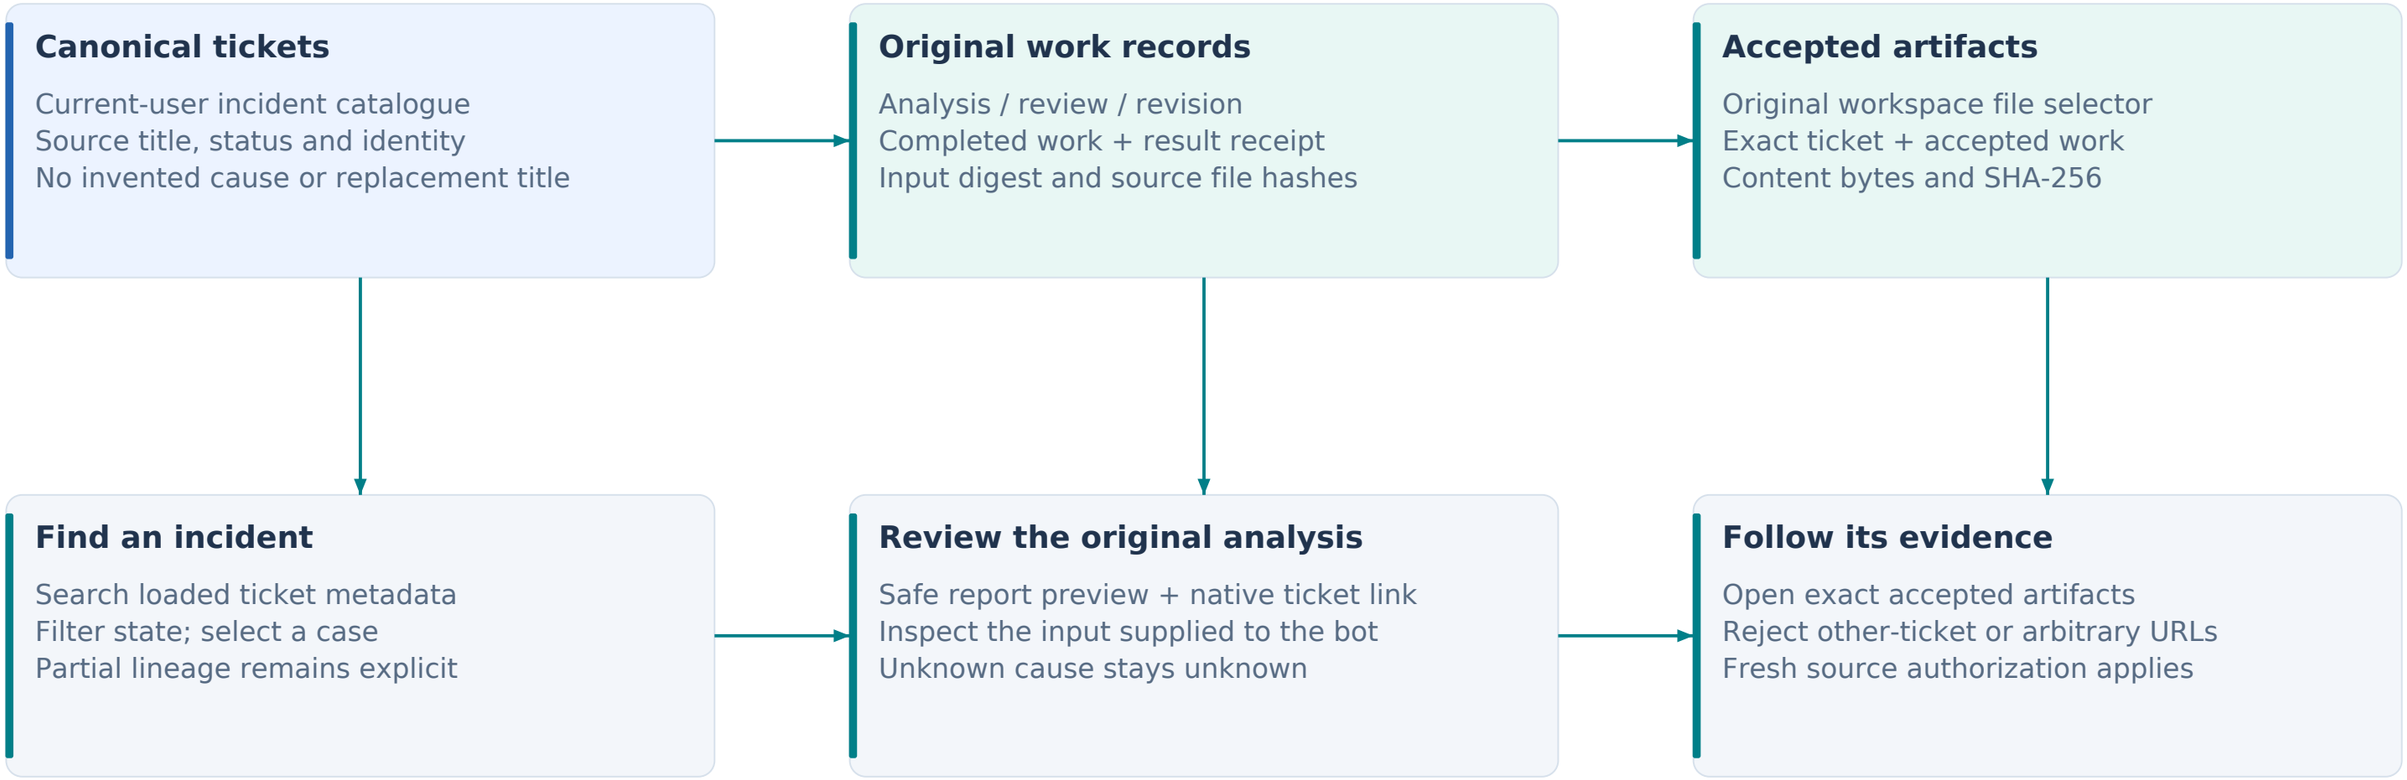

Storage and retrieval boundaries

Temporal topology and correlation stay in their graph records. Reports stay in canonical work and workspace artifacts. Automatic semantic case retrieval is a separate backlog item. Report acceptance does not establish infrastructure recovery.