

Skills Network

Hands on Lab: CREATE, ALTER, TRUNCATE, DROP Tables

Estimated time needed: 15 minutes

In this lab, you will learn some commonly used DDL (Data Definition Language) statements of SQL. First you will learn the CREATE statement, which is used to create a new table in a database. Next, you will learn the ALTER statement which is used to add, delete, or modify columns in an existing table. Then, you will learn the TRUNCATE statement which is used to remove all rows from an existing table without deleting the table itself. Lastly, you will learn the DROP statement which is used to delete an existing table in a database.

How does the syntax of a CREATE statement look?

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6

1. CREATE TABLE table_name (
2. column1 datatype,
3. column2 datatype,
4. column3 datatype,
6. );
```

about:blank 1/16

```
Copied!
```

How does the syntax of an ALTER statement look?

```
2. 2
 3. 3
 4.4
 5.5
 6.6
 7. 7
 8.8
 9.9
10. 10
11. 11
 1. ALTER TABLE table_name
 2. ADD COLUMN column_name data_type column_constraint;
 4. ALTER TABLE table name
 5. DROP COLUMN column name;
 7. ALTER TABLE table name
 8. ALTER COLUMN column_name SET DATA TYPE data_type;
 9.
10. ALTER TABLE table_name
11. RENAME COLUMN current column name TO new column name;
Copied!
```

How does the syntax of a TRUNCATE statement look?

```
    1. 1
    1. TRUNCATE TABLE table_name;

Copied!
```

How does the syntax of a DROP statement look?

```
    1. 1
    DROP TABLE table_name;

Copied!
```

Software Used in this Lab

In this lab, you will use IBM Db2 Database. Db2 is a Relational Database Management System (RDBMS) from IBM, designed to store, analyze and retrieve the data efficiently.

To complete this lab you will utilize a Db2 database service on IBM Cloud. If you did not already complete this lab task earlier in this module, you will not yet have access to Db2 on IBM Cloud, and you will need to follow this lab first:

• Hands-on Lab: Sign up for IBM Cloud, Create Db2 service instance and Get started with the Db2 console

Database Used in this Lab

The databases used in this lab are internal databases.

about:blank 2/16

Objectives

After completing this lab, you will be able to:

- Create a new table in a database
- Add, delete, or modify columns in an existing table
- Remove all rows from an existing table without deleting the table itself
- Delete an existing table in a database

Instructions

When you approach the exercises in this lab, follow the instructions to run the queries on Db2:

- Go to the Resource List of IBM Cloud by logging in where you can find the Db2 service instance that you created in a previous lab under Services section. Click on the Db2-xx service. Next, open the Db2 Console by clicking on Open Console button. Click on the 3-bar menu icon in the top left corner and go to the Run SQL page. The Run SQL tool enables you to run SQL statements.
 - o If needed, follow Hands-on Lab: Sign up for IBM Cloud, Create Db2 service instance and Get started with the Db2 console


```
::page{title="Exercise 1: CREATE"}
```

In this exercise, you will use the CREATE statement to create two new tables using Db2.

1. You need to create two tables, PETSALE and PET. To create the two tables PETSALE and PET, copy the code below and paste it to the textbox of the Run SQL page. Click Run all. In the History section below the editor box, you will be able to see if the query has been executed successfully or not.

```
1. 1
2. 2
3. 3
 4.4
5.5
6.6
7. 7
8.8
9.9
10.10
11. 11
12. 12
13. 13
1. CREATE TABLE PETSALE (
       ID INTEGER NOT NULL,
2.
        PET CHAR(20),
3.
4.
        SALEPRICE DECIMAL(6,2),
       PROFIT DECIMAL(6,2),
5.
        SALEDATE DATE
 6.
 7.
        );
8.
9. CREATE TABLE PET (
10.
        ID INTEGER NOT NULL,
        ANIMAL VARCHAR(20),
11.
12.
        QUANTITY INTEGER
13.
        );
Copied!
```

about:blank 3/16

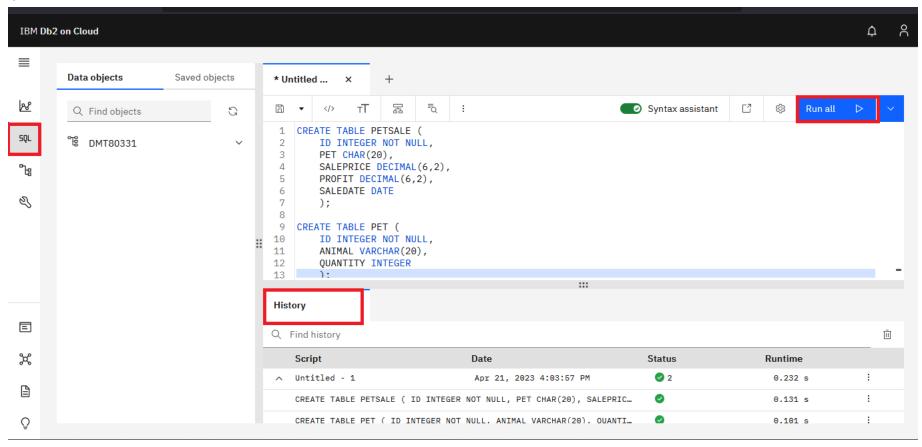


2. Now insert some records into the two newly created tables and show all the records of the two tables. Copy the code below and paste it to the textbox of the Run SQL page. Click Run all.

```
1. 1
2. 2
 3. 3
 4.4
 5.5
 6.6
 7. 7
 8.8
9.9
10.10
11. 11
12. 12
13. 13
14. 14
1. INSERT INTO PETSALE VALUES
 2.
        (1, 'Cat', 450.09, 100.47, '2018-05-29'),
        (2,'Dog',666.66,150.76,'2018-06-01'),
3.
 4.
        (3, 'Parrot', 50.00, 8.9, '2018-06-04'),
 5.
        (4, 'Hamster', 60.60, 12, '2018-06-11'),
        (5, 'Goldfish', 48.48, 3.5, '2018-06-14');
7.
 8. INSERT INTO PET VALUES
9.
        (1, 'Cat',3),
10.
        (2,'Dog',4),
11.
        (3, 'Hamster', 2);
12.
13. SELECT * FROM PETSALE;
```


about:blank 4/16

14. SELECT * FROM PET;
Copied!

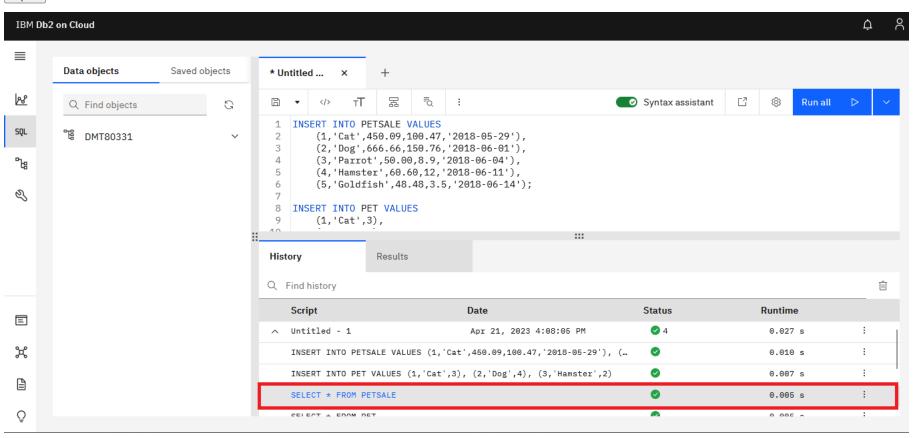

You can click on the query in the History section to check its result:

about:blank 5/16

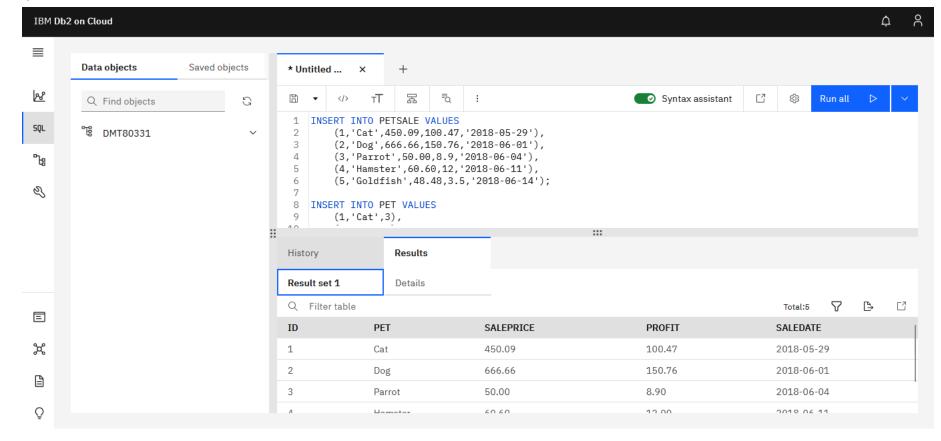

::page{title="Exercise 2: ALTER"}


In this exercise, you will use the ALTER statement to add, delete, or modify columns in two of the existing tables created in exercise 1.

Task A: ALTER using ADD COLUMN

1. Add a new QUANTITY column to the PETSALE table and show the altered table. Copy the code below and paste it to the textbox of the Run SQL page. Click Run all.

```
1. 1
2. 2
3. 3
4. 4
1. ALTER TABLE PETSALE
2. ADD COLUMN QUANTITY INTEGER;
3.
4. SELECT * FROM PETSALE;
Copied!
```


about:blank 6/16

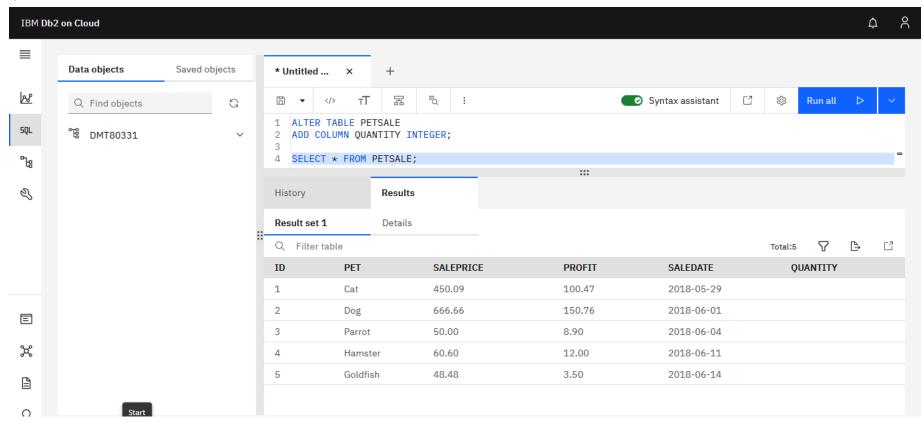

2. Now update the newly added QUANTITY column of the PETSALE table with some values and show all the records of the table. Copy the code below and paste it to the textbox of the Run SQL page. Click Run all. After the query has executed successfully, click on it to check the result set.

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
1. UPDATE PETSALE SET QUANTITY = 9 WHERE ID = 1;
2. UPDATE PETSALE SET QUANTITY = 3 WHERE ID = 2;
3. UPDATE PETSALE SET QUANTITY = 2 WHERE ID = 3;
4. UPDATE PETSALE SET QUANTITY = 6 WHERE ID = 4;
5. UPDATE PETSALE SET QUANTITY = 24 WHERE ID = 5;
6.
7. SELECT * FROM PETSALE;
Copied!
```

about:blank 7/16

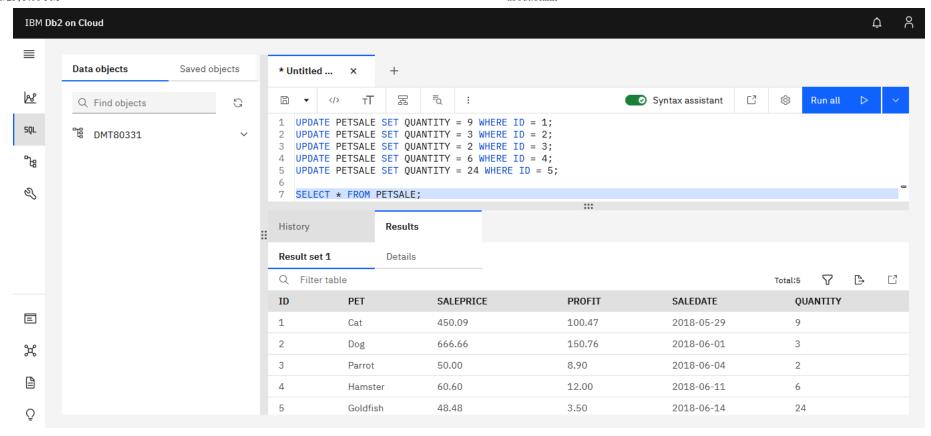


Task B: ALTER using DROP COLUMN

1. Delete the PROFIT column from the PETSALE table and show the altered table. Copy the code below and paste it to the textbox of the Run SQL page. Click Run all.

```
1. 1
2. 2
3. 3
4. 4
1. ALTER TABLE PETSALE
2. DROP COLUMN PROFIT;
3.
4. SELECT * FROM PETSALE;
Copied!
```

about:blank 8/16

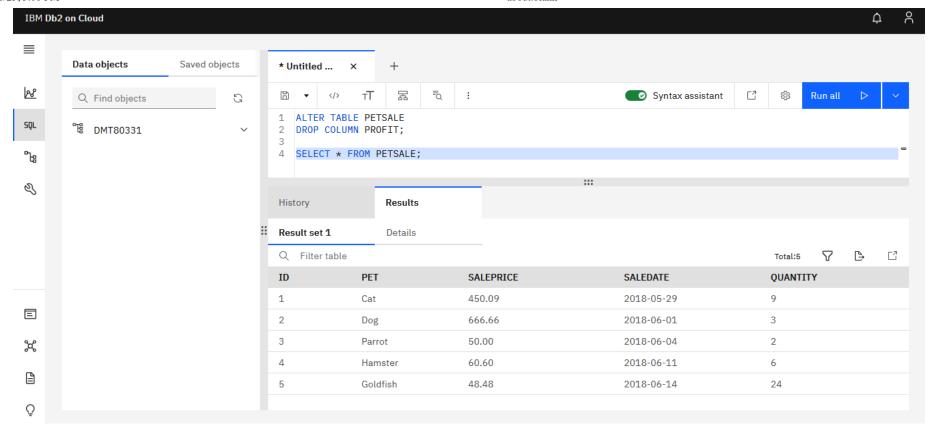


Task C: ALTER using ALTER COLUMN

1. Change the data type to VARCHAR(20) type of the column PET of the table PETSALE and show the altered table. Copy the code below and paste it to the textbox of the Run SQL page. Click Run all.


```
1. 1
2. 2
3. 3
4. 4
1. ALTER TABLE PETSALE
2. ALTER COLUMN PET SET DATA TYPE VARCHAR(20);
3.
4. SELECT * FROM PETSALE;
Copied!
```

about:blank 9/16

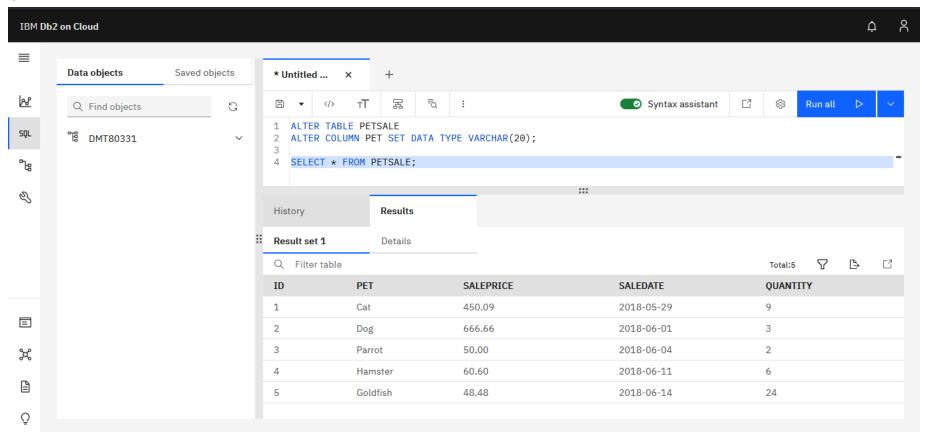


2. Now verify if the data type of the column PET of the table PETSALE changed to VARCHAR(20) type or not. Click on the Data Section in the left menu bar.

about:blank 10/16




Then click on Tables:

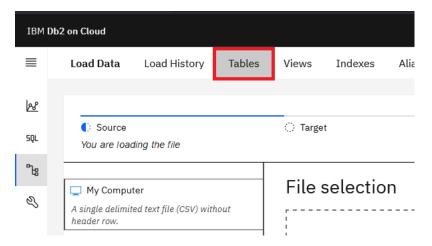


Find your schema and choose the table PETSALE

about:blank 11/16

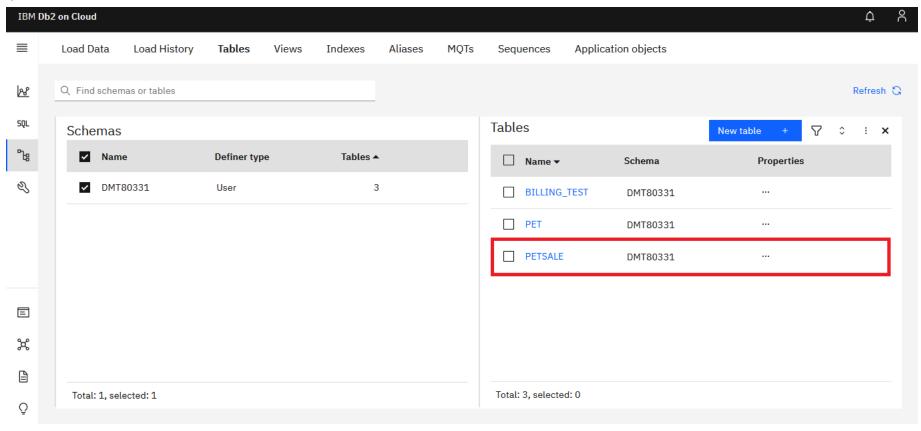

You will see that the datatype of the column PET has changed to VARCHAR(20)

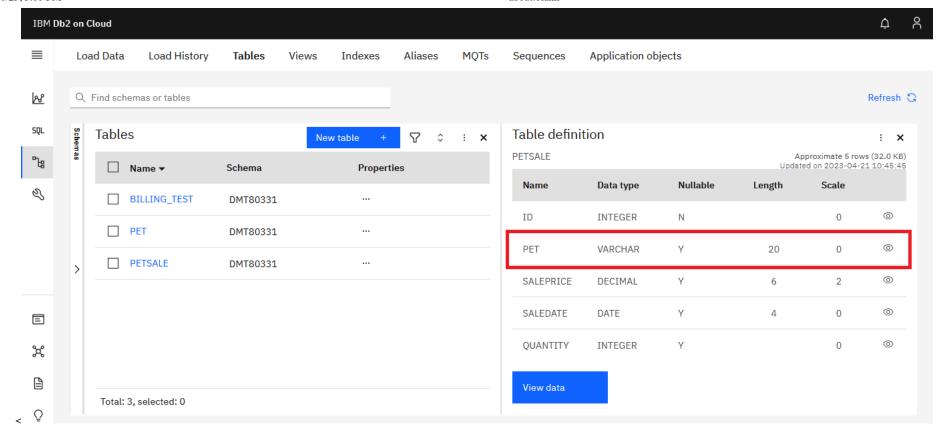


Task D: ALTER using RENAME COLUMN

1. In the PETSALE table, rename the column PET to ANIMAL and show the altered table. Copy the code below and paste it to the textbox of the Run SQL page. Click Run all.

- 1. 1 2. 2
- 3. 3
- 4. 4
- 1. ALTER TABLE PETSALE
- 2. RENAME COLUMN PET TO ANIMAL;
- 4. SELECT * FROM PETSALE;

Copied!

about:blank 13/16

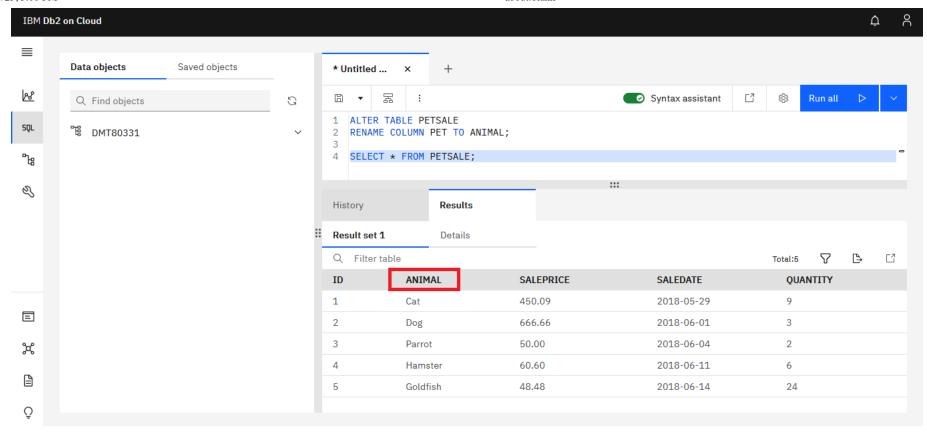


In this exercise, you will use the TRUNCATE statement to remove all rows from an existing table created in exercise 1 without deleting the table itself.

1. Remove all rows from the PET table and show the empty table. Copy the code below and paste it to the textbox of the Run SQL page. Click Run all. You will see no data in the Result section.

```
1. 1
2. 2
3. 3
1. TRUNCATE TABLE PET IMMEDIATE;
2.
3. SELECT * FROM PET;
Copied!
```

about:blank 14/16

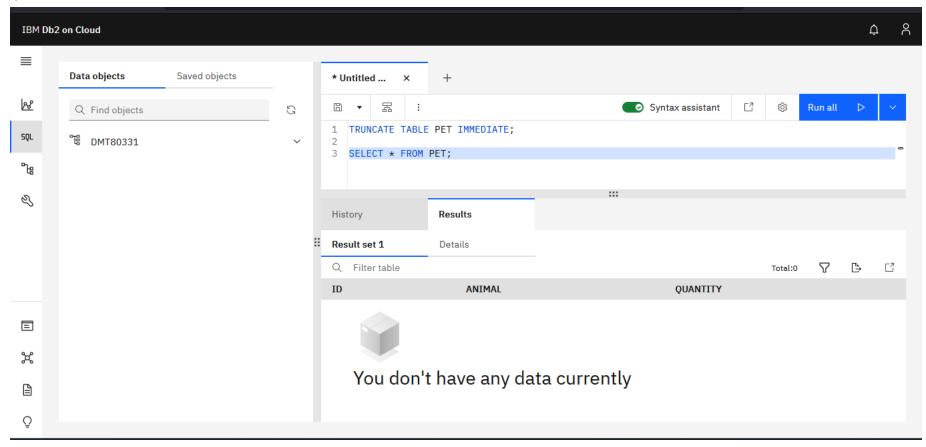


In this exercise, you will use the DROP statement to delete an existing table created in exercise 1.

1. Delete the **PET** table and verify if the table still exists or not (SELECT statement won't work if a table doesn't exist). Copy the code below and paste it to the textbox of the **Run SQL** page. Click **Run all**. You will see that the **select statement fails**.

1. 1
2. 2
3. 3
1. DROP TABLE PET;
2.
3. SELECT * FROM PET;
Copied!

about:blank 15/16

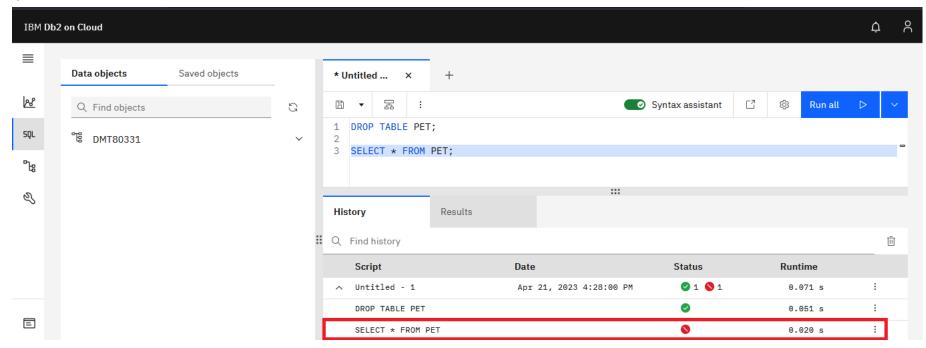

Congratulations! You have completed this Lab. You are ready for the next topic.

Author(s)

• Sandip Saha Joy

Changelog

Date	Version	Changed by	Change Description
2023-04-21	1.2	Shreya Khurana	Updated screenshots and instructions
2020-12-24	1.1	Steve Ryan	ID reviewed
2020-12-07	1.0	Sandip Saha Joy	Initial version created

頃BM Corporation 2020. All rights reserved.

about:blank 16/16