

UNIVERSIDAD AMERICANA
FACULTAD DE INGENIERÍA Y ARQUITECTURA



Ingeniería en Sistemas de Información

Diseño Web

Guía 4

Estudiante:

Emilio Jose Carranza Rivera

Profesor:

José A. Durán G

Search

Invite Upgrade

OverviewNew CollecGET New Re[CONFLICT]GET New RGET New Re+No environment

New Collection > New Request

GEThttp://localhost:8080/api/empleadosSend

DocsParamsAuthorizationHeaders8BodyScriptsSettingsCookies

rawJSONSchemaBeautify

```
1 {
2   "nombres": "Carlos",
3   "apellidos": "Lanzas",
4   "cargo": "Desarrollador",
5   "salario": 1500.00
6 }
```

BodyCookiesHeaders5Test Results200 OK • 152 ms • 164 B • Save Response

{ } JSONPreviewVisualize1 []

Build faster with Agent Mode

Use Agent Mode to transform the way you work with APIs.

Get your API working

Fix configurations, scripts, or anything else to get your request working.

Document

Describe what type of documentation you'd like, and watch Agent Mode do the rest.

Explore

Let Agent Mode configure requests and identify use-cases.

And much more!

Use Agent Mode across Flows, Monitors, Mocks, and more!

By using this AI product, you agree to Postman's Terms of Service

Agree and Continue

Ready to go!

GlobalsVaultTools19:57

Search

Invite Upgrade

OverviewNew CollecGET New Re[CONFLICT]GET New RGET New Re+No environment

New Collection > New Request

GEThttp://localhost:8080/api/empleadosSend

DocsParamsAuthorizationHeaders8BodyScriptsSettingsCookies

rawJSONSchemaBeautify

```
1 {
2   "nombres": "Carlos",
3   "apellidos": "Lanzas",
4   "cargo": "Desarrollador",
5   "salario": 1500.00
6 }
```

BodyCookiesHeaders5Test Results200 OK • 7 ms • 164 B • Save Response

{ } JSONPreviewVisualize1 []

Build faster with Agent Mode

Use Agent Mode to transform the way you work with APIs.

Get your API working

Fix configurations, scripts, or anything else to get your request working.

Document

Describe what type of documentation you'd like, and watch Agent Mode do the rest.

Explore

Let Agent Mode configure requests and identify use-cases.

And much more!

Use Agent Mode across Flows, Monitors, Mocks, and more!

By using this AI product, you agree to Postman's Terms of Service

Agree and Continue

Ready to go!

GlobalsVaultTools19:57

Search

Invite Upgrade

OverviewNew CollecGET New Re[CONFLICT]GET New RePOST New R+No environment

New Collection > New Request

POSThttp://localhost:8080/api/empleadosSend

DocsParamsAuthorizationHeaders8BodyScriptsSettingsCookies

rawJSONSchemaBeautify

```
1 {
2   "nombres": "Carlos",
3   "apellidos": "Lanzas",
4   "cargo": "Desarrollador",
5   "salario": 1500.00
6 }
```

BodyCookiesHeaders5Test Results201 Created • 276 ms • 252 B • Save Response

JSONPreviewVisualize

```
1 {
2   "apellidos": "Lanzas",
3   "cargo": "Desarrollador",
4   "id": 1,
5   "nombres": "Carlos",
6   "salario": 1500.00
7 }
```

Build faster with Agent Mode

Use Agent Mode to transform the way you work with APIs.

Get your API working

Fix configurations, scripts, or anything else to get your request working.

Document

Describe what type of documentation you'd like, and watch Agent Mode do the rest.

Explore

Let Agent Mode configure requests and identify use-cases.

And much more!

Use Agent Mode across Flows, Monitors, Mocks, and more!

By using this AI product, you agree to Postman's [Terms of Service](#)

Agree and Continue

Ready to go!

GlobalsVaultTools

Search

Invite Upgrade

OverviewNew CollecGET New Re[CONFLICT]GET New RePUT New Re+No environment

New Collection > New Request

PUThttp://localhost:8080/api/empleadosSend

DocsParamsAuthorizationHeaders8BodyScriptsSettingsCookies

rawJSONSchemaBeautify

```
1 {
2   "nombres": "Carlos",
3   "apellidos": "Lanzas",
4   "cargo": "Desarrollador",
5   "salario": 1500.00
6 }
```

Body405 Method Not Allowed • 39 ms • 4.48 KB • Save Response

JSONPreviewDebug with AI

```
1 {
2   "timestamp": "2026-09-08T01:59:05.194Z",
3   "status": 405,
4   "error": "Method Not Allowed",
5   "trace": "org.springframework.web.HttpRequestMethodNotSupportedException: Request method
'PUT' is not supported\r\n\tat org.springframework.web.servlet.mvc.method.
RequestMappingInfoHandlerMapping.handleNoMatch(RequestMappingInfoHandlerMapping.
java:260)\r\n\tat org.springframework.web.servlet.handler.
AbstractHandlerMethodMapping.lookupHandlerMethod(AbstractHandlerMethodMapping.
java:432)\r\n\tat org.springframework.web.servlet.handler.
AbstractHandlerMethodMapping.getHandlerInternal(AbstractHandlerMethodMapping.java:376)
\r\n\tat org.springframework.web.servlet.mvc.method.RequestMappingInfoHandlerMapping
```

Build faster with Agent Mode

Use Agent Mode to transform the way you work with APIs.

Get your API working

Fix configurations, scripts, or anything else to get your request working.

Document

Describe what type of documentation you'd like, and watch Agent Mode do the rest.

Explore

Let Agent Mode configure requests and identify use-cases.

And much more!

Use Agent Mode across Flows, Monitors, Mocks, and more!

By using this AI product, you agree to Postman's [Terms of Service](#)

Agree and Continue

Ready to go!

GlobalsVaultTools

Q Search

Invite Upgrade

OverviewNew CollecGET New Re[CONFLICT]GET New ReDEL New R+No environment

New Collection > New Request

DELETEhttp://localhost:8080/api/empleados/1Send

DocsParamsAuthorizationHeaders8BodyScriptsSettingsCookies

rawJSONSchemaBeautify

```
1 {
2   "nombres": "Carlos",
3   "apellidos": "Lanzas",
4   "cargo": "Desarrollador",
5   "salario": 1500.00
6 }
```

Body200 OK12 ms208 BSave Response

JSONPreviewVisualize

```
1 {
2   "mensaje": "Empleado eliminado correctamente"
3 }
```

Build faster with Agent Mode

Use Agent Mode to transform the way you work with APIs.

Get your API working

Fix configurations, scripts, or anything else to get your request working.

Document

Describe what type of documentation you'd like, and watch Agent Mode do the rest.

Explore

Let Agent Mode configure requests and identify use-cases.

And much more!

Use Agent Mode across Flows, Monitors, Mocks, and more!

By using this AI product, you agree to Postman's Terms of Service

Q Search

Invite Upgrade

OverviewNew CollecGET New Re[CONFLICT]GET New ReDEL New R+No environment

New Collection > New Request

DELETEhttp://localhost:8080/api/empleados/1Send

DocsParamsAuthorizationHeaders8BodyScriptsSettingsCookies

rawJSONSchemaBeautify

```
1 {
2   "nombres": "Carlos",
3   "apellidos": "Lanzas",
4   "cargo": "Desarrollador",
5   "salario": 1500.00
6 }
```

Body200 OK12 ms208 BSave Response

JSONPreviewVisualize

```
1 {
2   "mensaje": "Empleado eliminado correctamente"
3 }
```

Build faster with Agent Mode

Use Agent Mode to transform the way you work with APIs.

Get your API working

Fix configurations, scripts, or anything else to get your request working.

Document

Describe what type of documentation you'd like, and watch Agent Mode do the rest.


Explore

Let Agent Mode configure requests and identify use-cases.

And much more!

Use Agent Mode across Flows, Monitors, Mocks, and more!

By using this AI product, you agree to Postman's Terms of Service

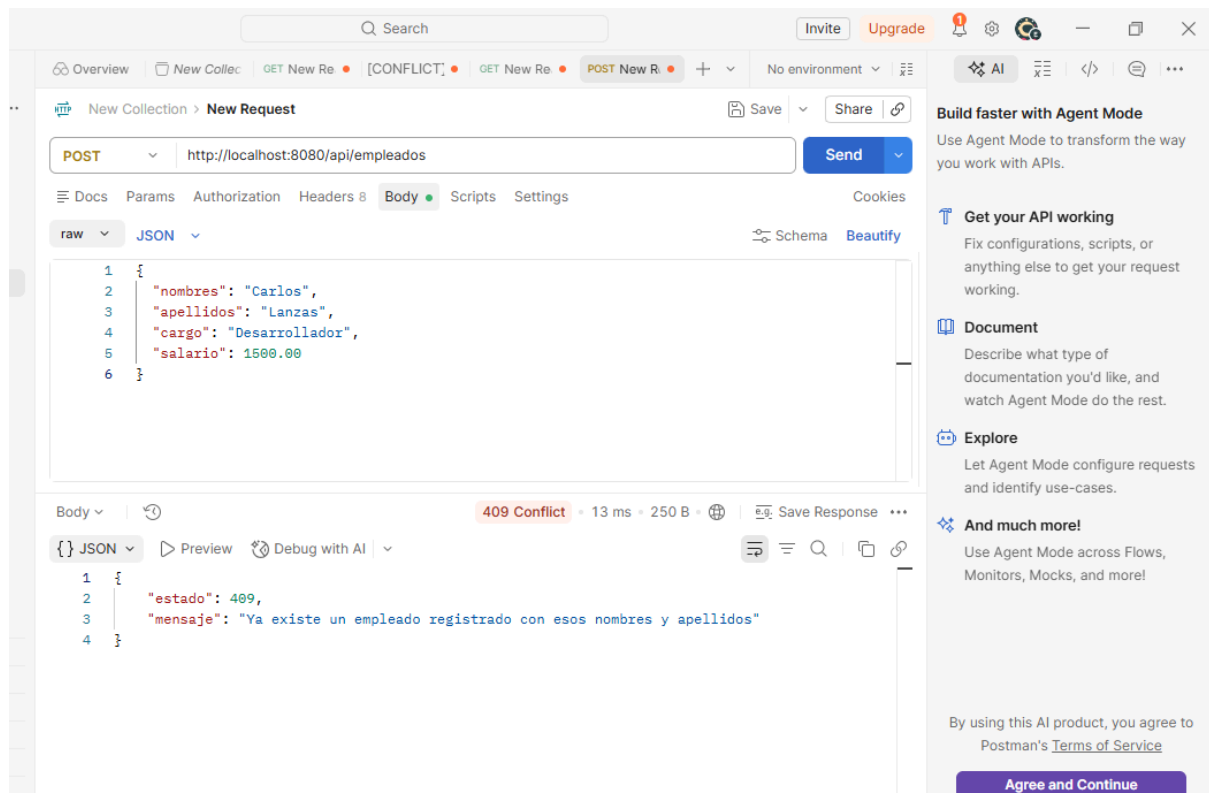

1. ¿Qué diferencia existe entre @Controller y @RestController?

@Controller: Se utiliza en la arquitectura Spring MVC tradicional para devolver vistas HTML (como páginas procesadas con Thymeleaf o JSP).

2. ¿Qué función cumple @RequestBody?

Le indica a Spring Boot que tome el cuerpo (body) de la petición HTTP recibida (por ejemplo, el JSON enviado desde Postman o un cliente frontend) y lo transforme/deserialice automáticamente en un objeto Java (como un DTO) dentro del parámetro del método.

3. ¿Por qué se utiliza @Valid junto al DTO?

Activa la evaluación automática de las anotaciones de validación (como @NotBlank, @NotNull, @Size, @Min) definidas en las propiedades de la clase DTO. Si los datos recibidos no cumplen con estas reglas, Spring detiene la ejecución del método y dispara una excepción de validación (MethodArgumentNotValidException), permitiendo retornar una respuesta de error adecuada (como un estado 400 Bad Request).

4. ¿Qué código HTTP debe devolver un registro creado correctamente?

Debe devolver el código 201 Created, el cual indica explícitamente que la solicitud POST fue exitosa y que el nuevo recurso ha sido generado en el servidor.

5. ¿Cómo interviene Jackson en las respuestas de la API?

Jackson es la librería mapeadora integrada por defecto en Spring Boot que se encarga del proceso de serialización y deserialización:

Deserialización: Convierte el JSON recibido en la petición HTTP a un objeto Java dentro de la aplicación.

Serialización: Convierte los objetos Java retornados por los métodos de los controladores a formato JSON para enviarlos en la respuesta HTTP al cliente.