

Databases

Lecture 3 - Entity-Relationship-Model

Emily Lucia Antosch

HAW Hamburg

20.02.2025

Contents

1. Introduction	2
2. Entity-Relationship-Model	6
3. The relational model	37
4. License Notice	53

1. Introduction

1.1 Where are we right now?

- Last time, we looked at SQL as the language in which we define our database.
- We learnt about different database objects and how they can help us achieve our business requirements.
- Today, we'll look at
 - ▶ what an ERM (Entity-Relationship-Model) is,
 - ▶ how we can use it to effectively conceptually design databases and
 - ▶ why conceptually designing a database prior to implementation can save us a lot of headache.

1.1 Where are we right now?

1. Introduction

1. Introduction
2. Basics
3. SQL
4. **Entity-Relationship-Model**
5. Relationships
6. Constraints
7. More SQL
8. Subqueries & Views
9. Transactions
10. Database Applications
11. Integrity, Trigger & Security

1.2 What is the goal of this chapter?

- At the end of this lesson, you should be able to
 - ▶ design a database using the ER-model,
 - ▶ decide about which attributes, constraints and relations will help you achieve your requirements.

2. Entity-Relationship-Model

What is an ERM

- Entity-Relationship-Model is model/diagram for the logical draft of the database
- The focus is on the business requirements
- This language is not implemented in any DBMS


A quick history of the ERM

- Introduced by Peter Chen in 1976.
- An ERM describes interrelated things of interest in a specific domain of knowledge.
- A basic ERM is composed of entity types (which classify the things of interest) and specifies relationships that can exist between entities (instances of those entity types).
- Elements:
 - ▶ Entity: A distinguishable thing existing in the real world.
 - ▶ Relationship: Between entities.
 - ▶ Attribute: Property of an entity or relationship.

2.1 Basics

2. Entity-Relationship-Model

Conceptual Design with ERM

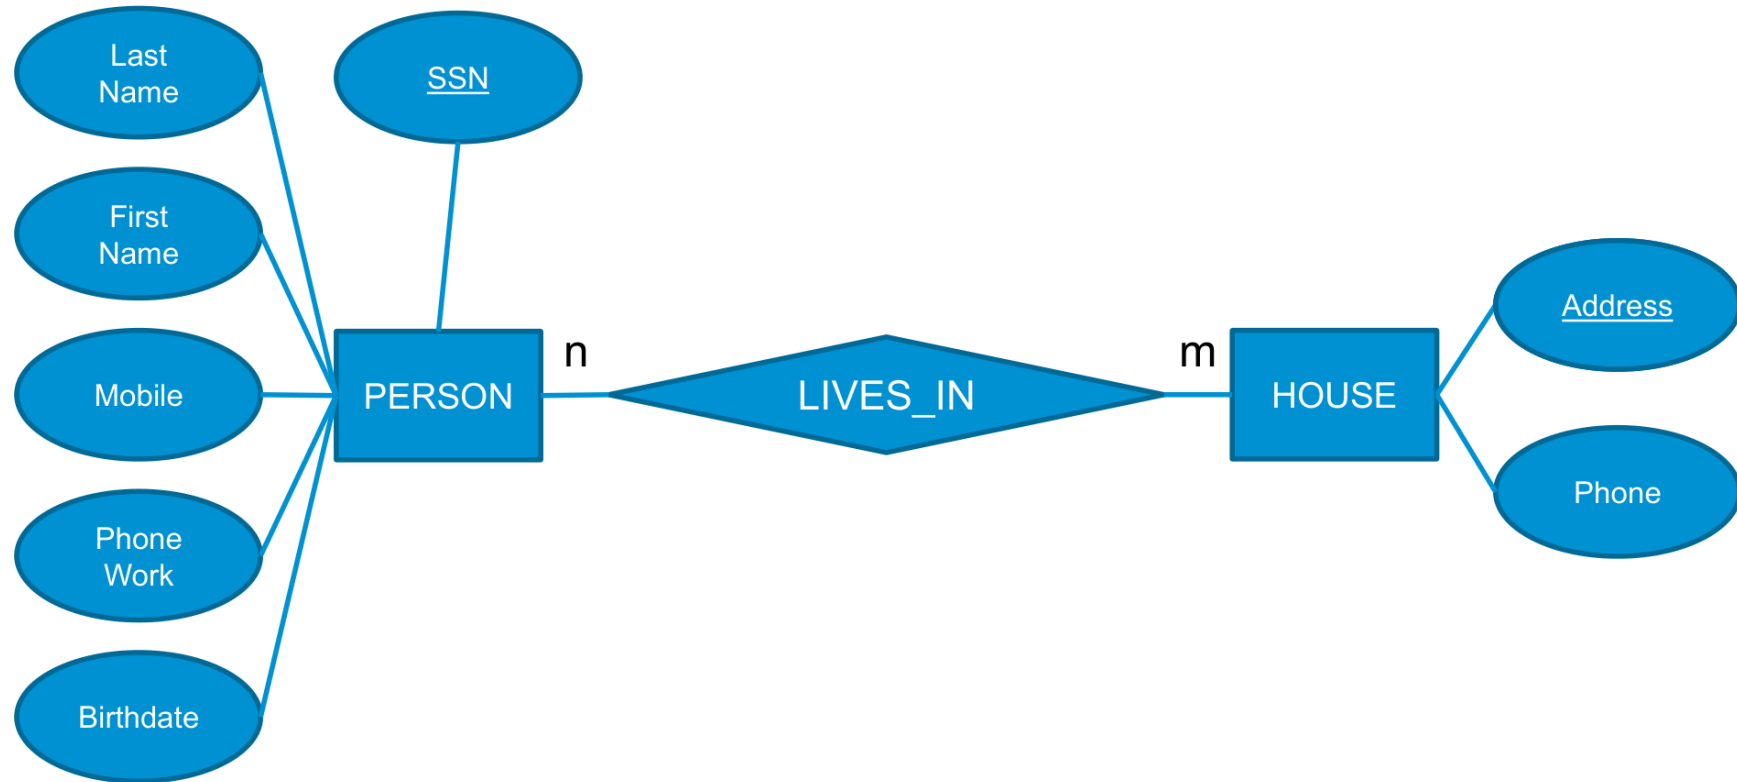

2.1 Basics

Conceptual Design with ERM

- Entity Type
 - ▶ Represented as a rectangle
 - ▶ Singular Noun
- Attribute Type
 - ▶ Represented as ovals
 - ▶ Noun
- Relationship Type
 - ▶ Represented as diamond
 - ▶ Always between entities
 - ▶ Verb & has cardinalities




2. Entity-Relationship-Model

2.1 Basics

Online-Tools for ERM


- Creating ERMs can be done by using any drawing tool or just a piece of paper and a pen.
- Examples of drawing tools:
 - ▶ Excalidraw
(Recommended)
 - ▶ Draw.io
 - ▶ Lucidchart
 - ▶ Creately

2. Entity-Relationship-Model

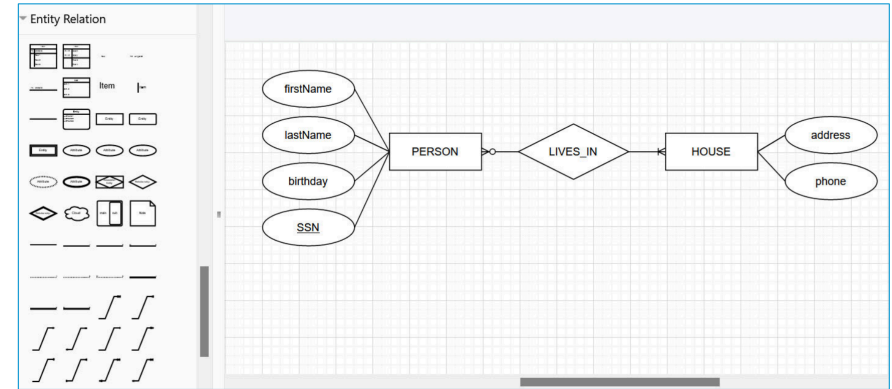

Entity Abstraction

Some entities (in the Real World)

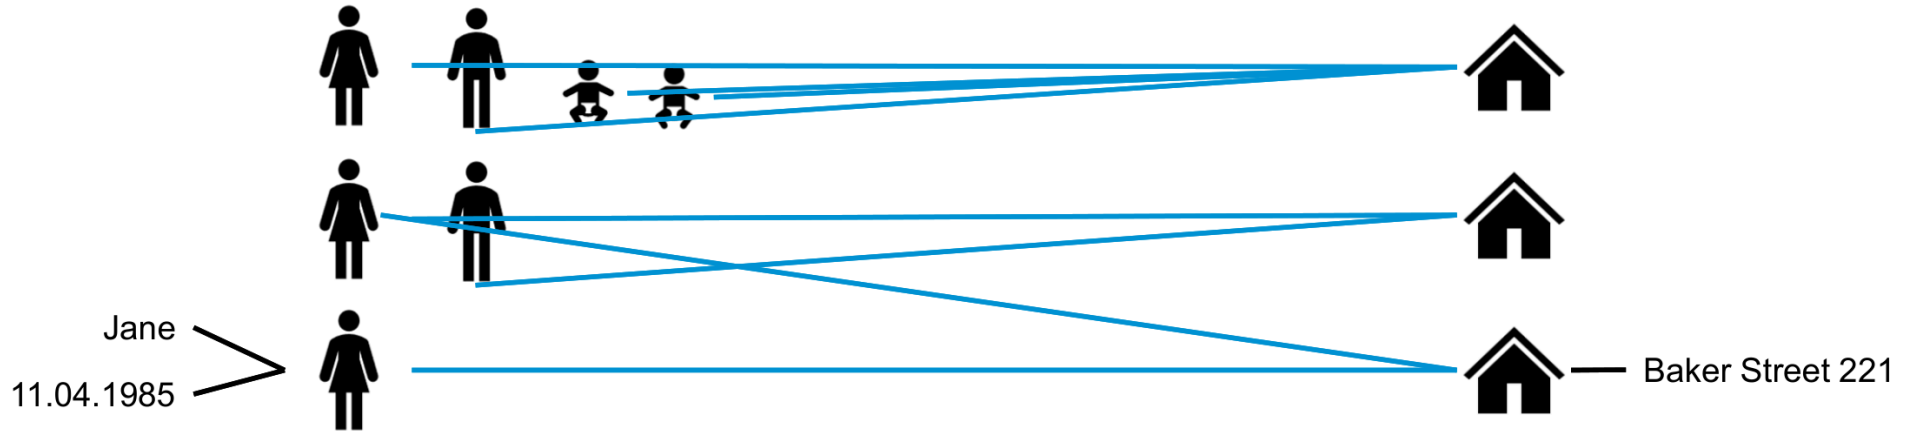

Entity types (abstraction of the real world)



Entity Abstraction

! Memorize

- An **entity** is a distinguishable thing that exists in the real world.
- An abstraction of entities would be an **entity type** (comparable to classes in OOP)
- Several entities make up an **entity set**
- An abstraction of relationships is called a **relationship type**

Entity Abstraction



Example


Imagine a company:

- A company is made-up of departments and each department has a unique name, a number and a manager.
- Each employee's name, social security number, address, salary and birth date is stored within our database.
- We also want to keep track of the hours per week per project, keep track of the supervisor.

2.1 Basics

2. Entity-Relationship-Model

ERM: Company Example

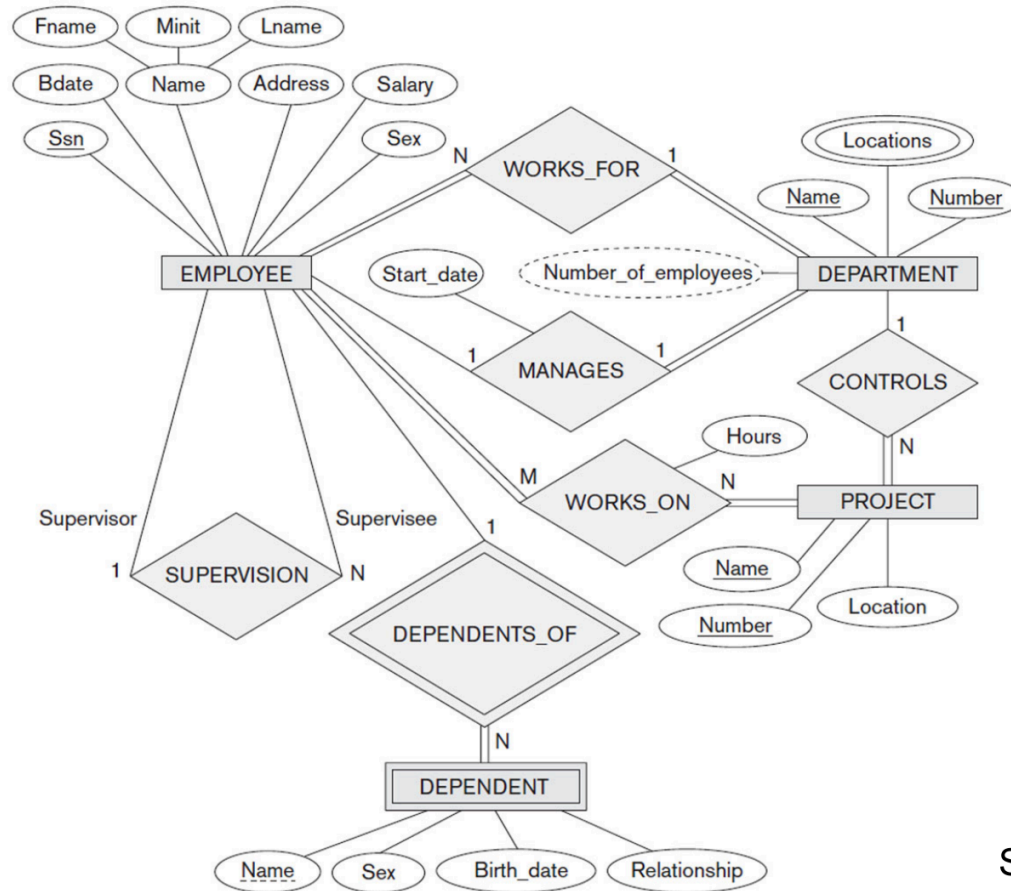

Source: Elmasri, Fundamentals of Database Systems, Page 204 ff

Entity Type

- An **entity type** is a basic object in an ERM.
- Represents a thing in the real world, like a car, a job or a person.
- An entity type has attributes, such as a name, an address or an age.
- A particular entity of that type will have values for each of these attributes.

Entity Type

! Memorize

- An entity type therefore defines a collection of entities, that have the same attributes.
- Each entity type can be defined by its name and its attributes.
- The collection of all entities of a particular entity type, so all the instances of this entity type, is called an **entity set**.

ERM: Entity Example

- Categories for entities could be
 - ▶ actual physical objects, people, roles, organizations,
 - ▶ actions, interfaces or general information
- An element is not an entity type
 - ▶ if it has neither attributes nor relationships,
 - ▶ only contains attributes that another entity type already has

? Question

What is a good name for an entity type?

ERM: Entity Example


Task 1

What are the entity types in the following examples?

- A company is organized in departments.
- Departments have a unique name, a unique number, a manager.
- A department oversees a number of projects, each with a name and a number.
- The company may store information about each employee like their name, their social security number and their salary.


2.1 Basics

Entity Type

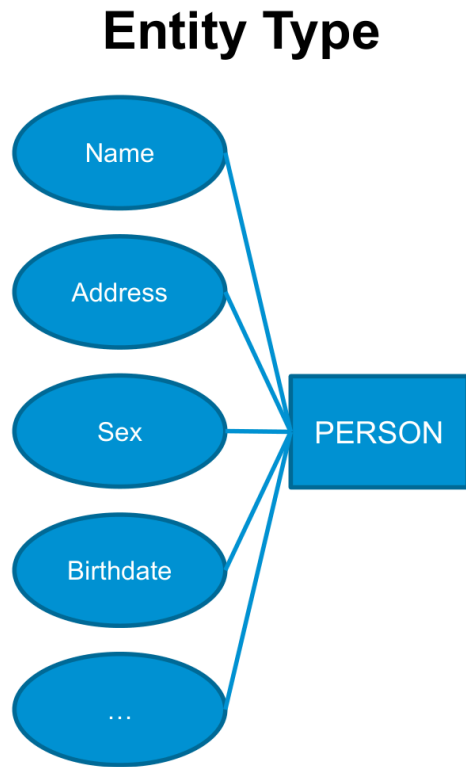

2. Entity-Relationship-Model

Entities

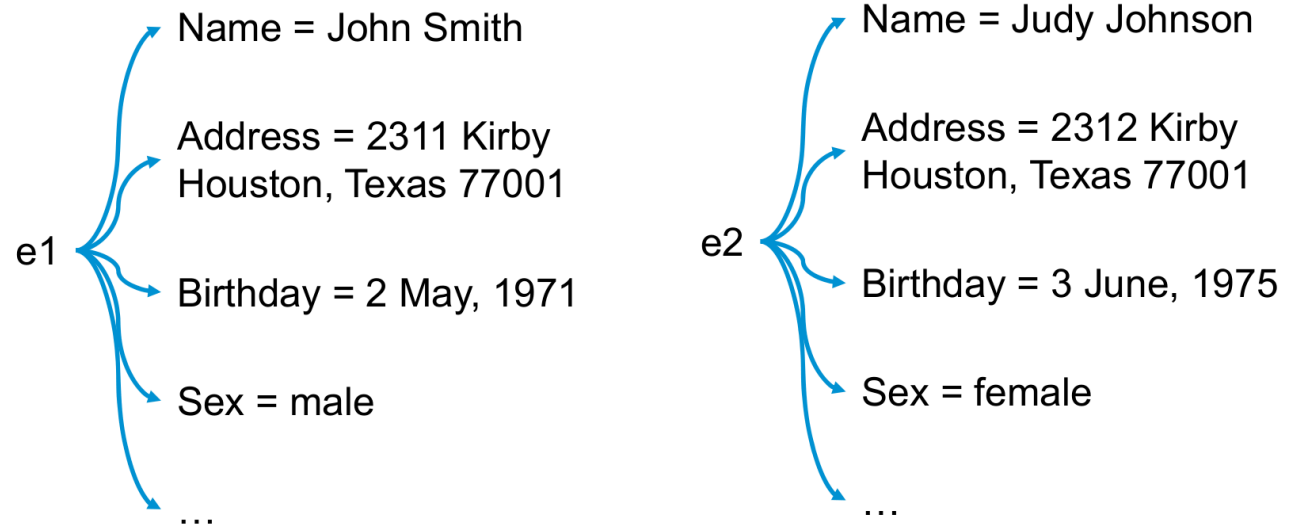

Source: Elmasri, Fundamentals of Database Systems, Page 204 ff

Attributes

- Is the attribute relevant to the problem you are trying to solve?
- An attribute must belong to an entity type (or a relationship type).
- Some of the attributes of an entity are important in identifying the entity. These are called **key attributes**.
- A good name for an attribute is unique within the entity type, but not necessarily across the entire model.

Attributes

Task 2

When you look at the attributes of the entity project, what could be identifying or key attributes?

- A department controls a number of projects, each with a unique name, unique number and a single location.


2.1 Basics

Attributes

2. Entity-Relationship-Model

2.1 Basics

2. Entity-Relationship-Model

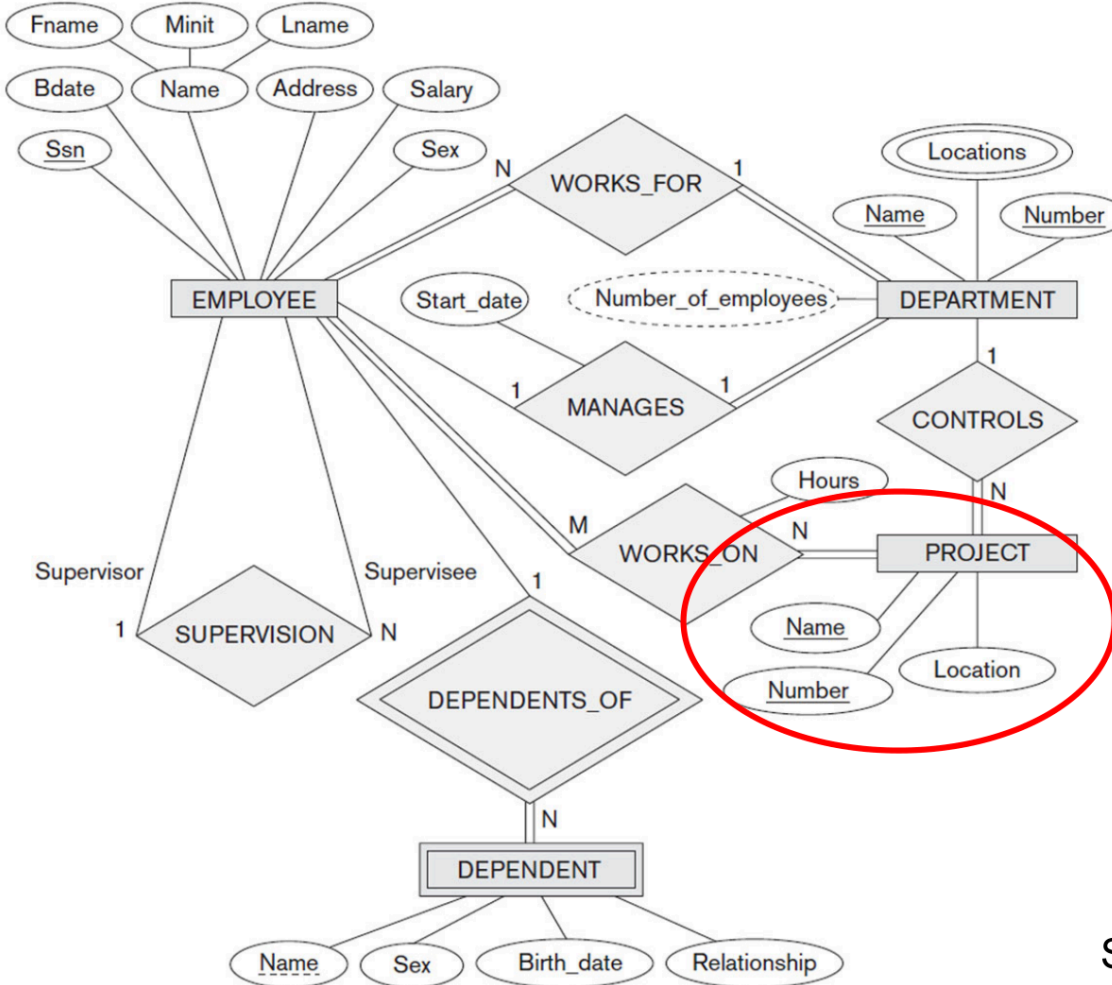

Source: Elmasri, Fundamentals of Database Systems, Page 204 ff


2.1 Basics

Attributes

2. Entity-Relationship-Model

2.1 Basics


2. Entity-Relationship-Model

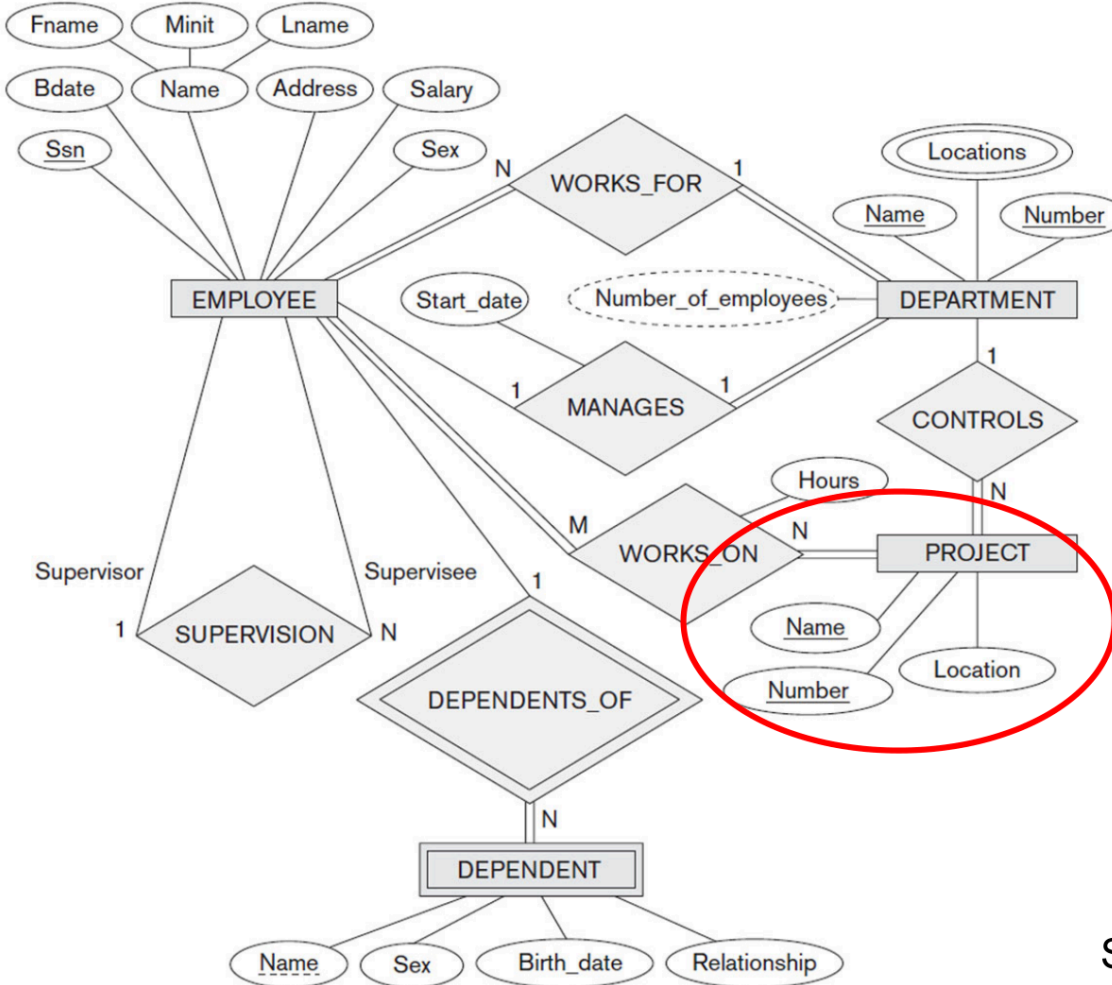

Source: Elmasri, Fundamentals of Database Systems, Page 204 ff

- Composite vs. Simple (atomic) attributes
 - ▶ Attributes which are not divisible are called simple or atomic attributes
 - ▶ Composite attributes can form a hierarchy
 - ▶ Composite attributes are useful to model situations in which a user sometimes refers to the composite attribute as a unit but at other times refers specifically to its components
 - ▶ If the composite attribute is referenced only as a whole, there is no need to subdivide it into component attributes
 - ▶ Composite attributes are attached to their component attributes by straight lines

Attributes in Entity Types

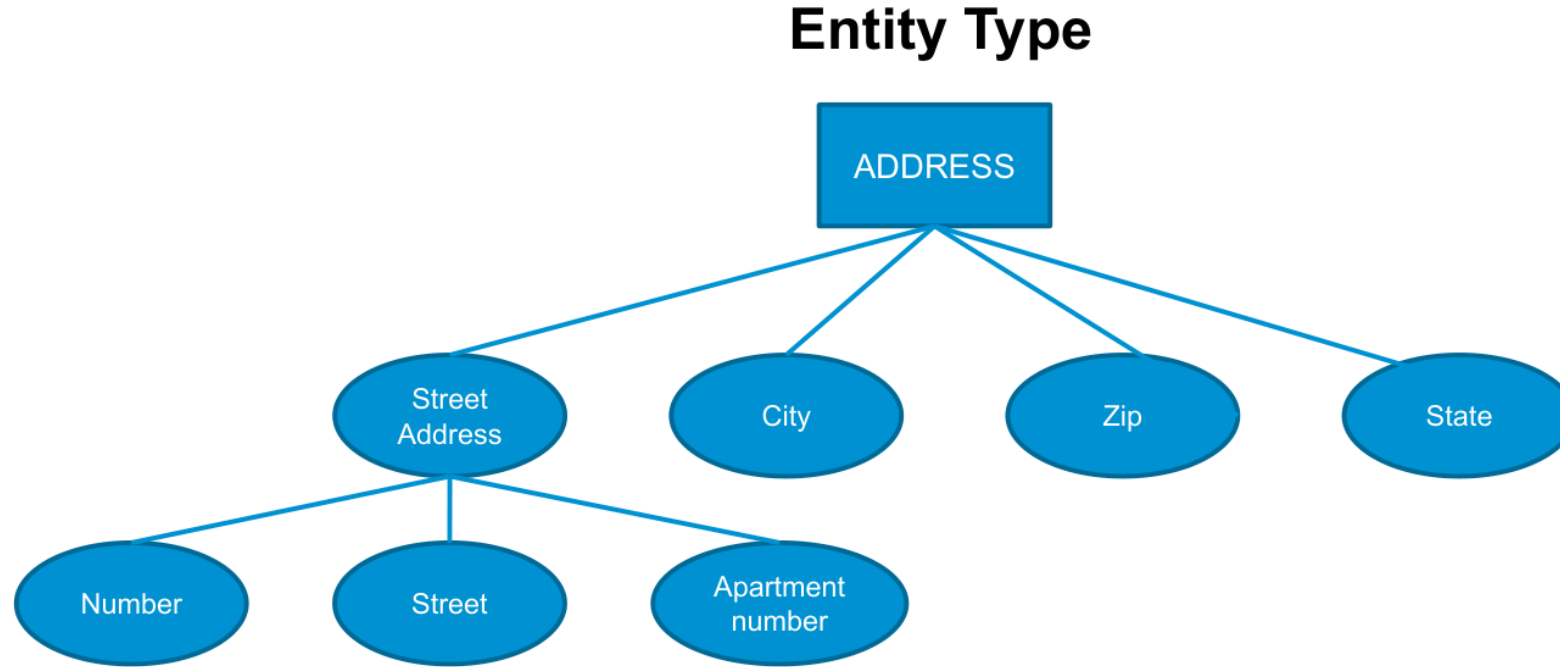

Source: Elmasri, Fundamentals of Database Systems, Page 204 ff

Key Attributes in entity sets

- How can we identify an actual entity within an entity set?
- Attributes must be used → Key Attributes (also called identifying attributes)
- Sometimes several attributes together form a key attribute (identifying attribute), meaning that the combination of the attribute values must be distinct for each entity
 - ▶ If a set of attributes possesses this property, the proper way to represent this in the ER model that is to define a composite attribute and designate it as a key attribute of the entity type

- ▶ Notice that such a composite key attributes must be minimal; that is, all component attributes must be included in the composite attribute to have the uniqueness property
- Key attributes are underlined
- If two attributes are underlined separately, then each is an identifying attribute on its own

Key Attributes in entity sets

Task 3

What are key attributes for entity type EMPLOYEE and DEPARTMENT?

- A company is organized in departments.
- Departments have a unique name, a unique number, a manager.
- A department oversees a number of projects, each with a name and a number.

- The company may store information about each employee like their name, their social security number and their salary.


2.1 Basics

Key attributes in entity sets

2. Entity-Relationship-Model

2.1 Basics

2. Entity-Relationship-Model

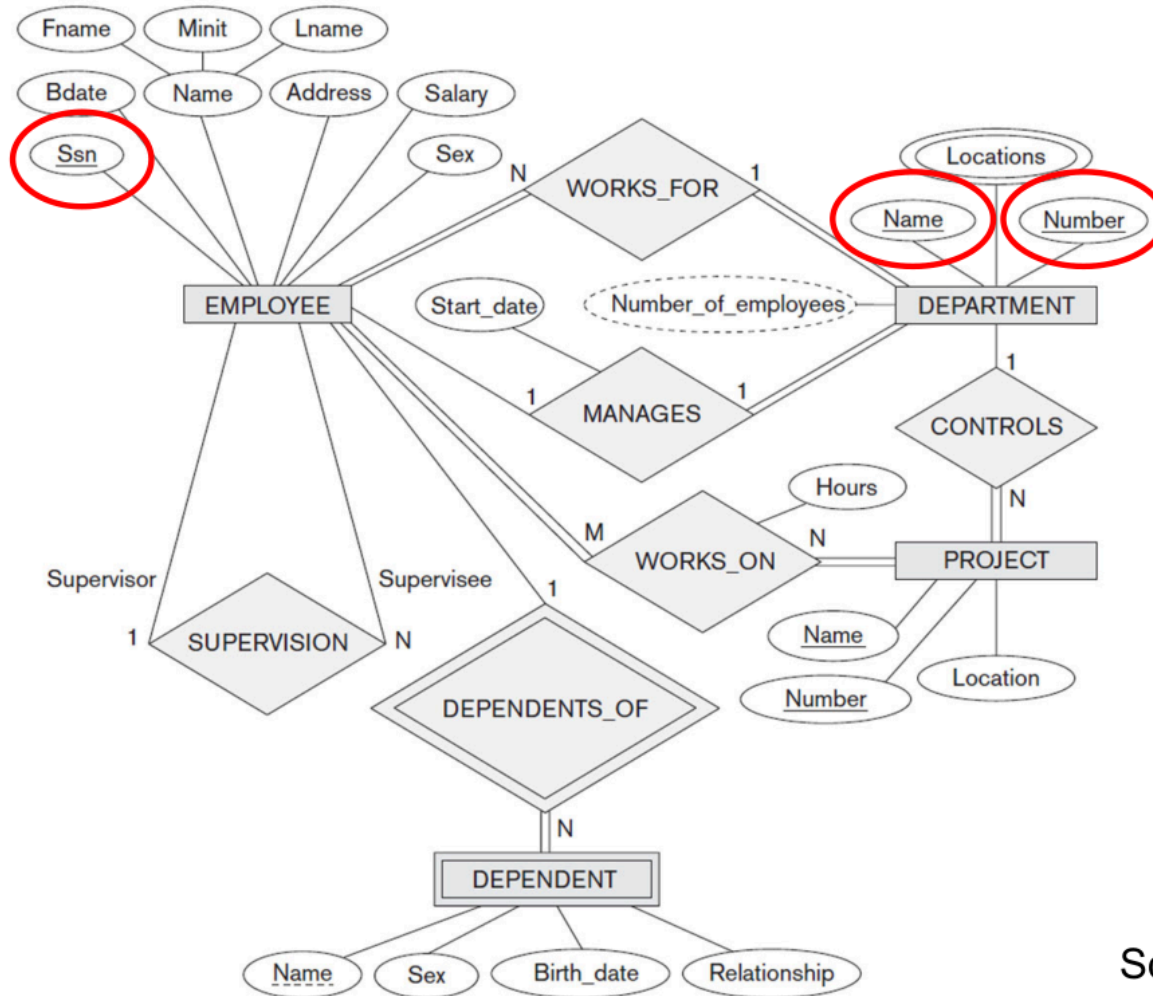


Source: Elmasri, Fundamentals of Database Systems, Page 204 ff

Key attributes in entity sets

☰ Task 4


What are key attributes for BOOK?

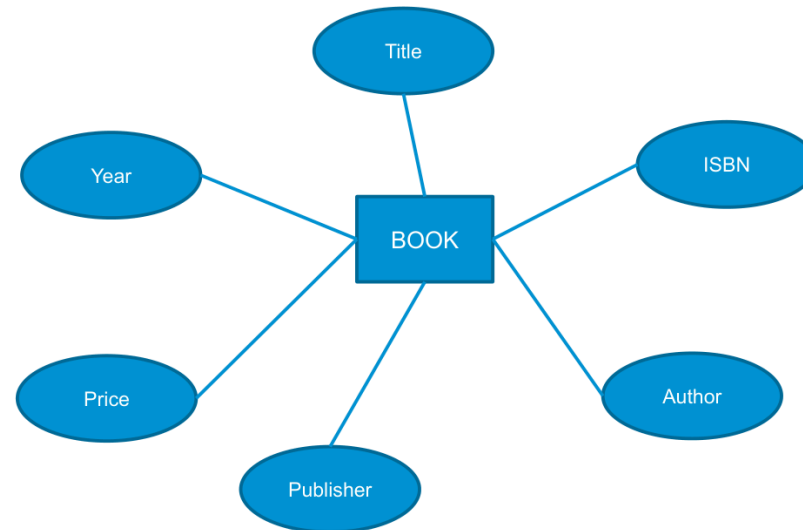

Key attributes in entity sets

☰ Task 5

What are key attributes for PERSON and HOUSE?

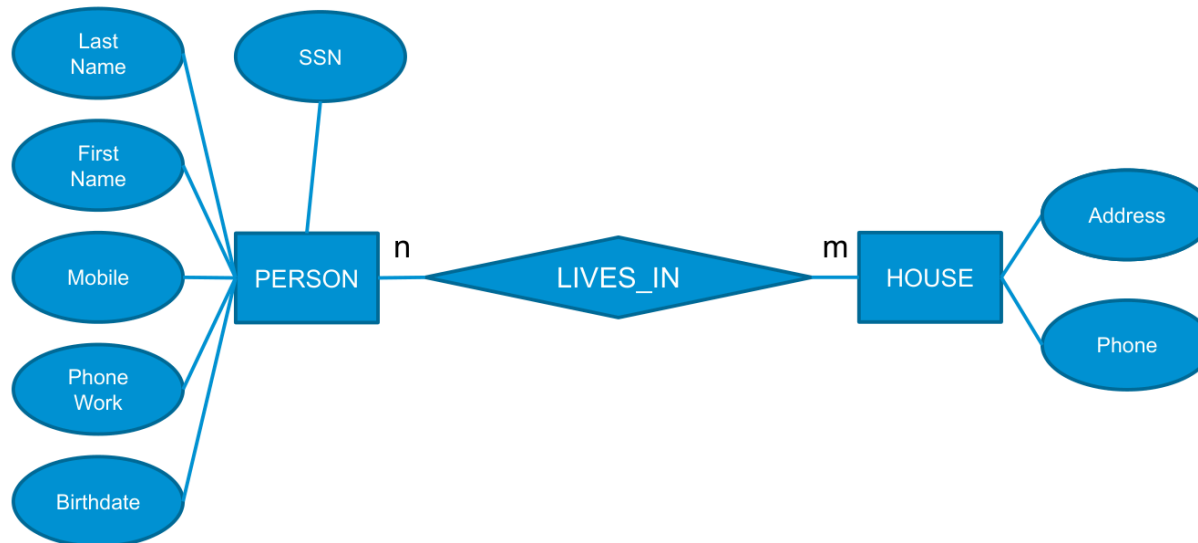

3. The relational model

3.1 What is the relational model


RM: A quick history

3. The relational model

3.1 What is the relational model

3. The relational model

- Edgar F. Codd invented the relational model in 1970 and won the Turing price for it.
- The model has become widely accepted.
- The model is based on relations, that are subset of the Cartesian product.
- Everything is modelled in tables.

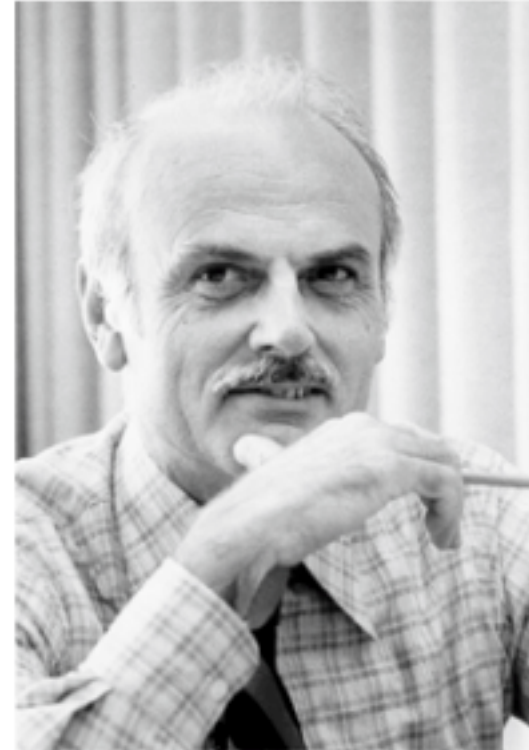

Source: www.wikipedia.org

3.1 What is the relational model

3. The relational model

Name	Matr_no	Term
John Meyer	123456	2
Judy Fisher	234567	4
William Smith	345678	3


RM: The model

- The relational schema describes objects and relationships as a relational schema.
- A relational schema consists of a set of attributes
- Each attribute belongs to a value range/type
- A database schema consists of a set of relational schemas
- A relation displays the current data for the relational schema
- The set of relations is called the database (or the state of the DB)
- An element of a relation is called a tuple, which is simply a row

3.1 What is the relational model

3. The relational model

RM: The model

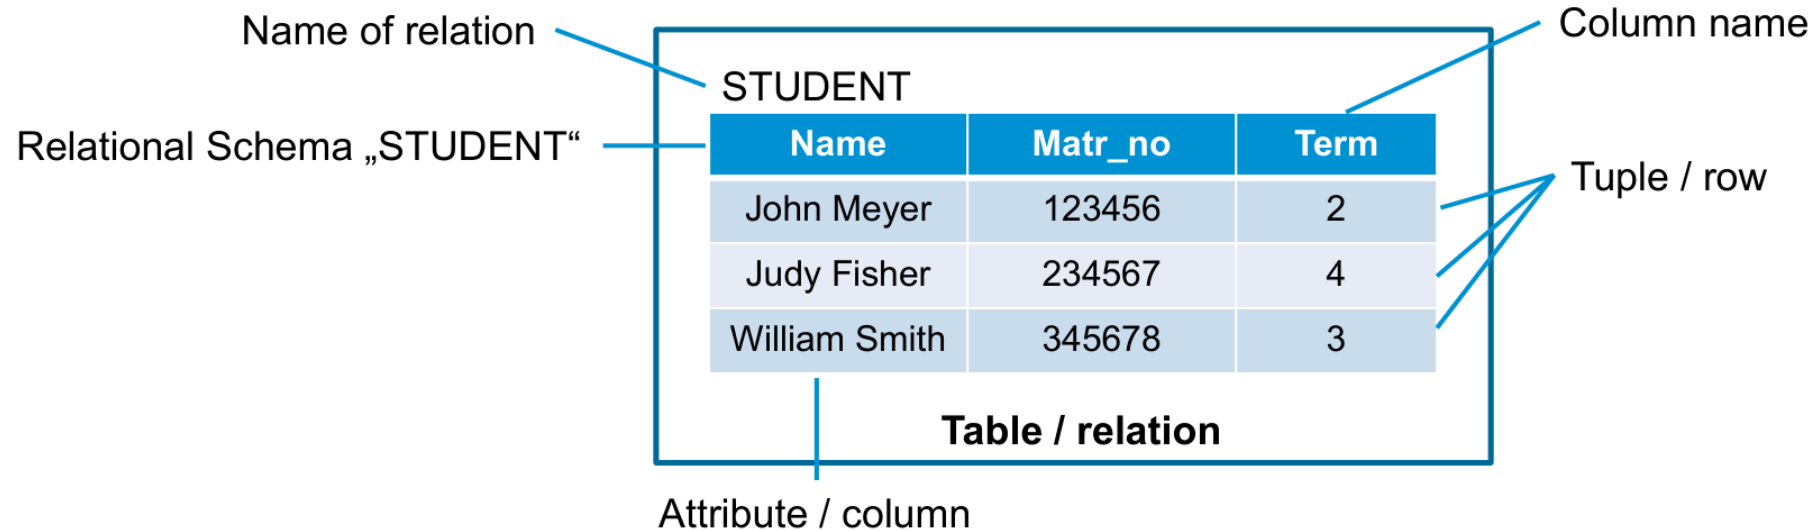

Attribute	Type
Name	String
Matr_no	Integer
Term	Integer

3.1 What is the relational model

3. The relational model


RM: The model

Relational Schema „STUDENT“

STUDENT		
Name	Matr_no	Term
John Meyer	123456	2
Judy Fisher	234567	4

Annotations: Name of relation (points to STUDENT), Column name (points to Name, Matr_no, Term), Tuple / row (points to the data rows).

A table can be created by taking the Cartesian product of a set of rows and a set of columns.
If the Cartesian product rows \times columns is taken, the cells of the table contain ordered pairs of the form (row value, column value).

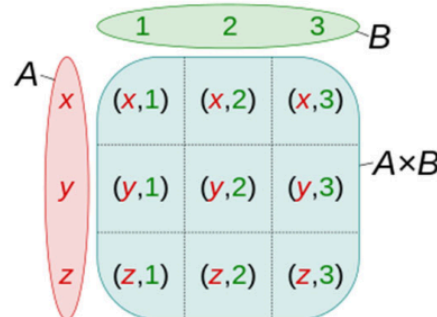

Mathematically:

Relation STUDENT \subseteq String \times Integer \times Integer

Cartesian Product

Source: www.wikipedia.org

3.1 What is the relational model

3. The relational model

RM: The model

- Objects are described using relations
 - ▶ Relations can be viewed as tables
 - ▶ But: Not like a spreadsheet table!
- There can be links between relations
- Attributes describe properties
- Possible attribute values are defined by the domain

3.1 What is the relational model

3. The relational model

RM: The model

Informally:

- A relational model represents the database as a collection of relations
- Each relation resembles a table of values or, to some extent, a flat file of records
- When a relation is thought of as a table of values, each row in the table represents a collection of related data values
- A row represents a fact that typically corresponds to a real-world entity or relationship

3.1 What is the relational model

3. The relational model

- The table name and column names are used to help to interpret the meaning of the values in each row
- All values in a column are of the same data type

3.1 What is the relational model

3. The relational model

RM: The model

Formally:

- A row is called a tuple
- A column header is called an attribute
- The table is called a relation
- The data type describing the types of values that can appear in each column is represented by a domain of possible values

3.1 What is the relational model

3. The relational model

RM: The math behind it

- Example:
 - ▶ `ROOM(room_num, function, seats)`
 - ▶ where `function = {auditorium, lab, office, administration}`

3.1 What is the relational model

3. The relational model

RM: The math behind it



Idea

- A Relation Schema R is a set of attributes (A_1, A_2, \dots, A_n) .
- Each attribute A_i is the name of a role played by a certain domain D in the relational schema R .
- A domain D of attribute A_i is denoted as $\text{dom}(A_i)$.
- The degree (or arity) of a relation is the number of attributes n of its relational schema.

3.1 What is the relational model

RM: The math behind it


3. The relational model


3.1 What is the relational model

3. The relational model

RM: The math behind it

- Relational Schema:
- Relational Schema with types:

1	BOOK	 SQL
2	(ISBN,	
3	title,	
4	author,	
5	publisher,	
6	year,	
7	price)	

1	BOOK	 SQL
2	(ISBN: <i>integer</i> ,	
3	title: string,	
4	author: string,	
5	publisher: string,	
6	year: <i>integer</i> ,	
7	price: <i>real</i>)	

→ Relation BOOK is of degree six.

3.1 What is the relational model

RM: The math behind it

3. The relational model

4. License Notice

4.1 Attribution

- This work is shared under the CC BY-NC-SA 4.0 License and the respective Public License.
- <https://creativecommons.org/licenses/by-nc-sa/4.0/>
- This work is based off of the work by Prof. Dr. Ulrike Herster.
- Some of the images and texts, as well as the layout were changed.
- The base material was supplied in private, therefore the link to the source cannot be shared with the audience.