
3 / 📦 Deliverable: Application, Registration, or Request Flow

Repository link : https://github.com/emilylei361/module-3-deliverable
Published-page URL : emilylei361.github.io/module-3-deliverable/

Disclaimer: Root colors are different from Module 1, I am redoing both Module 1 and 2 deliverables because it's not connected to this module's content as of now. The color palette for now has been to represent BAC colors (Black African Coalition at ASU). 3 colors were colorpicked from their logo.

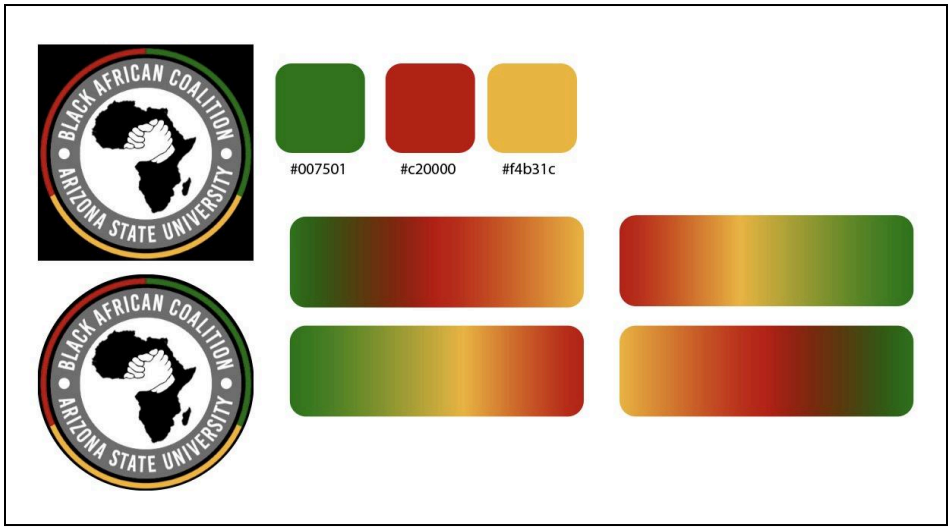

Design Brief: Form from the BAC at ASU (Black African Coalition) and is an application for anyone interested in being a Student Speaker at the Fall 2026 Special Interest Celebrations.

REQUIRED FLOW SECTIONS:


ID	Section	Required evidence
F1	Purpose and expectations	Task title, audience, what happens after submission, time expectation, required/optional convention, and privacy statement. ✅
F2	Task and data plan	A field inventory explaining why each value is necessary, whether it is required, its control/type, submitted name, autocomplete purpose, constraint, and sensitivity. ✅
F3	Semantic form	8–14 purposeful controls; persistent labels; at least two logical fieldsets/legends; at least four suitable input/control types; meaningful names/values; explicit submit button. ✅


F4	Requirements and validation	Requirements stated before entry; appropriate native constraints; helpful format examples; no unnecessary rigid patterns. ✅
F5	States and recovery	Documented default, focus, required, valid, invalid, disabled, and static server-returned error states. Errors use text plus another cue, preserve entries, identify the field, and explain recovery. ✅
F6	System and evidence	Module 1 system extended coherently; responsive form layout; test record; fictional test-data list; AI disclosure; and valid, organized code. ✅


REQUIRED TESTS:

HTML/CSS Validation:

HTML is valid, action is empty since it's just for testing:
CSS is valid:

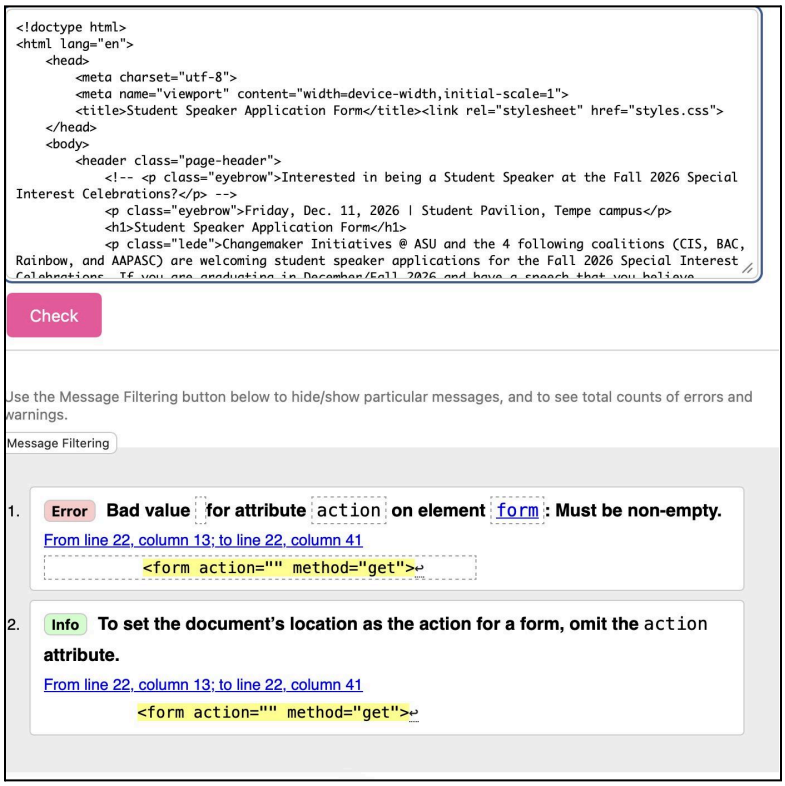




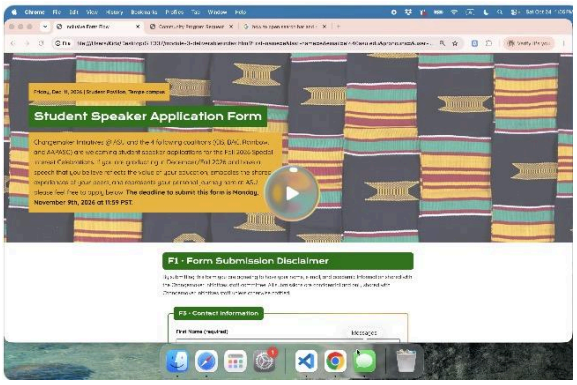
Keyboard-only completion and submission attempt	Evidence
Used fake information	Screen Recording Link: Screen Recording 2026-10-24 at 1.56.40 PM.mov 

Accessibility-name/group inspection	Evidence
Representative text	Each **for** has a unique **ID**, proper autocomplete tokens for controls that need it
Radio	Each “radio” has proper ID, name, and value
Checkbox	`id="grad-date-confirmation"` ensures the screenreader reads instructions for graduation date confirmation.
Select	combobox "Pronouns (Optional)" focusable: true expanded: false MenuListPopup "" option "Select" focusable: true selected: true option "She/Her" focusable: true selected: false option "He/Him" focusable: true selected: false option "They/Them" focusable: true selected: false option "Prefer not to say" focusable: true selected: false option "Other" focusable: true selected: false


textarea controls	group "Questions or Comments" Legend "" StaticText "Questions or Comments" LabelText "" StaticText "Questions, Comments, or Concerns? (Optional)" paragraph "" StaticText "Please write any questions, comments, or concerns regarding the event and/or form. A Changemaker Initiatives staff member will reach back via e-mail within 48 hours. Maximum 800 characters." InlineTextBox "Please write any questions, comments, or concerns regarding the event and/or form. A " InlineTextBox "Changemaker Initiatives staff member will reach back via e-mail within 48 hours. " InlineTextBox "Maximum 800 characters." textbox "Questions, Comments, or Concerns? (Optional)" focusable: true settable: true multiline: true readonly: false required: false Ignored generic "" button "Submit" focusable: true

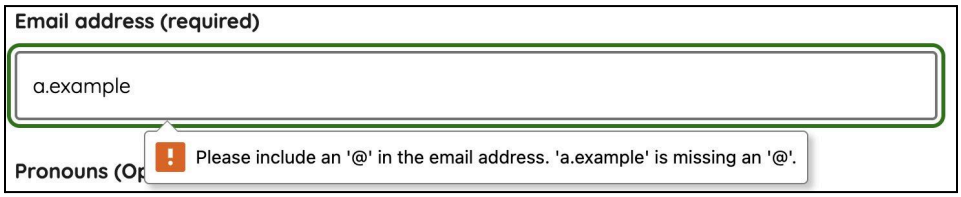
Accessibility-name/group inspection	**Evidence**
Empty	Tested all required fields by filling out 1 by 1, ensuring that if I clicked “Submit” an error window directing me to the unfilled section would pop up. Tested for First Name, Last Name, E-mail, Grad Date confirmation, Celebration Select, Degree Type, Major, Speech submission
Malformed	Tested malformed input (user puts a.example for the e-mail instead of a proper format): 
Boundary-minimum	None of my survey questions required a boundary-minimum
Boundary-maximum	Tested the “Any questions, comments, or concerns?" textbox (max 800 characters) , First and Last Names (`maxlength="50"`). Prevents you from typing past the maxlength amount. *Note to self: Want to add an error message if the user attempts to go past but that might be JavaScript related.*


Valid submissions	Filled out form completely with valid input and was able to submit the form, URL looked like this: file:///Users/Kids/Desktop/GIT337/module-3-deliverable/index.html?first-name=em&last-name=lei&email=example%40gmail.com&pronouns=&user-confirmation=yes&celebration=Rainbow&degree=undergrad-degree&user-majors=Math&user-minors=&user-file=emily_lei-tps-poster.pdf&user-comments=

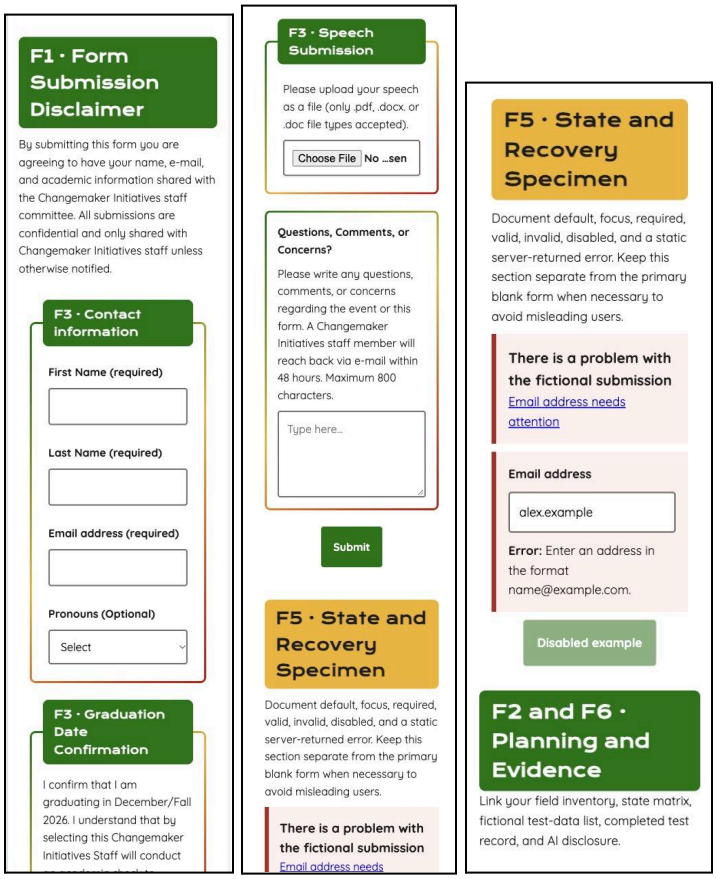CSS pixel width	Viewport Checks
320 (phone)	


768 (tablet)

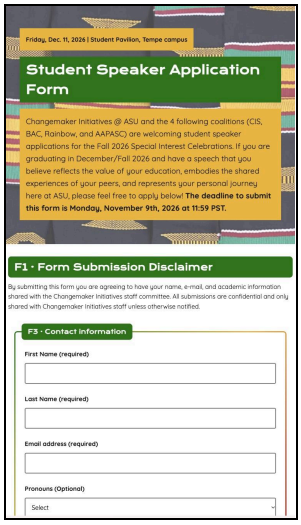


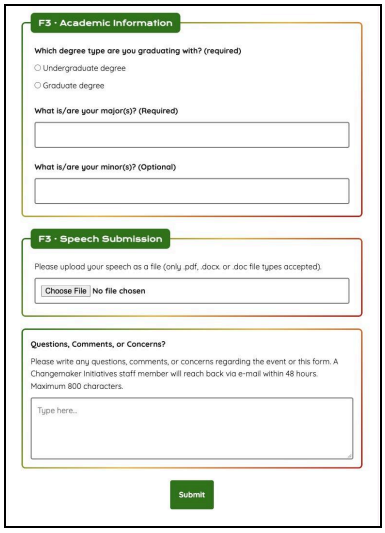


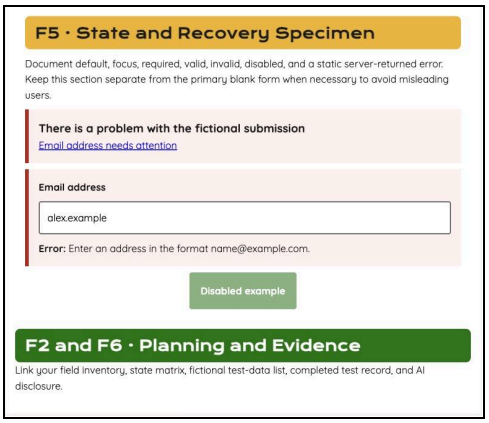




1280



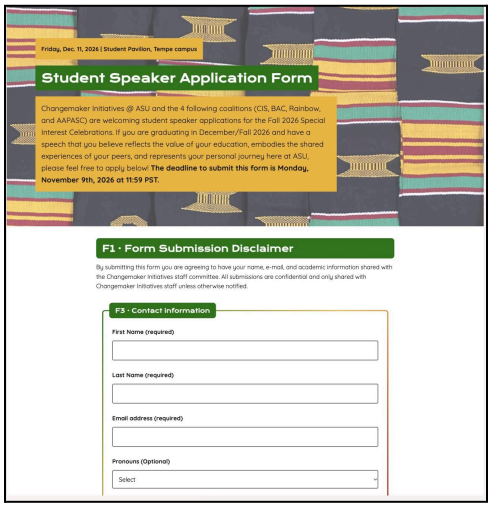


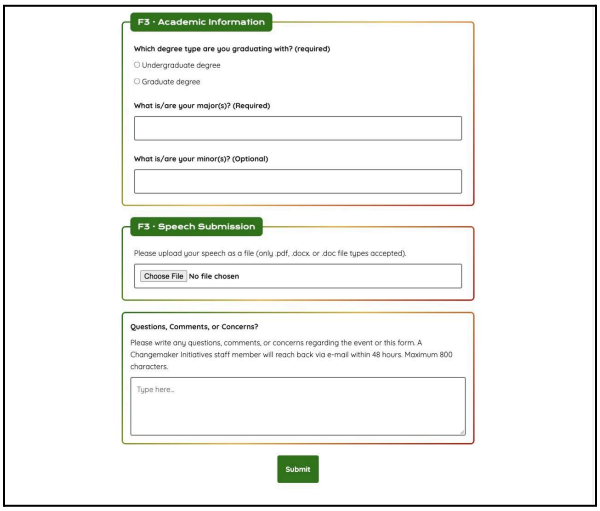

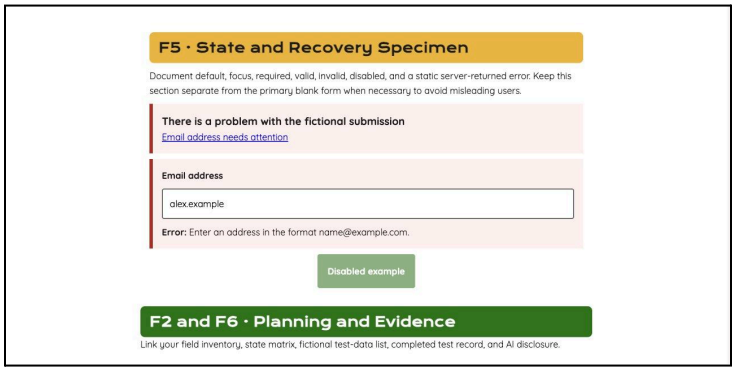

Browser zoom	Viewport Check

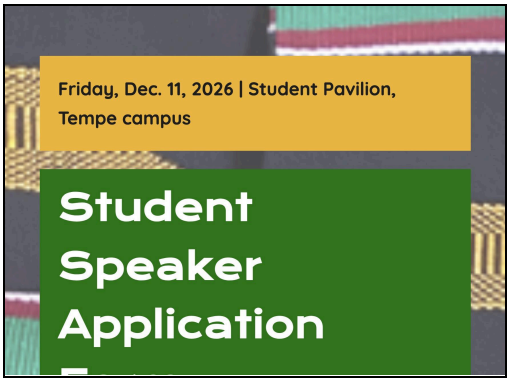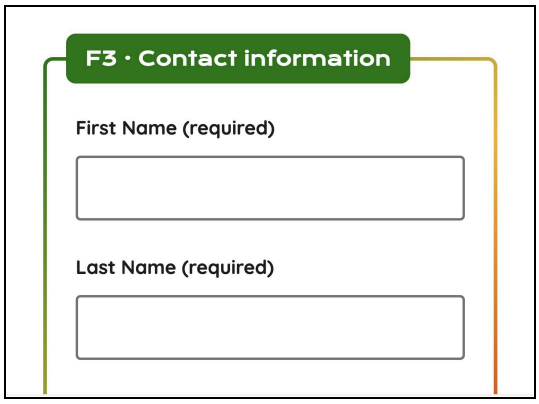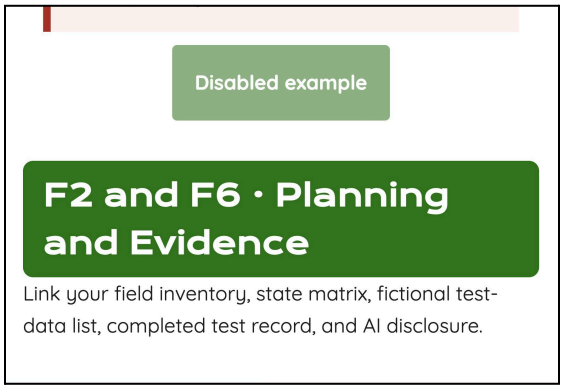200% (tested at 768 CSS pixel width)	   

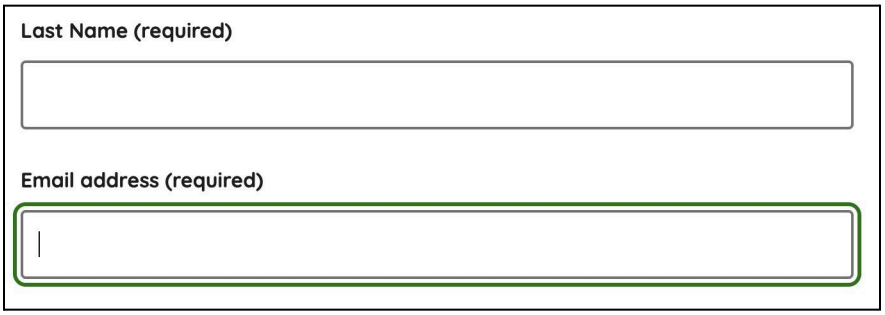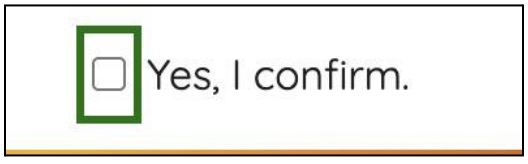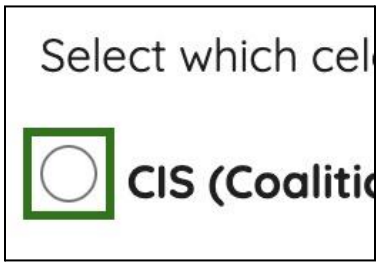User Comfort Testing	Evidence
Focus visibility	Used a green color for :focus state, comparison of Last Name and Email Address being focused on.  :focus states for checkbox and multiple choice:  

Comfortable pointer/touch operation	Clicking or pressing the words next to each checkbox/radio option will also trigger it.

Query-string Inspection	Evidence Check
Use fictional data with method = “get”	Filled out form completely with valid input, URL looked like this: file:///Users/Kids/Desktop/GIT337/module-3-deliverable/index.html?first-name=em&last-name=lei&email=example%40gmail.com&pronouns=&user-confirmation=yes&celebration=Rainbow&degree=undergrad-degree&user-majors=Math&user-minors=&user-file=emily_lei-tps-poster.pdf&user-comments=

Starter file	How you will use it
`index.html`	Use it as the structural starting point. Replace the placeholder task, instructions, labels, controls, names, values, constraints, and error examples. Add enough purposeful controls to meet F3. You may reorganize the page, but keep the F1–F6 labels visible so each requirement is easy to locate. ✅
`styles.css`	Use the supplied responsive and accessible control styles as a baseline. Merge in your Module 1 reset, tokens, typography, and component decisions; then adapt the form, states, and layout to your project. Do not submit the starter styling unchanged. ✅
`field-inventory-template.html`	Complete one row for every control before finalizing the form. Duplicate rows as needed. This completed file is your F2 task/data plan and is submitted with the project. ✅
`README.txt`	Read it before editing. It summarizes the required boundaries: F1–F6, native HTML/CSS only, no live data collection, and fictional test information. ✅

AI Disclosure:

- Asked Claude on how to make the header a background image, and helped with some sizing issues because the original photo dimensions were too big
- MDN evidence: https://developer.mozilla.org/en-US/docs/Web/CSS/Reference/Properties/background-image

how to make .page-header a hero ing with lowered opacity

13 minutes ago

Layer the image behind the header's content with a pseudo-element, so only the image gets the lowered opacity and the text stays fully opaque. Setting `opacity` on `.page-header` itself would fade the text too.

```css
.page-header {
  position: relative;
  min-height: 300px;
  display: flex;
  align-items: center;
  justify-content: center;
  text-align: center;
  color: #000;
  overflow: hidden;
  isolation: isolate;       /* keeps the image behind the text without leaking z-index
}

.page-header::before {
  content: "";
  position: absolute;
  inset: 0;                 /* stretches to fill the header */
  background: url("hero.jpg") center / cover no-repeat;
  opacity: 0.4;             /* 0 = invisible, 1 = full strength */
  z-index: -1;
}
```

- `background: url(...) center / cover` centers the image and scales it to fill the header without distorting it. Replace `hero.jpg` with your image path or URL.
- `opacity: 0.4` is on the pseudo-element only, so the headline and any other content inside `.page-header` stay crisp. Adjust to taste.
- `isolation: isolate` creates a stacking conte… so the `z-index: -1` image sits behind the text but still above the page background.
- `overflow: hidden` stops the image from spilling outside the header.

- Asked Claude on how to make words have a background color but not have it extend to the whole container
- MDN evidence: https://developer.mozilla.org/en-US/docs/Web/CSS/Reference/Values/fit-content

how to have <p> tag have a background color behind the text that doesn't expand past it horizontally

A `<p>` is a block element, so it stretches to the full width of its container by default. To make the background hug the text, change how the width is calculated.

Option 1: `width: fit-content` (best for most cases)

```css
p.highlight {
  background: #fff3b0;
  width: fit-content;
  padding: 0.5em 0.75em;
}
```

https://developer.mozilla.org/en-US/docs/Web/HTML/Guides/Constraint_validation

Here is the HTML part:

HTML Copy Play

```
<label for="fs">Select a file smaller than 75 kB: </label>
<input type="file" id="fs" />
```

This displays:

Play

Select a file smaller than 75 kB: Choose File no file selected