



Lab Exercise Guide

Simplifying Z Configuration - Harness the power of config as code
Enforcing a Zero Trust Strategy in CICS using Security Discovery

Technical Enablement Specialists:

Leigh Compton: lcompton@us.ibm.com

Steve Fowlkes: fowlkes@us.ibm.com

Eric Higgins: erichiggins@us.ibm.com

Ezriel Gross: ezriel@ibm.com


Andrew Smithson: SMITHSON@uk.ibm.com

Access the lab using the following URL:

<https://emitchj.github.io/WSC-CICSzVA-Registration/>

Lab Environment Connection Instructions

1. Go to website <https://emitchj.github.io/WSC-CICSzVA-Registration/>

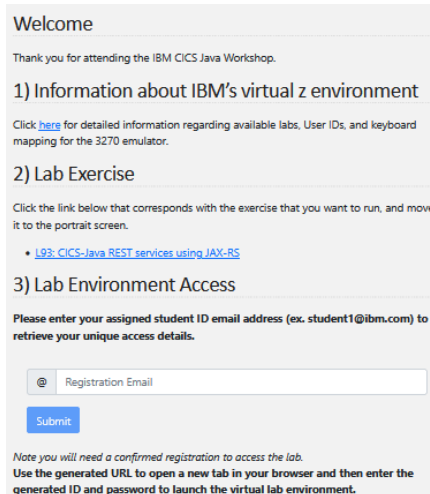

Welcome

Thank you for attending the IBM CICS Java Workshop.

1) Information about IBM's virtual z environment

Click [here](#) for detailed information regarding available labs, User IDs, and keyboard mapping for the 3270 emulator.

2) Lab Exercise

Click the link below that corresponds with the exercise that you want to run, and move it to the portrait screen.

- [L93: CICS-Java REST services using JAX-RS](#)

3) Lab Environment Access


Please enter your assigned student ID email address (ex. student1@ibm.com) to retrieve your unique access details.

Registration Email

Submit

Note you will need a confirmed registration to access the lab.
Use the generated URL to open a new tab in your browser and then enter the generated ID and password to launch the virtual lab environment.

2. Click the link in section **#1** to read detailed instructions about accessing and using the IBM virtual environment.
3. Click the link in section **#2** to access a PDF copy of the lab instructions. You may save a copy of these instructions on your own desktop for reference. There are hard-copies available for SHARE.
4. Use section **#3** to obtain access information and credentials for the virtual environment. **Enter** the **student ID** email address from the sheet of paper in the "Registration Email" box and hit **Submit**.
5. You will be presented with a URL, user ID, and password for the virtual environment that looks like this image:

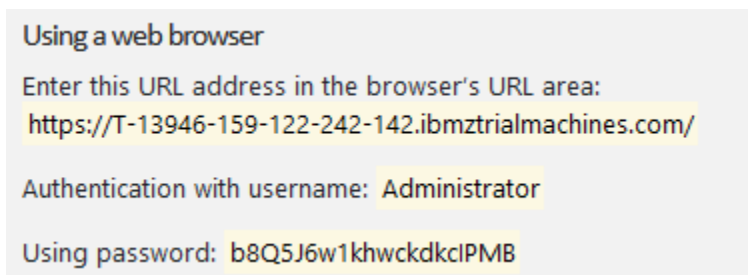

Using a web browser

Enter this URL address in the browser's URL area:
<https://T-13946-159-122-242-142.ibmztrialmachines.com/>

Authentication with username: Administrator

Using password: b8Q5J6w1khwckdkcIPMB

6. Use the URL that was returned in step #5 to initiate the virtual image sign-on page a web page. It may take a few seconds for the sign-on page to appear.

IBM Z Trial

Welcome to IBM Z Trial

Thank you for choosing to try out IBM Z Trials. You can find your user credentials in the last email we sent you.


This demo will be active for 3 days from the date of the same email.

If you are facing any problems with the trial please contact ztrial@uk.ibm.com

Username:
Administrator
t-8375-169-59-156-209.ibmztrialmachines.com
Manage Passwords
Key/Password:
DEFAULT

Cancel Sign In

7. Enter the **user ID** and **password** that was returned in step #5, and click on **Sign In**.
 - **Use copy/paste for the password to avoid typos.**
8. Once the image starts, you will be presented with a virtual image in a web browser that looks like this:

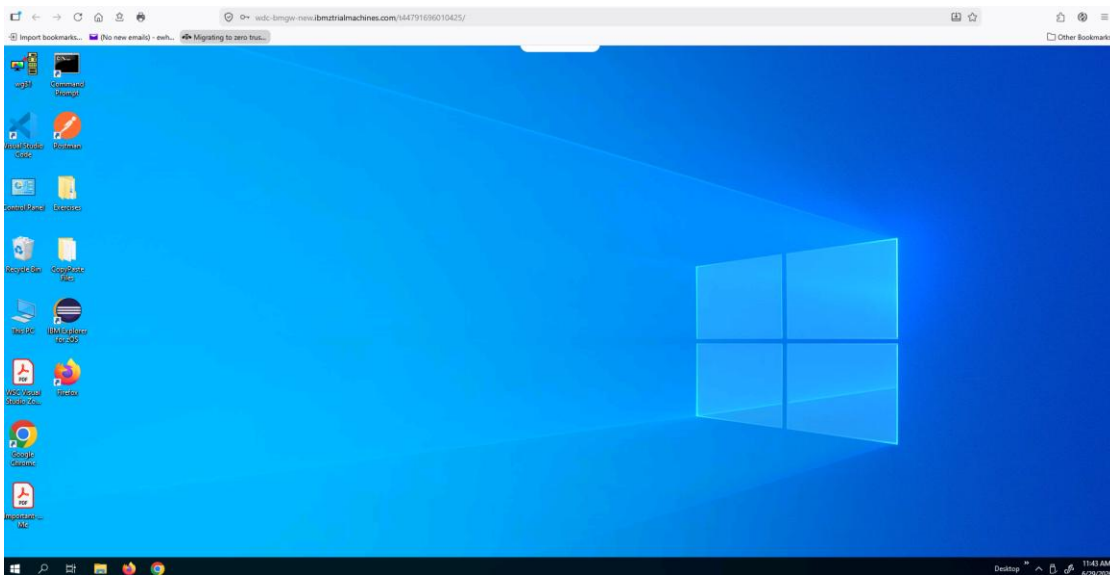

9. Note, it may take a minute or two for the virtual environment to activate.
10. You are now ready to start following the step-by-step instructions in the lab guide.

Available Lab Exercises

- Simplifying Z Configuration - Harness the Power of Config as Code
- Enforcing a Zero Trust Strategy in CICS using Security Discovery

NOTE1:

Hardcopies of the lab exercise documents are available at the event. Your instructors will make them available to you.


PDF versions are available for download. They are located at: <https://github.com/ibm-wsc/CICS-Conference-Labs>

NOTE2:

To assist with entering various input fields during the lab exercises, there may be copy/paste files that contain the input text for various steps in the exercise.

Use the text in these files to avoid manually typing input, especially the longer and more complex items. This will help avoid typos and other mistakes.

The copy/paste files are located on the desktop of the virtual windows image with the folder name of **copy/paste**.



Lab Exercise Key: **(z/OS Userids, Password, Port, etc.)**

The labs have symbols which you will need to substitute. Symbols look like this:

<zOS_userid>.CICSLAB.UTIL

You will substitute using one of these values:

- <zOS_userid> : USER1
- <zOS_Password> : USER1
- <CICS_Port> : 1423 (used for all labs except Liberty labs)
- <CICS_APPLID> : CICS1
- <Servlet_JSP_Port> : 1424 (used for Liberty labs)
- <zOS_DNS_Name> : ws31.washington.ibm.com

Results:

USER1.CICSLAB.UTIL

Note: Screen shots are NOT 100% accurate. Follow the text explanations rather than what you see in the screen shot.

Personal Communications Emulator Tips

Note: The 3270-terminal sessions for TSO and OMVS screen shots in these exercises are in reverse video simply for printing purposes.


There are 3270-emulator keyboard mapping issues encountered when using a web browser to access Windows desktop. As a result, not all keyboard mappings described in this document may not work as intended.

Below is a guide to help you resolve issues if you have inconsistent or non-working 3270 keys.


Any references to the Enter key in non-3270 windows, OMVS terminal session, etc. refers to the key labeled Enter on the keyboard.

- The 3270-emulator used for this workshop (IBM Personal Communication) maps the 3270 *enter* key to the right Ctrl key (see below). If the right Ctrl key does not work, try using the key labeled Enter or Return on your keyboard.
- The 3270 *newline* key has been mapped to the Shift-Enter key sequence.

- The 3270 *clear* key has been mapped to the Cntl-Enter key sequence.
- If all else fails, select *Actions* on the 3270-emulator tool bar and then select the Display *Popup Keypad* option. This displays the popup below where you select various keys.

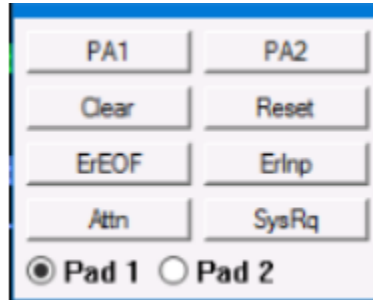


- z/OS Updates Different 3270-terminal emulators will display an icon like the 'Personal Communications' icon below at the bottom of the screen when the keyboard is locked. If this occurs use the left **Ctrl** key to reset or free the keyboard.

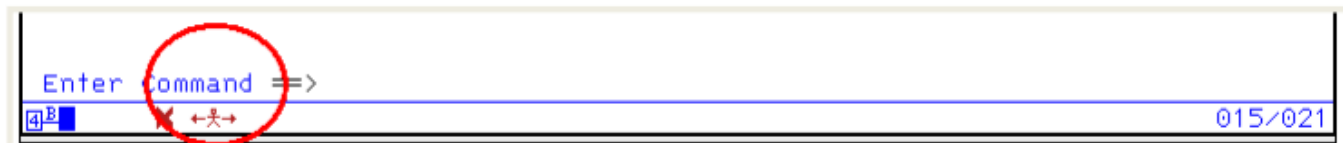


Configuring the Keyboard with Mac keyboards

- To reconfigure the IBM Personal Communications keyboard when using a Mac keyboard, click on *View* on the tool bar and select the Tool Bar option. Next click on the Remap Keyboard functions icon (see below).

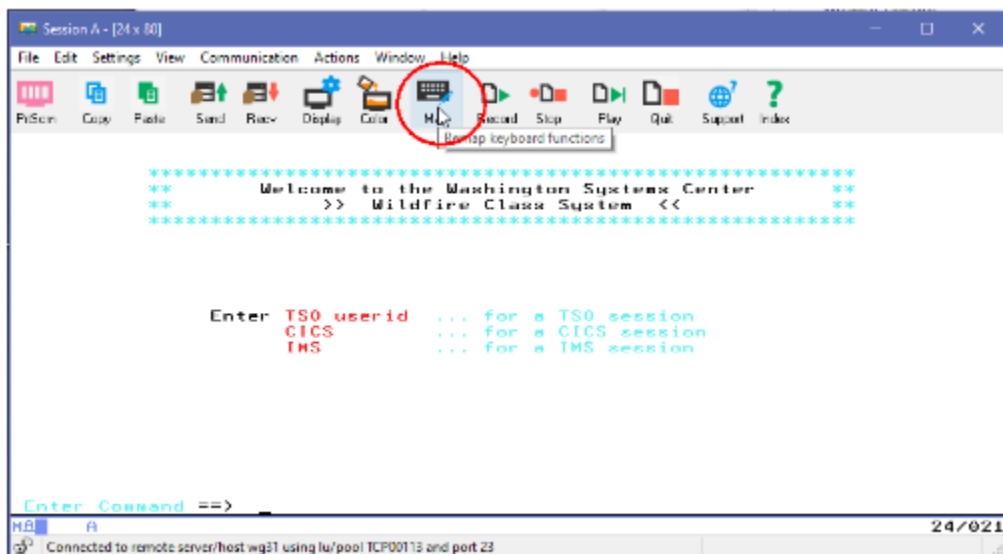


- To set the **Return** key to perform the *enter* function, click on the Return (1) key, use the pull down arrow to select *Enter* from the function list menu (2), and then in the *Change Current Actions for Selected Key* section, click on the arrow to the left of *Base* (3) to set the default function of pressing the **Return** key to [enter] (refer to the picture below)

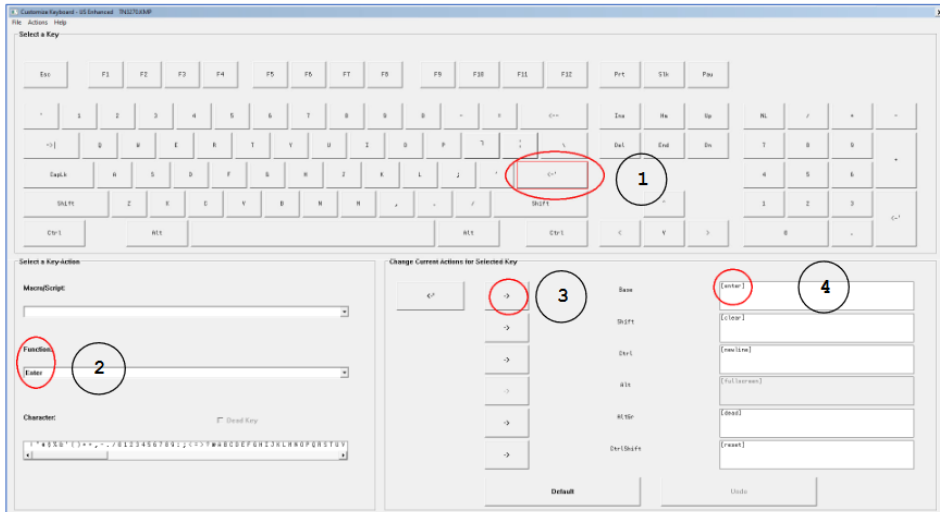

- To set the **Return** key to perform the *clear* the screen function, click on the **Return** (1) key, use the pull down arrow to select *Clear Screen* from the function list menu (2), and then in the *Change Current Actions for Selected Key* section, click on the arrow to the left of *Shift* (3) to set the default function of pressing the **Shift-Return** key sequence [clear].
- To set the **Return** key to perform the *new line* function, click on the **Return** (1) key, use the pull down arrow to select **New Line** from the function list menu (2), and then in the *Change Current Actions for Selected Key* section, click on the arrow to the left of *Ctrl* (3) to set the default function of pressing the **Ctrl-Return** key sequence to move the cursor down a line [newline].
- To set the **Return** key to reset a locked keyboard, click on the **Return** (1) key, use the pull down arrow to select **Reset** from the function list menu (2), and then in the *Change Current Actions for Selected Key* section, click on the arrow to the left of *Ctrl/Shift* (3) to set the default function of pressing the **Ctrl-Shift-Return** key sequence to reset or unlock a key board [reset].
- When finished, your keyboard actions for the Return key should match the picture above. To set the **Ctrl-C** key sequence to perform the *copy* function, click on the **C** key (1) and then in the *Change Current Actions for Selected Key*

section, click on the arrow to the left of **Ctrl** (2) to set the default function of pressing the **Ctrl-C** key sequence to [edit-copy] (3) (refer to the picture below).

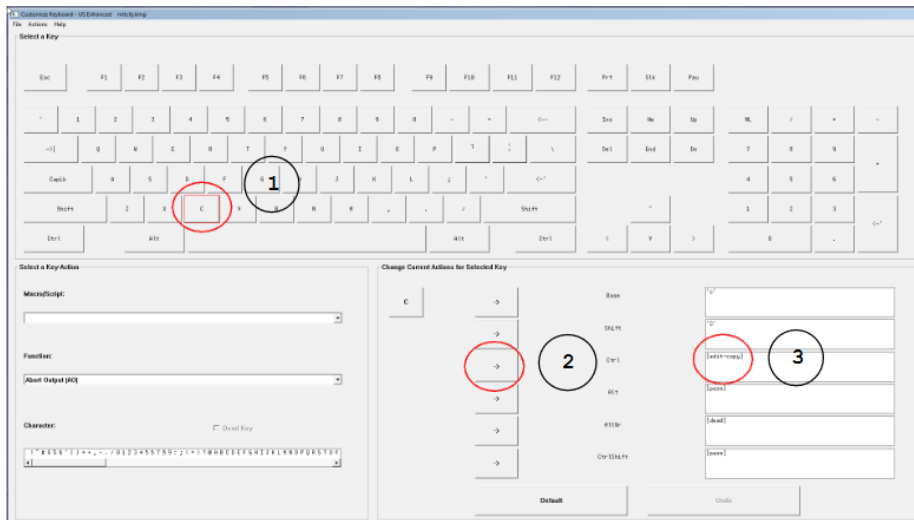

- To set the **Ctrl-V** key sequence to perform the *paste* function, click on the **V** key (1) and then in the *Change Current Actions for Selected Key* section, click on the arrow to the left of **Ctrl** (2) to set the default function of pressing the **Ctrl-V** key sequence to [edit-paste] (3) (refer to the picture below).

