



Grover's algorithm on Steane $[[7, 1, 3]]$ code
2 logical qubits, 1 iteration, depolarizing noise
 $p_1 = 0.001$, $p_2 = 0.01$, $p_{\text{idle}} = 1e-05$


Target $|00_L\rangle$

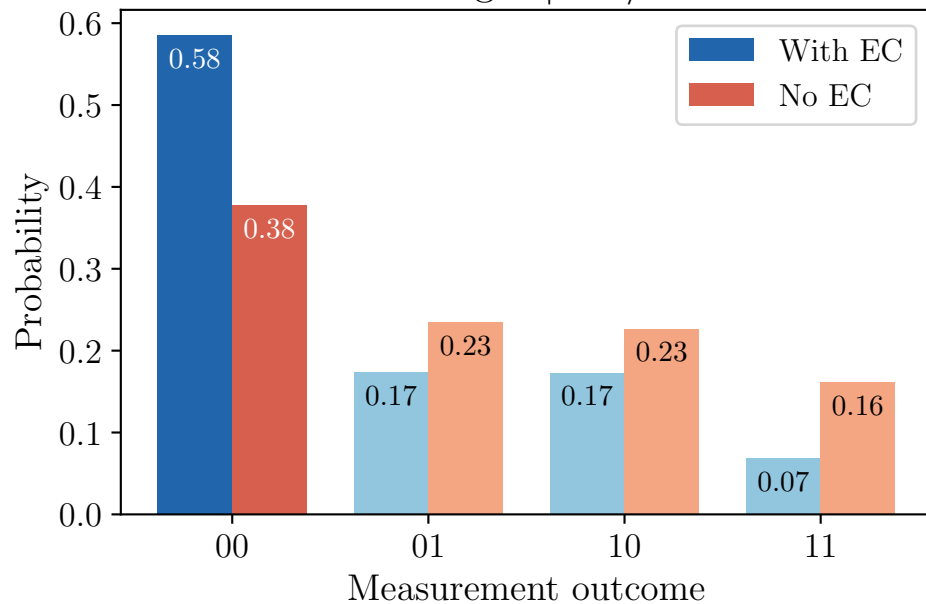

Target $|01_L\rangle$

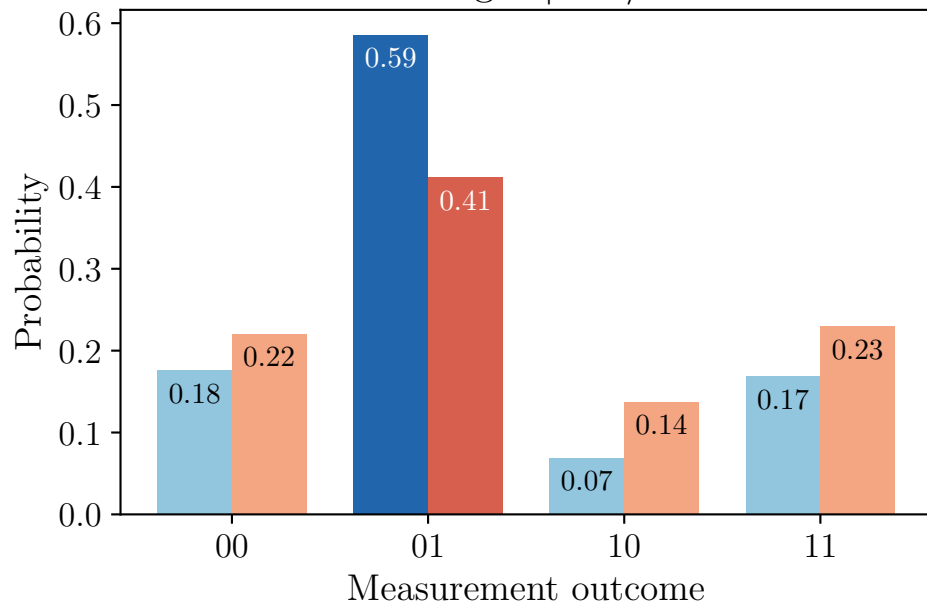

Target $|10_L\rangle$

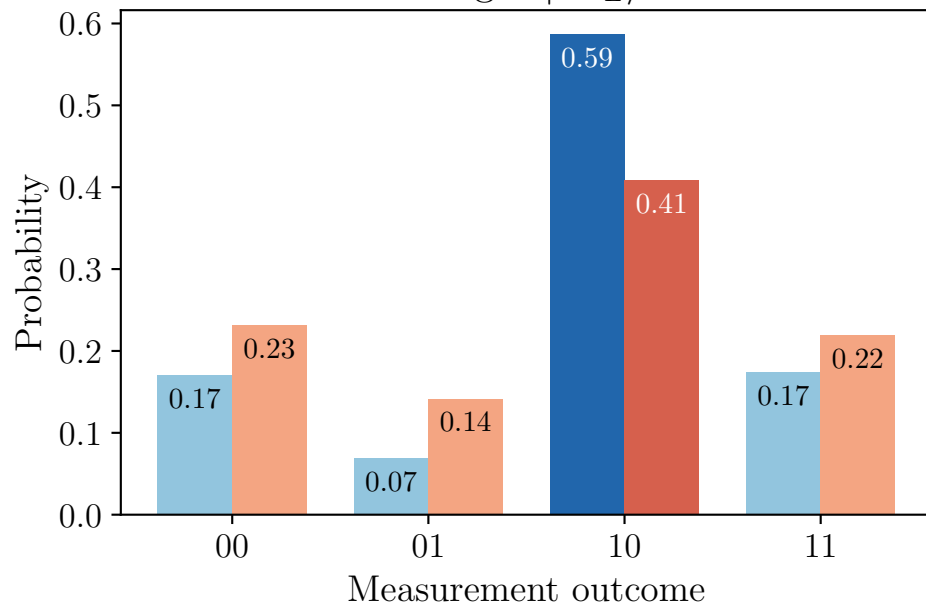

Target $|11_L\rangle$

