



TP6


Mohamed Ali Knis - TD3/TP6

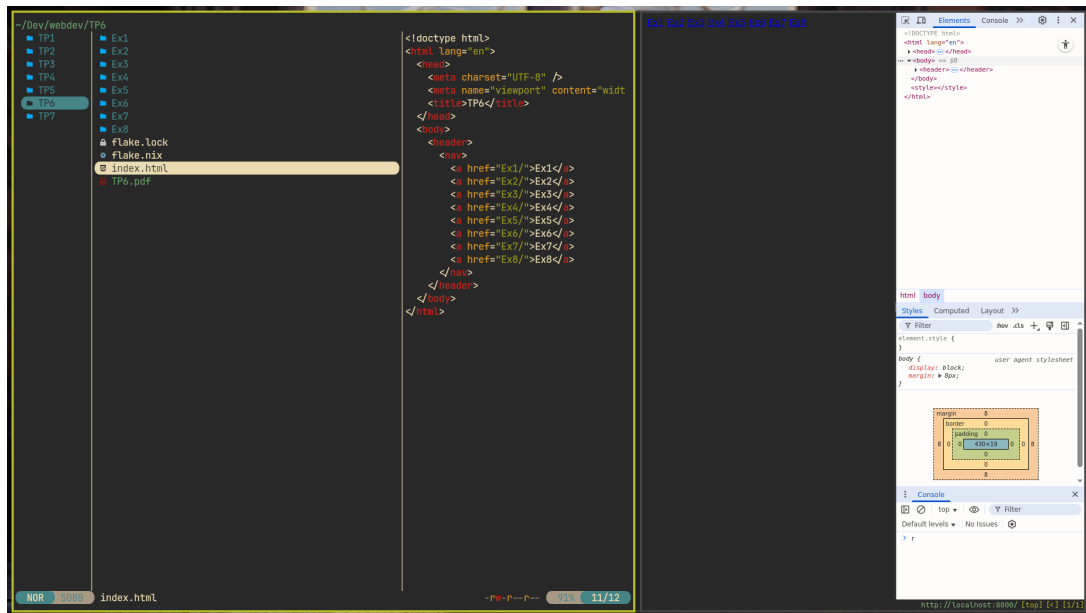


1 Ex1

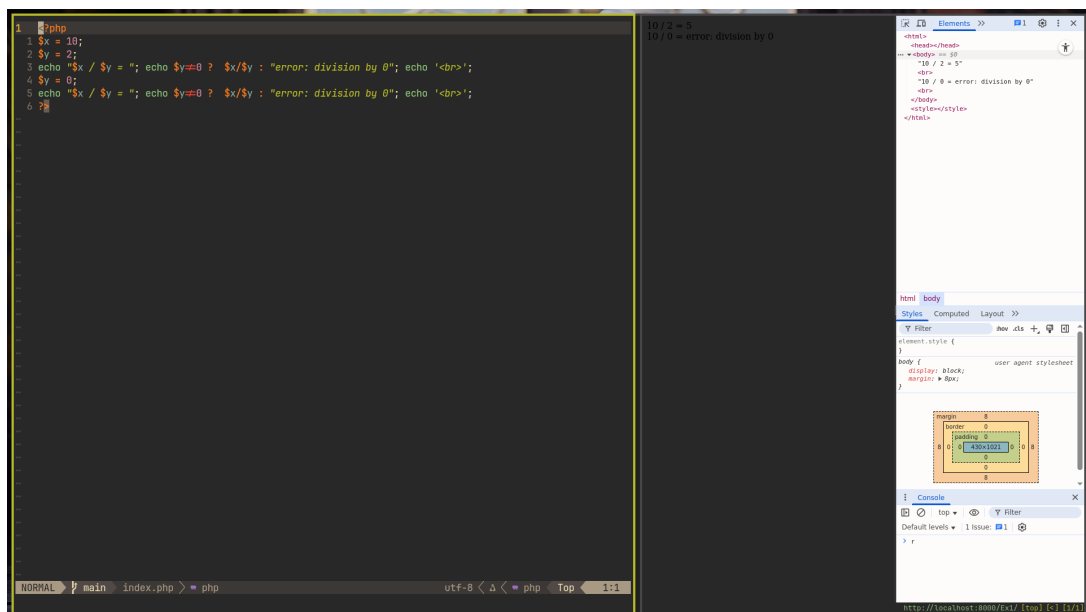

2 Ex2

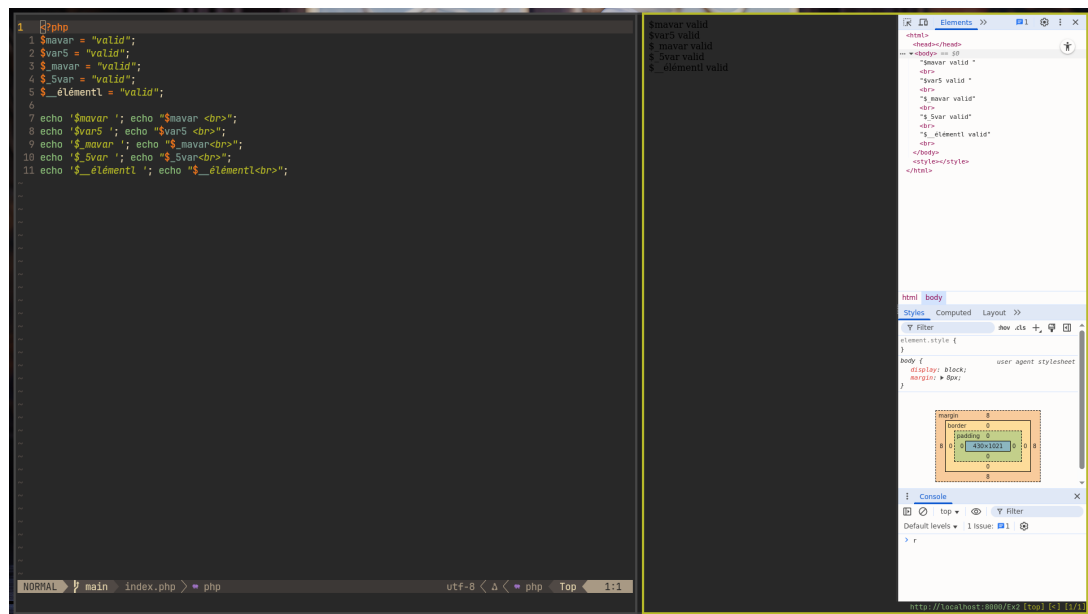

3 Ex3

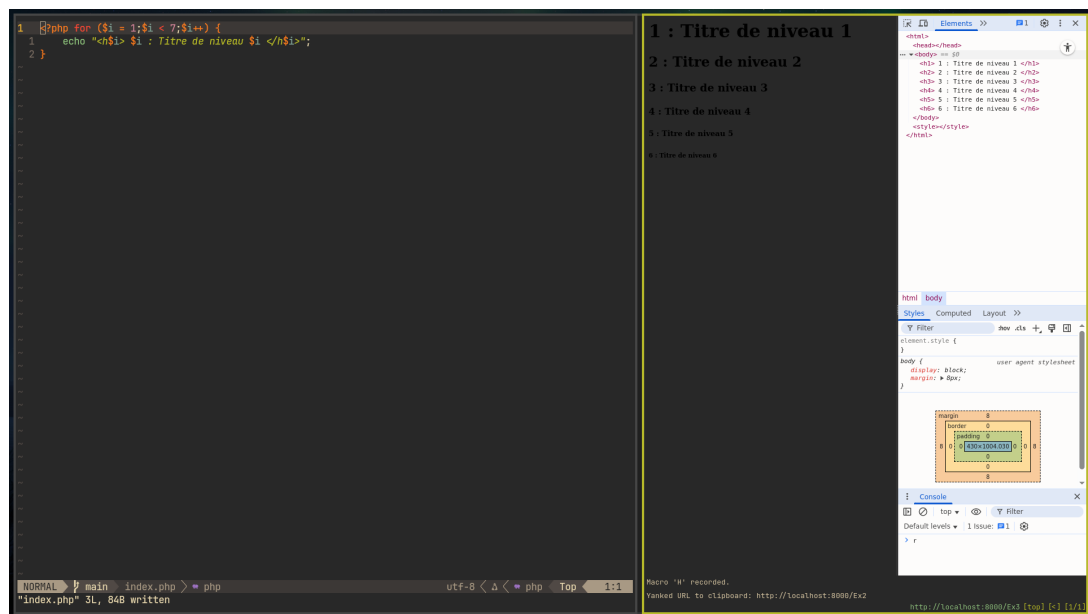

4 Ex4

The screenshot shows a web browser displaying the output of a PHP script. The output is a table with 10 columns and 1 row, containing the following values: 1+0, 2+8, 3+7, 4+6, 5+5, 6+4, 7+3, 8+2, 9+1, and 10. The table is styled with a border of 1px solid black. The developer tools on the right show the HTML structure and the CSS styles applied to the table.

```

1 <table border="1">
2 <tr>
3 <td>1+0</td>
4 <td>2+8</td>
5 <td>3+7</td>
6 <td>4+6</td>
7 <td>5+5</td>
8 <td>6+4</td>
9 <td>7+3</td>
10 <td>8+2</td>
11 <td>9+1</td>
12 <td>10</td>
13 </tr>
14 </table>

```

The developer tools on the right show the HTML structure and the CSS styles applied to the table. The table is styled with a border of 1px solid black. The developer tools on the right show the HTML structure and the CSS styles applied to the table.

5 Ex5

The screenshot shows a web browser displaying the output of a PHP script. The output is a table with 10 columns and 1 row, containing the following values: 1, 2, 3, 4, 5, 6, 7, 8, 9, and 10. The table is styled with a border of 1px solid black. The developer tools on the right show the HTML structure and the CSS styles applied to the table.

```

1 <table border="1">
2 <tr>
3 <td>1</td>
4 <td>2</td>
5 <td>3</td>
6 <td>4</td>
7 <td>5</td>
8 <td>6</td>
9 <td>7</td>
10 <td>8</td>
11 <td>9</td>
12 <td>10</td>
13 </tr>
14 </table>

```

The developer tools on the right show the HTML structure and the CSS styles applied to the table. The table is styled with a border of 1px solid black. The developer tools on the right show the HTML structure and the CSS styles applied to the table.

6 Ex6

```

1 <?php
2 $tableau = [
3     "knis" => ["mohamed", "Tunis", 20],
4     "knis2" => ["mohamed ali", "Zarzis", 21],
5     "knis3" => ["ali", "Mednine", 22],
6 ];
7
8 echo "print_r() : ";
9 echo "<br>";
10 echo "<pre>";
11 print_r($tableau);
12 echo "</pre>";
13
14 // Affichage formaté
15 foreach ($tableau as $nom => $data) {
16     echo "Nom : $nom / Prenom : {$data[0]} / Ville : {$data[1]} / Age : {$data[2]} ans <br>";
17 }

```

```

print_r():
Array
(
    [knis] => Array
        (
            [0] => mohamed
            [1] => Tunis
            [2] => 20
        )
    [knis2] => Array
        (
            [0] => mohamed ali
            [1] => Zarzis
            [2] => 21
        )
    [knis3] => Array
        (
            [0] => ali
            [1] => Mednine
            [2] => 22
        )
)

```

Nom : knis | Prenom : mohamed | Ville : Tunis | Age : 20 ans
 Nom : knis2 | Prenom : mohamed ali | Ville : Zarzis | Age : 21 ans
 Nom : knis3 | Prenom : ali | Ville : Mednine | Age : 22 ans

Elements

```

<html>
<head></head>
<body>
    <pre>
        print_r() :
        <br>
        <pre>
            Nom : knis | Prenom : mohamed | Ville :
            Tunis | Age : 20 ans
            <br>
            Nom : knis2 | Prenom : mohamed ali | Ville :
            Zarzis | Age : 21 ans
            <br>
            Nom : knis3 | Prenom : ali | Ville :
            Mednine | Age : 22 ans
        </pre>
    </body>
</html>

```

Styles Computed Layout

Y Filter

element.style { }

body { display: block; margin: 8px; }

Console

Default levels 1 Issue 1

> r

7 Ex7

```

1 <?php
2 $tableau = [
3     "knis" => ["prenom" => "mohamed", "ville" => "Tunis", "age" => 20],
4     "knis2" => ["prenom" => "mohamed ali", "ville" => "Zarzis", "age" => 21],
5     "knis3" => ["prenom" => "ali", "ville" => "Mednine", "age" => 22],
6 ];
7
8 echo "print_r() : ";
9 echo "<br>";
10 echo "<pre>";
11 print_r($tableau);
12 echo "</pre>";
13
14 // Affichage formaté
15 foreach ($tableau as $nom => $data) {
16     echo "Nom : $nom / Prenom : {$data['prenom']} / Ville : {$data['ville']} / Age : {$data['age']} ans <br>";
17 }

```

```

print_r():
Array
(
    [knis] => Array
        (
            [prenom] => mohamed
            [ville] => Tunis
            [age] => 20
        )
    [knis2] => Array
        (
            [prenom] => mohamed ali
            [ville] => Zarzis
            [age] => 21
        )
    [knis3] => Array
        (
            [prenom] => ali
            [ville] => Mednine
            [age] => 22
        )
)

```

Nom : knis | Prenom : mohamed | Ville : Tunis | Age : 20 ans
 Nom : knis2 | Prenom : mohamed ali | Ville : Zarzis | Age : 21 ans
 Nom : knis3 | Prenom : ali | Ville : Mednine | Age : 22 ans

Elements

```

<html>
<head></head>
<body>
    <pre>
        print_r() :
        <br>
        <pre>
            Nom : knis | Prenom : mohamed | Ville :
            Tunis | Age : 20 ans
            <br>
            Nom : knis2 | Prenom : mohamed ali | Ville :
            Zarzis | Age : 21 ans
            <br>
            Nom : knis3 | Prenom : ali | Ville :
            Mednine | Age : 22 ans
        </pre>
    </body>
</html>

```

Styles Computed Layout

Y Filter

element.style { }

body { display: block; margin: 8px; }

Console

Default levels 1 Issue 1

> r

8 Ex8

The screenshot shows a web browser displaying a form titled "Adresse client". The form contains five input fields: "Nom", "Prénom", "Adresse", "Ville", and "Code postal", each followed by a small "Envoyer" button. The browser's developer tools are open, showing the HTML source code on the left and the DOM tree on the right. The HTML code is as follows:

```

1 <!doctype html>
2 <html lang="fr">
3 <head>
4 <meta charset="UTF-8" />
5 </head>
6 <body>
7 <h2>Adresse client</h2>
8 <form action="submit.php" method="post">
9 <fieldset>
10 <legend>Adresse client</legend>
11 Nom : <input type="text" name="nom" /><br /><br />
12 Prénom : <input type="text" name="prenom" /><br /><br />
13 Adresse : <input type="text" name="adresse" /><br /><br />
14 Ville : <input type="text" name="ville" /><br /><br />
15 Code postal : <input type="text" name="code_postal" /><br /><br />
16 <input type="submit" value="Envoyer" />
17 </fieldset>
18 </form>
19 </body>
20 </html>

```

The browser's console shows no errors, and the DOM tree displays the structure of the form.

The screenshot shows a web browser displaying the output of a PHP script. The output is a table with the following data:

Nom	Prénom	Adresse	Ville	Code Postal
ars	ars	ars	ars	ars

The browser's developer tools are open, showing the PHP source code on the left and the DOM tree on the right. The PHP code is as follows:

```

1 <?php
2 $nom = $_POST['nom'];
3 $prenom = $_POST['prenom'];
4 $adresse = $_POST['adresse'];
5 $ville = $_POST['ville'];
6 $code_postal = $_POST['code_postal'];
7
8 echo "Données reçues :";
9 echo "<br>";
10 echo "<pre>";
11 print_r($_POST);
12 echo "</pre>";
13
14
15 <table border="1">
16 <tr><th>Nom</th><th>Prénom</th><th>Adresse</th><th>Ville</th><th>Code Postal</th></tr>
17 <tr>
18 <td>?php
19 echo "<td>$nom</td>";
20 echo "<td>$prenom</td>";
21 echo "<td>$adresse</td>";
22 echo "<td>$ville</td>";
23 echo "<td>$code_postal</td>";
24 </tr>
25 </table>

```

The browser's console shows the output of the PHP script, and the DOM tree displays the structure of the table.