
## Chapter IV

## Exercise 01: ft\_ultimate\_ft

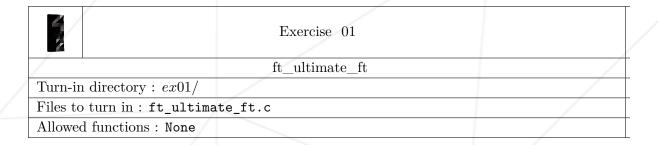

- Create a function that takes a pointer to int as a parameter and sets the value "42" to that int.
- Here's how it should be prototyped:

void ft\_ultimate\_ft(int \*\*\*\*\*\*\*nbr);