
## Chapter VII

## Exercise 04: ft\_ultimate\_div\_mod

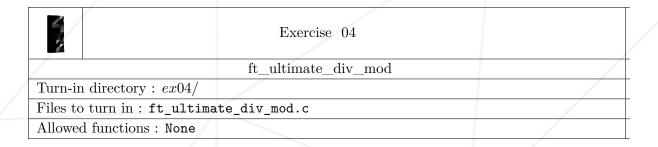

• Create a function ft\_ultimate\_div\_mod with the following prototype :

void ft\_ultimate\_div\_mod(int \*a, int \*b);

• This function divides parameters a by b. The result of this division is stored in the int pointed by a. The remainder of the division is stored in the int pointed by b.