
## Chapter III

Exercise 00: ft\_ft

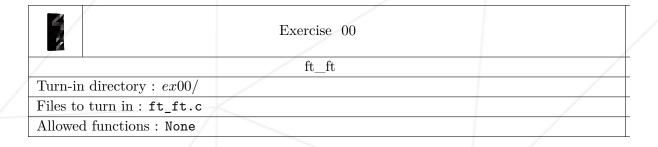

- Create a function that takes a pointer to int as a parameter, and sets the value "42" to that int.
- Here's how it should be prototyped :

void ft\_ft(int \*nbr);