
Chapter IV

Exercise 01: ft_print_params

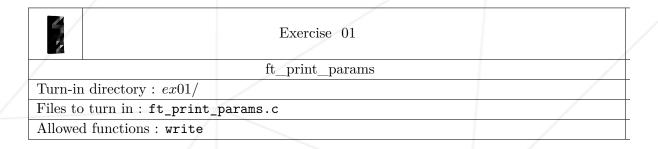

- \bullet We're dealing with a <u>program</u> here, you should therefore have a function main in your $.\,c$ file.
- Create a program that displays its given arguments.
- One per line, in the same order as in the command line.
- It should display all arguments, except for argv[0].
- Example:

\$>./a.out test1 test2 test3
test1
test2
test3
\$>