A Minimal Book Example

Yihui Xie 2019-10-23

Contents

1	Prerequisites	5			
2	Introduction	7			
3	Literature				
4 Methods					
5	Applications5.1 Example one5.2 Example two				
	Final Words 6.1 R Markdown				

4 CONTENTS

Prerequisites

This is a *sample* book written in **Markdown**. You can use anything that Pandoc's Markdown supports, e.g., a math equation $a^2 + b^2 = c^2$. The **bookdown** package can be installed from CRAN or Github:

```
install.packages("bookdown")
# or the development version
# devtools::install_github("rstudio/bookdown")
```

Remember each Rmd file contains one and only one chapter, and a chapter is defined by the first-level heading #.

To compile this example to PDF, you need XeLaTeX. You are recommended to install TinyTeX (which includes XeLaTeX): https://yihui.name/tinytex/.

Introduction

You can label chapter and section titles using {#label} after them, e.g., we can reference Chapter 2. If you do not manually label them, there will be automatic labels anyway, e.g., Chapter 4.

Figures and tables with captions will be placed in figure and table environments, respectively.

```
par(mar = c(4, 4, .1, .1))
plot(pressure, type = 'b', pch = 19)
```

Reference a figure by its code chunk label with the fig: prefix, e.g., see Figure 2.1. Similarly, you can reference tables generated from knitr::kable(), e.g., see Table 2.1.

```
knitr::kable(
  head(iris, 20), caption = 'Here is a nice table!',
  booktabs = TRUE
)
```

You can write citations, too. For example, we are using the **bookdown** package (Xie, 2019) in this sample book, which was built on top of R Markdown and **knitr** (Xie, 2015).

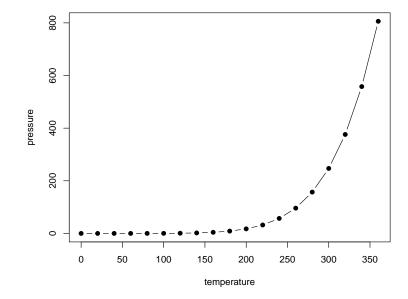


Figure 2.1: Here is a nice figure!

Table 2.1: Here is a nice table!

Table 2.1: Here is a nice table!						
Sepal.Length	Sepal.Width	Petal.Length	Petal.Width	Species		
5.1	3.5	1.4	0.2	setosa		
4.9	3.0	1.4	0.2	setosa		
4.7	3.2	1.3	0.2	setosa		
4.6	3.1	1.5	0.2	setosa		
5.0	3.6	1.4	0.2	setosa		
5.4	3.9	1.7	0.4	setosa		
4.6	3.4	1.4	0.3	setosa		
5.0	3.4	1.5	0.2	setosa		
4.4	2.9	1.4	0.2	setosa		
4.9	3.1	1.5	0.1	setosa		
5.4	3.7	1.5	0.2	setosa		
4.8	3.4	1.6	0.2	setosa		
4.8	3.0	1.4	0.1	setosa		
4.3	3.0	1.1	0.1	setosa		
5.8	4.0	1.2	0.2	setosa		
5.7	4.4	1.5	0.4	setosa		
5.4	3.9	1.3	0.4	setosa		
5.1	3.5	1.4	0.3	setosa		
5.7	3.8	1.7	0.3	setosa		
5.1	3.8	1.5	0.3	setosa		

Literature

Here is a review of existing methods.

Methods

We describe our methods in this chapter.

Applications

Some significant applications are demonstrated in this chapter.

- 5.1 Example one
- 5.2 Example two

Final Words

We have finished a nice book.

6.1 R Markdown

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see http://rmarkdown.rstudio.com.


When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:

summary(cars)

```
##
                        dist
        speed
                   Min.
##
   Min.
         : 4.0
                         : 2.00
##
   1st Qu.:12.0
                   1st Qu.: 26.00
   Median :15.0
                  Median : 36.00
   Mean
           :15.4
                   Mean
                         : 42.98
   3rd Qu.:19.0
                   3rd Qu.: 56.00
           :25.0
   Max.
                   Max.
                          :120.00
```

6.2 Including Plots

You can also embed plots, for example:

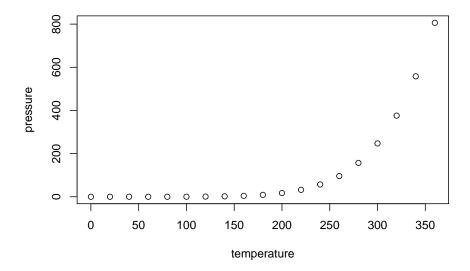

Note that the $\tt echo = FALSE$ parameter was added to the code chunk to prevent printing of the R code that generated the plot.

Bibliography

Xie, Y. (2015). Dynamic Documents with R and knitr. Chapman and Hall/CRC, Boca Raton, Florida, 2nd edition. ISBN 978-1498716963.

Xie, Y. (2019). bookdown: Authoring Books and Technical Documents with R Markdown. R package version 0.14.