Contents

Validation and conversion rules **1**
1. Identity and duplicates . . . 2
1.1 Every object is identified by the source's key . . . 2
1.2 An unchanged record is stored once; a changed one replaces the old version . . . 2
1.3 A voucher's child rows are replaced as a whole . . . 2
1.4 Incremental syncs by AlterID; deletions by a separate check . . . 2
1.5 Nothing unverified is counted as complete; company numbers stay the same . . . 3
1.6 TallyPrime Edit Log changes nothing the sync reads . . . 3
2. Signs and amounts . . . 3
2.1 Canonical sign: debit positive . . . 3
2.2 The postings of a voucher are read once . . . 3
2.3 Foreign-currency amounts: the base part is the books' figure . . . 3
3. Opening balances (as at the books' beginning) . . . 4
3.1 Openings are fetched for a period starting on the books' beginning . . . 4
3.2 A ledger's balance follows its own opening, not its opening bills . . . 4
3.3 The opening difference is the one Tally displays . . . 4
4. Which vouchers count, in the books and in stock . . . 5
4.1 Cancelled, optional and deleted vouchers count nowhere . . . 6
4.2 Voucher types that don't post: memorandum, reversing journals, orders, notes . . . 6
4.3 Post-dated vouchers count from their own date . . . 6
5. Stock moved once (tracked invoices) . . . 7
6. Stock journals and job work . . . 8
6.1 Stock journals are read once . . . 8
6.2 Stock is counted where Tally counts it: by godown kind . . . 8
7. Stock ledgers at the stock value . . . 8
8. Foreign-currency ledgers at book value . . . 10
9. Effective dates . . . 11
10. Reference resolution . . . 12
11. Master classification . . . 13
11.1 Groups, natures and standard accounts . . . 13
11.2 Parties . . . 13
11.3 Duties & Taxes and GST tax lines . . . 13
11.4 Branch / Divisions . . . 13
12. Custom fields and the `extra` column . . . 13
13. Error handling . . . 14
14. Educational mode: reliable dates only . . . 14
15. Validation checks . . . 15
16. Statements from the source's own figures . . . 17
16.1 Statements are laid out as Tally's and match them line by line . . . 17
16.2 Stock in the statements is the source's own figure . . . 17
16.3 Ledgers directly under Primary are Profit & Loss A/c . . . 17
16.4 Foreign-currency ledgers at Tally's revalued balance . . . 18
16.5 A difference in opening balances is a note . . . 18
16.6 A pilot-safe summary of the lines that differ . . . 18
16.7 A Trial Balance line splits ledger by ledger, groups netted for reporting as one . . . 19
16.8 Lines taken from the source . . . 19
17. Only the expected company is compared . . . 20
18. Foreign currency beside the books . . . 20
19. Monthly sales (RPT-013) . . . 20
Change log . . . 21

Validation and conversion rules

Field	Value
Version	1.15

Field	Value
Date	2026-10-24
Scope	Tally (TallyPrime) data converted into the canonical model, and its validation

The rulebook: every rule LedgerBridge follows when it converts Tally data and validates it against Tally's own figures. For each rule: **what** it is, **why** (what the pilot showed, in counts only), **how it was proven** (a Tally report, or an experiment on LedgerBridge Test Co reproduced by the seeder), **where** it lives in the code, which **tests** cover it, and its **ADR** in architecture.md. The tables and columns named here are described in the schema reference; the problem codes (LB-xxx) in the error catalogue.

Rules are built generically (PIL-003): Tally specifics live in `data-plane/connectors/tally`; the rest works for any source. Every rule about Tally's counting was reproduced on the test company and checked against Tally's own reports before it was coded (ADR-029). No client names or amounts appear here: pilot findings are counts and Tally's standard names only.

Contents: 1 Identity and duplicates · 2 Signs and amounts · 3 Opening balances · 4 Which vouchers count · 5 Stock moved once · 6 Stock journals and job work · 7 Stock ledgers · 8 Foreign-currency ledgers · 9 Effective dates · 10 Reference resolution · 11 Master classification · 12 Custom fields · 13 Error handling · 14 Reliable dates (Educational mode) · 15 Validation checks

---

1. Identity and duplicates

1.1 Every object is identified by the source's key

- **What:** a record's identity is the source's own key (Tally: GUID), never its name. Canonical rows are upserted on `(connection_id, source_key)`. Companies are found by their GUID too (`entity_sources`), so a company whose name is shown slightly differently is still found.
- **Why:** pilot: company names with double and trailing spaces weren't found by name (pilot run, 2026-10-12).
- **Proven:** recorded responses of the test company; names with spaces in the pilot.
- **Code:** `connectors/tally/parser.py` (`source_key`), `core/transform.py` (`_Upserter`), `workers/entities.py` (`select_entities`, `resolve`).
- **Tests:** `tests/test_sync.py` (`test_month_overlap_updates_never_duplicates`, `test_second_sync_is_incremental_an` `tests/test_entity_lookup.py`.
- **ADR:** ADR-021.

1.2 An unchanged record is stored once; a changed one replaces the old version

- **What:** the raw layer keeps every record exactly as received; a record whose payload hash equals the latest stored version isn't stored again. Retries and rebuilds apply only an object's latest version; older failed versions are marked superseded.
- **Code:** `core/raw_store.py`; `core/transform.py` (`retry_failed`, `rebuild`).
- **Tests:** `tests/test_raw_store.py`, `tests/test_retransform.py`.
- **ADR:** ADR-005, ADR-025 (DAT-008).

1.3 A voucher's child rows are replaced as a whole

- **What:** when a voucher is created or changed in the source, its lines, bill, cost-centre and dimension allocations, inventory and tax lines are deleted and written again, with the header, in one transaction.
- **Code:** `core/transform.py` (voucher preparation and write), `ON DELETE CASCADE` foreign keys.
- **Tests:** `tests/test_sync.py` (`test_altered_voucher_replaces_its_lines`).
- **ADR:** schema.md Section 8 rule 7.

1.4 Incremental syncs by AlterID; deletions by a separate check

- **What:** a sync fetches what changed since the highest AlterID stored per object type (`sync_markers`). Deleted objects are found by a **deletion check** that lists every key in the source and soft-deletes stored rows whose key has gone (`is_deleted`); a sync alone never soft-deletes.

- **Code:** workers/sync.py, core/transform.py (mark_deleted).
- **Tests:** tests/test_sync.py (test_sync_alone_never_soft_deletes, test_deletion_check_run_soft_deletes_what_h
test_voucher_deleted_in_source_is_soft_deleted).
- **ADR:** ADR-018.

1.5 Nothing unverified is counted as complete; company numbers stay the same

- **What:** a chunk of a full sync is checkpointed only when it is known to be complete; ranges that couldn't be proven complete are recorded (sync_unverified_ranges) and re-fetched. In output, a company keeps its number (company <n>) once given, whatever order connect lists companies in.
- **Why:** pilot: a part-month listing returned fewer vouchers than the month; after a reconnect, entity 1 became company 2.
- **Code:** workers/sync.py, workers/entities.py (Labels, connections.config.company_numbers).
- **Tests:** tests/test_large_sync.py, tests/test_entity_lookup.py (test_company_numbers_survive_connect_in_anot
- **ADR:** ADR-022, ADR-023, ADR-033.

1.6 TallyPrime Edit Log changes nothing the sync reads

- **What:** a company opened in TallyPrime Edit Log exports the same fields, formats and values as in TallyPrime. An alteration keeps **no edit history in the XML export** (its audit lists stay empty); the altered voucher is exported as its current version with a new AlterID, like any alteration, and replaces the stored one (1.2, 1.3). Only UPDATEDDATETIME is now filled, which the sync doesn't fetch, so stored records and their hashes don't change.
- **Proven:** the test company opened in Edit Log (2026-10-19): every export compared with the responses recorded from TallyPrime (identical, same AlterIDs); a journal created and altered under Edit Log (seed case EDITLOG-ALTER-1); full sync, validation (105 checks) and report passed.
- **Code:** connectors/tally/envelopes.py (VOUCHERS.fetch).
- **Tests:** tests/test_edit_log.py.

2. Signs and amounts

2.1 Canonical sign: debit positive

- **What:** canonical amount = −(Tally amount): Tally writes debits negative (ISDEEMEDPOSITIVE=Yes). Every voucher's lines sum to zero. Amounts are exact decimals (DECIMAL(20,4), Python Decimal), never floats.
- **Proven:** the sign check on the test company (schema.md 7.1): 21 of 21 balances agree with Tally's own $$IsDr.
- **Code:** connectors/tally/signs.py (tally_amount), connectors/tally/mapping.py (_canonical).
- **Tests:** tests/connectors/tally/test_signs.py.
- **ADR:** schema.md 7.1.

2.2 The postings of a voucher are read once

- **What:** ALLLEDGERENTRIES.LIST, when present, is the complete set of postings (it already holds the sales or purchase ledger posted through inventory). Otherwise LEDGERENTRIES.LIST plus the inventory entries' ACCOUNTINGALLOCATIONS.LIST. Entries without a ledger (a cancelled voucher's placeholder) are skipped.
- **Code:** connectors/tally/signs.py (postings).
- **Tests:** tests/connectors/tally/test_signs.py (test_complete_all_ledger_entries_are_not_double_counted, test_cancelled_voucher_placeholder_entry_is_ignored).
- **ADR:** schema.md 7.2.

2.3 Foreign-currency amounts: the base part is the books' figure

- **What:** an amount written -$100.00 @ Rs82.00/$ = -Rs8200.00 counts by its base part (after =); its foreign part (before @) is kept in voucher_lines.amount_fc.
- **Code:** connectors/tally/signs.py (tally_amount, tally_foreign_amount).
- **Tests:** tests/test_forex.py (test_a_foreign_amount_keeps_both_parts).
- **ADR:** ADR-035, ADR-037.

---

3. Opening balances (as at the books' beginning)

3.1 Openings are fetched for a period starting on the books' beginning

- **What:** Tally computes `OPENINGBALANCE` (ledgers, stock items, opening bills) and `OPENINGVALUE` **for the requested period**: the balance at its start. Masters with openings are therefore fetched for a period starting on the company's books-from date, so the opening is the master's own.
- **Why:** pilot: ledgers and items differed from the first year end by exactly their opening.
- **Proven:** the test company: the same ledger fetched from the books' beginning and from 1 August gave its opening and its balance on 1 August.
- **Code:** `connectors/tally/envelopes.py` (`OPENING_SPECS`, `balances_period`), `connectors/tally/connector.py` (`_period_for`).
- **Tests:** `tests/test_counting_rules.py` (`test_masters_with_openings_are_fetched_as_at_the_books_beginning`, `test_opening_fields_follow_the_requested_period`).
- **ADR:** ADR-029.

3.2 A ledger's balance follows its own opening, not its opening bills


- **What:** opening bills affect only the bill-wise outstanding; a ledger whose opening bills total differently keeps its own opening.
- **Proven:** the test company (2026-10-15).
- **Tests:** `tests/test_counting_rules.py` (`test_a_ledgers_balance_follows_its_opening_not_its_opening_bills`).
- **ADR:** ADR-031.

3.3 The opening difference is the one Tally displays

- **What:** the `opening_difference` warning fires only when Tally itself shows a difference: the "Difference in opening balances" line of its own Trial Balance as at the books' beginning (its Balance Sheet then shows "Diff. in Opening Balances"), by that line's amount. When the report can't be read: the primary group openings, else ledger and item openings. `validate analyse` compares the figures and tests what a difference equals.
- **Why:** pilot: a company not integrated with inventory had no difference line in Tally's Trial Balance or Balance Sheet while its group openings didn't total zero.
- **Proven:** the test company's Trial Balance at the books' beginning (no difference line); synthetic trial balances with and without the line.
- **Code:** `connectors/tally/connector.py` (`opening_difference_shown`), `core/validation.py` (`_opening_difference`).
- **Tests:** `tests/test_forex.py` (`test_the_opening_difference_is_what_tallys_trial_balance_shows`), `tests/test_validation.py` (`test_opening_difference_warns_only_when_the_source_shows_one`), `tests/test_job_wo`
- **ADR:** ADR-031, ADR-033, ADR-038.

---

4. Which vouchers count, in the books and in stock

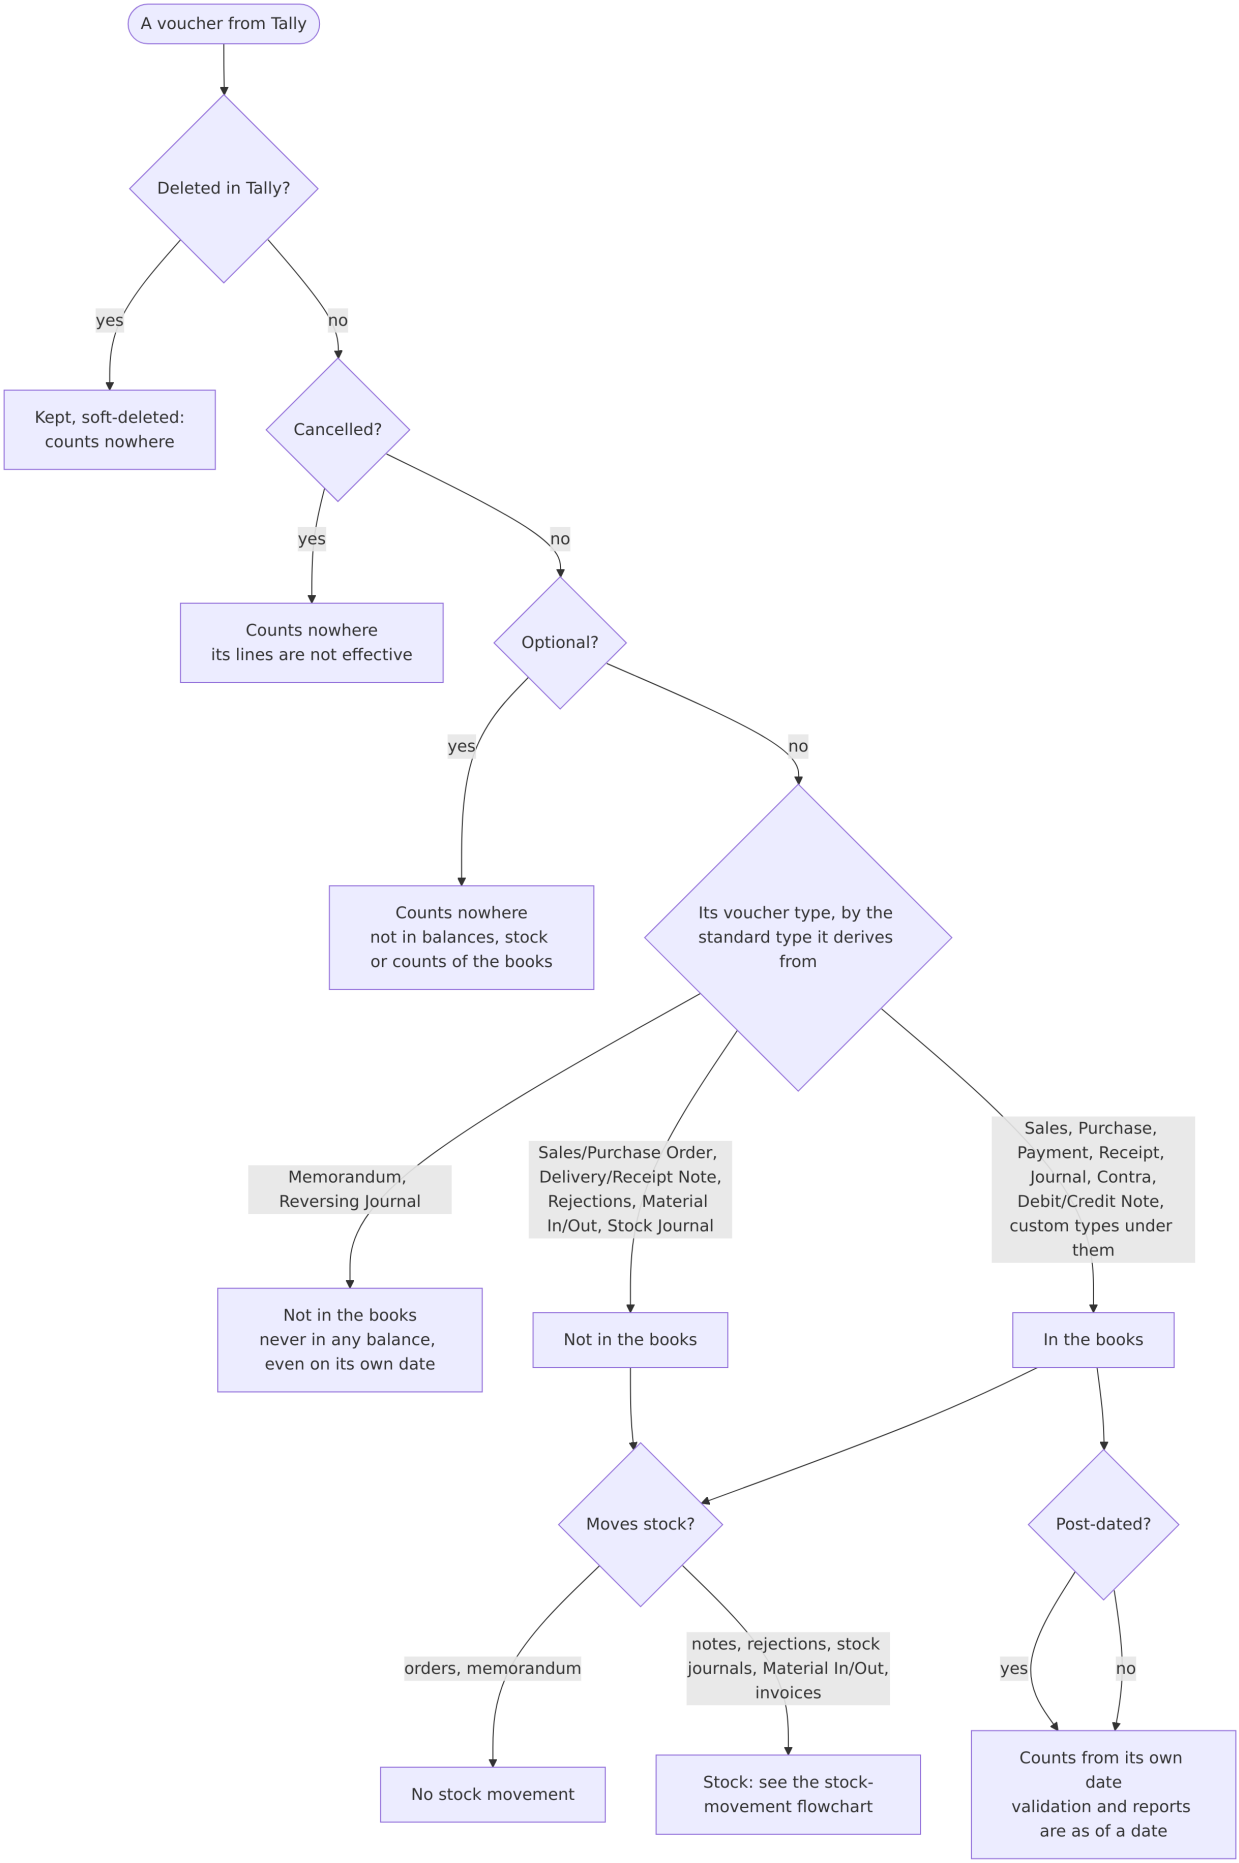

4.1 Cancelled, optional and deleted vouchers count nowhere

- **What:** their lines are stored but not effective (`voucher_lines.is_effective = false`); they move no stock.
- **Code:** `core/transform.py` (effective flag), `connectors/tally/mapping.py` (`voucher`).
- **Tests:** `tests/test_sync.py` (`test_every_voucher_balances_and_lines_are_effective_only_when_they_count`).
- **ADR:** ADR-027, ADR-029.

4.2 Voucher types that don't post: memorandum, reversing journals, orders, notes


- **What:** a voucher type's behaviour comes from the standard type it derives from (its reserved name, its parent, inherited through custom types). Memorandum and Reversing Journal vouchers are in no balance, **not even on their own date**; orders, delivery and receipt notes, rejections, Material In/Out and stock journals post nothing to the books. A custom type under Journal counts like Journal.
- **Why:** pilot: unbalanced and differing ledgers explained by non-posting types; 3 optional Journals per foreign-currency customer appeared only on our side in `compare-ledger`, not counted.
- **Proven:** the test company: a reversing journal on 1 and 2 September, with reversing journals enabled, was in no balance; a memorandum and an optional journal likewise.
- **Code:** `connectors/tally/mapping.py` (`NON_ACCOUNTING_VOUCHER_TYPES`, `NON_STOCK_VOUCHER_TYPES`, `voucher_type`), `core/transform.py` (`_TypeTree`).
- **Tests:** `tests/test_references.py` (`test_vouchers_of_types_that_dont_post_dont_count`, `test_voucher_type_mappi` `tests/test_counting_rules.py`.
- **ADR:** ADR-027, ADR-029.

4.3 Post-dated vouchers count from their own date

- **What:** every balance, validation and report is computed **as of a date**: vouchers dated after it, post-dated ones included, are left out.
- **Proven:** the test company (a post-dated payment).
- **Tests:** `tests/test_validation.py` (`test_balances_as_of_a_date_leave_out_later_vouchers`).
- **ADR:** ADR-019.

---

5. Stock moved once (tracked invoices)

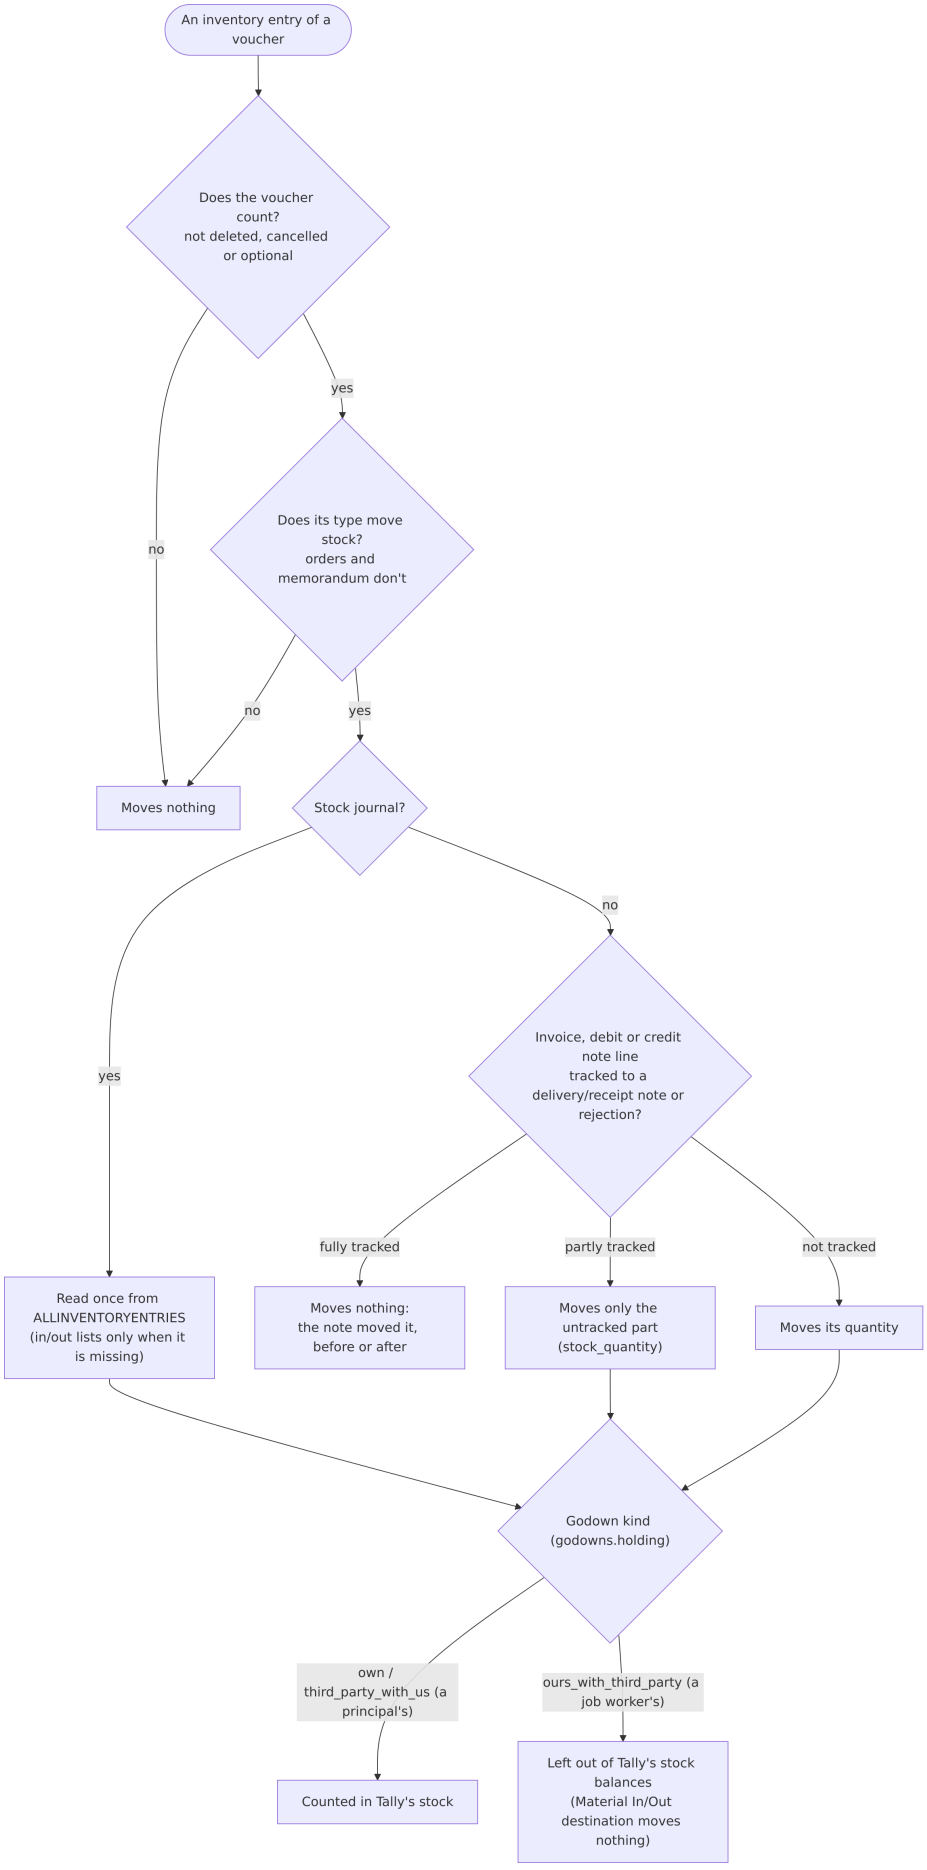

- **What:** a delivery or receipt note, or a rejection, moves stock. A sales, purchase, debit or credit note line **tracked** to one of them (`BATCHALLOCATIONS.LIST/TRACKINGNUMBER`, not "Not Applicable") moves nothing, whether the note came before or after; a partly tracked line moves only its untracked part. `inventory_lines.stock_quantity` holds what a line moves; `quantity` stays the invoiced quantity.
- **Why:** pilot: stock items differed by sales lines tracked to delivery notes (counted twice).
- **Proven:** the test company's Stock Summary with notes before and after their invoices, partly tracked invoices, and a return tracked to a rejection.
- **Code:** `connectors/tally/mapping.py` (`_tracked`, `_inventory_lines`), migration 0014.
- **Tests:** `tests/test_counting_rules.py` (`test_tracked_invoice_lines_dont_move_stock_but_the_note_does`, `test_tracked_quantity`).
- **ADR:** ADR-029.

---

6. Stock journals and job work

6.1 Stock journals are read once

- **What:** TallyPrime lists a stock journal's produced and consumed items in `ALLINVENTORYENTRIES.LIST` (with the right sign) **and** again in `INVENTORYENTRIESIN/OUT.LIST`. They are read from `ALLINVENTORYENTRIES`; the in and out lists only when it is missing.
- **Why:** reading both counted each entry twice.
- **Proven:** the test company (a manufacturing stock journal).
- **Code:** `connectors/tally/mapping.py` (`voucher`).
- **Tests:** `tests/test_job_work.py`.
- **ADR:** ADR-031.

6.2 Stock is counted where Tally counts it: by godown kind

- **What:** godowns carry whose stock they hold (`godowns.holding`): `own`, `ours_with_third_party` (a job worker's, Tally `ISEXTERNAL`), `third_party_with_us` (a principal's, `ISINTERNAL`). Stock at a job worker's godown is in no item balance, Stock Summary or closing stock value; a principal's stock with us is counted. A Material In/Out moves stock at its line's godown; its destination godown moves nothing. An entry spread over several godowns becomes one inventory line per godown, each going in or out as the entry does; a batch without its own amount gets its share by quantity, so an entry with no quantity of its own whose batches lack amounts stays one line.
- **Why:** pilot: stock differences on items sent for job work.
- **Proven:** the test company's godown and item balances after Material Out/In, consumption at the job worker and a principal's material.
- **Code:** `connectors/tally/mapping.py` (`_holding`, `_inventory_lines`), `core/validation.py` (`counted_godown`), migration 0015.
- **Tests:** `tests/test_job_work.py`.
- **ADR:** ADR-031.

---

7. Stock ledgers at the stock value


- **What:** with accounts integrated with inventory (`ISINTEGRATED`), Tally's trial balance, balance sheet and profit use the stock items' values and leave out every ledger under its reserved Stock-in-Hand group (renamed or not); the group's own opening and closing are the stock value Tally uses. Tally refuses vouchers on such a ledger. When Tally reports a stock ledger at its closing stock value (not its own opening and postings), validation compares it with that value and notes LB-VAL-021; otherwise ledger by ledger.
- **Why:** pilot: in two companies the Stock-in-Hand ledger's balance was the closing stock value at every date.
- **Proven:** the test company: a renamed Stock-in-Hand group with one ledger (its opening kept in its own balance, left out of the trial balance); the group equal to the items' value at each date; a voucher on the ledger refused.
- **Code:** `connectors/tally/connector.py` (`closing_balances`, `_stock_in_hand`), `core/validation.py` (`at_stock_value`, `_at_stock_value`).
- **Tests:** `tests/test_stock_ledger_and_dates.py`, `tests/test_job_work.py`.
- **Not integrated** (recorded on the test company with the feature switched off, 2026-10-22): Tally's trial balance, balance sheet and Profit and Loss count the stock ledgers as ordinary ledgers, and its opening and closing stock are

their own balances; the items' values aren't used. The connector reads each company's own setting (`ISINTEGRATED` Yes or No).

- **ADR:** ADR-031, ADR-033, ADR-040.

---

8. Foreign-currency ledgers at book value

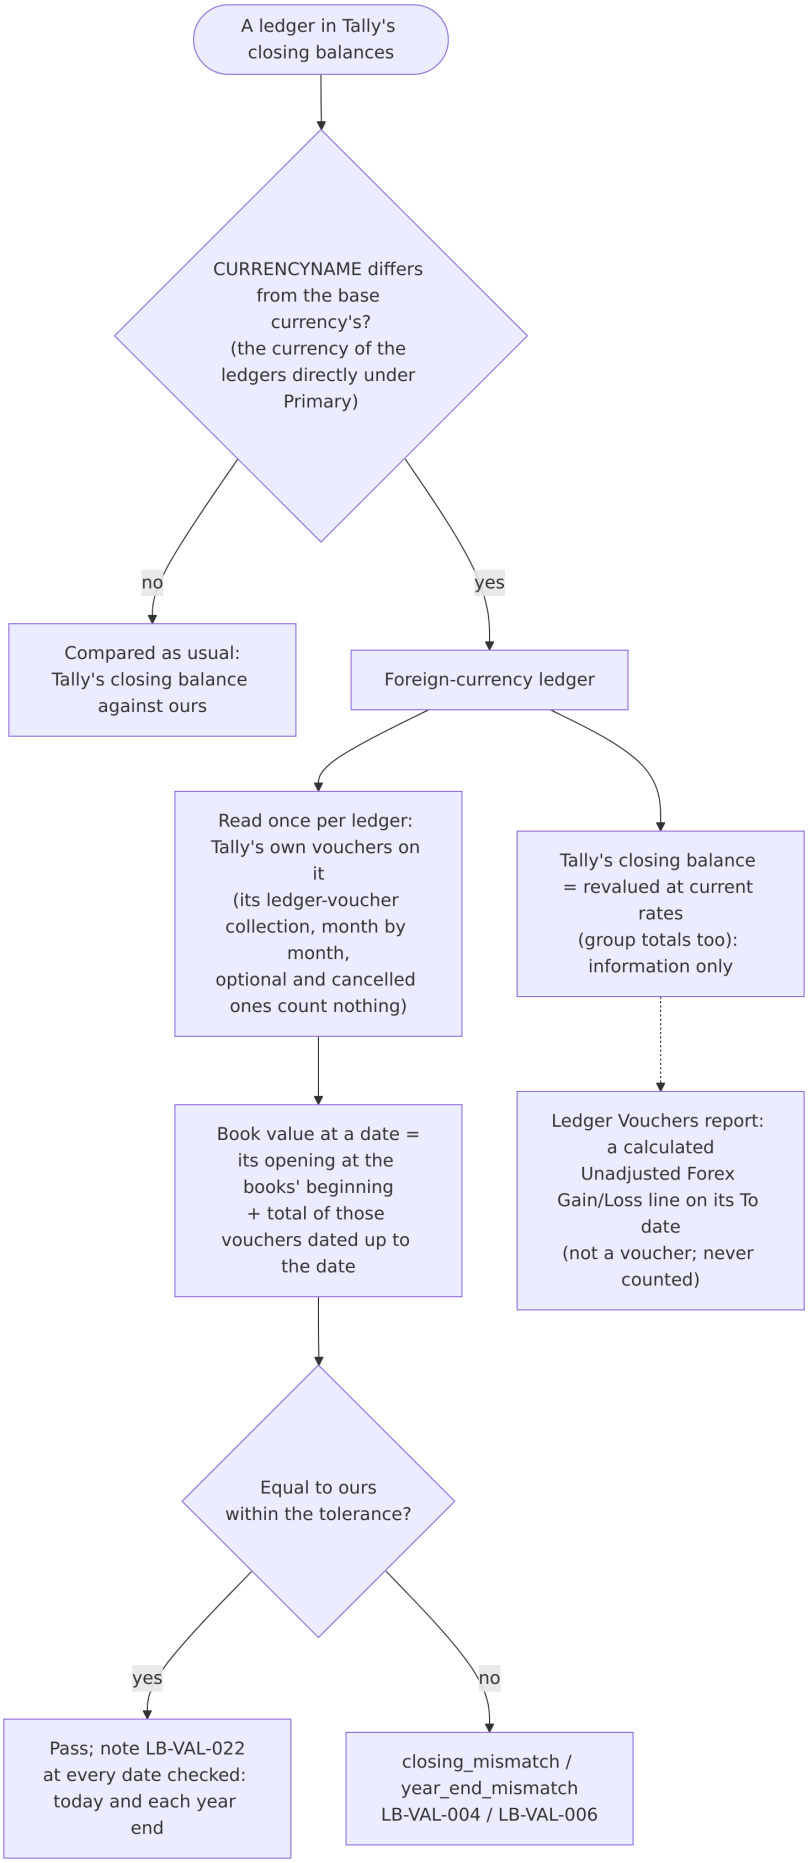

- **What:** a ledger is kept in a foreign currency when its `CURRENCYNAME` differs from the base currency's (the currency of the ledgers directly under Primary; Tally exports the rupee sign as "?"). Tally reports its closing balance, and its group totals, **revalued at current rates**; its books keep the amounts entered. Its **book value** at a date is its opening plus the total of Tally's own vouchers on it up to the date (its ledger-voucher collection, read once per ledger; optional and cancelled vouchers count nothing). Validation compares each foreign-currency ledger with its own book value at every date checked and notes LB-VAL-022; the revalued balance is information only. Tally's Ledger Vouchers report adds a calculated "Unadjusted Forex Gain/Loss" line on its To date: it is not a voucher and is never counted.
- **Why:** pilot: three foreign-currency customers differed; `compare-ledger` matched every one of Tally's vouchers with ours (47 of 47, 60 of 60, 3 of 3) with equal totals, while Tally's closing balances were revalued.
- **Proven:** the test company: a dollar customer whose closing balance and group total were 0 while Rs 8,200 was entered, with an "Unadjusted Forex Gain/Loss" line in the trial balance; its book value from its vouchers equals ours.
- **Code:** `connectors/tally/connector.py` (`_foreign`, `_book_values`, `ledger_total`, `ledger_vouchers`), `core/validation.py` (`at_book_value`, `_at_book_value`), `workers/compare.py`.
- **Tests:** `tests/test_forex.py`, `tests/test_compare_ledger.py`.
- **ADR:** ADR-035 to ADR-038 (ADR-038 current).


---

9. Effective dates

- **What:** a voucher's effective date (`EFFECTIVEDATE`) is kept (`vouchers.effective_date`) but **balances count by the voucher date**, as Tally does.
- **Proven:** the test company: journals and sales dated 31 August and effective 1 September (and the reverse), regular and optional: each counted on its voucher date.
- **Code:** `connectors/tally/mapping.py` (`voucher`), migration 0016.
- **Tests:** `tests/test_stock_ledger_and_dates.py` (`test_tally_counts_by_the_voucher_date_not_the_effective_date` `test_the_effective_date_is_stored`).
- **ADR:** ADR-033.

---

10. Reference resolution

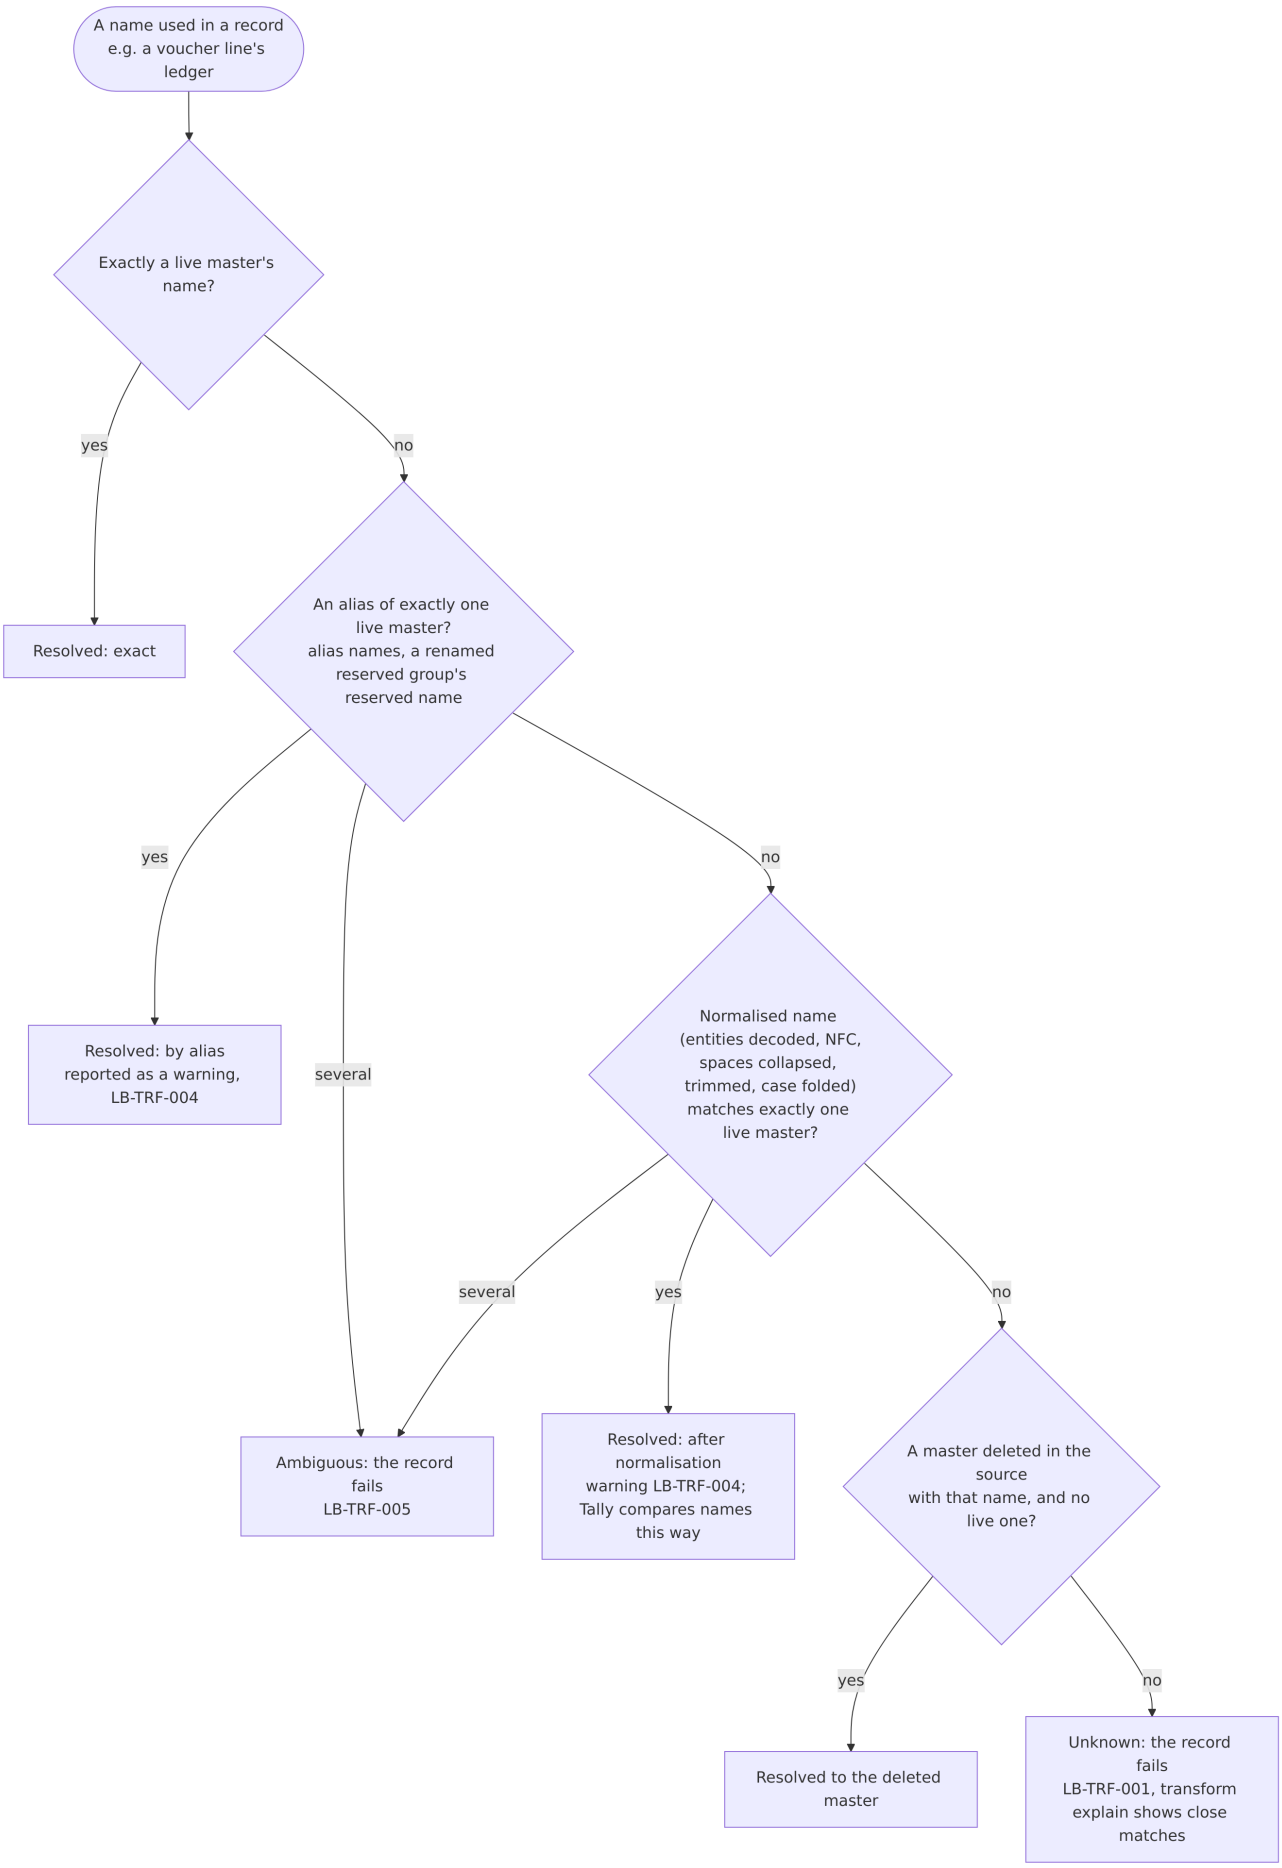

- **What:** a reference by name (a voucher's ledger, a ledger's group, a stock item) resolves **exact**, then by **alias** (alias names, a renamed reserved group's reserved name), then **normalised** (entities decoded, Unicode NFC, spaces collapsed, trimmed, case folded), each only when exactly one master fits; otherwise the record fails (unknown or ambiguous). Alias and normalised matches are reported (LB-TRF-004). Masters deleted in the source answer only to names no live master has. Look-alike characters and punctuation are never matched automatically; `transform explain` names the kinds of difference.
- **Why:** pilot: references matched by alias (voucher → ledger 20, voucher → party 2) and after normalisation; three customers differed as if lines sat on the wrong ledger (it turned out to be foreign currency, Section 8).
- **Proven:** the test company: "Party Lima", "PARTY LIMA" and "Party Lima" were taken by Tally for the existing "Party Lima"; a ledger whose alias was another ledger's name was refused; a journal naming an alias came back naming the ledger. So Tally's names compare the way our normalisation does, and one name identifies one master.
- **Code:** `core/names.py` (`NameIndex`, `normalise`), `core/transform.py` (`_by_name`, `_ref`), `workers/references.py`.
- **Tests:** `tests/test_references.py`, `tests/test_line_attribution.py`.
- **ADR:** ADR-027, ADR-034.

---

11. Master classification

11.1 Groups, natures and standard accounts

- **What:** a group's nature comes from its primary group (`ISREVENUE`, `ISDEEMEDPOSITIVE`; Capital Account and Reserves & Surplus are equity). Each ledger gets a standard account from its nearest reserved group (`STANDARD_ACCOUNT_BY_GROUP`); Indirect Expenses stays unmapped (it mixes accounts). Ledgers directly under Primary (Profit & Loss A/c) hang from a synthetic primary group mapped to reserves and surplus.
- **Code:** `connectors/tally/mapping.py` (`group`, `ledger`, `STANDARD_ACCOUNT_BY_GROUP`); the standard chart is seeded by `migrations/versions/0003_seed_reference_data.py`.
- **Tests:** `tests/test_standard_accounts.py`, `tests/test_sync.py` (`test_standard_accounts_mapped_from_groups`).
- **ADR:** schema.md 7.3.

11.2 Parties

- **What:** ledgers under Sundry Debtors are customers, under Sundry Creditors vendors (`PARTY_TYPE_BY_GROUP`); GSTIN, state, PAN, e-mail, phone, credit days and limit go to `parties` (sensitive: AI-015).
- **Code:** `connectors/tally/mapping.py` (`ledger`).
- **Tests:** `tests/test_sync.py`.

11.3 Duties & Taxes and GST tax lines

- **What:** a Duties & Taxes ledger's standard account follows its tax type (GST, TDS, TCS); `TAXTYPE` and `GSTDUTYHEAD` give `tax_type` (Central → cgst, State/UT → sgst, Integrated → igst, Cess). An empty duty head on a GST ledger is taken as Central Tax (Tally leaves defaults out) and reported (LB-TRF-007). Every line on a tax ledger becomes a `tax_lines` row.
- **Code:** `connectors/tally/mapping.py` (`_tax_type`, `STANDARD_ACCOUNT_BY_TAX_TYPE`).
- **Tests:** `tests/connectors/tally/test_mapping.py` (`test_duties_and_taxes_default_by_tax_type`, `test_empty_duty_head_is_central_tax_for_gst_only_and_warns`), `tests/test_sync.py` (`test_bills_tax_and_invent`

11.4 Branch / Divisions

- **What:** ledgers under Branch / Divisions map to standard account 1275 (debit balances; credit balances report as 3275 at the reporting date, M6).
- **Code:** `connectors/tally/mapping.py` (`STANDARD_ACCOUNT_BY_GROUP`).
- **Tests:** `tests/test_standard_accounts.py` (`test_suspense_and_inter_company_accounts`).

---

12. Custom fields and the `extra` column

- **What:** every field Tally sends that has no column (e.g. UDFs from TDL customisations, `UDF:` prefixed tags) is kept in the row's `extra` JSON and catalogued (`source_fields`, with counts and an inferred type); a catalogued voucher field can be promoted to a reporting dimension (`promote-field`). A value too long or otherwise unfit for

its column is kept in full in `extra` (never truncated) and reported (LB-TRF-003); a value with characters MySQL can't store is cleaned, and if it is then still too long it is kept in `extra` too. Names kept in `extra` because they were too long are found by those names, with the same rule as every name: a deleted row never takes a live row's name (ADR-034). Undeclared XML prefixes are parsed and kept as written.

- **Why:** pilot: UDF prefixes broke parsing; values longer than their column failed records.
- **Known limitation:** the catalogue keys a field by its path cut to 255 characters (`source_fields.field_path`), so two paths that differ only after the 255th character are counted as one field. Values are unaffected (they are kept in full in `extra`); only the catalogue's counts merge. Not seen in the test company or the pilot; fixing it needs a schema change (a hash of the full path as the key), left until such paths appear (developer's decision, 2026-10-22).
- **Code:** `core/transform.py` (`_fit`, `_with_extra`, `_Catalogue`), `connectors/tally/mapping.py` (`unmapped_fields`, `USED_FIELDS`), `connectors/tally/parser.py`.
- **Tests:** `tests/test_retransform.py`, `tests/test_fit_integration.py`, `tests/test_pilot_robustness.py`.
- **ADR:** ADR-025.

---

13. Error handling

- **What:** a record that can't be converted fails **alone**: `raw_records.process_status = failed` with the error type and a short message (never SQL or values). A batch the database rejects is written again one record at a time, so one bad record leaves the rest converted. `transform retry` converts failed records again with the current code, `transform rebuild` every stored record, both without contacting Tally. Validation names the root cause when records failed (consequences counted, LB-TRF-001 first).
- **Why:** pilot: thousands of records failed in one batch on a data error (2,170 ledgers and 238,392 vouchers in one attempt).
- **Code:** `core/transform.py` (batch write, `retry_failed`, `rebuild`), `core/errors.py` (`short_error`), `core/validation.py` (`RootCause`).
- **Tests:** `tests/test_retransform.py` (`test_one_bad_record_in_a_batch_leaves_the_rest_converted`, `test_mysql_data_errors_are_described_without_values`, `test_validation_names_the_root_cause`).
- **ADR:** ADR-025, ADR-028.

On the fetch side: requests time out and wait for a busy source before declaring it unresponsive; slow months are split; interrupted syncs resume from their checkpoints; a run lock tied to its job keeps runs from overlapping (ADR-022, ADR-023, ADR-024, ADR-030).

---

14. Educational mode: reliable dates only

- **What:** TallyPrime in Educational mode gives correct balances only on the 1st, 2nd and 31st of a month. Validation runs as of the latest such date on or before the date asked; the analysis's month ends move to the next one (a 30 June month end is compared on 1 July); the output names the dates used. The connection setting `educational` (auto / yes / no) decides; auto asks Tally (`$$LicenseInfo:IsEducationalMode`). Voucher listings always request whole months.
- **Statements are stricter:** on the 1st, Tally's own Trial Balance, Profit and Loss and computed profit don't agree with its own ledger balances that day (test company, 2026-10-22: as of 1 October its ledgers equalled ours, while its reports and its Profit & Loss A/c balance didn't; the 2nd and the 31st agreed). Statements and year-end checks (whose profit carrier comparison uses Tally's computed profit) therefore use `DateRule.period_end`: the 31st where the month has one, otherwise the 2nd of the next month, never the 1st (a 31 March year end is checked on 31 March, a 30 June one on 2 July; developer's decision, 2026-10-22). A year end whose date is after the as-of date waits for the next validation.
- **Why:** on the test company a balance requested for the 30th included later vouchers; the pilot runs in Educational mode.
- **Code:** `core/dates.py` (`DateRule`, `period_end`), `connectors/tally/connector.py` (`date_rule`, `is_educational`), `workers/validate.py` (`source_controls`), `workers/analyse.py`, `workers/statements.py`.
- **Tests:** `tests/test_dates.py` (`test_period_ends_use_the_31st_or_the_2nd_never_the_1st`, `test_a_30_june_year_en
- **ADR:** ADR-032.

---

15. Validation checks

Every check compares our figures with Tally's own, **as of a date** (default today, moved to a reliable date in Educational mode, Section 14). Amounts compare within the connection's **tolerance**: `validation_tolerance` in the connection's settings, else `VALIDATION_TOLERANCE`, **0 (exact) by default**. Counts and quantities always compare exactly. A *thorough* validation (every `validate` and full sync) also compares the source's controls: voucher counts, stock, bills and year ends.

Code	Check	What it compares	Tolerance	As-of rule
LB-VAL-001	`voucher_unbalanced`	Each effective voucher's lines sum to zero	exact	every voucher
LB-VAL-002	`tb_unbalanced`	The trial balance totals our opening total at the as-of date and each year end	exact	as of, year ends
LB-VAL-003	`opening_difference` (warning)	Tally's own difference in opening balances (Section 3.3)	tolerance	books' beginning
LB-VAL-004	`closing_mismatch`	Each ledger's balance against Tally's closing balance; stock ledgers at the stock value (Section 7); foreign-currency ledgers at book value (Section 8)	tolerance	as of
LB-VAL-005	`profit_carrier_mismatch`	Profit & Loss A/c: its posted balance plus the period's profit (stock change included) against Tally's	tolerance	as of
LB-VAL-006	`year_end_mismatch`	The same ledger comparison at every financial year end before the as-of date	tolerance	year ends (reliable dates)
LB-VAL-007	`ledger_missing`	Ledgers on one side only	—	as of
LB-VAL-008	`voucher_count_mismatch`	Vouchers per month and voucher type (cancelled and optional included, deleted excluded); the source's type names matched to ours by the name rules (`core/names.py`, as the transform does), a name matched only after normalisation noted as LB-VAL-036 (pilot 2026-10-30: a name with two spaces in a row was written with one in Tally's counts)	exact	months up to as of

Code	Check	What it compares	Tolerance	As-of rule
LB-VAL-009	`stock_quantity_mismatch`	Each item's closing quantity (counted vouchers, counted godowns, Sections 5 and 6)	exact	as of
LB-VAL-010	`bills_mismatch`	Each party's bill-wise outstanding (opening bills plus allocations, on-account excluded)	tolerance	only as of today (Tally reports bills as of now)
LB-VAL-011	`closing_unavailable`	Tally's closing balances couldn't be read	—	—
LB-VAL-012	`year_end_balances_unavailable`	A year-end's balances couldn't be read	—	—
LB-VAL-013	`voucher_counts_unavailable`	Counts couldn't be read	—	—
LB-VAL-014	`stock_quantities_unavailable`	Stock couldn't be read	—	—
LB-VAL-015	`bill_outstanding_unavailable`	Bills couldn't be read	—	—
LB-VAL-016	`check_not_supported` (info)	The source doesn't offer a figure	—	—
LB-VAL-017	`not_compared` (info)	Stock values per item and bills on other dates are compared only in total / as of today	—	—
LB-VAL-018	`source_controls_not_checked` (info)	A period validation skipped the controls	—	—
LB-VAL-019	`never_validated`	A company never validated	—	—
LB-VAL-020	`validation_error`	Validation couldn't run	—	—
LB-VAL-021	`stock_ledger_at_stock_value` (info)	Stock ledgers compared with Tally's closing stock value (Section 7)	tolerance	each date
LB-VAL-022	`foreign_ledgers_at_book_value` (info)	Foreign-currency ledgers compared with their book value (Section 8)	tolerance	each date
LB-VAL-023	`stock_value_mismatch`	The stock value stored for a date against the source's now (Section 16.2)	tolerance	as of, year ends
LB-VAL-024	`statement_mismatch`	Our Trial Balance, Profit & Loss and Balance Sheet against the source's own, line by line and in total (Section 16.1)	tolerance	as of, year ends; every month end with `statements`
LB-VAL-025	`statements_unavailable`	The source's statements couldn't be read for a date	n/a	as of, year ends

- **Code:** `core/validation.py` (`Validator`), `workers/validate.py` (`run_validation`, `source_controls`), `core/problems.py` (codes, texts).
- **Tests:** `tests/test_validation.py`, `tests/test_counting_rules.py` (`test_seed_reproduces_tallys_figures`),

`tests/test_retransform.py` (`test_thorough_validation_passes_on_the_test_company`), and the rule tests above.
- **Diagnostics:** `validate analyse` tests explanations for every mismatch (counts only, VAL-010); `validate compare-ledger` compares one ledger voucher by voucher (VAL-014).
- **ADR:** ADR-019, ADR-028, ADR-029.

16. Statements from the source's own figures

16.1 Statements are laid out as Tally's and match them line by line

- **What:** our Trial Balance, Profit & Loss and Balance Sheet have one line per primary group (its current name), plus Tally's own lines: Cost of Sales (Opening Stock, Add: the purchase groups, Less: Closing Stock, then Direct Expenses and any other expense group that affects gross profit, each under its own name), Profit & Loss A/c and Unadjusted Forex Gain/Loss. Direct Incomes is a line of its own, beside the sales. Each is compared with Tally's own report export line by line (by label, without "Add:" / "Less:") and in total at the as-of date and every year end (LB-VAL-024); `./dev.ps1 statements` does the same at every month end. Trial balance lines compare their debit and credit totals.
- **Cost of Sales without stock (2026-10-30):** Tally writes a zero amount as an empty tag. Its stock lines and "Add:" / "Less:" lines are always inside Cost of Sales, so with both amounts empty they are read as sub lines worth 0 (`connectors/tally/reports.py`), and ours shows the Cost of Sales block wherever Tally's report does, stock counting as zero (`core/statements.py`). Pilot: four companies whose stock was zero at some dates lost the block and their totals differed by it. Tests: `tests/test_statements.py` (`test_zero_stock_lines_are_read_as_stock_lines`, `test_without_stock_cost_of_sales_follows_the_sources_layo
- **Why:** reports must equal what the client sees in Tally (RPT-012).
- **Proven:** the test company at four dates (books' beginning, two month ends, the as-of date), with integration on and off: every line and total equal. Then, after the statement layout seed (2026-10-23: a Direct Expenses ledger with a 300 payment, a Direct Incomes ledger with a 120 receipt), Tally's Cost of Sales was 12,980 = 2,010 + 16,250 − 5,580 + 300, with "Direct Expenses" listed after Closing Stock, and Direct Incomes a main line: ours equal at both dates recorded. The pilot's steady two Profit & Loss differences per date (Cost of Sales and the total) were this.
- **Code:** `core/statements.py`, `connectors/tally/reports.py`, `connector.source_statements`.
- **Tests:** `tests/test_statements.py`.
- **ADR:** ADR-040.

16.2 Stock in the statements is the source's own figure

- **What:** the opening and closing stock are those of Tally's Profit and Loss, stored in `stock_values`. In both settings the stock ledgers are replaced by that stock: at its opening value in the Trial Balance and its closing value in the Balance Sheet, under the stock ledgers' primary group (Current Assets). Integrated, it is the items' value; not integrated, the stock ledgers' own, which in Tally can be closing values entered on the ledger by date rather than its balance. The stored value is checked against Tally's at each date validated (LB-VAL-023).
- **Across a year end (recorded 2026-10-24, books from 1 April 2025, integration on and off):** Tally's Profit and Loss for the whole period opens with the books' opening stock and closes with the stock at the date; its Balance Sheet stock is that closing stock; Profit & Loss A/c carries over as its own opening plus the whole period's result. Ours equal at every date before, on and after the year end. One pilot company's Balance Sheet stock (integrated) differed from its Profit and Loss's after its first year end; that line was taken from the source until the pilot matched at every date with ours (retired 2026-10-24).
- **Why:** with integration off Tally takes the stock ledger's balances (1,500), not the items' values (2,010 / 5,580): following Tally's own figures keeps our statements equal whatever the setting. Pilot (2026-10-24, not integrated): the Balance Sheet differed by the stock at the last year end less the opening stock at 44 of 67 dates, which is a stock ledger counted at its balance instead of the closing value entered for the year end.
- **Proven:** the recordings above; the connector reads Yes and No.
- **Code:** `core/statements.py` (`Figures`), `core/validation.py` (`_statements`, `_stock_value`).
- **Tests:** `tests/test_statements.py`.

16.3 Ledgers directly under Primary are Profit & Loss A/c

- **What:** Tally's Profit & Loss A/c line on the Balance Sheet is the balance of the ledgers directly under Primary (Opening Balance) plus the period's profit (Current Period): liabilities side for a profit, assets side for a loss. In the Trial Balance they are listed by name when not zero.

- **Proven:** the test company: Profit & Loss A/c equal to the period's loss at every date; after the seed gave Profit & Loss A/c an opening balance (3,000 Cr, balanced by a fixed asset), Tally's Balance Sheet line was that opening plus the period's loss (4,121 Dr), still one line in its export (no Opening Balance or Current Period lines), and the Trial Balance listed the account at 3,000 Cr. How the account looks after a year end is still unproven (the test company has none): the summary below tests it on the pilot.

16.4 Foreign-currency ledgers at Tally's revalued balance

- **What:** in the statements, a foreign-currency ledger counts at the balance Tally reports (revalued at current rates, read for the same period and date as the statements), stored in `fx_revaluation_snapshots`; the difference to its book value is one "Unadjusted Forex Gain/Loss" line, as in Tally's reports. In the Trial Balance that line's debit is the ledgers' losses and its credit their gains, ledger by ledger (book value above the revalued balance is a loss); the Balance Sheet shows the net. Validation still compares the ledger itself at book value (rule 8).
- **Proven:** the test company's dollar customer: 0 revalued, 8,200 book, the line 8,200 Dr. After the seed added a dollar vendor with an expense entered in rupees (4,100 book, 0 revalued: a gain), Tally's Trial Balance showed the line as 8,200 Dr and 4,100 Cr, its Balance Sheet 4,100 Dr; ours equal. The pilot's steady four Trial Balance differences per date (the line's debit and credit, both totals) were this.
- **The line is taken from the source (fallback, 2026-10-24):** pilot entity 1 (customers in foreign currency, an opening difference Tally doesn't show) had no line in Tally at 37 of 78 dates where ours equalled its difference in opening balances, and elsewhere differed mostly, not always, by that difference. The rule couldn't be reproduced: rates of exchange and foreign amounts can't be imported (ADR-035), and a ledger opened in dollars by hand stayed in the base currency, not revalued. So the line is Tally's own, labelled "Unadjusted Forex Gain/Loss (taken from the source)"; ours, computed as above, is the detail line "Unadjusted Forex Gain/Loss (computed)". Where the two differ, the summary of differences says so and what the difference equals.
- **Code:** `core/statements.py` (`Figures.forex`, `Figures.source_line`, `trial_balance`, `taken_differences`).

16.5 A difference in opening balances is a note

- **What:** when the openings don't total zero (e.g. not integrated: the items' opening value 2,010 against the stock ledger's 1,500, a difference of 510), Tally's exported Trial Balance and Balance Sheet don't balance and show no line for it. Ours add "Difference in opening balances" as a detail line (not compared), so ours balance and still equal Tally's line by line.

16.6 A pilot-safe summary of the lines that differ

- **What:** when statements differ, validation and `./dev.ps1 statements` print, per company, one line per statement line that differs: its label (the statements' own lines and Tally's reserved group names as they are; a renamed reserved group as " (renamed)", any other group as "a custom group under ", a ledger directly under Primary as such, anything else as "a line not recognised"), whether the line is missing on one side or has a different amount, on how many dates, and which tested amounts the difference equals at how many of them: Direct Expenses, Direct Incomes, the opening and closing stock, the stock ledgers' opening and closing, the stock gap (the items' own value against the stock ledgers', at the books' beginning and at the date), the foreign-currency revaluation and its losses and gains, Tally's own Unadjusted Forex Gain/Loss, Profit & Loss A/c's own balance, the net profit, the difference in opening balances, and after a year end the profit up to it and since, and the stock stored for it; the foreign-currency ledgers' openings; for a Trial Balance group line, its split with each sub-group netted first; and for an integrated company after its first year end, the closing stock less each other closing stock Tally reports (its Stock-in-Hand group's closing balance, the stock items' closing value, the current financial year's own closing stock). Never other names, never amounts. When every ledger check passes, the report gives the layout as the likely cause of a statement difference, not a ledger balance.
- **Trial Balance split, as recorded (2026-10-23):** Tally splits a group's line into debit and credit ledger by ledger, also inside a sub-group (Duties & Taxes: input tax ledgers 2,340 Dr, output tax ledgers in the 26,129 Cr); netting each sub-group first would give 0 Dr. A group setting that nets it is the open question for the pilot's Current Liabilities.
- **Why:** the pilot's statement differences can't be shown (names and amounts); the summary says which rule a difference follows, so the layout can be corrected from counts alone.
- **Code:** `core/statement_differences.py` (`Labels`, `tested_amounts`, `last_year_end`, `Summary`), `core/validation.py` (`_statements`), `workers/statements.py`, `workers/cli.py` (`_print_statement_summary`).
- **Tests:** `tests/test_statements.py` (`test_the_summary_names_each_line_safely_and_what_it_equals`, `test_validation_prints_the_summary`, `test_the_last_year_end_gives_its_profit_and_stock`).

16.7 A Trial Balance line splits ledger by ledger, groups netted for reporting as one

- **What:** each Trial Balance line shows the debit balances and the credit balances under the primary group separately, ledger by ledger (also inside sub-groups), except a group Tally nets for reporting ("Nett Debit/Credit Balances for Reporting", ISADDABLE Yes): its balances count as one figure (the highest such group above a ledger). "Group behaves like a sub-ledger" (ISSUBLEDGER, Yes for Sundry Debtors and Sundry Creditors in every company) doesn't change the split. The setting is read from Tally with the statements at each date.
- **Why:** pilot: Current Liabilities (and Current Assets, Fixed Assets) differed in their debit and credit columns with equal net amounts.
- **Proven:** the netting seed (2026-10-24): under Current Assets an ISADDABLE group with 400 Dr and 150 Cr shown as 250 Dr, a sub-ledger group and a plain one each split (200 Dr / 90 Cr, 300 Dr / 120 Cr): Current Assets 72,518 Dr and 210 Cr; a vendor with a 700 advance inside Sundry Creditors: Current Liabilities 3,040 Dr. Ours equal.
- **Code:** `core/statements.py` (`Figures.unit`, `trial_balance`), `connector._netted_groups` (`envelopes.GROUP_REPORTING`)
- **Tests:** `tests/test_statements.py` (`test_a_group_netted_for_reporting_is_one_figure_in_the_trial_balance`, `test_tally_splits_a_trial_balance_line_ledger_by_ledger`).
- **ADR:** ADR-042.

16.8 Lines taken from the source

Only where no rule could be found, a line is the source's own figure, labelled "(taken from the source)" in the views (`v_trial_balance`, `v_balance_sheet`), with ours computed beside it as a "(computed)" detail line; the label suffix is ignored when lines are compared, and every date where the two differ is reported by the summary with what the difference equals:

Line	When	Why
Unadjusted Forex Gain/Loss (Trial Balance and Balance Sheet)	always	16.4: the pilot's line didn't follow the ledgers' book value less their revalued balance, and its rule couldn't be reproduced on the test company.
Temporary stopgap: a group line holding foreign-currency ledgers (Trial Balance and Balance Sheet; e.g. Current Assets)	only at dates where the source shows its Unadjusted Forex Gain/Loss line and ours differs from the source's by more than the tolerance; ours at every other date	Pilot entity 1 (2026-10-24): Current Assets differed at 18 of 78 dates, by no single ledger's revaluation nor a fixed mix of them (the revalued figure Tally's Balance Sheet uses isn't its ledger-balance export's). A detail line "Forex revaluation difference (per Tally, under review)" makes the ledgers plus it equal the group's total. **Exit:** replace with the computed figure once the revaluation rule is found.

- **"Differs":** by more than the validation tolerance, the same as the comparison's: `connections.config.validation_tolerance` else `VALIDATION_TOLERANCE`, default 0 (exact). A trial balance line differs when its debit or its credit does.
- **Open differences, not passes:** every date where a taken line differs from ours computed is a warning, "Statement line taken from the source (open difference)" (LB-VAL-026): not counted as passed, not a failure. Validation then reports OK with warnings and exits 0; the summary gives one line per statement line with its number of dates; `ledgerbridge_reporting.v_statement_open_differences` lists every date (any difference above zero).
- **One number:** reports and the AI read the statement views' `main` lines; detail lines (ours computed, the reconciling line, notes) explain them.
- **Code:** `core/statements.py` (`TAKEN`, `COMPUTED`, `Figures.foreign_group_from_source`, `_group_line`, `taken_differences`), `core/statement_differences.py` (kind "taken").
- **Tests:** `tests/test_statements.py` (`test_the_forex_line_is_taken_from_the_source_and_ours_kept_as_detail`, `test_after_the_year_end_the_balance_sheet_stock_line_is_taken_from_the_source`).
- **ADR:** ADR-043.

17. Only the expected company is compared

- **What:** before every step that reads Tally to compare or store (sync, deletion check, validation, `validate analyse`, `statements`) and again after reading, the company the entity was synced from must be loaded (by its GUID) and no other loaded company may have the same name; otherwise the run stops with "Expected company not loaded" (LB-SYNC-011): nothing compared or marked deleted, no validation problems or alerts, a sync run marked interrupted so it resumes.
- **Why:** pilot: a run with another company loaded reported 3,742 ledgers missing.
- **Code:** `workers/entities.py` (`ensure_loaded`), `workers/sync.py`, `workers/validate.py`, `workers/analyse.py` (`_read`), `workers/statements.py`.
- **Tests:** `tests/test_entity_guard.py`.
- **ADR:** ADR-041.

18. Foreign currency beside the books

- **What:** a foreign-currency amount is written `-$100.00 @ 82.00/$ = -8200.00` (the rupee sign exported as `?`): the base amount after `=` stays the books' figure; the currency (`$`), the foreign amount and the rate (per unit) are kept beside it, on voucher lines and on ledger openings. A ledger's own currency is Tally's CURRENCYNAME, mapped to an ISO code through the currency masters (`EXPANDEDSYMBOL`, else `ISOCURRENCYCODE`); a ledger Tally keeps in rupees can still open in dollars (the test company's Customer Hotel USD), and keeps that opening's dollars. Rates: Tally's own lists (standard, buying, selling; each entry read as its first date and first other number, since their fields weren't known) and, per currency and day, the voucher lines' base over foreign amounts. Each ledger's foreign balance at a date is its foreign opening plus the foreign amounts of its counted lines up to it.
- **Never changes the books:** `transform rebuild` compares every voucher's base lines and every ledger's opening and balance before and after, and reports the counts (LB-TRF-010 if any differ).
- **No foreign amount unread unnoticed:** the rupee sign isn't read (only the digits around it), so `?`, , `Rs.`, `Rs` and `INR` all read the same. An amount written as a foreign one (with `@` or `=`) whose foreign part or base amount can't be read is counted and noted on its record (LB-TRF-011, in the report); `transform rebuild` prints "Foreign-currency amounts: N read, M not read".
- **Which rule Tally revalues by, in three parts (2026-10-26):** (1) per ledger, each rule's value against Tally's own revalued balance (to the paisa, rounded to the rupee, within 1); (2) the layout, with Tally's per-ledger figures: the ledgers kept in rupees but holding foreign amounts at book value or revalued by each rule, and the forex line ledger by ledger (losses the debit, gains the credit, as `statements` does) or netted in total, per currency or per group, each with either sign; (3) each rule computed throughout, in the same combinations. The last line names the combinations matching every date (ADR-043's time-box). Before that: `./dev.ps1 validate fx-rules` counts, for each candidate rule, the dates where the groups holding foreign-currency ledgers and the Unadjusted Forex Gain/Loss line equal Tally's (exactly and within 1), laid out with the statements' own code; "as exported" (Tally's ledger-balance export) is the calibration and must reproduce what `statements` found.
- **Code:** `connectors/tally/signs.py` (`tally_foreign_parts`), `connectors/tally/mapping.py` (`currency`, `_foreign`), `core/transform.py` (`_currencies`), `core/fx.py`, `core/fx_rules.py`, `core/base_check.py`, `workers/fx_rules.py`.
- **Tests:** `tests/test_fx_core.py`, `tests/test_fx_rules.py`, `tests/test_retransform.py` (`test_transform_rebuild_com`
- **ADR:** ADR-046 (and ADR-043, whose stopgap it is meant to end).
- **Each ledger's own currency (2026-10-30):** `currency_name` is Tally's CURRENCYNAME; `is_foreign_currency` says whether it is another than the base currency (the currency master with the entity's base ISO code, else the currency most ledgers are kept in: Tally's company record doesn't name it); `currency_code` is its ISO code from the master's formal name, ISO code or mailing name (three capital letters), matched by the master's NAME or ORIGINALNAME, NULL without one (LB-VAL-034). A ledger kept in rupees can still hold foreign amounts (its opening's currency is `opening_currency_name`). `./dev.ps1 validate currencies` counts them per company and warns about ledgers the source revalues that aren't marked foreign (LB-VAL-035). Tests: `tests/test_fx_core.py`, `tests/test_currencies.py`.

19. Monthly sales (RPT-013)

- **What counts:** every effective entry (not cancelled, optional or memorandum; voucher not deleted in the source) on the ledgers under the source's own Sales Accounts group and its sub-groups at any depth, by voucher date. The

group is the source's predefined one, renamed or not (Tally: RESERVEDNAME "Sales Accounts"), never found by its name.

- **Split:** gross sales are the entries of Sales voucher types, sales returns those of Credit Note types, other adjustments those of every other type (e.g. debit notes, journals). Net sales = gross sales + sales returns + other adjustments. Sales are shown positive, returns negative.
- **Cross-checks (warnings, counts only):** no predefined Sales Accounts group (LB-VAL-030: nothing compared); ledgers with entries mapped to sale of goods (4110) outside it (LB-VAL-031: not in the report, as not in the source's line); sales ledgers with an opening balance (LB-VAL-033).
- **Proof:** `./dev.ps1 validate monthly-sales` compares, for each period between consecutive dates `statements` stored, the sum of `v_daily_sales` with the difference of the source's Sales Accounts line in its Profit and Loss (cumulative from the books' beginning); the first period starts at the books' beginning. Every day up to the last stored date is compared once; the output says how many periods were exact calendar months (in Educational mode a 30-day month's statements are stored on the 2nd of the next month). Refused when the statements are older than the latest sync or transform (LB-VAL-032). A differing period is LB-VAL-029 (exit 1).
- **Code:** migration 0021 (the views), `connectors/tally/mapping.py` (`predefined_role`), `core/monthly_sales.py`, `workers/monthly_sales.py`, `docs/sql/monthly-sales.sql`.
- **Tests:** `tests/test_monthly_sales.py` (the proof on the test company's recorded Profit and Loss), `tests/test_monthly_sales_integration.py` (the views and the SQL file on MySQL).
- **ADR:** ADR-047.

Change log

Date	Version	Change
2026-10-30	1.15	Voucher counts: the source's type names matched by the name rules (LB-VAL-036).
2026-10-30	1.14	16: Cost of Sales without stock; 18: each ledger's own currency.
2026-10-29	1.13	19: monthly sales and their proof.
2026-10-26	1.12	18: the fx-rules finder in three parts (per ledger, layout, computed).
2026-10-24	1.11	18: foreign currency beside the books, the base check after a rebuild, the fx-rules finder.
2026-10-24	1.10	16.2 and 16.8: the Balance Sheet stock fallback retired; stock computed and compared everywhere.
2026-10-24	1.9	16.8: the Current Assets stopgap, the tolerance stated, open differences (LB-VAL-026).
2026-10-24	1.8	16.2 stock ledgers replaced by the source's stock in both settings, and the year end recorded; 16.4 and 16.8 lines taken from the source; 16.7 Trial Balance netting; 17 the expected company.
2026-10-24	1.7	16.6: more tested amounts (netted split, other stock figures, foreign-currency openings); the Trial Balance split as recorded; the report's likely cause without ledger differences.
2026-10-23	1.6	Section 16: Direct Expenses inside Cost of Sales; the Trial Balance's forex line with losses as its debit and gains as its credit; Profit & Loss A/c with an opening balance; 16.6 the pilot-safe summary of differences.

Date	Version	Change
2026-10-22	1.5	Section 14: year-end checks use the 31st or the 2nd, never the 1st, like statements; Section 12: the 255-character field path limitation.
2026-10-22	1.4	Section 16: statements from the source's own figures; rule 7 without integration; checks LB-VAL-023 to LB-VAL-025.
2026-10-22	1.3	Values with invalid characters that are too long; long names of deleted rows.
2026-10-19	1.2	Rule 6.2: entries with no quantity of their own across several godowns.
2026-10-19	1.1	Rule 1.6: TallyPrime Edit Log.
2026-10-16	1.0	First edition: every conversion and validation rule up to PR #33, with flowcharts.