Contents

Database schema reference **2**

1. The four databases . . . 2
2. Database users and their rights . . . 3
3. Diagrams . . . 3
4. Tables . . . 8

`ledgerbridge_source`: raw layer: data as received . . . 8
- `ledgerbridge_source.raw_records` . . . 8

`ledgerbridge_accounting`: organisation and chart of accounts . . . 9
- `ledgerbridge_accounting.entities` . . . 9
- `ledgerbridge_accounting.entity_sources` . . . 9
- `ledgerbridge_accounting.branches` . . . 10
- `ledgerbridge_accounting.financial_years` . . . 10
- `ledgerbridge_accounting.currencies` . . . 11
- `ledgerbridge_accounting.currency_sources` . . . 11
- `ledgerbridge_accounting.exchange_rates` . . . 12
- `ledgerbridge_accounting.standard_accounts` . . . 12
- `ledgerbridge_accounting.account_groups` . . . 13
- `ledgerbridge_accounting.ledgers` . . . 15

`ledgerbridge_accounting`: masters . . . 16
- `ledgerbridge_accounting.parties` . . . 16
- `ledgerbridge_accounting.items` . . . 17
- `ledgerbridge_accounting.item_groups` . . . 18
- `ledgerbridge_accounting.units` . . . 19
- `ledgerbridge_accounting.godowns` . . . 20
- `ledgerbridge_accounting.cost_centres` . . . 21
- `ledgerbridge_accounting.voucher_types` . . . 22
- `ledgerbridge_accounting.dimensions` . . . 23
- `ledgerbridge_accounting.dimension_values` . . . 23

`ledgerbridge_accounting`: transactions . . . 24
- `ledgerbridge_accounting.vouchers` . . . 24
- `ledgerbridge_accounting.voucher_lines` . . . 25
- `ledgerbridge_accounting.bill_allocations` . . . 26
- `ledgerbridge_accounting.line_cost_allocations` . . . 26
- `ledgerbridge_accounting.line_dimensions` . . . 27
- `ledgerbridge_accounting.inventory_lines` . . . 27
- `ledgerbridge_accounting.tax_lines` . . . 28

`ledgerbridge_accounting`: field catalogue . . . 28
- `ledgerbridge_accounting.source_fields` . . . 28

`ledgerbridge_accounting`: source figures . . . 29
- `ledgerbridge_accounting.stock_values` . . . 29
- `ledgerbridge_accounting.fx_revaluation_snapshots` . . . 29

`ledgerbridge_reporting`: statements, ours and the source's (views on top) . . . 30
- `ledgerbridge_reporting.statement_lines` . . . 30

`ledgerbridge_system`: connections and sync . . . 31
- `ledgerbridge_system.sources` . . . 31
- `ledgerbridge_system.agents` . . . 31
- `ledgerbridge_system.connections` . . . 32
- `ledgerbridge_system.sync_markers` . . . 32
- `ledgerbridge_system.sync_runs` . . . 33
- `ledgerbridge_system.sync_logs` . . . 33
- `ledgerbridge_system.sync_checkpoints` . . . 34
- `ledgerbridge_system.sync_slow_periods` . . . 34
- `ledgerbridge_system.sync_unverified_ranges` . . . 35
- `ledgerbridge_system.import_batches` . . . 35
- `ledgerbridge_system.file_layouts` . . . 36

`ledgerbridge_system`: validation and alerts . . . 36

ledgerbridge_system.validation_runs . . . 36
ledgerbridge_system.validation_issues . . . 37
ledgerbridge_system.alerts . . . 37
ledgerbridge_system: users, roles and access . . . 38
ledgerbridge_system.users . . . 38
ledgerbridge_system.roles . . . 38
ledgerbridge_system.permissions . . . 38
ledgerbridge_system.role_permissions . . . 39
ledgerbridge_system.user_roles . . . 39
ledgerbridge_system.user_entity_access . . . 39
ledgerbridge_system.masking_rules . . . 40
ledgerbridge_system: audit and AI log . . . 40
ledgerbridge_system.audit_log . . . 40
ledgerbridge_system.ai_query_log . . . 41
ledgerbridge_system: configuration . . . 41
ledgerbridge_system.kpi_definitions . . . 41
ledgerbridge_system.settings . . . 41
ledgerbridge_reporting . . . 42

Database schema reference


Every database, table and column of the client-hosted data plane (MySQL 8), generated from the code. For the design and its reasons see schema.md and the decision log in architecture.md; for the conversion and validation rules see the rulebook.

56 tables, 628 columns.

Conventions. Amounts are `DECIMAL(20,4)` in the base currency with the **canonical sign**: debit positive, credit negative (schema.md 1, 7.1). Every accounting table carries its source tracking columns (`connection_id`, `source_key`, `source_alter_id`, `origin`, `import_batch_id`, `raw_record_id`). Rows deleted in the source are kept with `is_deleted` (soft delete). `PK` primary key, `FK` foreign key, `UK` part of a unique key.

1. The four databases

Database	What it holds	Tables
`ledgerbridge_source`	Raw layer: every record exactly as the source sent it (ADR-005). Written only by connectors through the sync; the transform reads it.	1
`ledgerbridge_accounting`	Canonical model: companies, chart of accounts, masters and transactions in one shape for every source. Written by the transform; read by validation, reports and (later) the reporting layer.	29
`ledgerbridge_reporting`	Semantic layer for reports and AI (M6): views and aggregate tables. Empty until M6; the only database the AI user can read (AI-003).	1
`ledgerbridge_system`	Running the platform: connections, sync runs and progress, validation, alerts, users, roles, audit and AI logs, configuration.	25

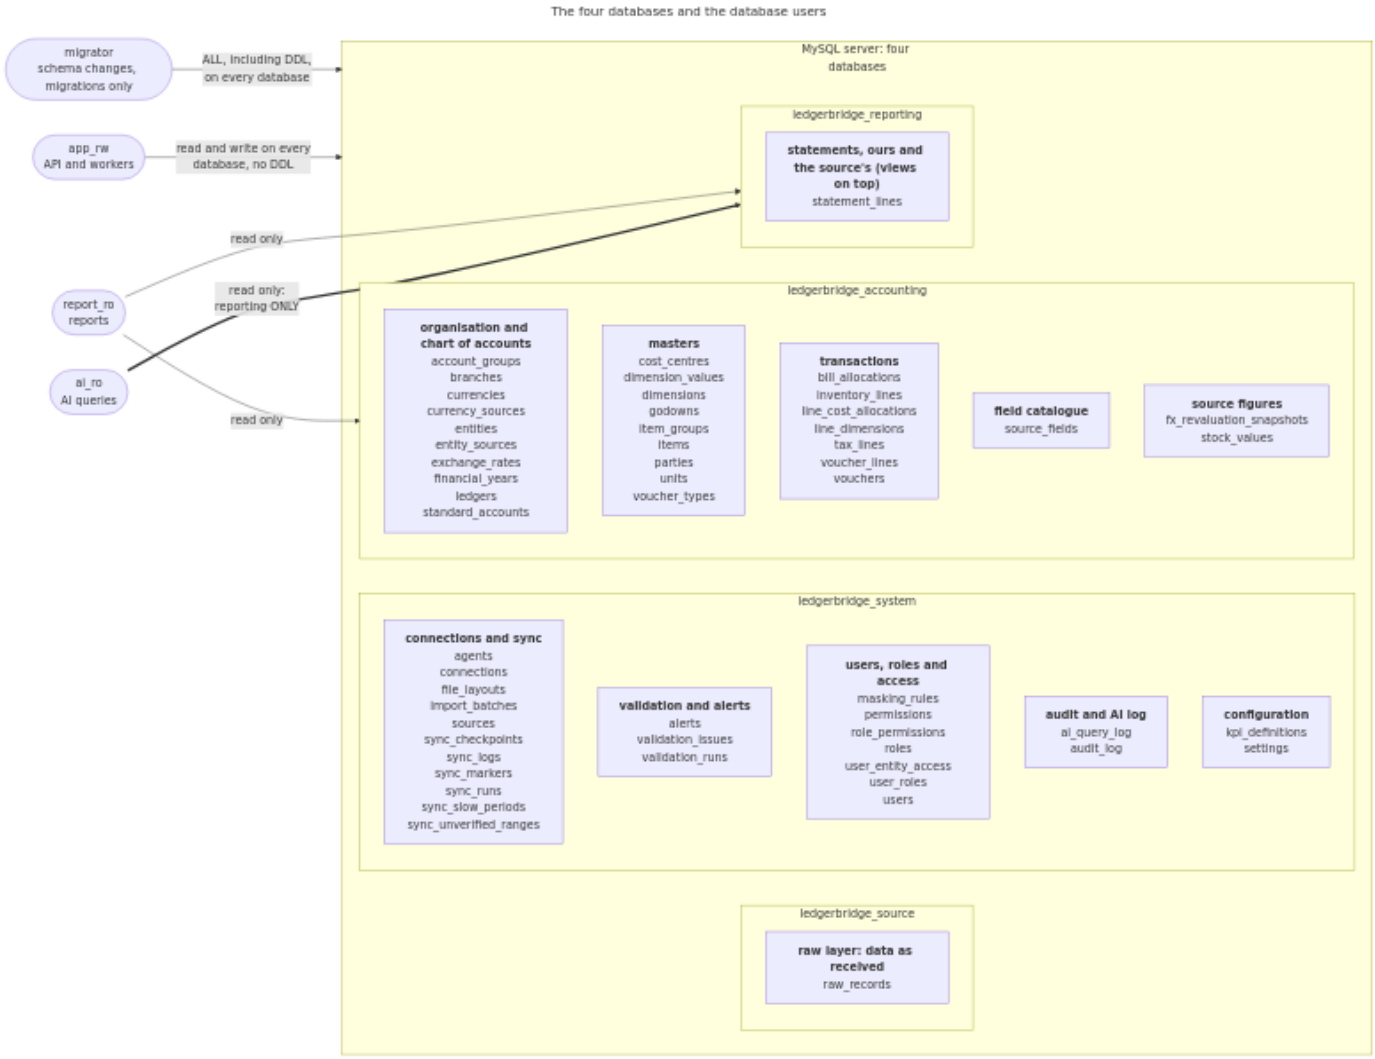

2. Database users and their rights


Created by `deploy/mysql/init/01-schemas.sh` (schema.md 2.1). Each user has only the rights it needs; the AI can read the reporting layer and nothing else.

User	Used by	Rights	Databases
`migrator`	schema changes, migrations only	ALL, including DDL, on every database	`ledgerbridge_source`, `ledgerbridge_system`, `ledgerbridge_accounting`, `ledgerbridge_reporting`
`app_rw`	API and workers	read and write on every database, no DDL	`ledgerbridge_source`, `ledgerbridge_system`, `ledgerbridge_accounting`, `ledgerbridge_reporting`
`report_ro`	reports	read only	`ledgerbridge_accounting`, `ledgerbridge_reporting`
`ai_ro`	AI queries	read only: reporting ONLY	`ledgerbridge_reporting`


3. Diagrams

How to read them: docs/diagrams/README.md.


Overview (keys only)

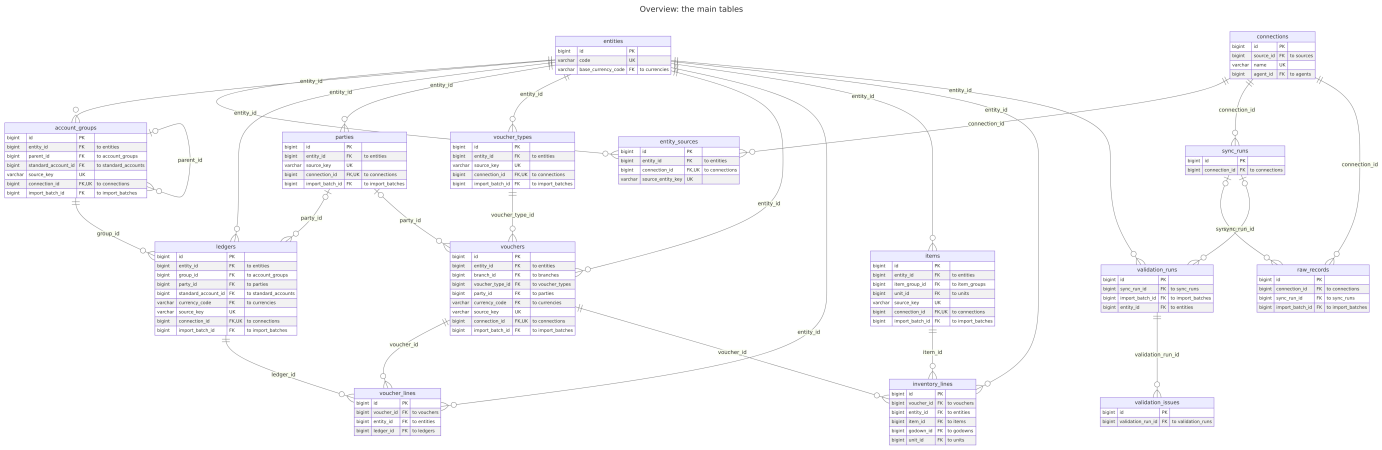


Organisation and chart of accounts (ledgerbridge_accounting)

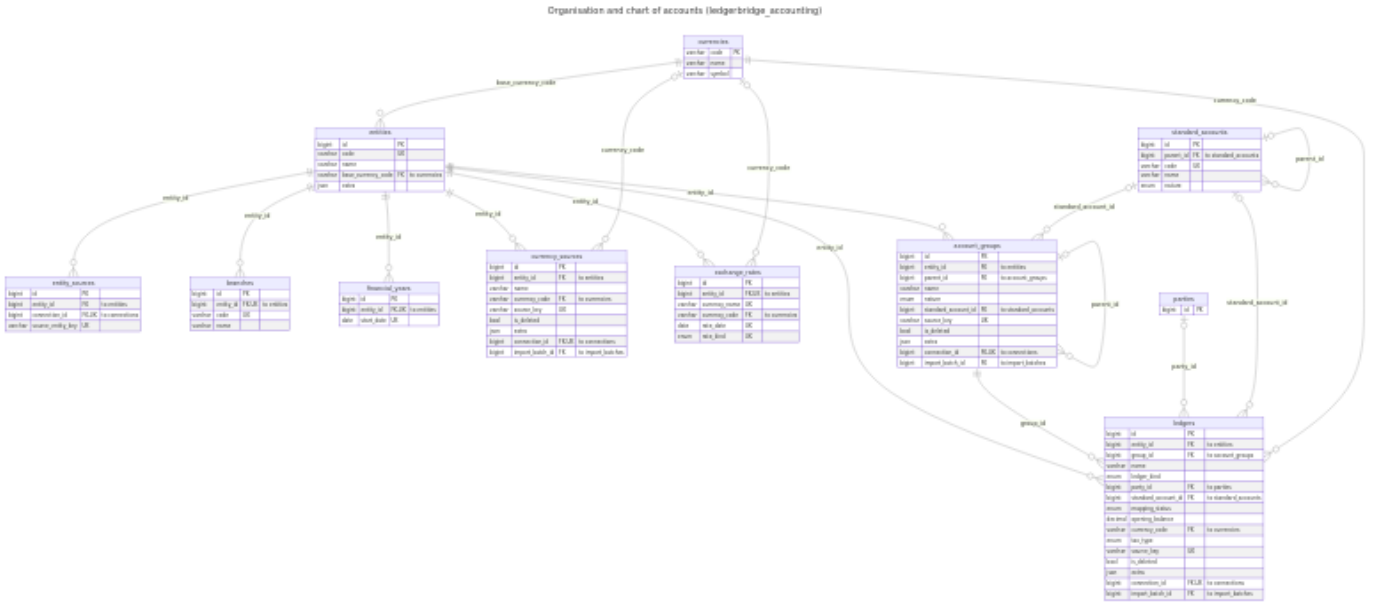


Masters: parties, items, units, godowns, cost centres, voucher types, dimensions (ledgerbridge_accounting)

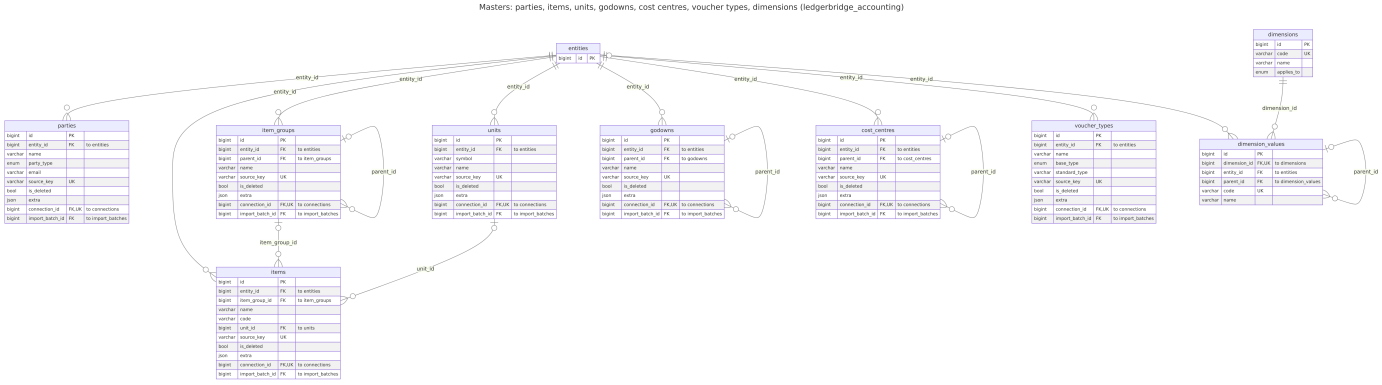


Transactions: vouchers and their child tables (ledgerbridge_accounting)

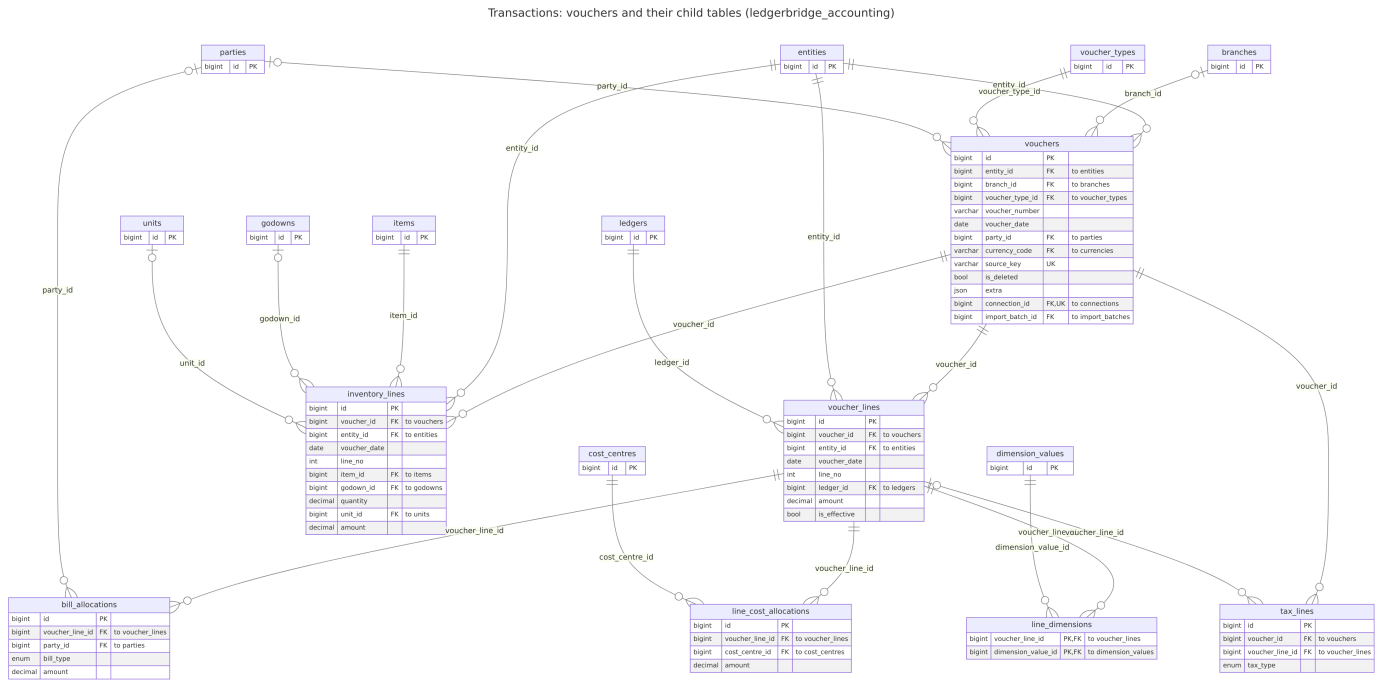

System, part 1: connections, sync, raw records, validation, alerts, field catalogue

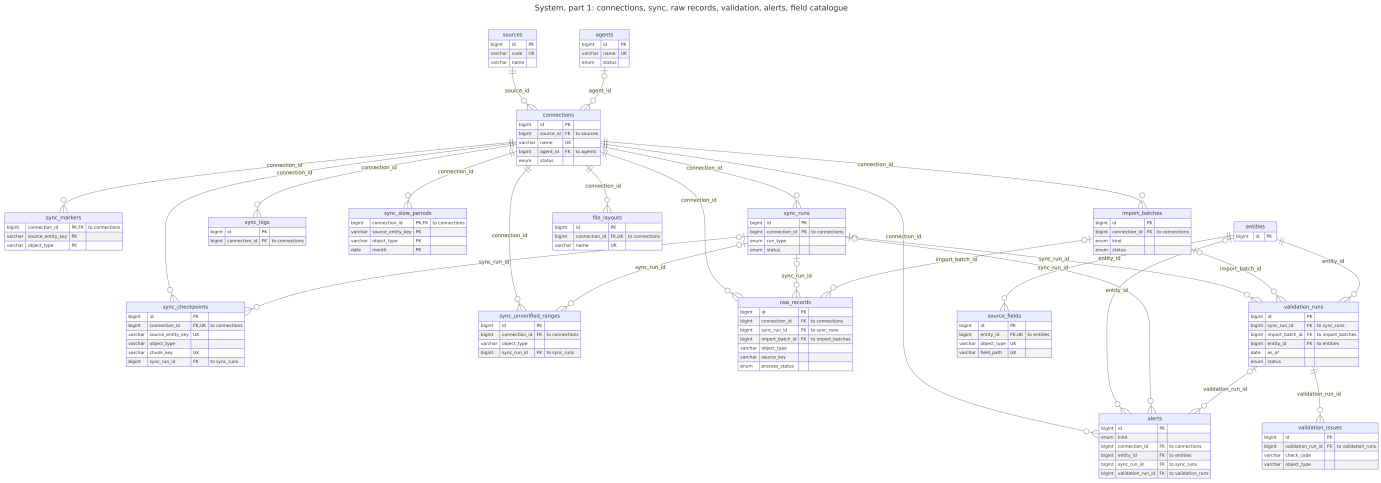


System, part 2: users, roles and access, audit and AI log, configuration (ledgerbridge_system)

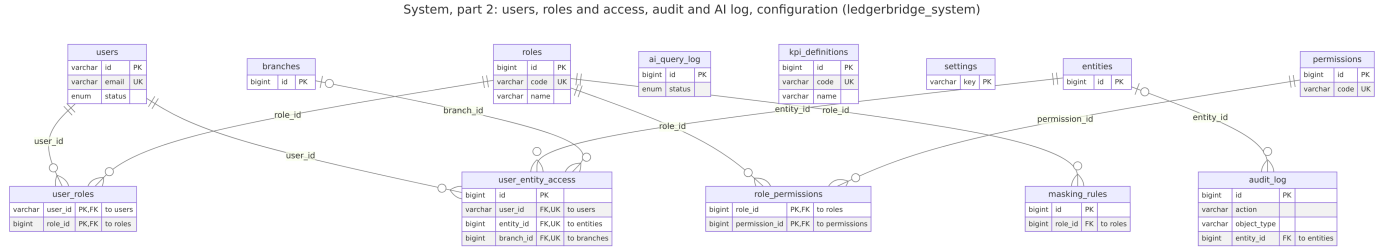


Source figures and statements: stock values, foreign-currency revaluations (ledgerbridge_accounting) and statement lines (ledgerbridge_reporting)

Source figures and statements: stock values, foreign-currency revaluations (ledgerbridge_accounting) and statement lines (ledgerbridge_reporting)

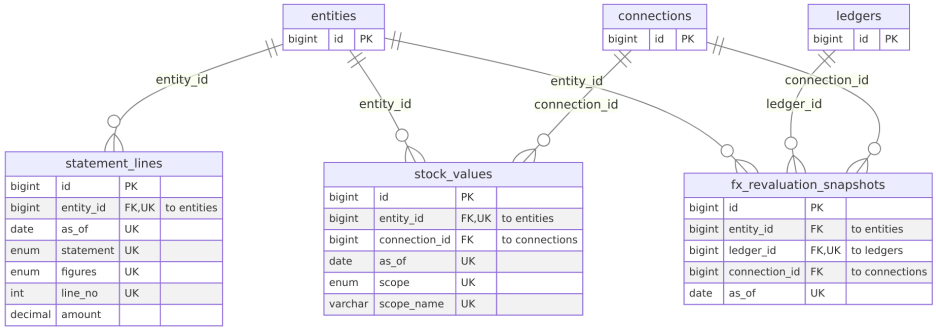


Data flow, level 0 (the platform and what it talks to)

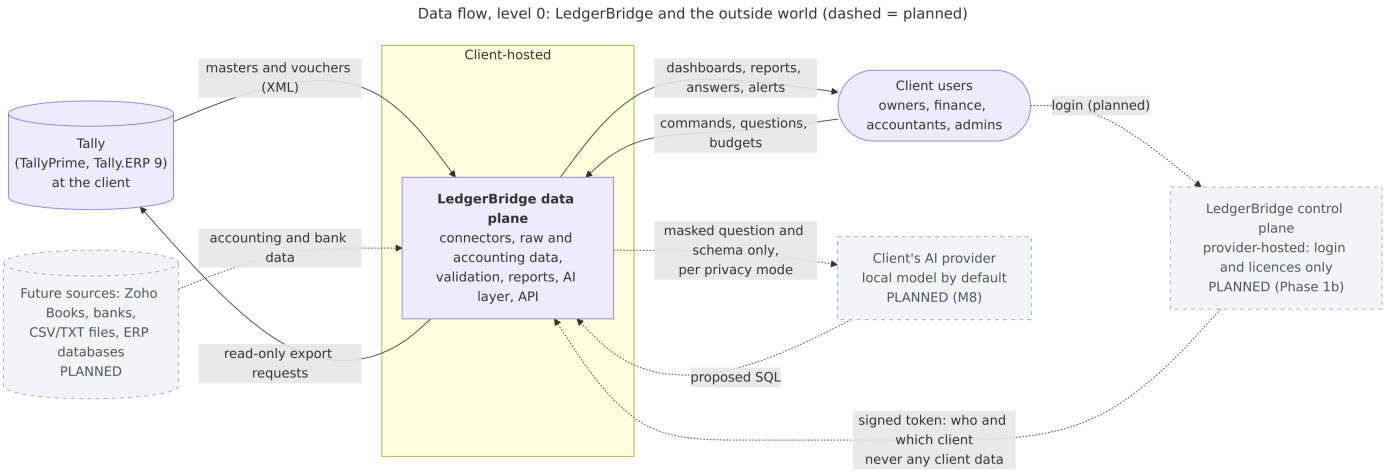

Data flow, level 1 (inside the data plane)

Data flow, level 1: inside the data plane (dashed = planned)

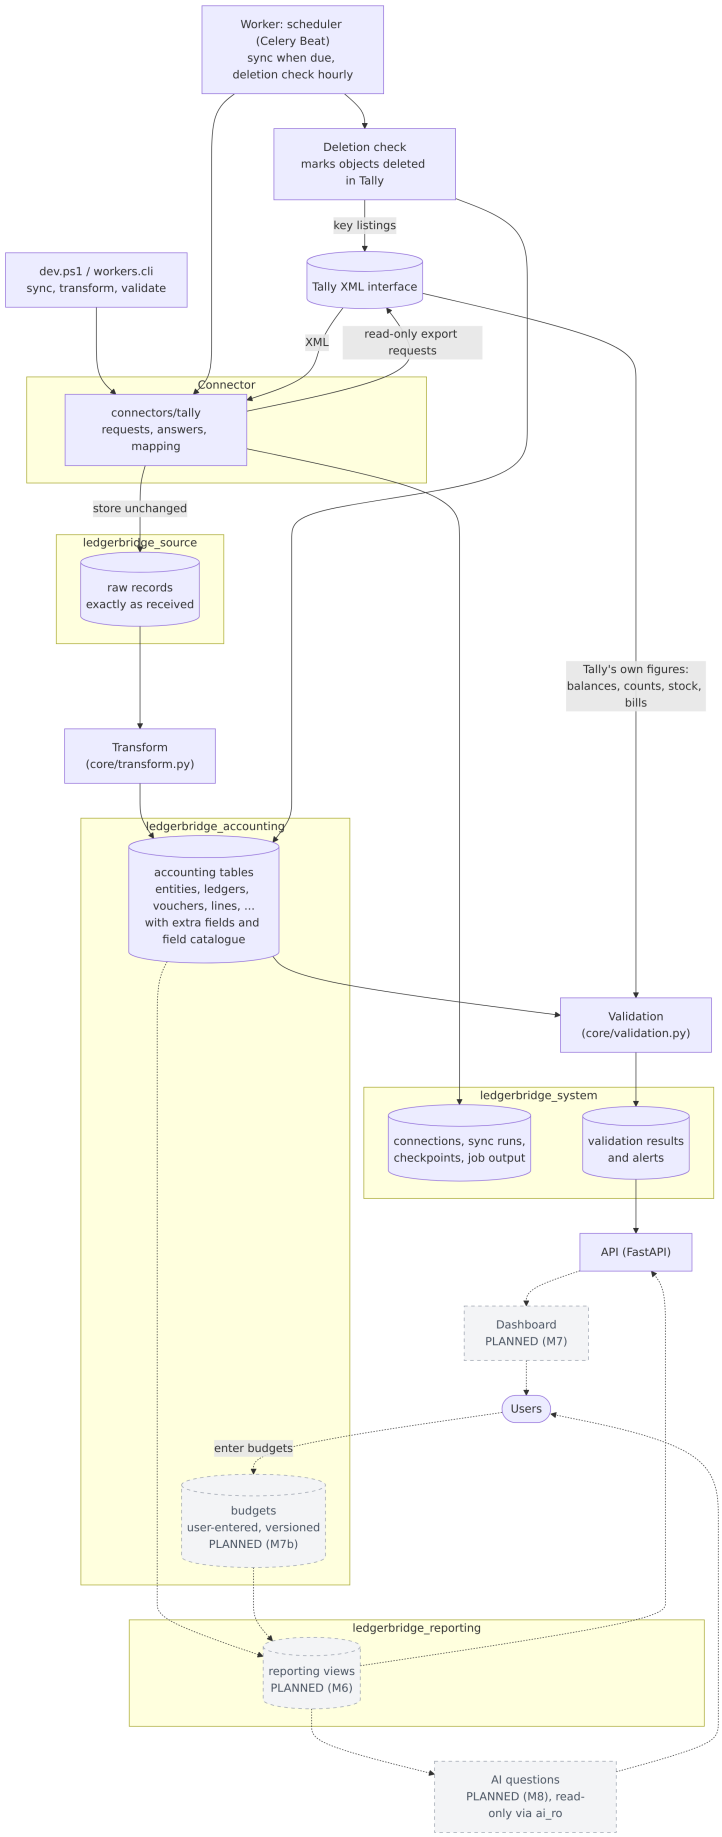

4. Tables

ledgerbridge_source: raw layer: data as received

ledgerbridge_source.raw_records

Purpose: Every object fetched from a source, exactly as received (XML for Tally), one row per version.

Filled by: Sync (connector -> RawStore): a new row only when the payload changed (hash); process_status tracks the transform.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
connection_id	BIGINT UNSIGNED	no	FK	The connection the row came from.
sync_run_id	BIGINT UNSIGNED	yes	FK	The sync run it belongs to.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
source_entity_key	VARCHAR(191)	no		The source company's key (Tally: company GUID).
object_type	VARCHAR(64)	no		group, ledger, voucher_type, voucher, stock_item, …
source_key	VARCHAR(191)	no		The source's own key (Tally: GUID); unique per connection.
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
payload_format	ENUM('xml','json','csv','text')	no		Payload format.
payload	LONGTEXT	no		The record exactly as received (re-serialised XML).
payload_hash	CHAR(64)	no		SHA-256 of the payload: an unchanged record isn't stored again.
received_at	DATETIME(6)	no		When: received.
process_status	ENUM('pending','processed','failed','skipped')	no		pending / processed / failed / skipped (superseded).
process_error	TEXT	yes		Why the transform failed: error type and a short message, never SQL.
process_warning	TEXT	yes		Process warning.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: index ix_raw_records_conn_type_key (connection_id, object_type, source_key); index ix_raw_records_status_received (process_status, received_at).

Refers to: connection_id → connections.id; sync_run_id → sync_runs.id; import_batch_id → import_batches.id.

ledgerbridge_accounting: organisation and chart of accounts

ledgerbridge_accounting.entities

Purpose: A company in the platform (one per source company).

Filled by: Transform, from the source's company record, on the first sync.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
code	VARCHAR(32)	no	UK	Short code used in reports.
name	VARCHAR(255)	no		Name as the source keeps it.
legal_name	VARCHAR(255)	yes		Legal name.
country_code	CHAR(2)	no		Default IN.
state_code	VARCHAR(8)	yes		GST state code.
gstin	VARCHAR(32)	yes		15 characters when valid; wider so source data that isn't fits (migration 0010).
pan	VARCHAR(32)	yes		Pan.
base_currency_code	CHAR(3)	no	FK	Default INR.
fy_start_month	TINYINT	no		Default 4 (April) (DAT-006).
books_from	DATE	yes		Company inception / books start (IMP-001).
is_active	BOOL	no		Whether it is in use.
extra	JSON	yes		ADR-025
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (code).

Refers to: base_currency_code → currencies.code.

Referred to by: account_groups, alerts, audit_log, branches, cost_centres, currency_sources, dimension_values, entity_sources, exchange_rates, financial_years, fx_revaluation_snapshots, godowns, inventory_lines, item_groups, items, ledgers, parties, source_fields, statement_lines, stock_values, units, user_entity_access, validation_runs, voucher_lines, voucher_types, vouchers.

ledgerbridge_accounting.entity_sources

Purpose: Which source company (by its key, Tally's GUID) belongs to which entity, on which connection.

Filled by: Transform, with the entity.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.

Column	Type	Null	Key	Meaning
source_entity_key	VARCHAR(191)	no	UK	Tally company GUID or name, Zoho organization ID.
source_entity_name	VARCHAR(255)	no		Source entity name.
precedence	SMALLINT	no		Higher wins on overlap (IMP-005).
active_from	DATE	yes		Active from.
active_to	DATE	yes		Active to.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_entity_key).

Refers to: entity_id → entities.id; connection_id → connections.id.

ledgerbridge_accounting.branches

Purpose: Branches of an entity (planned).

Filled by: Not filled yet.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK, UK	The entity (company) the row belongs to.
code	VARCHAR(64)	no	UK	Short stable code.
name	VARCHAR(255)	no		Name as the source keeps it.
state_code	VARCHAR(8)	yes		GST state code.
gstin	VARCHAR(32)	yes		GST registration number.
is_active	BOOL	no		Whether it is in use.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (entity_id, code).

Refers to: entity_id → entities.id.

Referred to by: user_entity_access, vouchers.

ledgerbridge_accounting.financial_years

Purpose: Financial years of an entity (planned).

Filled by: Not filled yet.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK, UK	The entity (company) the row belongs to.
label	VARCHAR(64)	no		Label.
start_date	DATE	no	UK	Start date.

Column	Type	Null	Key	Meaning
end_date	DATE	no		End date.
is_closed	BOOL	no		Whether closed.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (entity_id, start_date).

Refers to: entity_id → entities.id.

ledgerbridge_accounting.currencies

Purpose: Currencies by ISO code, with the symbol the source writes.

Filled by: Seeded (INR); foreign currencies from the source's currency masters (FX-001).

Column	Type	Null	Key	Meaning
code	CHAR(3)	no	PK	ISO 4217
name	VARCHAR(255)	no		Name as the source keeps it.
decimal_places	TINYINT	no		Decimals shown.
symbol	VARCHAR(16)	yes		e.g. "$"
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Referred to by: currency_sources, entities, exchange_rates, ledgers, vouchers.

ledgerbridge_accounting.currency_sources

Purpose: Each entity's currencies as its source names them (e.g. "$"), with the ISO code when the source gives one (FX-001).

Filled by: Transform, from currency masters.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
name	VARCHAR(255)	no		as the source writes it in amounts ("$")
currency_code	CHAR(3)	yes	FK	Currency (ISO code).
formal_name	VARCHAR(255)	yes		Formal name.
decimal_places	TINYINT	yes		Decimals shown.
source_key	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).

Column	Type	Null	Key	Meaning
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index ix_currency_sources_raw_record (raw_record_id).

Refers to: entity_id → entities.id; currency_code → currencies.code; connection_id → connections.id; import_batch_id → import_batches.id.

ledgerbridge_accounting.exchange_rates

Purpose: Rates per entity, currency and date, each with its kind and source: the source's own rate list, or the day's voucher lines weighted by foreign amount (FX-003).

Filled by: Transform: currency masters' rate lists and voucher rates.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK, UK	The entity (company) the row belongs to.
currency_name	VARCHAR(64)	no	UK	Currency name.
currency_code	CHAR(3)	yes	FK	Currency (ISO code).
rate_date	DATE	no	UK	Rate date.
rate	NUMERIC(20, 8)	no		Rate.
rate_kind	ENUM('standard','buying','selling','vouchers')	no	UK	Rate kind.
source	ENUM('source_rate_list','vouchers')	no		Source.
voucher_count	INTEGER	yes		Voucher count.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (entity_id, currency_name, rate_date, rate_kind).

Refers to: entity_id → entities.id; currency_code → currencies.code.

ledgerbridge_accounting.standard_accounts

Purpose: The standard chart of accounts used to compare and combine companies (RPT-006).

Filled by: Seeded by a migration.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
parent_id	BIGINT UNSIGNED	yes	FK	Hierarchy.
code	VARCHAR(32)	no	UK	Short stable code.
name	VARCHAR(255)	no		Name as the source keeps it.
nature	ENUM('asset','liability','equity','income','expense')	no		Nature.
statement	ENUM('balance_sheet','profit_loss')	no		Statement.
statement_line	VARCHAR(64)	no		e.g. revenue, cogs, current_assets.
cash_flow_class	ENUM('operating','investing','financing','cash','none')	no		For cash flow statement.
sort_order	INTEGER	no		Sort order.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (code).

Refers to: parent_id → standard_accounts.id.

Referred to by: account_groups, ledgers, standard_accounts.

ledgerbridge_accounting.account_groups

Purpose: The source's group tree (Tally groups), per entity, as kept there.

Filled by: Transform, from group masters; renamed reserved groups keep their reserved name as an alias.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
parent_id	BIGINT UNSIGNED	yes	FK	The parent row in the same table (a tree).
name	VARCHAR(255)	no		Name as the source keeps it.
nature	ENUM('asset','liability','equity','income','expense')	yes		Derived from primary group.
is_primary	BOOL	no		Tally's 28 predefined primary groups.
affects_gross_profit	BOOL	no		Tally flag for P&L layout.

Column	Type	Null	Key	Meaning
predefined_role	VARCHAR(64)	yes		**Migration 0021 (RPT-013).** Which of the source's own predefined groups this is, renamed or not, in our vocabulary (Tally: RESERVEDNAME in lower case, words joined by _, e.g. sales_accounts); NULL for groups the user created. Filled by the transform: after migration 0021, transform rebuild.
standard_account_id	BIGINT UNSIGNED	yes	FK	Default mapping for ledgers under this group.
source_key	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index ix_account_groups_raw_record (raw_record_id).

Refers to: entity_id → entities.id; parent_id → account_groups.id; standard_account_id → standard_accounts.id; connection_id → connections.id; import_batch_id → import_batches.id.

Referred to by: account_groups, ledgers.

`ledgerbridge_accounting.ledgers`

Purpose: The source's ledgers, per entity, with their group, kind, standard account, opening balance as at the books' beginning and tax type.

Filled by: Transform, from ledger masters fetched for a period starting on the books' beginning.

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`entity_id`	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
`group_id`	BIGINT UNSIGNED	no	FK	Refers to `account_groups`.
`name`	VARCHAR(255)	no		Name as the source keeps it.
`alias`	VARCHAR(255)	yes		Alias.
`ledger_kind`	ENUM('party','bank','cash','tax','stock','income','expense','asset','liability','equity','other')	no		party, bank, cash, tax, stock, … (from the reserved group).
`party_id`	BIGINT UNSIGNED	yes	FK	Set for customer/vendor ledgers.
`standard_account_id`	BIGINT UNSIGNED	yes	FK	Overrides group mapping.
`mapping_status`	ENUM('auto','suggested','confirmed','unmapped')	no		auto (a standard account was found) or unmapped.
`opening_balance`	NUMERIC(20, 4)	no		Signed; as at `opening_balance_date`.
`opening_balance_date`	DATE	yes		Opening balance date.
`currency_code`	CHAR(3)	no	FK	Currency (ISO code).
`currency_name`	VARCHAR(64)	yes		Currency name.
`opening_balance_fc`	NUMERIC(20, 4)	yes		Opening balance fc.
`is_bill_wise`	BOOL	no		Whether bill wise.
`is_cost_centre_applicable`	BOOL	no		Whether cost centre applicable.
`gstin`	VARCHAR(32)	yes		GST registration number.
`tax_type`	ENUM('cgst','sgst','igst','cess','tds','tcs','vat','other')	yes		cgst, sgst, igst, cess, tds, tcs, vat for tax ledgers.
`source_key`	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
`source_alter_id`	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
`origin`	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
`raw_record_id`	BIGINT UNSIGNED	yes		The raw record it was transformed from.
`is_deleted`	BOOL	no		Deleted in the source (soft delete; kept for history).

Column	Type	Null	Key	Meaning
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index `ix_ledgers_entity_group` (entity_id, group_id); index `ix_ledgers_entity_name` (entity_id, name); index `ix_ledgers_raw_record` (raw_record_id).

Refers to: `entity_id` → `entities.id`; `group_id` → `account_groups.id`; `party_id` → `parties.id`; `standard_account_id` → `standard_accounts.id`; `currency_code` → `currencies.code`; `connection_id` → `connections.id`; `import_batch_id` → `import_batches.id`.

Referred to by: `fx_revaluation_snapshots`, `voucher_lines`.

ledgerbridge_accounting: masters

`ledgerbridge_accounting.parties`

Purpose: Customers and vendors (the ledgers under Sundry Debtors / Creditors), with GST, PAN and contact details (sensitive: AI-015).

Filled by: Transform, with their ledgers.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
name	VARCHAR(255)	no		**Sensitive** (masking candidate).
party_type	ENUM('customer','vendor','both','other')	no		Tally: Sundry Debtors → customer, Sundry Creditors → vendor.
gstin	VARCHAR(32)	yes		GST registration number.
pan	VARCHAR(32)	yes		**Sensitive.**
state_code	VARCHAR(8)	yes		GST state code.
country_code	CHAR(2)	yes		Country code.
credit_days	INTEGER	yes		Used for ageing and overdue flags.
credit_limit	NUMERIC(20, 4)	yes		Credit limit.
email	VARCHAR(255)	yes		E-mail address.
phone	VARCHAR(255)	yes		Phone.
source_key	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.

Column	Type	Null	Key	Meaning
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index `ix_parties_raw_record` (raw_record_id).

Refers to: `entity_id` → `entities.id`; `connection_id` → `connections.id`; `import_batch_id` → `import_batches.id`.

Referred to by: `bill_allocations`, `ledgers`, `vouchers`.

`ledgerbridge_accounting.items`

Purpose: Stock items with their opening quantity and value.

Filled by: Transform, from stock item masters (as at the books' beginning).

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
item_group_id	BIGINT UNSIGNED	yes	FK	Refers to `item_groups`.
name	VARCHAR(255)	no		Name as the source keeps it.
code	VARCHAR(255)	yes		Short stable code.
unit_id	BIGINT UNSIGNED	yes	FK	Refers to `units`.
hsn_code	VARCHAR(32)	yes		Hsn code.
gst_rate	NUMERIC(20, 6)	yes		Gst rate.
opening_qty	NUMERIC(20, 6)	no		Opening qty.
opening_value	NUMERIC(20, 4)	no		Opening value.
source_key	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.

Column	Type	Null	Key	Meaning
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index `ix_items_raw_record` (raw_record_id).

Refers to: `entity_id` → `entities.id`; `item_group_id` → `item_groups.id`; `unit_id` → `units.id`; `connection_id` → `connections.id`; `import_batch_id` → `import_batches.id`.

Referred to by: `inventory_lines`.

`ledgerbridge_accounting.item_groups`

Purpose: Stock groups.

Filled by: Transform, from stock group masters.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
parent_id	BIGINT UNSIGNED	yes	FK	The parent row in the same table (a tree).
name	VARCHAR(255)	no		Name as the source keeps it.
source_key	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).

Column	Type	Null	Key	Meaning
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index `ix_item_groups_raw_record` (raw_record_id).

Refers to: `entity_id` → `entities.id`; `parent_id` → `item_groups.id`; `connection_id` → `connections.id`; `import_batch_id` → `import_batches.id`.

Referred to by: `item_groups`, `items`.

`ledgerbridge_accounting.units`

Purpose: Units of measure.

Filled by: Transform, from unit masters.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
symbol	VARCHAR(255)	no		Symbol.
name	VARCHAR(255)	no		Name as the source keeps it.
decimal_places	TINYINT	no		Decimals shown.
source_key	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).

Column	Type	Null	Key	Meaning
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index ix_units_raw_record (raw_record_id).

Refers to: entity_id → entities.id; connection_id → connections.id; import_batch_id → import_batches.id.

Referred to by: inventory_lines, items.

ledgerbridge_accounting.godowns

Purpose: Godowns (locations) and whose stock they hold (holding, ADR-031).

Filled by: Transform, from godown masters.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
parent_id	BIGINT UNSIGNED	yes	FK	The parent row in the same table (a tree).
name	VARCHAR(255)	no		Name as the source keeps it.
holding	ENUM('own','ours_with_third_party','third_party_with_us')	no		own / ours_with_third_party (a job worker's) / third_party_with_us.
source_key	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.

Column	Type	Null	Key	Meaning
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index ix_godowns_raw_record (raw_record_id).

Refers to: entity_id → entities.id; parent_id → godowns.id; connection_id → connections.id; import_batch_id → import_batches.id.

Referred to by: godowns, inventory_lines.

ledgerbridge_accounting.cost_centres

Purpose: Cost centres and their categories.

Filled by: Transform, from cost centre masters.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
parent_id	BIGINT UNSIGNED	yes	FK	The parent row in the same table (a tree).
category	VARCHAR(255)	yes		Category.
name	VARCHAR(255)	no		Name as the source keeps it.
source_key	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).

Column	Type	Null	Key	Meaning
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index ix_cost_centres_raw_record (raw_record_id).

Refers to: entity_id → entities.id; parent_id → cost_centres.id; connection_id → connections.id; import_batch_id → import_batches.id.

Referred to by: cost_centres, line_cost_allocations.

ledgerbridge_accounting.voucher_types

Purpose: The source's voucher types and the standard type each derives from; whether its vouchers post to the books and move stock.

Filled by: Transform, from voucher type masters (type tree resolved, ADR-027).

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
name	VARCHAR(255)	no		Name as the source keeps it.
base_type	ENUM('sales','purchase','payment','receipt','journal','contra','debit_note','credit_note','stock_journal','d	no		Base type.
is_accounting	BOOL	no		Whether accounting.
is_inventory	BOOL	no		Whether inventory.
standard_type	VARCHAR(64)	yes		Standard type.
moves_stock	BOOL	no		Moves stock.
source_key	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index ix_voucher_types_raw_record (raw_record_id).

Refers to: entity_id → entities.id; connection_id → connections.id; import_batch_id → import_batches.id.

Referred to by: vouchers.

ledgerbridge_accounting.dimensions

Purpose: User-defined reporting dimensions (DAT-005), e.g. a promoted UDF.

Filled by: promote-field, from the field catalogue.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
code	VARCHAR(64)	no	UK	Short stable code.
name	VARCHAR(255)	no		Name as the source keeps it.
applies_to	ENUM('voucher','line')	no		Applies to.
is_active	BOOL	no		Whether it is in use.
source_object_type	VARCHAR(64)	yes		Source object type.
source_field	VARCHAR(255)	yes		Source field.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (code).

Referred to by: dimension_values.

ledgerbridge_accounting.dimension_values

Purpose: The values of a dimension.

Filled by: Transform, for promoted fields.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
dimension_id	BIGINT UNSIGNED	no	FK, UK	Refers to dimensions.
entity_id	BIGINT UNSIGNED	yes	FK	The entity (company) the row belongs to.
parent_id	BIGINT UNSIGNED	yes	FK	The parent row in the same table (a tree).
code	VARCHAR(64)	no	UK	Short stable code.
name	VARCHAR(255)	no		Name as the source keeps it.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (dimension_id, code).

Refers to: dimension_id → dimensions.id; entity_id → entities.id; parent_id → dimension_values.id.

Referred to by: dimension_values, line_dimensions.

ledgerbridge_accounting: transactions

`ledgerbridge_accounting.vouchers`

Purpose: Vouchers (transactions) with their type, number, date, party and flags.

Filled by: Transform, from voucher records; replaced as a whole with their child rows (schema.md 8 rule 7).

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`entity_id`	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
`branch_id`	BIGINT UNSIGNED	yes	FK	Refers to `branches`.
`voucher_type_id`	BIGINT UNSIGNED	no	FK	Refers to `voucher_types`.
`voucher_number`	VARCHAR(255)	no		The source's voucher number (up to 255 characters).
`voucher_date`	DATE	no		The voucher's date (denormalised for fast period queries).
`reference_number`	VARCHAR(255)	yes		The source's reference (e.g. the supplier's invoice number).
`reference_date`	DATE	yes		Reference date.
`effective_date`	DATE	yes		The source's effective date (Tally `EFFECTIVEDATE`); balances count by `voucher_date`, as Tally does. Migration `0016`.
`party_id`	BIGINT UNSIGNED	yes	FK	Main party, if any.
`narration`	TEXT	yes		Searchable via RAG later (AI-010).
`currency_code`	CHAR(3)	no	FK	Currency (ISO code).
`exchange_rate`	NUMERIC(20, 8)	no		Exchange rate.
`is_cancelled`	BOOL	no		Whether cancelled.
`is_optional`	BOOL	no		Tally optional/memo vouchers, excluded from books.
`is_post_dated`	BOOL	no		The source marks it post-dated; it counts from its date.
`source_key`	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
`source_alter_id`	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
`origin`	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
`raw_record_id`	BIGINT UNSIGNED	yes		The raw record it was transformed from.

Column	Type	Null	Key	Meaning
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index `ix_vouchers_entity_date` (entity_id, voucher_date); index `ix_vouchers_entity_type_date` (entity_id, voucher_type_id, voucher_date); index `ix_vouchers_party_date` (party_id, voucher_date); index `ix_vouchers_raw_record` (raw_record_id).

Refers to: `entity_id` → `entities.id`; `branch_id` → `branches.id`; `voucher_type_id` → `voucher_types.id`; `party_id` → `parties.id`; `currency_code` → `currencies.code`; `connection_id` → `connections.id`; `import_batch_id` → `import_batches.id`.

Referred to by: `inventory_lines`, `tax_lines`, `voucher_lines`.

ledgerbridge_accounting.voucher_lines

Purpose: The double-entry lines of each voucher (debit +, credit −); `is_effective` says whether a line counts in the books.

Filled by: Transform, with the voucher.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
voucher_id	BIGINT UNSIGNED	no	FK	Refers to `vouchers`.
entity_id	BIGINT UNSIGNED	no	FK	Denormalized for fast filtering.
voucher_date	DATE	no		Denormalized for fast period queries.
line_no	INTEGER	no		Position of the line in its voucher.
ledger_id	BIGINT UNSIGNED	no	FK	Refers to `ledgers`.
amount	NUMERIC(20, 4)	no		Base currency, debit +, credit −.
amount_fc	NUMERIC(20, 4)	yes		Foreign-currency amount (Tally: the part before `@` of `-$100.00 @ Rs82.00/$ = -Rs8200.00`); its rate is `amount / amount_fc`. NULL in the base currency.
currency_name	VARCHAR(64)	yes		Currency name.
exchange_rate	NUMERIC(20, 8)	yes		Exchange rate.
is_party_line	BOOL	no		Whether party line.

Column	Type	Null	Key	Meaning
is_effective	BOOL	no		Counts in the books: not cancelled, optional or deleted, and of a type that posts.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: index ix_voucher_lines_entity_ledger_date (entity_id, ledger_id, voucher_date); index ix_voucher_lines_voucher (voucher_id).

Refers to: voucher_id → vouchers.id, on delete cascade; entity_id → entities.id; ledger_id → ledgers.id.

Referred to by: bill_allocations, line_cost_allocations, line_dimensions, tax_lines.

ledgerbridge_accounting.bill_allocations

Purpose: Bill-wise allocations of a line (receivables and payables ageing).

Filled by: Transform, with the voucher.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
voucher_line_id	BIGINT UNSIGNED	no	FK	Refers to voucher_lines.
party_id	BIGINT UNSIGNED	yes	FK	Refers to parties.
bill_type	ENUM('new_ref','against_ref','advance','on_account')	no		Bill type.
bill_name	VARCHAR(255)	yes		Bill name.
bill_date	DATE	yes		Bill date.
due_date	DATE	yes		Due date.
amount	NUMERIC(20, 4)	no		Amount in the base currency, canonical sign (debit +, credit −).
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: voucher_line_id → voucher_lines.id, on delete cascade; party_id → parties.id.

ledgerbridge_accounting.line_cost_allocations

Purpose: Cost centre allocations of a line.

Filled by: Transform, with the voucher.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
voucher_line_id	BIGINT UNSIGNED	no	FK	Refers to voucher_lines.
cost_centre_id	BIGINT UNSIGNED	no	FK	Refers to cost_centres.

Column	Type	Null	Key	Meaning
amount	NUMERIC(20, 4)	no		Amount in the base currency, canonical sign (debit +, credit −).
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: voucher_line_id → voucher_lines.id, on delete cascade; cost_centre_id → cost_centres.id.

ledgerbridge_accounting.line_dimensions

Purpose: A voucher line's value for each dimension.

Filled by: Transform, with the voucher.

Column	Type	Null	Key	Meaning
voucher_line_id	BIGINT UNSIGNED	no	PK, FK	Refers to voucher_lines.
dimension_value_id	BIGINT UNSIGNED	no	PK, FK	Refers to dimension_values.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: voucher_line_id → voucher_lines.id, on delete cascade; dimension_value_id → dimension_values.id.

ledgerbridge_accounting.inventory_lines

Purpose: Stock movements of a voucher (in +, out −) by item, godown and batch; stock_quantity is what moves stock (tracked lines move nothing).

Filled by: Transform, with the voucher.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
voucher_id	BIGINT UNSIGNED	no	FK	Refers to vouchers.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
voucher_date	DATE	no		The voucher's date (denormalised for fast period queries).
line_no	INTEGER	no		Position of the line in its voucher.
item_id	BIGINT UNSIGNED	no	FK	Refers to items.
godown_id	BIGINT UNSIGNED	yes	FK	Refers to godowns.
quantity	NUMERIC(20, 6)	no		Quantity.
stock_quantity	NUMERIC(20, 6)	no		What the line moves in stock: the quantity less the part tracked to a note.
unit_id	BIGINT UNSIGNED	yes	FK	Refers to units.
rate	NUMERIC(20, 6)	yes		Rate.

Column	Type	Null	Key	Meaning
amount	NUMERIC(20, 4)	no		Amount in the base currency, canonical sign (debit +, credit −).
discount_pct	NUMERIC(20, 6)	yes		Discount pct.
batch_name	VARCHAR(255)	yes		Batch name.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: voucher_id → vouchers.id, on delete cascade; entity_id → entities.id; item_id → items.id; godown_id → godowns.id; unit_id → units.id.

ledgerbridge_accounting.tax_lines

Purpose: Tax amounts of a voucher (GST, TDS, …) from lines posted to tax ledgers.

Filled by: Transform, with the voucher.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
voucher_id	BIGINT UNSIGNED	no	FK	Refers to vouchers.
voucher_line_id	BIGINT UNSIGNED	yes	FK	Refers to voucher_lines.
tax_type	ENUM('cgst','sgst','igst','cess','tds','tcs','vat','other')	no		Tax type.
rate	NUMERIC(20, 6)	yes		Rate.
taxable_amount	NUMERIC(20, 4)	yes		Taxable amount.
tax_amount	NUMERIC(20, 4)	no		Tax amount.
hsn_code	VARCHAR(32)	yes		Hsn code.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: voucher_id → vouchers.id, on delete cascade; voucher_line_id → voucher_lines.id, on delete cascade.

ledgerbridge_accounting: field catalogue

ledgerbridge_accounting.source_fields

Purpose: Field catalogue (ADR-025): every source field that has no column, kept in extra, with counts and an inferred type.

Filled by: Transform.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK, UK	The entity (company) the row belongs to.
object_type	VARCHAR(64)	no	UK	Kind of source object.
field_path	VARCHAR(255)	no	UK	Field path.
prefix	VARCHAR(64)	yes		Prefix.
inferred_type	ENUM('text','number','date','flag','mixed')	no		Inferred type.

Column	Type	Null	Key	Meaning
record_count	BIGINT	no		Record count.
first_seen_at	DATETIME(6)	no		When: first seen.
last_seen_at	DATETIME(6)	no		When: last seen.

Keys and indexes: unique (entity_id, object_type, field_path).

Refers to: entity_id → entities.id.

ledgerbridge_accounting: source figures

ledgerbridge_accounting.stock_values

Purpose: The source's own stock value as of a date (DAT-013, ADR-040): the total its Profit and Loss uses, and by stock group and godown.

Filled by: Validation (as-of date, year ends) and ./dev.ps1 statements (every month end and year end).

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK, UK	The entity (company) the row belongs to.
connection_id	BIGINT UNSIGNED	no	FK	The connection the row came from.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
as_of	DATE	no	UK	As of.
scope	ENUM('total','stock_group','godown')	no	UK	total (what the source's profit uses), stock_group or godown.
scope_name	VARCHAR(255)	no	UK	Scope name.
opening_value	NUMERIC(20, 4)	yes		Opening value.
closing_value	NUMERIC(20, 4)	yes		Closing value.
integrated	BOOL	yes		Whether the source integrates accounts with inventory (total rows).
read_at	DATETIME(6)	no		When: read.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (entity_id, as_of, scope, scope_name).

Refers to: entity_id → entities.id; connection_id → connections.id.

ledgerbridge_accounting.fx_revaluation_snapshots

Purpose: Each foreign-currency ledger's balance as the source reports it (revalued at current rates) against its book value (FX-004, ADR-037, ADR-040).

Filled by: Validation and ./dev.ps1 statements, for each date.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.

Column	Type	Null	Key	Meaning
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
ledger_id	BIGINT UNSIGNED	no	FK, UK	Refers to ledgers.
connection_id	BIGINT UNSIGNED	no	FK	The connection the row came from.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
as_of	DATE	no	UK	Month end, financial year end or validation date (a reliable date in Educational mode, core/dates.py).
currency_code	CHAR(3)	yes		Currency (ISO code).
balance_fc	NUMERIC(20, 4)	yes		The source's own balance in the currency (the foreign part of its closing balance).
book_value	NUMERIC(20, 4)	no		The source's base-currency value of its vouchers (closing balance less the calculated line).
revalued_value	NUMERIC(20, 4)	no		The source's closing balance at current rates.
unrealised_gain_loss	NUMERIC(20, 4)	no		Book value less revalued value (a debit is an unrealised loss).
read_at	DATETIME(6)	no		When: read.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (ledger_id, as_of); index ix_fx_revaluation_entity_date (entity_id, as_of).

Refers to: entity_id → entities.id; ledger_id → ledgers.id; connection_id → connections.id.

ledgerbridge_reporting: statements, ours and the source's (views on top)

ledgerbridge_reporting.statement_lines

Purpose: Trial Balance, Profit & Loss and Balance Sheet lines, ours and the source's, as of each stored date (RPT-012, ADR-040); the views v_trial_balance, v_profit_loss, v_balance_sheet, v_statement_check and v_statement_open_differences read them.

Filled by: Validation and ./dev.ps1 statements (core/statements.py).

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK, UK	The entity (company) the row belongs to.
as_of	DATE	no	UK	As of.
statement	ENUM('trial_balance','profit_loss','balance_sheet')	no	UK	Statement.

Column	Type	Null	Key	Meaning
figures	ENUM('ours','source')	no	UK	ours (built here) or source (the source's own report).
line_no	INTEGER	no	UK	Position of the line in its voucher.
section	VARCHAR(32)	yes		Section.
label	VARCHAR(255)	no		Label.
match_key	VARCHAR(255)	no		The label as both sides are compared.
level	ENUM('main','sub','detail')	no		main, sub (inside a block) or detail (ours only, never compared).
amount	NUMERIC(20, 4)	no		Amount in the base currency, canonical sign (debit +, credit −).
debit	NUMERIC(20, 4)	yes		Debit.
credit	NUMERIC(20, 4)	yes		Credit.
refreshed_at	DATETIME(6)	no		When: refreshed.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (entity_id, as_of, statement, figures, line_no); index `ix_statement_lines_match` (entity_id, as_of, statement, match_key).

Refers to: `entity_id` → `entities.id`.

`ledgerbridge_system`: connections and sync

`ledgerbridge_system.sources`

Purpose: Registered connector types (e.g. `tally`).

Filled by: Seeded on first use.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
code	VARCHAR(32)	no	UK	Short stable code.
name	VARCHAR(255)	no		Name as the source keeps it.
connector_version	VARCHAR(32)	no		Connector version.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (code).

Referred to by: `connections`.

`ledgerbridge_system.agents`

Purpose: Connector agents near on-premise sources (Phase 1b).

Filled by: Not filled yet.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
name	VARCHAR(255)	no	UK	Name as the source keeps it.
cert_fingerprint	VARCHAR(128)	yes		Cert fingerprint.
version	VARCHAR(32)	yes		Version.
last_seen_at	DATETIME(6)	yes		When: last seen.
status	ENUM('active','disabled')	no		Current state.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (name).

Referred to by: connections.

ledgerbridge_system.connections

Purpose: Each configured connection: source, origin, companies, settings, status.

Filled by: connect; status by connect -Activate / -Paused.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
source_id	BIGINT UNSIGNED	no	FK	Refers to sources.
name	VARCHAR(255)	no	UK	Name as the source keeps it.
config	JSON	no		Config.
credentials_enc	VARBINARY(4096)	yes		Credentials enc.
agent_id	BIGINT UNSIGNED	yes	FK	Refers to agents.
sync_interval_sec	INTEGER	no		Sync interval sec.
status	ENUM('active','paused','error')	no		Current state.
created_by	VARCHAR(36)	yes		Created by.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (name).

Refers to: source_id → sources.id; agent_id → agents.id.

Referred to by: account_groups, alerts, cost_centres, currency_sources, entity_sources, file_layouts, fx_revaluation_snapshots, godowns, import_batches, item_groups, items, ledgers, parties, raw_records, stock_values, sync_checkpoints, sync_logs, sync_markers, sync_runs, sync_slow_periods, sync_unverified_ranges, units, voucher_types, vouchers.

ledgerbridge_system.sync_markers

Purpose: The last AlterID stored per connection, company and object type (incremental syncs).

Filled by: Sync.

Column	Type	Null	Key	Meaning
connection_id	BIGINT UNSIGNED	no	PK, FK	The connection the row came from.
source_entity_key	VARCHAR(191)	no	PK	The source company's key (Tally: company GUID).
object_type	VARCHAR(64)	no	PK	Kind of source object.
marker_value	VARCHAR(191)	no		Marker value.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: connection_id → connections.id.

ledgerbridge_system.sync_runs

Purpose: Every sync, deletion check and transform run with its status and counts (SYN-005).

Filled by: Sync, deletion check, transform.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
connection_id	BIGINT UNSIGNED	no	FK	The connection the row came from.
run_type	ENUM('incremental','full','import','deletion_check','transform')	no		Run type.
status	ENUM('running','succeeded','failed','interrupted')	no		Current state.
started_at	DATETIME(6)	no		When it started.
finished_at	DATETIME(6)	yes		When it finished.
records_received	INTEGER	no		Records received.
records_failed	INTEGER	no		Records failed.
error_summary	TEXT	yes		Error summary.
heartbeat_at	DATETIME(6)	yes		When: heartbeat.
pid	INTEGER	yes		Pid.
host	VARCHAR(64)	yes		Host.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: connection_id → connections.id.

Referred to by: alerts, raw_records, sync_checkpoints, sync_unverified_ranges, validation_runs.

ledgerbridge_system.sync_logs

Purpose: Output lines of a background job, for sync watch (ADR-024).

Filled by: Background jobs.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
connection_id	BIGINT UNSIGNED	no	FK	The connection the row came from.
job_id	CHAR(36)	no		Job id.
logged_at	DATETIME(6)	no		When: logged.

Column	Type	Null	Key	Meaning
line	TEXT	no		Line.

Keys and indexes: index ix_sync_logs_job (job_id, id).

Refers to: connection_id → connections.id.

ledgerbridge_system.sync_checkpoints

Purpose: Chunks of a full sync fetched and stored, so an interrupted one resumes (ADR-022).

Filled by: Sync.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
source_entity_key	VARCHAR(191)	no	UK	The source company's key (Tally: company GUID).
object_type	VARCHAR(64)	no		Kind of source object.
chunk_key	VARCHAR(128)	no	UK	e.g. voucher:2023-04-01..2023-04-30
records	INTEGER	no		Records.
sync_run_id	BIGINT UNSIGNED	yes	FK	The sync run it belongs to.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_entity_key, chunk_key).

Refers to: connection_id → connections.id; sync_run_id → sync_runs.id.

ledgerbridge_system.sync_slow_periods

Purpose: Months the source couldn't deliver in one request; later runs split them directly.

Filled by: Sync.

Column	Type	Null	Key	Meaning
connection_id	BIGINT UNSIGNED	no	PK, FK	The connection the row came from.
source_entity_key	VARCHAR(191)	no	PK	The source company's key (Tally: company GUID).
object_type	VARCHAR(64)	no	PK	Kind of source object.
month	DATE	no	PK	first day of the month
piece_days	INTEGER	no		Piece days.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: connection_id → connections.id.

ledgerbridge_system.sync_unverified_ranges

Purpose: Date ranges whose records couldn't be proven complete (ADR-023).

Filled by: Sync.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
connection_id	BIGINT UNSIGNED	no	FK	The connection the row came from.
source_entity_key	VARCHAR(191)	no		The source company's key (Tally: company GUID).
object_type	VARCHAR(64)	no		Kind of source object.
period_from	DATE	no		Period from.
period_to	DATE	no		Period to.
reason	VARCHAR(255)	no		counts and kinds only, never names
sync_run_id	BIGINT UNSIGNED	yes	FK	The sync run it belongs to.
resolved_at	DATETIME(6)	yes		When it was resolved (NULL while open).
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: index ix_sync_unverified_open (connection_id, source_entity_key, resolved_at).

Refers to: connection_id → connections.id; sync_run_id → sync_runs.id.

ledgerbridge_system.import_batches

Purpose: Backup or file imports (IMP-003, IMP-004).

Filled by: Imports (later).

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
connection_id	BIGINT UNSIGNED	no	FK	The connection the row came from.
kind	ENUM('backup','file')	no		Kind.
file_name	VARCHAR(255)	yes		File name.
file_sha256	CHAR(64)	yes		File sha256.
period_from	DATE	yes		Period from.
period_to	DATE	yes		Period to.
status	ENUM('pending','running','succeeded','failed')	no		Current state.
created_by	VARCHAR(36)	yes		Created by.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: connection_id → connections.id.

Referred to by: account_groups, cost_centres, currency_sources, godowns, item_groups, items, ledgers, parties, raw_records, units, validation_runs, voucher_types, vouchers.

`ledgerbridge_system.file_layouts`

Purpose: Saved CSV/TXT column mappings (CON-003).

Filled by: Not filled yet.

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`connection_id`	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
`name`	VARCHAR(255)	no	UK	Name as the source keeps it.
`column_mapping`	JSON	no		Column mapping.
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, name).

Refers to: `connection_id` → `connections.id`.

`ledgerbridge_system`: validation and alerts

`ledgerbridge_system.validation_runs`

Purpose: Each validation of an entity as of a date, with counts (VAL-001).

Filled by: Validation after every sync and on `validate`.

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`sync_run_id`	BIGINT UNSIGNED	yes	FK	The sync run it belongs to.
`import_batch_id`	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
`entity_id`	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
`as_of`	DATE	no		As of.
`started_at`	DATETIME(6)	no		When it started.
`status`	ENUM('running','passed','failed')	no		Current state.
`checks_passed`	INTEGER	no		Checks passed.
`checks_failed`	INTEGER	no		Checks failed.
`thorough`	BOOL	yes		Whether the source's controls (counts, stock, bills, year ends) were compared.
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: `sync_run_id` → `sync_runs.id`; `import_batch_id` → `import_batches.id`; `entity_id` → `entities.id`.

Referred to by: `alerts`, `validation_issues`.

`ledgerbridge_system.validation_issues`

Purpose: Each failed check of a run, with its code and the two figures; resolved when a later run no longer finds it.

Filled by: Validation.

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`validation_run_id`	BIGINT UNSIGNED	no	FK	Refers to `validation_runs`.
`check_code`	VARCHAR(64)	no		The check (see the error catalogue, LB-VAL-xxx).
`severity`	ENUM('error','warning','info')	no		Severity.
`object_type`	VARCHAR(64)	yes		Kind of source object.
`object_id`	VARCHAR(64)	yes		Object id.
`expected_value`	NUMERIC(20, 4)	yes		Expected value.
`actual_value`	NUMERIC(20, 4)	yes		Actual value.
`message`	TEXT	no		Message.
`resolved_at`	DATETIME(6)	yes		When it was resolved (NULL while open).
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: `validation_run_id` → `validation_runs.id`.

`ledgerbridge_system.alerts`

Purpose: In-app alerts: one open per connection and kind (SYN-006, ADR-019).

Filled by: Sync and validation.

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`kind`	ENUM('sync_failed','detection_check_failed','validation_failed')	no		Kind.
`severity`	ENUM('error','warning')	no		Severity.
`connection_id`	BIGINT UNSIGNED	no	FK	The connection the row came from.
`entity_id`	BIGINT UNSIGNED	yes	FK	The entity (company) the row belongs to.
`sync_run_id`	BIGINT UNSIGNED	yes	FK	The sync run it belongs to.
`validation_run_id`	BIGINT UNSIGNED	yes	FK	Refers to `validation_runs`.
`message`	TEXT	no		Message.
`resolved_at`	DATETIME(6)	yes		When it was resolved (NULL while open).
`resolution`	VARCHAR(255)	yes		why resolved
`acknowledged_at`	DATETIME(6)	yes		When: acknowledged.
`acknowledged_by`	VARCHAR(36)	yes		Acknowledged by.
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: index `ix_alerts_open` (connection_id, kind, resolved_at).

Refers to: `connection_id` → `connections.id`; `entity_id` → `entities.id`; `sync_run_id` → `sync_runs.id`; `validation_run_id` → `validation_runs.id`.

`ledgerbridge_system`: users, roles and access

`ledgerbridge_system.users`

Purpose: Users (same id as the control plane); local password only with AUTH_MODE=local.

Filled by: M5.

Column	Type	Null	Key	Meaning
`id`	CHAR(36)	no	PK	same ID as the control plane
`email`	VARCHAR(255)	no	UK	E-mail address.
`display_name`	VARCHAR(255)	no		Display name.
`status`	ENUM('active','disabled','locked')	no		Current state.
`password_hash`	VARCHAR(255)	yes		Password hash.
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (email).

Referred to by: `user_entity_access`, `user_roles`.

`ledgerbridge_system.roles`

Purpose: Roles.

Filled by: M5 (seeded defaults).

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`code`	VARCHAR(64)	no	UK	Short stable code.
`name`	VARCHAR(255)	no		Name as the source keeps it.
`is_system`	BOOL	no		Whether system.
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (code).

Referred to by: `masking_rules`, `role_permissions`, `user_roles`.

`ledgerbridge_system.permissions`

Purpose: Permission codes, e.g. `validation.view`.

Filled by: M5 (seeded).

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`code`	VARCHAR(64)	no	UK	Short stable code.

Column	Type	Null	Key	Meaning
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (code).

Referred to by: role_permissions.

ledgerbridge_system.role_permissions

Purpose: Which role has which permission.

Filled by: M5.

Column	Type	Null	Key	Meaning
role_id	BIGINT UNSIGNED	no	PK, FK	Refers to roles.
permission_id	BIGINT UNSIGNED	no	PK, FK	Refers to permissions.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: role_id → roles.id; permission_id → permissions.id.

ledgerbridge_system.user_roles

Purpose: Which user has which role.

Filled by: M5.

Column	Type	Null	Key	Meaning
user_id	CHAR(36)	no	PK, FK	Refers to users.
role_id	BIGINT UNSIGNED	no	PK, FK	Refers to roles.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: user_id → users.id; role_id → roles.id.

ledgerbridge_system.user_entity_access

Purpose: Which entities (and branches) a user may see (ACC-002).

Filled by: M5.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
user_id	CHAR(36)	no	FK, UK	Refers to users.
entity_id	BIGINT UNSIGNED	no	FK, UK	The entity (company) the row belongs to.
branch_id	BIGINT UNSIGNED	yes	FK, UK	Refers to branches.

Column	Type	Null	Key	Meaning
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (user_id, entity_id, branch_id).

Refers to: user_id → users.id; entity_id → entities.id; branch_id → branches.id.

ledgerbridge_system.masking_rules

Purpose: Masking per role for sensitive fields (ACC-003, AI-015).

Filled by: M5 / M8.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
role_id	BIGINT UNSIGNED	no	FK	Refers to roles.
target	VARCHAR(64)	no		e.g. party.name, party.pan
mask_type	ENUM('hide','partial','hash')	no		Mask type.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: role_id → roles.id.

ledgerbridge_system: audit and AI log

ledgerbridge_system.audit_log

Purpose: Append-only audit trail (AUD-001).

Filled by: API and workers (M5).

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
occurred_at	DATETIME(6)	no		When: occurred.
user_id	CHAR(36)	yes		User id.
action	VARCHAR(64)	no		Action.
object_type	VARCHAR(64)	yes		Kind of source object.
object_id	VARCHAR(64)	yes		Object id.
entity_id	BIGINT UNSIGNED	yes	FK	The entity (company) the row belongs to.
details	JSON	yes		Details.
ip_address	VARCHAR(45)	yes		Ip address.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: index ix_audit_log_occurred_at (occurred_at); index ix_audit_log_user_id (user_id).

Refers to: entity_id → entities.id.

`ledgerbridge_system.ai_query_log`

Purpose: One row per AI question (AI-007).

Filled by: M8.

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`user_id`	CHAR(36)	yes		User id.
`question`	TEXT	no		Question.
`generated_sql`	TEXT	yes		Generated sql.
`status`	ENUM('succeeded','failed','refused')	no		Current state.
`row_count`	INTEGER	yes		Row count.
`duration_ms`	INTEGER	yes		Duration ms.
`provider`	VARCHAR(64)	yes		Provider.
`model`	VARCHAR(128)	yes		Model.
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: index `ix_ai_query_log_user_created` (user_id, created_at).

`ledgerbridge_system`: configuration

`ledgerbridge_system.kpi_definitions`

Purpose: Business health indicators and thresholds (RPT-002).

Filled by: M6.

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`code`	VARCHAR(64)	no	UK	Short stable code.
`name`	VARCHAR(255)	no		Name as the source keeps it.
`formula_view`	VARCHAR(128)	no		Formula view.
`good_threshold`	NUMERIC(20, 4)	yes		Good threshold.
`bad_threshold`	NUMERIC(20, 4)	yes		Bad threshold.
`direction`	ENUM('higher_better','lower_better')	no		Direction.
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (code).

`ledgerbridge_system.settings`

Purpose: Key-value settings.

Filled by: Configuration.

Column	Type	Null	Key	Meaning
`key`	VARCHAR(128)	no	PK	Key.
`value`	JSON	no		Value.
`created_at`	DATETIME(6)	no		When the row was created (UTC).

Column	Type	Null	Key	Meaning
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

`ledgerbridge_reporting`

No tables yet: the reporting views and aggregate tables are built in M6 (designed in schema.md Section 6).