Contents

Database schema reference **2**

1. The four databases . . . 2
2. Database users and their rights . . . 3
3. Diagrams . . . 4
4. Tables . . . 8

`ledgerbridge_source`: raw layer: data as received . . . 8
- `ledgerbridge_source.raw_records` . . . 8

`ledgerbridge_accounting`: organisation and chart of accounts . . . 9
- `ledgerbridge_accounting.entities` . . . 9
- `ledgerbridge_accounting.entity_sources` . . . 10
- `ledgerbridge_accounting.branches` . . . 10
- `ledgerbridge_accounting.financial_years` . . . 11
- `ledgerbridge_accounting.currencies` . . . 11
- `ledgerbridge_accounting.currency_sources` . . . 12
- `ledgerbridge_accounting.exchange_rates` . . . 13
- `ledgerbridge_accounting.standard_accounts` . . . 13
- `ledgerbridge_accounting.account_groups` . . . 14
- `ledgerbridge_accounting.ledgers` . . . 15

`ledgerbridge_accounting`: masters . . . 17
- `ledgerbridge_accounting.parties` . . . 17
- `ledgerbridge_accounting.items` . . . 19
- `ledgerbridge_accounting.item_opening_batches` . . . 20
- `ledgerbridge_accounting.item_groups` . . . 20
- `ledgerbridge_accounting.units` . . . 21
- `ledgerbridge_accounting.godowns` . . . 22
- `ledgerbridge_accounting.cost_categories` . . . 23
- `ledgerbridge_accounting.cost_centres` . . . 24
- `ledgerbridge_accounting.tax_units` . . . 24
- `ledgerbridge_accounting.stock_categories` . . . 25
- `ledgerbridge_accounting.item_prices` . . . 26
- `ledgerbridge_accounting.source_budgets` . . . 27
- `ledgerbridge_accounting.source_budget_lines` . . . 28
- `ledgerbridge_accounting.voucher_types` . . . 28
- `ledgerbridge_accounting.voucher_number_series` . . . 29
- `ledgerbridge_accounting.dimensions` . . . 30
- `ledgerbridge_accounting.dimension_values` . . . 30

`ledgerbridge_accounting`: transactions . . . 31
- `ledgerbridge_accounting.vouchers` . . . 31
- `ledgerbridge_accounting.voucher_lines` . . . 33
- `ledgerbridge_accounting.bill_allocations` . . . 35
- `ledgerbridge_accounting.opening_bills` . . . 35
- `ledgerbridge_accounting.voucher_orders` . . . 36
- `ledgerbridge_accounting.line_gst_rates` . . . 36
- `ledgerbridge_accounting.line_cost_allocations` . . . 36
- `ledgerbridge_accounting.line_dimensions` . . . 37
- `ledgerbridge_accounting.inventory_lines` . . . 37
- `ledgerbridge_accounting.tax_lines` . . . 38
- `ledgerbridge_accounting.voucher_versions` . . . 38
- `ledgerbridge_accounting.voucher_version_lines` . . . 39
- `ledgerbridge_accounting.voucher_ledger_changes` . . . 40

`ledgerbridge_accounting`: field catalogue . . . 40
- `ledgerbridge_accounting.source_fields` . . . 40

`ledgerbridge_accounting`: source figures . . . 41
- `ledgerbridge_accounting.stock_values` . . . 41
- `ledgerbridge_accounting.fx_revaluation_snapshots` . . . 41

`ledgerbridge_accounting`: settings for the figures . . . 42

ledgerbridge_accounting.short_term_borrowings . . . 42
ledgerbridge_reporting: statements, ours and the source's (views on top) . . . 43
ledgerbridge_reporting.statement_lines . . . 43
ledgerbridge_system: connections and sync . . . 43
ledgerbridge_system.sources . . . 43
ledgerbridge_system.agents . . . 44
ledgerbridge_system.connections . . . 44
ledgerbridge_system.sync_markers . . . 45
ledgerbridge_system.sync_runs . . . 45
ledgerbridge_system.sync_logs . . . 46
ledgerbridge_system.sync_checkpoints . . . 46
ledgerbridge_system.sync_slow_periods . . . 47
ledgerbridge_system.sync_unverified_ranges . . . 47
ledgerbridge_system.import_batches . . . 47
ledgerbridge_system.file_layouts . . . 48
ledgerbridge_system: validation and alerts . . . 48
ledgerbridge_system.validation_runs . . . 48
ledgerbridge_system.validation_issues . . . 49
ledgerbridge_system.alerts . . . 50
ledgerbridge_system: users, roles and access . . . 50
ledgerbridge_system.users . . . 50
ledgerbridge_system.roles . . . 51
ledgerbridge_system.permissions . . . 51
ledgerbridge_system.role_permissions . . . 51
ledgerbridge_system.user_roles . . . 52
ledgerbridge_system.user_entity_access . . . 52
ledgerbridge_system.masking_rules . . . 52
ledgerbridge_system: audit and AI log . . . 53
ledgerbridge_system.audit_log . . . 53
ledgerbridge_system.ai_query_log . . . 53
ledgerbridge_system: configuration . . . 53
ledgerbridge_system.kpi_definitions . . . 53
ledgerbridge_system.settings . . . 54
ledgerbridge_reporting . . . 54

Database schema reference

Every database, table and column of the client-hosted data plane (MySQL 8), generated from the code. For the design and its reasons see schema.md and the decision log in architecture.md; for the conversion and validation rules see the rulebook.


71 tables, 844 columns.

Conventions. Amounts are `DECIMAL(20,4)` in the base currency with the **canonical sign**: debit positive, credit negative (schema.md 1, 7.1). Every accounting table carries its source tracking columns (`connection_id`, `source_key`, `source_alter_id`, `origin`, `import_batch_id`, `raw_record_id`). Rows deleted in the source are kept with `is_deleted` (soft delete). `PK` primary key, `FK` foreign key, `UK` part of a unique key.

1. The four databases

Database	What it holds	Tables
`ledgerbridge_source`	Raw layer: every record exactly as the source sent it (ADR-005). Written only by connectors through the sync; the transform reads it.	1

Database	What it holds	Tables
`ledgerbridge_accounting`	Canonical model: companies, chart of accounts, masters and transactions in one shape for every source. Written by the transform; read by validation, reports and (later) the reporting layer.	44
`ledgerbridge_reporting`	Semantic layer for reports and AI (M6): views and aggregate tables. Empty until M6; the only database the AI user can read (AI-003).	1
`ledgerbridge_system`	Running the platform: connections, sync runs and progress, validation, alerts, users, roles, audit and AI logs, configuration.	25

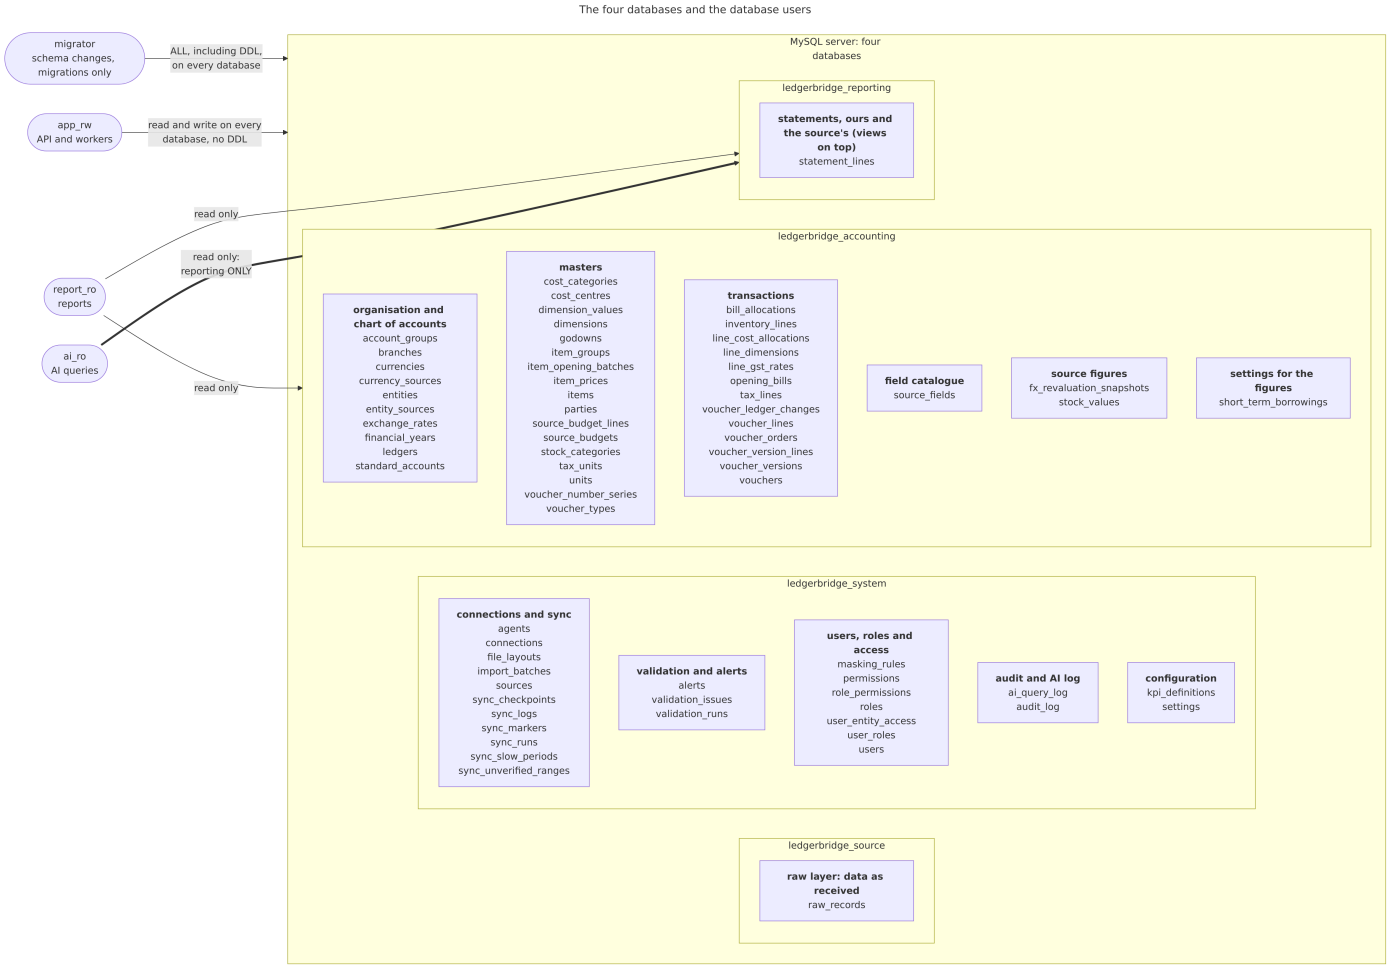

2. Database users and their rights


Created by `deploy/mysql/init/01-schemas.sh` (schema.md 2.1). Each user has only the rights it needs; the AI can read the reporting layer and nothing else.

User	Used by	Rights	Databases
`migrator`	schema changes, migrations only	ALL, including DDL, on every database	`ledgerbridge_source`, `ledgerbridge_system`, `ledgerbridge_accounting`, `ledgerbridge_reporting`
`app_rw`	API and workers	read and write on every database, no DDL	`ledgerbridge_source`, `ledgerbridge_system`, `ledgerbridge_accounting`, `ledgerbridge_reporting`
`report_ro`	reports	read only	`ledgerbridge_accounting`, `ledgerbridge_reporting`
`ai_ro`	AI queries	read only: reporting ONLY	`ledgerbridge_reporting`


3. Diagrams

How to read them: docs/diagrams/README.md.


Overview (keys only)

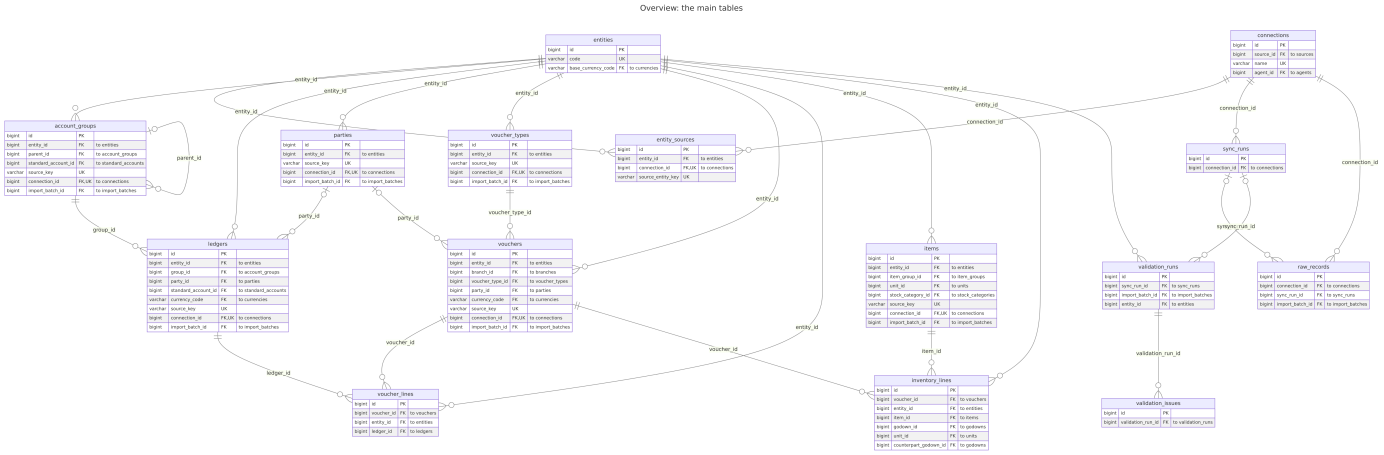


Organisation and chart of accounts (ledgerbridge_accounting)

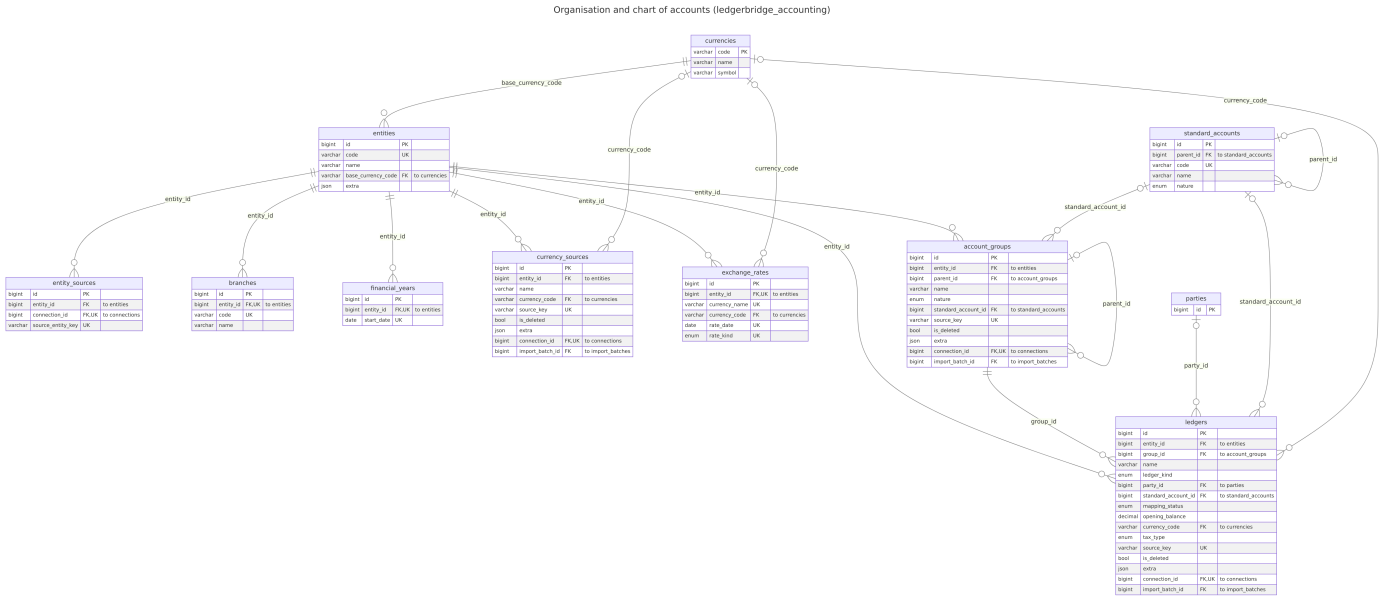


Masters: parties, items, units, godowns, cost centres, voucher types, dimensions (ledgerbridge_accounting)

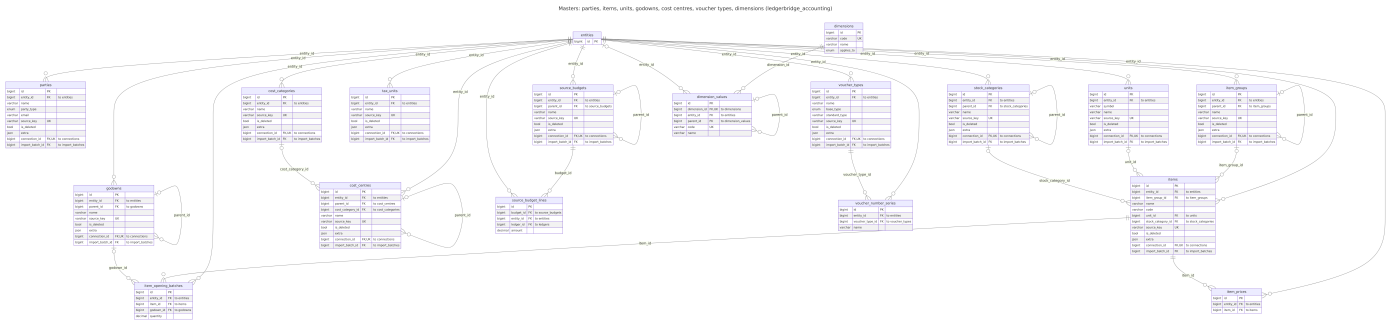


Transactions: vouchers, child tables and observed history (ledgerbridge_accounting)

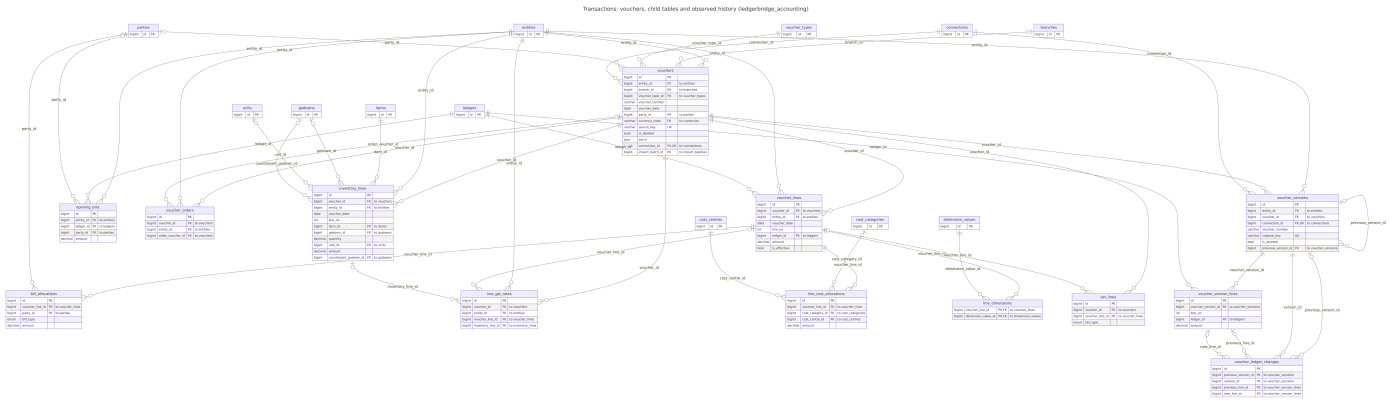

System, part 1: connections, sync, raw records, validation, alerts, field catalogue

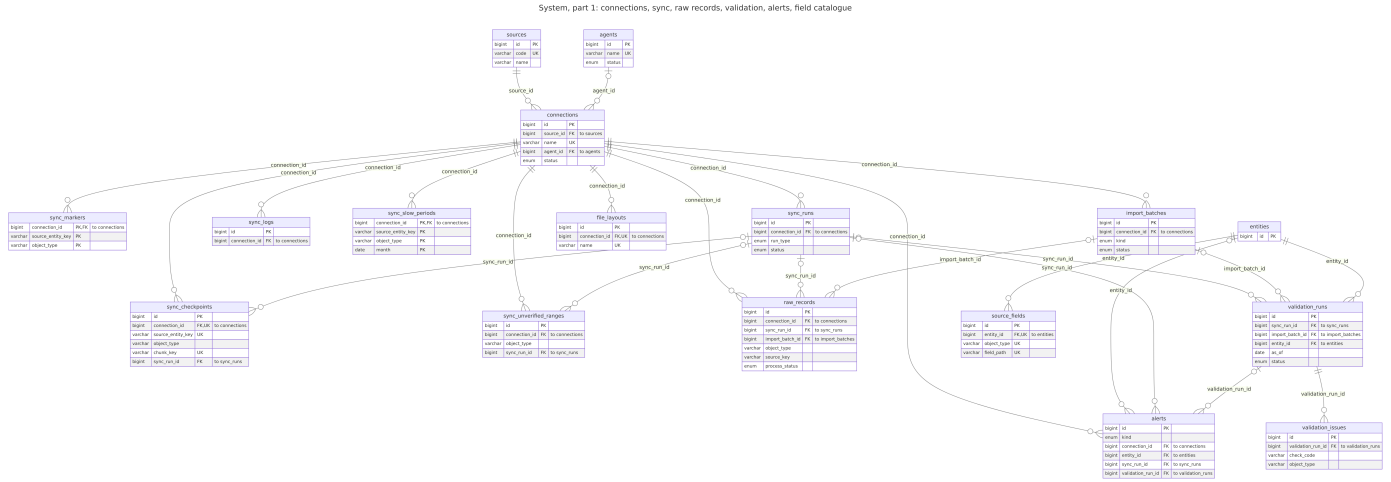


System, part 2: users, roles and access, audit and AI log, configuration (ledgerbridge_system)

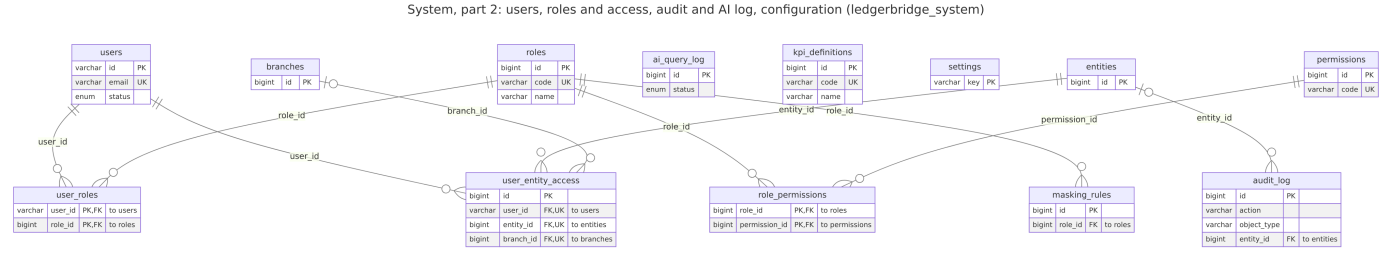


Source figures and statements: stock values, foreign-currency revaluations, loans marked as short-term (ledgerbridge_accounting) and statement lines (ledgerbridge_reporting)

Source figures and statements: stock values, foreign-currency revaluations, loans marked as short-term (ledgerbridge_accounting) and statement lines (ledgerbridge_reporting)

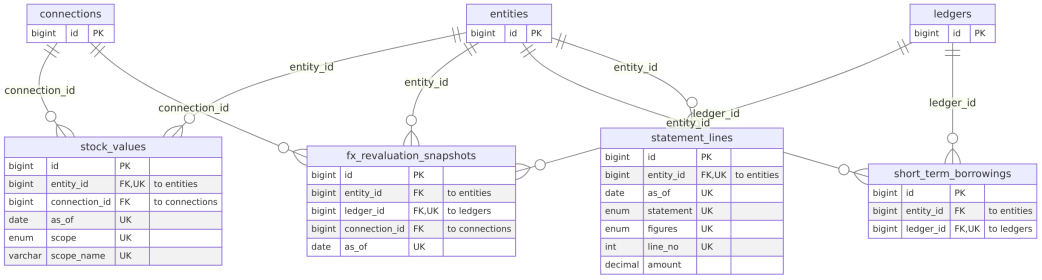


Data flow, level 0 (the platform and what it talks to)

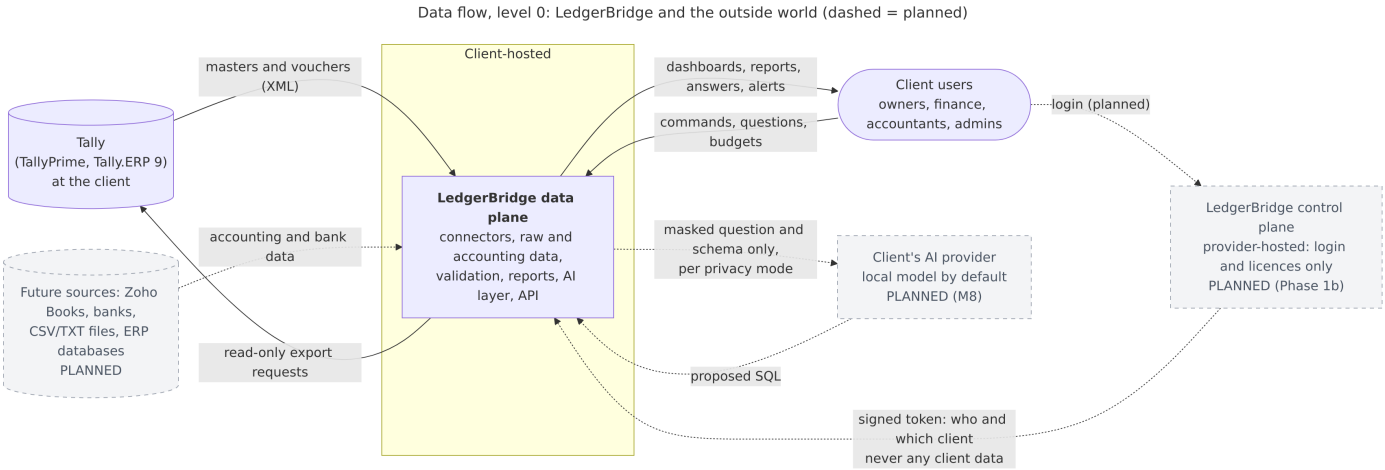

Data flow, level 1 (inside the data plane)

Data flow, level 1: inside the data plane (dashed = planned)

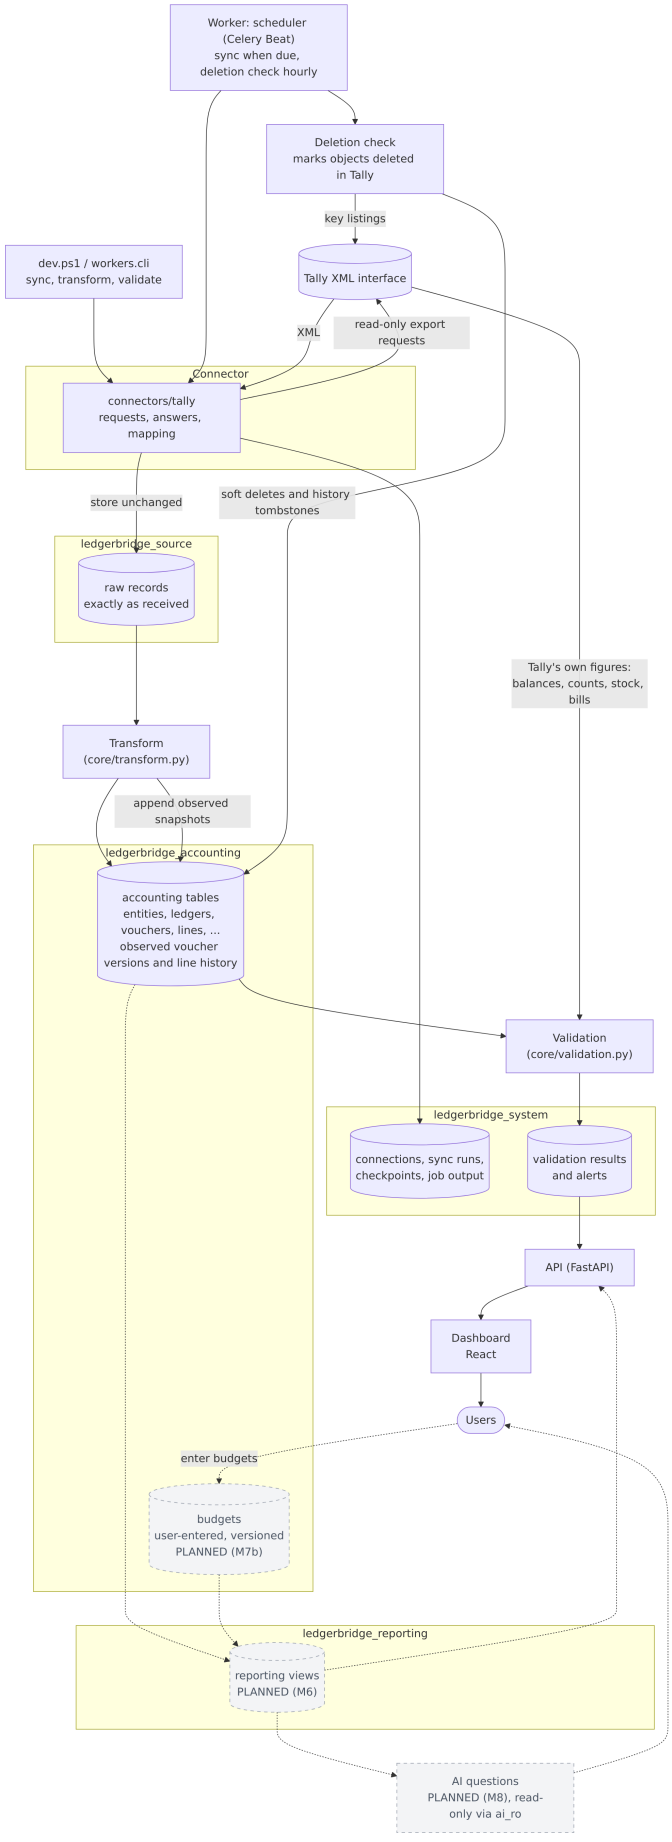

4. Tables

ledgerbridge_source: raw layer: data as received

ledgerbridge_source.raw_records

Purpose: Every object fetched from a source, exactly as received (XML for Tally), one row per version.

Filled by: Sync (connector -> RawStore): a new row only when the payload changed (hash); process_status tracks the transform.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
connection_id	BIGINT UNSIGNED	no	FK	The connection the row came from.
sync_run_id	BIGINT UNSIGNED	yes	FK	The sync run it belongs to.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
source_entity_key	VARCHAR(191)	no		The source company's key (Tally: company GUID).
object_type	VARCHAR(64)	no		group, ledger, voucher_type, voucher, stock_item, …
source_key	VARCHAR(191)	no		The source's own key (Tally: GUID); unique per connection.
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
payload_format	ENUM('xml','json','csv','text')	no		Payload format.
payload	LONGTEXT	no		The record exactly as received (re-serialised XML).
payload_hash	CHAR(64)	no		SHA-256 of the payload: an unchanged record isn't stored again.
received_at	DATETIME(6)	no		When: received.
process_status	ENUM('pending','processed','failed','skipped')	no		pending / processed / failed / skipped (superseded).
process_error	TEXT	yes		Why the transform failed: error type and a short message, never SQL.
process_warning	TEXT	yes		Process warning.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: index ix_raw_records_conn_type_key (connection_id, object_type, source_key); index ix_raw_records_status_received (process_status, received_at).

Refers to: connection_id → connections.id; sync_run_id → sync_runs.id; import_batch_id → import_batches.id.

ledgerbridge_accounting: organisation and chart of accounts

ledgerbridge_accounting.entities

Purpose: A company in the platform (one per source company).

Filled by: Transform, from the source's company record, on the first sync.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
code	VARCHAR(32)	no	UK	Short code used in reports.
name	VARCHAR(255)	no		Name as the source keeps it.
legal_name	VARCHAR(255)	yes		Legal name.
country_code	CHAR(2)	no		Default IN.
state_code	VARCHAR(8)	yes		GST state code.
gstin	VARCHAR(32)	yes		15 characters when valid; wider so source data that isn't fits (migration 0010).
pan	VARCHAR(32)	yes		Pan.
base_currency_code	CHAR(3)	no	FK	Default INR.
fy_start_month	TINYINT	no		Default 4 (April) (DAT-006).
books_from	DATE	yes		Company inception / books start (IMP-001).
is_active	BOOL	no		Whether it is in use.
is_on_hold	BOOL	no		On hold (SYN-007): sync, validation and statements skip it unless it is named, the health report lists it outside the overall verdict, dashboards hide it. Set with ./dev.ps1 on-hold (audited; migration 0023).
is_integrated	BOOL	yes		Whether integrated.
is_fifo	BOOL	yes		Whether fifo.
audited_upto	DATE	yes		The books audited up to this date (Tally AUDITEDUPTO). Migration 0035.
extra	JSON	yes		ADR-025
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (code).

Refers to: base_currency_code → currencies.code.

Referred to by: account_groups, alerts, audit_log, branches, cost_categories, cost_centres, currency_sources, dimension_values, entity_sources, exchange_rates, financial_years, fx_revaluation_snapshots, godowns,

inventory_lines, item_groups, item_opening_batches, item_prices, items, ledgers, line_gst_rates, opening_bills, parties, short_term_borrowings, source_budget_lines, source_budgets, source_fields, statement_lines, stock_categories, stock_values, tax_units, units, user_entity_access, validation_runs, voucher_lines, voucher_number_series, voucher_orders, voucher_types, voucher_versions, vouchers.

ledgerbridge_accounting.entity_sources

Purpose: Which source company (by its key, Tally's GUID) belongs to which entity, on which connection.

Filled by: Transform, with the entity.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
source_entity_key	VARCHAR(191)	no	UK	Tally company GUID or name, Zoho organization ID.
source_entity_name	VARCHAR(255)	no		Source entity name.
precedence	SMALLINT	no		Higher wins on overlap (IMP-005).
active_from	DATE	yes		Active from.
active_to	DATE	yes		Active to.
source_checked_at	DATETIME(6)	yes		When the source was last asked which companies it has loaded (migration 0025). NULL: never asked.
source_loaded	BOOL	yes		Whether it had this company loaded then. The dashboard's company chips show it; the dashboard never contacts the source.
source_checked_by	ENUM('sync','entity_check')	yes		What asked: a sync (at its start and end) or entity-check.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_entity_key).

Refers to: entity_id → entities.id; connection_id → connections.id.

ledgerbridge_accounting.branches

Purpose: Branches of an entity (planned).

Filled by: Not filled yet.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.

Column	Type	Null	Key	Meaning
entity_id	BIGINT UNSIGNED	no	FK, UK	The entity (company) the row belongs to.
code	VARCHAR(64)	no	UK	Short stable code.
name	VARCHAR(255)	no		Name as the source keeps it.
state_code	VARCHAR(8)	yes		GST state code.
gstin	VARCHAR(32)	yes		GST registration number.
is_active	BOOL	no		Whether it is in use.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (entity_id, code).

Refers to: entity_id → entities.id.

Referred to by: user_entity_access, vouchers.

ledgerbridge_accounting.financial_years

Purpose: Financial years of an entity (planned).

Filled by: Not filled yet.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK, UK	The entity (company) the row belongs to.
label	VARCHAR(64)	no		Label.
start_date	DATE	no	UK	Start date.
end_date	DATE	no		End date.
is_closed	BOOL	no		Whether closed.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (entity_id, start_date).

Refers to: entity_id → entities.id.

ledgerbridge_accounting.currencies

Purpose: Currencies by ISO code, with the symbol the source writes.

Filled by: Seeded (INR); foreign currencies from the source's currency masters (FX-001).

Column	Type	Null	Key	Meaning
code	CHAR(3)	no	PK	ISO 4217
name	VARCHAR(255)	no		Name as the source keeps it.
decimal_places	TINYINT	no		Decimals shown.
symbol	VARCHAR(16)	yes		e.g. "$"
created_at	DATETIME(6)	no		When the row was created (UTC).

Column	Type	Null	Key	Meaning
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Referred to by: currency_sources, entities, exchange_rates, ledgers, vouchers.

ledgerbridge_accounting.currency_sources

Purpose: Each entity's currencies as its source names them (e.g. "$"), with the ISO code when the source gives one (FX-001).

Filled by: Transform, from currency masters.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
name	VARCHAR(255)	no		as the source writes it in amounts ("$")
currency_code	CHAR(3)	yes	FK	Currency (ISO code).
formal_name	VARCHAR(255)	yes		Formal name.
decimal_places	TINYINT	yes		Decimals shown.
source_key	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index ix_currency_sources_raw_record (raw_record_id).

Refers to: entity_id → entities.id; currency_code → currencies.code; connection_id → connections.id; import_batch_id → import_batches.id.

ledgerbridge_accounting.exchange_rates

Purpose: Rates per entity, currency and date, each with its kind and source: the source's own rate list, or the day's voucher lines weighted by foreign amount (FX-003).

Filled by: Transform: currency masters' rate lists and voucher rates.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK, UK	The entity (company) the row belongs to.
currency_name	VARCHAR(64)	no	UK	Currency name.
currency_code	CHAR(3)	yes	FK	Currency (ISO code).
rate_date	DATE	no	UK	Rate date.
rate	NUMERIC(20, 8)	no		Rate.
rate_kind	ENUM('standard','buying','selling','vouchers')	no	UK	Rate kind.
source	ENUM('source_rate_list','vouchers')	no		Source.
voucher_count	INTEGER	yes		Voucher count.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (entity_id, currency_name, rate_date, rate_kind).

Refers to: entity_id → entities.id; currency_code → currencies.code.

ledgerbridge_accounting.standard_accounts

Purpose: The standard chart of accounts used to compare and combine companies (RPT-006).

Filled by: Seeded by a migration.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
parent_id	BIGINT UNSIGNED	yes	FK	Hierarchy.
code	VARCHAR(32)	no	UK	Short stable code.
name	VARCHAR(255)	no		Name as the source keeps it.
nature	ENUM('asset','liability','equity','income','expense')	no		Nature.
statement	ENUM('balance_sheet','profit_loss')	no		Statement.
statement_line	VARCHAR(64)	no		e.g. revenue, cogs, current_assets.
cash_flow_class	ENUM('operating','investing','financing','cash','none')	no		For cash flow statement.
sort_order	INTEGER	no		Sort order.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (code).

Refers to: parent_id → standard_accounts.id.

Referred to by: account_groups, ledgers, standard_accounts.

`ledgerbridge_accounting.account_groups`

Purpose: The source's group tree (Tally groups), per entity, as kept there.

Filled by: Transform, from group masters; renamed reserved groups keep their reserved name as an alias.

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`entity_id`	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
`parent_id`	BIGINT UNSIGNED	yes	FK	The parent row in the same table (a tree).
`name`	VARCHAR(255)	no		Name as the source keeps it.
`nature`	ENUM('asset','liability','equity','income','expense')	yes		Derived from primary group.
`is_primary`	BOOL	no		Tally's 28 predefined primary groups.
`affects_gross_profit`	BOOL	no		Tally flag for P&L layout.
`predefined_role`	VARCHAR(64)	yes		**Migration 0021 (RPT-013).** Which of the source's own predefined groups this is, renamed or not, in our vocabulary (Tally: RESERVEDNAME in lower case, words joined by `_`, e.g. `sales_accounts`); NULL for groups the user created. Filled by the transform: after migration 0021, `transform rebuild`.
`standard_account_id`	BIGINT UNSIGNED	yes	FK	Default mapping for ledgers under this group.
`sort_position`	INTEGER	yes		Where the source lists it among its siblings (Tally `SORTPOSITION`; its predefined primary groups 10 to 280, groups the user made 500). The statements order primary groups by it, then by nature, as the source's Trial Balance does; lines are compared by label, so the order never changes what matches. Migration `0035`.

Column	Type	Null	Key	Meaning
source_key	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index `ix_account_groups_raw_record` (raw_record_id).

Refers to: `entity_id` → `entities.id`; `parent_id` → `account_groups.id`; `standard_account_id` → `standard_accounts.id`; `connection_id` → `connections.id`; `import_batch_id` → `import_batches.id`.

Referred to by: `account_groups`, `ledgers`.

ledgerbridge_accounting.ledgers

Purpose: The source's ledgers, per entity, with their group, kind, standard account, opening balance as at the books' beginning and tax type.

Filled by: Transform, from ledger masters fetched for a period starting on the books' beginning.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
group_id	BIGINT UNSIGNED	no	FK	Refers to `account_groups`.
name	VARCHAR(255)	no		Name as the source keeps it.
alias	VARCHAR(255)	yes		Alias.
ledger_kind	ENUM('party','bank','cash','tax','stock','income','expense','asset','liability','equity','other')	no		party, bank, cash, tax, stock, … (from the reserved group).
party_id	BIGINT UNSIGNED	yes	FK	Set for customer/vendor ledgers.

Column	Type	Null	Key	Meaning
standard_account_id	BIGINT UNSIGNED	yes	FK	Overrides group mapping.
mapping_status	ENUM('auto','suggested','confirmed','unmapped')			auto (a standard account was found) or unmapped.
opening_balance	NUMERIC(20, 4)	no		Signed; as at opening_balance_date.
opening_balance_date	DATE	yes		Opening balance date.
currency_code	CHAR(3)	yes	FK	The ledger's own currency's ISO code; the base currency's for ledgers kept in it; NULL when the source's currency master gives none (migration 0022).
currency_name	VARCHAR(64)	yes		The ledger's own currency as the source names it (Tally CURRENCYNAME, e.g. $; migrations 0020, 0022).
is_foreign_currency	BOOL	no		Kept in another currency than the entity's base one (core/fx.py: the base currency is the master with the entity's base ISO code, else the currency most ledgers are kept in).
opening_currency_name	VARCHAR(64)	yes		The currency of the opening's foreign part (with opening_balance_fc); a ledger kept in the base currency can open in another.
opening_balance_fc	NUMERIC(20, 4)	yes		The opening's foreign part.
is_bill_wise	BOOL	no		Whether bill wise.
is_cost_centre_applicable	BOOL	no		Whether cost centre applicable.
sort_position	INTEGER	yes		Where the source lists it (Tally SORTPOSITION; 1000 for every ledger by default: the source lists them by name). Migration 0035.

Column	Type	Null	Key	Meaning
affects_stock	BOOL	yes		Tally AFFECTSSTOCK (a purchase or sales ledger used with inventory). NULL: not read. Migration 0035.
gstin	VARCHAR(32)	yes		GST registration number.
tax_type	ENUM('cgst','sgst','igst','cess','tds','tcs','vat','other')	yes		cgst, sgst, igst, cess, tds, tcs, vat for tax ledgers.
source_key	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index ix_ledgers_entity_group (entity_id, group_id); index ix_ledgers_entity_name (entity_id, name); index ix_ledgers_raw_record (raw_record_id).

Refers to: entity_id → entities.id; group_id → account_groups.id; party_id → parties.id; standard_account_id → standard_accounts.id; currency_code → currencies.code; connection_id → connections.id; import_batch_id → import_batches.id.

Referred to by: fx_revaluation_snapshots, opening_bills, short_term_borrowings, source_budget_lines, voucher_lines, voucher_version_lines.

ledgerbridge_accounting: masters

ledgerbridge_accounting.parties

Purpose: Customers and vendors (the ledgers under Sundry Debtors / Creditors), with GST, PAN and contact details (sensitive: AI-015).

Filled by: Transform, with their ledgers.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
name	VARCHAR(255)	no		**Sensitive** (masking candidate).
party_type	ENUM('customer','vendor','both','other')	no		Tally: Sundry Debtors → customer, Sundry Creditors → vendor.
gstin	VARCHAR(32)	yes		GST registration number.
pan	VARCHAR(32)	yes		**Sensitive.**
state_code	VARCHAR(8)	yes		GST state code.
country_code	CHAR(2)	yes		Country code.
credit_days	INTEGER	yes		Used for ageing and overdue flags.
credit_limit	NUMERIC(20, 4)	yes		Credit limit.
email	VARCHAR(255)	yes		E-mail address.
phone	VARCHAR(255)	yes		Phone.
gst_registration_type	VARCHAR(32)	yes		Regular, Composition, Unregistered, Consumer, … (Tally: the latest LEDGSTREGDETAILS.LIST by APPLICABLEFROM). Migration 0034.
source_key	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index ix_parties_raw_record (raw_record_id).

Refers to: `entity_id` → `entities.id`; `connection_id` → `connections.id`; `import_batch_id` → `import_batches.id`.

Referred to by: `bill_allocations`, `ledgers`, `opening_bills`, `vouchers`.

`ledgerbridge_accounting.items`

Purpose: Stock items with their opening quantity and value.

Filled by: Transform, from stock item masters (as at the books' beginning).

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`entity_id`	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
`item_group_id`	BIGINT UNSIGNED	yes	FK	Refers to `item_groups`.
`name`	VARCHAR(255)	no		Name as the source keeps it.
`code`	VARCHAR(255)	yes		Short stable code.
`unit_id`	BIGINT UNSIGNED	yes	FK	Refers to `units`.
`hsn_code`	VARCHAR(32)	yes		Hsn code.
`gst_rate`	NUMERIC(20, 6)	yes		Gst rate.
`opening_qty`	NUMERIC(20, 6)	no		Opening qty.
`opening_value`	NUMERIC(20, 4)	no		Opening value.
`gst_taxability`	VARCHAR(32)	yes		Gst taxability.
`gst_classification`	VARCHAR(255)	yes		Gst classification.
`stock_category_id`	BIGINT UNSIGNED	yes	FK	Refers to `stock_categories`.
`reorder_level`	NUMERIC(20, 6)	yes		Reorder level.
`min_order_quantity`	NUMERIC(20, 6)	yes		Min order quantity.
`source_key`	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
`source_alter_id`	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
`origin`	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
`raw_record_id`	BIGINT UNSIGNED	yes		The raw record it was transformed from.
`is_deleted`	BOOL	no		Deleted in the source (soft delete; kept for history).
`extra`	JSON	yes		Source fields with no column, as JSON (ADR-025).
`connection_id`	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
`import_batch_id`	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index `ix_items_raw_record` (raw_record_id).

Refers to: `entity_id` → `entities.id`; `item_group_id` → `item_groups.id`; `unit_id` → `units.id`; `stock_category_id` → `stock_categories.id`; `connection_id` → `connections.id`; `import_batch_id` → `import_batches.id`.

Referred to by: `inventory_lines`, `item_opening_batches`, `item_prices`.

`ledgerbridge_accounting.item_opening_batches`

Purpose: A stock item's opening by godown and batch: quantity, rate and value (they add up to the item's opening).

Filled by: Transform, with the stock item; replaced as a whole per item.

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`entity_id`	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
`item_id`	BIGINT UNSIGNED	no	FK	Refers to `items`.
`godown_id`	BIGINT UNSIGNED	yes	FK	Refers to `godowns`.
`batch_name`	VARCHAR(255)	yes		Batch name.
`quantity`	NUMERIC(20, 6)	no		Quantity.
`rate`	NUMERIC(20, 6)	yes		Rate.
`value`	NUMERIC(20, 4)	no		Value.
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: index `ix_ledgerbridge_accounting_item_opening_batches_item_id` (item_id).

Refers to: `entity_id` → `entities.id`; `item_id` → `items.id`, on delete cascade; `godown_id` → `godowns.id`.

`ledgerbridge_accounting.item_groups`

Purpose: Stock groups.

Filled by: Transform, from stock group masters.

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`entity_id`	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
`parent_id`	BIGINT UNSIGNED	yes	FK	The parent row in the same table (a tree).
`name`	VARCHAR(255)	no		Name as the source keeps it.
`source_key`	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
`source_alter_id`	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
`origin`	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
`raw_record_id`	BIGINT UNSIGNED	yes		The raw record it was transformed from.

Column	Type	Null	Key	Meaning
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index `ix_item_groups_raw_record` (raw_record_id).

Refers to: `entity_id` → `entities.id`; `parent_id` → `item_groups.id`; `connection_id` → `connections.id`; `import_batch_id` → `import_batches.id`.

Referred to by: `item_groups`, `items`.

`ledgerbridge_accounting.units`

Purpose: Units of measure.

Filled by: Transform, from unit masters.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
symbol	VARCHAR(255)	no		Symbol.
name	VARCHAR(255)	no		Name as the source keeps it.
decimal_places	TINYINT	no		Decimals shown.
source_key	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.

Column	Type	Null	Key	Meaning
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index ix_units_raw_record (raw_record_id).

Refers to: entity_id → entities.id; connection_id → connections.id; import_batch_id → import_batches.id.

Referred to by: inventory_lines, items.

ledgerbridge_accounting.godowns

Purpose: Godowns (locations) and whose stock they hold (holding, ADR-031).

Filled by: Transform, from godown masters.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
parent_id	BIGINT UNSIGNED	yes	FK	The parent row in the same table (a tree).
name	VARCHAR(255)	no		Name as the source keeps it.
holding	ENUM('own','ours_with_third_party','third_party_with_us')	no		own / ours_with_third_party (a job worker's) / third_party_with_us.
source_key	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.

Column	Type	Null	Key	Meaning
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index ix_godowns_raw_record (raw_record_id).

Refers to: entity_id → entities.id; parent_id → godowns.id; connection_id → connections.id; import_batch_id → import_batches.id.

Referred to by: godowns, inventory_lines, item_opening_batches.

ledgerbridge_accounting.cost_categories

Purpose: Cost categories: sets of cost centres a line is allocated over.

Filled by: Transform, from cost category masters.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
name	VARCHAR(255)	no		Name as the source keeps it.
source_key	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index ix_cost_categories_raw_record (raw_record_id).

Refers to: entity_id → entities.id; connection_id → connections.id; import_batch_id → import_batches.id.

Referred to by: cost_centres, line_cost_allocations.

`ledgerbridge_accounting.cost_centres`

Purpose: Cost centres and their categories.

Filled by: Transform, from cost centre masters.

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`entity_id`	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
`parent_id`	BIGINT UNSIGNED	yes	FK	The parent row in the same table (a tree).
`category`	VARCHAR(255)	yes		Category.
`cost_category_id`	BIGINT UNSIGNED	yes	FK	Refers to `cost_categories`.
`name`	VARCHAR(255)	no		Name as the source keeps it.
`source_key`	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
`source_alter_id`	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
`origin`	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
`raw_record_id`	BIGINT UNSIGNED	yes		The raw record it was transformed from.
`is_deleted`	BOOL	no		Deleted in the source (soft delete; kept for history).
`extra`	JSON	yes		Source fields with no column, as JSON (ADR-025).
`connection_id`	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
`import_batch_id`	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index `ix_cost_centres_raw_record` (raw_record_id).

Refers to: `entity_id` → `entities.id`; `parent_id` → `cost_centres.id`; `cost_category_id` → `cost_categories.id`; `connection_id` → `connections.id`; `import_batch_id` → `import_batches.id`.

Referred to by: `cost_centres`, `line_cost_allocations`.

`ledgerbridge_accounting.tax_units`

Purpose: The company's tax registrations (GSTIN, state, registration type, from date).

Filled by: Transform, from the source's tax units.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
name	VARCHAR(255)	no		Name as the source keeps it.
gstin	VARCHAR(32)	yes		GST registration number.
state	VARCHAR(64)	yes		State.
registration_type	VARCHAR(32)	yes		Registration type.
registered_from	DATE	yes		Registered from.
used_for	VARCHAR(32)	yes		Used for.
is_primary	BOOL	no		Whether primary.
source_key	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index `ix_tax_units_raw_record` (raw_record_id).

Refers to: `entity_id` → `entities.id`; `connection_id` → `connections.id`; `import_batch_id` → `import_batches.id`.

`ledgerbridge_accounting.stock_categories`

Purpose: Stock categories: a second way of grouping stock items, across their groups.

Filled by: Transform, from the source's stock categories.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
parent_id	BIGINT UNSIGNED	yes	FK	The parent row in the same table (a tree).

Column	Type	Null	Key	Meaning
name	VARCHAR(255)	no		Name as the source keeps it.
source_key	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index `ix_stock_categories_raw_record` (raw_record_id).

Refers to: `entity_id` → `entities.id`; `parent_id` → `stock_categories.id`; `connection_id` → `connections.id`; `import_batch_id` → `import_batches.id`.

Referred to by: `items`, `stock_categories`.

ledgerbridge_accounting.item_prices

Purpose: A stock item's price list: price level, from date, quantity range, rate and discount.

Filled by: Transform, with the stock item; replaced as a whole per item.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
item_id	BIGINT UNSIGNED	no	FK	Refers to `items`.
price_level	VARCHAR(255)	no		Price level.
applicable_from	DATE	yes		Applicable from.
rate	NUMERIC(20, 6)	yes		Rate.
from_quantity	NUMERIC(20, 6)	yes		From quantity.
to_quantity	NUMERIC(20, 6)	yes		To quantity.
discount_pct	NUMERIC(20, 6)	yes		Discount pct.
created_at	DATETIME(6)	no		When the row was created (UTC).

Column	Type	Null	Key	Meaning
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: index ix_ledgerbridge_accounting_item_prices_item_id (item_id).

Refers to: entity_id → entities.id; item_id → items.id, on delete cascade.

ledgerbridge_accounting.source_budgets

Purpose: Budgets kept in the source (apart from our own budgets, M7b).

Filled by: Transform, from the source's budgets.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
parent_id	BIGINT UNSIGNED	yes	FK	The parent row in the same table (a tree).
name	VARCHAR(255)	no		Name as the source keeps it.
use_actuals	BOOL	yes		Use actuals.
source_key	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index ix_source_budgets_raw_record (raw_record_id).

Refers to: entity_id → entities.id; parent_id → source_budgets.id; connection_id → connections.id; import_batch_id → import_batches.id.

Referred to by: source_budget_lines, source_budgets.

ledgerbridge_accounting.source_budget_lines

Purpose: A source budget's ledger lines: period, basis (net transactions or closing balance) and amount as the source writes it.

Filled by: Transform, with the budget; replaced as a whole per budget.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
budget_id	BIGINT UNSIGNED	no	FK	Refers to source_budgets.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
ledger_id	BIGINT UNSIGNED	yes	FK	Refers to ledgers.
ledger_name	VARCHAR(255)	no		Ledger name.
period_from	DATE	yes		Period from.
period_to	DATE	yes		Period to.
basis	VARCHAR(32)	no		net_transactions / closing_balance
amount	NUMERIC(20, 4)	no		Amount in the base currency, canonical sign (debit +, credit −).
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: index ix_ledgerbridge_accounting_source_budget_lines_budget_id (budget_id).

Refers to: budget_id → source_budgets.id, on delete cascade; entity_id → entities.id; ledger_id → ledgers.id.

ledgerbridge_accounting.voucher_types

Purpose: The source's voucher types and the standard type each derives from; whether its vouchers post to the books and move stock.

Filled by: Transform, from voucher type masters (type tree resolved, ADR-027).

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
name	VARCHAR(255)	no		Name as the source keeps it.
base_type	ENUM('sales','purchase','payment','receipt','journal','contra','debit_note','credit_note','stock_journal','d	no		Base type.
is_accounting	BOOL	no		Whether accounting.
is_inventory	BOOL	no		Whether inventory.
standard_type	VARCHAR(64)	yes		Standard type.
moves_stock	BOOL	no		Moves stock.
source_key	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.

Column	Type	Null	Key	Meaning
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index `ix_voucher_types_raw_record` (raw_record_id).

Refers to: `entity_id` → `entities.id`; `connection_id` → `connections.id`; `import_batch_id` → `import_batches.id`.

Referred to by: `voucher_number_series`, `vouchers`.

`ledgerbridge_accounting.voucher_number_series`

Purpose: A voucher type's numbering series (e.g. Default, a branch's own): method, beginning number, width.

Filled by: Transform, with the voucher type; replaced as a whole per type.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
voucher_type_id	BIGINT UNSIGNED	no	FK	Refers to `voucher_types`.
name	VARCHAR(255)	no		Name as the source keeps it.
numbering_method	VARCHAR(64)	yes		Numbering method.
numbering_sub_method	VARCHAR(64)	yes		Numbering sub method.
beginning_number	INTEGER	yes		Beginning number.
width	INTEGER	yes		Width.
prefill_zero	BOOL	no		Prefill zero.
prevent_duplicates	BOOL	no		Prevent duplicates.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: index `ix_ledgerbridge_accounting_voucher_number_series_voucher_type_id` (voucher_type_id).

Refers to: `entity_id` → `entities.id`; `voucher_type_id` → `voucher_types.id`, on delete cascade.

`ledgerbridge_accounting.dimensions`

Purpose: User-defined reporting dimensions (DAT-005), e.g. a promoted UDF.

Filled by: `promote-field`, from the field catalogue.

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`code`	VARCHAR(64)	no	UK	Short stable code.
`name`	VARCHAR(255)	no		Name as the source keeps it.
`applies_to`	ENUM('voucher','line')	no		Applies to.
`is_active`	BOOL	no		Whether it is in use.
`source_object_type`	VARCHAR(64)	yes		Source object type.
`source_field`	VARCHAR(255)	yes		Source field.
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (code).

Referred to by: `dimension_values`.

`ledgerbridge_accounting.dimension_values`

Purpose: The values of a dimension.

Filled by: Transform, for promoted fields.

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`dimension_id`	BIGINT UNSIGNED	no	FK, UK	Refers to `dimensions`.
`entity_id`	BIGINT UNSIGNED	yes	FK	The entity (company) the row belongs to.
`parent_id`	BIGINT UNSIGNED	yes	FK	The parent row in the same table (a tree).
`code`	VARCHAR(64)	no	UK	Short stable code.
`name`	VARCHAR(255)	no		Name as the source keeps it.
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (dimension_id, code).

Refers to: `dimension_id` → `dimensions.id`; `entity_id` → `entities.id`; `parent_id` → `dimension_values.id`.

Referred to by: `dimension_values`, `line_dimensions`.

ledgerbridge_accounting: transactions

`ledgerbridge_accounting.vouchers`

Purpose: Vouchers (transactions) with their type, number, date, party and flags.

Filled by: Transform, from voucher records; replaced as a whole with their child rows (schema.md 8 rule 7).

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`entity_id`	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
`branch_id`	BIGINT UNSIGNED	yes	FK	Refers to `branches`.
`voucher_type_id`	BIGINT UNSIGNED	no	FK	Refers to `voucher_types`.
`voucher_number`	VARCHAR(255)	no		The source's voucher number (up to 255 characters).
`voucher_date`	DATE	no		The voucher's date (denormalised for fast period queries).
`reference_number`	VARCHAR(255)	yes		The source's reference (e.g. the supplier's invoice number).
`reference_date`	DATE	yes		Reference date.
`source_altered_at`	DATETIME(6)	yes		Tally `UPDATEDDATETIME`; preserve its timezone-unspecified wall-clock value without UTC conversion. NULL when missing or invalid.
`effective_date`	DATE	yes		The source's effective date (Tally `EFFECTIVEDATE`); balances count by `voucher_date`, as Tally does. Migration `0016`.
`party_id`	BIGINT UNSIGNED	yes	FK	Main party, if any.
`narration`	TEXT	yes		Searchable via RAG later (AI-010).
`currency_code`	CHAR(3)	no	FK	Currency (ISO code).
`exchange_rate`	NUMERIC(20, 8)	no		Exchange rate.
`is_cancelled`	BOOL	no		Whether cancelled.
`is_optional`	BOOL	no		Tally optional/memo vouchers, excluded from books.
`is_post_dated`	BOOL	no		The source marks it post-dated; it counts from its date.

Column	Type	Null	Key	Meaning
gst_registration	VARCHAR(255)	yes		The company's GST registration (tax unit name) the voucher is under (GSTREGISTRATION). Migration 0034.
place_of_supply	VARCHAR(64)	yes		PLACEOFSUPPLY. Migration 0034.
irn	VARCHAR(128)	yes		Irn.
irn_ack_number	VARCHAR(64)	yes		Irn ack number.
irn_date	DATE	yes		The e-invoice's acknowledgement date (IRNACKDATE). Migration 0034.
eway_bill_number	VARCHAR(64)	yes		Eway bill number.
eway_bill_date	DATE	yes		Eway bill date.
number_series	VARCHAR(255)	yes		The numbering series it is numbered in (VOUCHERNUMBERSERIES, e.g. Default). Migration 0035.
active_to	DATE	yes		A reversing journal's last day (ACTIVETO). Migration 0035.
has_cash_flow	BOOL	yes		Whether it affects cash flow (HASCASHFLOW). NULL: not read. Migration 0035.
source_key	VARCHAR(191)	no	UK	The source's own key (Tally: GUID); unique per connection.
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
extra	JSON	yes		Source fields with no column, as JSON (ADR-025).
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_key); index `ix_vouchers_entity_date` (entity_id, voucher_date); index `ix_vouchers_entity_type_date` (entity_id, voucher_type_id, voucher_date); index `ix_vouchers_party_date` (party_id, voucher_date); index `ix_vouchers_raw_record` (raw_record_id).

Refers to: `entity_id` → `entities.id`; `branch_id` → `branches.id`; `voucher_type_id` → `voucher_types.id`; `party_id` → `parties.id`; `currency_code` → `currencies.code`; `connection_id` → `connections.id`; `import_batch_id` → `import_batches.id`.

Referred to by: `inventory_lines`, `line_gst_rates`, `tax_lines`, `voucher_lines`, `voucher_orders`, `voucher_versions`.

`ledgerbridge_accounting.voucher_lines`

Purpose: The double-entry lines of each voucher (debit +, credit −); `is_effective` says whether a line counts in the books.

Filled by: Transform, with the voucher.

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`voucher_id`	BIGINT UNSIGNED	no	FK	Refers to `vouchers`.
`entity_id`	BIGINT UNSIGNED	no	FK	Denormalized for fast filtering.
`voucher_date`	DATE	no		Denormalized for fast period queries.
`line_no`	INTEGER	no		Position of the line in its voucher.
`ledger_id`	BIGINT UNSIGNED	no	FK	Refers to `ledgers`.
`amount`	NUMERIC(20, 4)	no		Base currency, debit +, credit −.
`amount_fc`	NUMERIC(20, 4)	yes		Foreign-currency amount (Tally: the part before `@` of `-$100.00 @ Rs82.00/$ = -Rs8200.00`); its rate is `amount / amount_fc`. NULL in the base currency.
`currency_name`	VARCHAR(64)	yes		Currency name.
`exchange_rate`	NUMERIC(20, 8)	yes		Exchange rate.
`is_party_line`	BOOL	no		Whether party line.
`is_effective`	BOOL	no		Counts in the books: not cancelled, optional or deleted, and of a type that posts.
`instrument_number`	VARCHAR(255)	yes		A bank line's cheque or instrument number (Tally `BANKALLOCATIONS.INSTRUMENTN` several joined with ";"). Migration `0026`.

Column	Type	Null	Key	Meaning
utr	VARCHAR(255)	yes		The UTR: only a value that looks like one (NEFT/RTGS [A-Z]{4}[NR] + 10 to 17 characters, IMPS/UPI 12 digits, or labelled "UTR"; core/utr.py), from the bank allocation's reference fields, a user-defined field, else the voucher's narration. Was transaction_reference (which held Tally's own code) until migration 0030. Stored only: no /api/v1 response, page or CSV export shows it.
tally_bank_entry_id	VARCHAR(255)	yes		The source's own id for the bank entry (Tally UNIQUEREFERENCENUMBER, a code it generates); never a UTR. Migration 0030.
utr_source	VARCHAR(16)	yes		Where the UTR was found: bank_field, udf or narration. Migration 0030.
transaction_type	VARCHAR(64)	yes		Stored only, like utr. Cheque, e-Fund Transfer, … (Tally TRANSACTIONTYPE). Migration 0030.
instrument_date	DATE	yes		The instrument's own date (INSTRUMENTDATE). Migration 0030.
bank_cleared_date	DATE	yes		The date the bank cleared it, bank reconciliation (BANKERSDATE). Migration 0030.
bank_recon_status	VARCHAR(64)	yes		Reconciliation status (BANKRECONSTATUS, e.g. Reconciled). Migration 0030.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: index ix_voucher_lines_entity_ledger_date (entity_id, ledger_id, voucher_date); index

ix_voucher_lines_voucher (voucher_id).

Refers to: voucher_id → vouchers.id, on delete cascade; entity_id → entities.id; ledger_id → ledgers.id.

Referred to by: bill_allocations, line_cost_allocations, line_dimensions, line_gst_rates, tax_lines.

ledgerbridge_accounting.bill_allocations

Purpose: Bill-wise allocations of a line, with the bill's date and due date (receivables and payables ageing).

Filled by: Transform, with the voucher.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
voucher_line_id	BIGINT UNSIGNED	no	FK	Refers to voucher_lines.
party_id	BIGINT UNSIGNED	yes	FK	Refers to parties.
bill_type	ENUM('new_ref','against_ref','advance','on_account')	no		Bill type.
bill_name	VARCHAR(255)	yes		Bill name.
bill_date	DATE	yes		Bill date.
due_date	DATE	yes		Due date.
amount	NUMERIC(20, 4)	no		Amount in the base currency, canonical sign (debit +, credit −).
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: voucher_line_id → voucher_lines.id, on delete cascade; party_id → parties.id.

ledgerbridge_accounting.opening_bills

Purpose: The bills of a ledger's opening balance: name, bill date, due date, amount (receivables and payables ageing).

Filled by: Transform, from the ledgers' opening bills; replaced as a whole per ledger.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
ledger_id	BIGINT UNSIGNED	no	FK	Refers to ledgers.
party_id	BIGINT UNSIGNED	yes	FK	Refers to parties.
bill_name	VARCHAR(255)	no		Bill name.
bill_date	DATE	yes		Bill date.
due_date	DATE	yes		Due date.
amount	NUMERIC(20, 4)	no		Amount in the base currency, canonical sign (debit +, credit −).
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: index ix_ledgerbridge_accounting_opening_bills_ledger_id (ledger_id).

Refers to: entity_id → entities.id; ledger_id → ledgers.id, on delete cascade; party_id → parties.id.

ledgerbridge_accounting.voucher_orders

Purpose: The sales or purchase orders a voucher (an invoice, a delivery or receipt note) is made against, with the order voucher when found.

Filled by: Transform, with the voucher; linked to the order by number.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
voucher_id	BIGINT UNSIGNED	no	FK	Refers to vouchers.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
order_number	VARCHAR(255)	no		Order number.
order_date	DATE	yes		Order date.
order_voucher_id	BIGINT UNSIGNED	yes	FK	Refers to vouchers.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: index ix_ledgerbridge_accounting_voucher_orders_voucher_id (voucher_id).

Refers to: voucher_id → vouchers.id, on delete cascade; entity_id → entities.id; order_voucher_id → vouchers.id, on delete set null.

ledgerbridge_accounting.line_gst_rates

Purpose: A ledger or inventory line's GST rate per duty head (CGST, SGST/UTGST, IGST, Cess, …), when the line carries its own.

Filled by: Transform, with the voucher.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
voucher_id	BIGINT UNSIGNED	no	FK	Refers to vouchers.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
voucher_line_id	BIGINT UNSIGNED	yes	FK	Refers to voucher_lines.
inventory_line_id	BIGINT UNSIGNED	yes	FK	Refers to inventory_lines.
duty_head	VARCHAR(32)	no		Duty head.
rate	NUMERIC(20, 6)	no		Rate.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: index ix_ledgerbridge_accounting_line_gst_rates_voucher_id (voucher_id).

Refers to: voucher_id → vouchers.id, on delete cascade; entity_id → entities.id; voucher_line_id → voucher_lines.id, on delete cascade; inventory_line_id → inventory_lines.id, on delete cascade.

ledgerbridge_accounting.line_cost_allocations

Purpose: Cost centre allocations of a line.

Filled by: Transform, with the voucher.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
voucher_line_id	BIGINT UNSIGNED	no	FK	Refers to voucher_lines.
cost_category_id	BIGINT UNSIGNED	yes	FK	Refers to cost_categories.
cost_centre_id	BIGINT UNSIGNED	no	FK	Refers to cost_centres.
amount	NUMERIC(20, 4)	no		canonical sign, as the line's
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: voucher_line_id → voucher_lines.id, on delete cascade; cost_category_id → cost_categories.id; cost_centre_id → cost_centres.id.

ledgerbridge_accounting.line_dimensions

Purpose: A voucher line's value for each dimension.

Filled by: Transform, with the voucher.

Column	Type	Null	Key	Meaning
voucher_line_id	BIGINT UNSIGNED	no	PK, FK	Refers to voucher_lines.
dimension_value_id	BIGINT UNSIGNED	no	PK, FK	Refers to dimension_values.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: voucher_line_id → voucher_lines.id, on delete cascade; dimension_value_id → dimension_values.id.

ledgerbridge_accounting.inventory_lines

Purpose: Stock movements of a voucher (in +, out −) by item, godown and batch; stock_quantity is what moves stock (tracked lines move nothing); counterpart_godown_id is the other godown of a move between godowns; order_number the order a line belongs to or is against.

Filled by: Transform, with the voucher.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
voucher_id	BIGINT UNSIGNED	no	FK	Refers to vouchers.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
voucher_date	DATE	no		The voucher's date (denormalised for fast period queries).
line_no	INTEGER	no		Position of the line in its voucher.
item_id	BIGINT UNSIGNED	no	FK	Refers to items.
godown_id	BIGINT UNSIGNED	yes	FK	Refers to godowns.

Column	Type	Null	Key	Meaning
quantity	NUMERIC(20, 6)	no		Quantity.
stock_quantity	NUMERIC(20, 6)	no		What the line moves in stock: the quantity less the part tracked to a note.
unit_id	BIGINT UNSIGNED	yes	FK	Refers to units.
rate	NUMERIC(20, 6)	yes		Rate.
amount	NUMERIC(20, 4)	no		Amount in the base currency, canonical sign (debit +, credit −).
discount_pct	NUMERIC(20, 6)	yes		Discount pct.
batch_name	VARCHAR(255)	yes		Batch name.
counterpart_godown_id	BIGINT UNSIGNED	yes	FK	Refers to godowns.
order_number	VARCHAR(255)	yes		Order number.
order_due_date	DATE	yes		Order due date.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: voucher_id → vouchers.id, on delete cascade; entity_id → entities.id; item_id → items.id; godown_id → godowns.id; unit_id → units.id; counterpart_godown_id → godowns.id.

Referred to by: line_gst_rates.

ledgerbridge_accounting.tax_lines

Purpose: Tax amounts of a voucher (GST, TDS, …) from lines posted to tax ledgers.

Filled by: Transform, with the voucher.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
voucher_id	BIGINT UNSIGNED	no	FK	Refers to vouchers.
voucher_line_id	BIGINT UNSIGNED	yes	FK	Refers to voucher_lines.
tax_type	ENUM('cgst','sgst','igst','cess','tds','tcs','vat','other')	no		Tax type.
rate	NUMERIC(20, 6)	yes		Rate.
taxable_amount	NUMERIC(20, 4)	yes		Taxable amount.
tax_amount	NUMERIC(20, 4)	no		Tax amount.
hsn_code	VARCHAR(32)	yes		Hsn code.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: voucher_id → vouchers.id, on delete cascade; voucher_line_id → voucher_lines.id, on delete cascade.

ledgerbridge_accounting.voucher_versions

Purpose: Append-only snapshots of distinct voucher payloads LedgerBridge observed, plus deletion tombstones (RPT-017, ADR-051).

Filled by: Captured during transform and source deletion checks; retries are idempotent.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
voucher_id	BIGINT UNSIGNED	no	FK	Refers to vouchers.
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
voucher_source_key	VARCHAR(191)	no		Voucher source key.
company_name	VARCHAR(255)	no		Company name.
voucher_number	VARCHAR(255)	no		Voucher number.
capture_key	VARCHAR(191)	no	UK	Capture key.
raw_record_id	BIGINT UNSIGNED	yes		The raw record it was transformed from.
payload_hash	CHAR(64)	yes		Payload hash.
source_alter_id	BIGINT	yes		The source's change counter (Tally: AlterID) when last stored.
source_altered_at	DATETIME(6)	yes		When: source altered.
observed_at	DATETIME(6)	no		When: observed.
is_deleted	BOOL	no		Deleted in the source (soft delete; kept for history).
deletion_detected_at	DATETIME(6)	yes		When: deletion detected.
previous_version_id	BIGINT UNSIGNED	yes	FK	Refers to voucher_versions.

Keys and indexes: unique (connection_id, capture_key); index ix_voucher_versions_altered_at (source_altered_at); index ix_voucher_versions_entity_key (entity_id, voucher_source_key, id).

Refers to: entity_id → entities.id; voucher_id → vouchers.id; connection_id → connections.id; previous_version_id → voucher_versions.id.

Referred to by: voucher_ledger_changes, voucher_version_lines, voucher_versions.

ledgerbridge_accounting.voucher_version_lines

Purpose: The ledger postings and bill/cost-centre details for one observed voucher version.

Filled by: Captured alongside each voucher version.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
voucher_version_id	BIGINT UNSIGNED	no	FK	Refers to voucher_versions.
line_no	INTEGER	no		Position of the line in its voucher.
ledger_id	BIGINT UNSIGNED	no	FK	Refers to ledgers.
ledger_source_key	VARCHAR(191)	no		Ledger source key.
ledger_name	VARCHAR(255)	no		Ledger name.
amount	NUMERIC(20, 4)	no		Amount in the base currency, canonical sign (debit +, credit −).
amount_fc	NUMERIC(20, 4)	yes		Amount fc.
currency_name	VARCHAR(64)	yes		Currency name.

Column	Type	Null	Key	Meaning
exchange_rate	NUMERIC(20, 8)	yes		Exchange rate.
is_party_line	BOOL	no		Whether party line.
details	JSON	no		Details.
identity_hash	CHAR(64)	no		Identity hash.
content_hash	CHAR(64)	no		Content hash.

Keys and indexes: index ix_voucher_version_lines_ledger (ledger_source_key); index ix_voucher_version_lines_versio (voucher_version_id, line_no).

Refers to: voucher_version_id → voucher_versions.id, on delete cascade; ledger_id → ledgers.id.

Referred to by: voucher_ledger_changes.

ledgerbridge_accounting.voucher_ledger_changes

Purpose: Differences between consecutive captured voucher versions; uncertain line matches are stored as ambiguous rather than guessed.

Filled by: Generated by the voucher history comparison during capture.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
previous_version_id	BIGINT UNSIGNED	yes	FK	Refers to voucher_versions.
version_id	BIGINT UNSIGNED	no	FK	Refers to voucher_versions.
previous_line_id	BIGINT UNSIGNED	yes	FK	Refers to voucher_version_lines.
new_line_id	BIGINT UNSIGNED	yes	FK	Refers to voucher_version_lines.
change_type	ENUM('added','modified','deleted','ambiguous')	no		Change type.
matching_basis	VARCHAR(64)	no		Matching basis.

Keys and indexes: index ix_voucher_ledger_changes_previous_version (previous_version_id); index ix_voucher_ledger_changes_version (version_id).

Refers to: previous_version_id → voucher_versions.id; version_id → voucher_versions.id, on delete cascade; previous_line_id → voucher_version_lines.id; new_line_id → voucher_version_lines.id.

ledgerbridge_accounting: field catalogue

ledgerbridge_accounting.source_fields

Purpose: Field catalogue (ADR-025): every source field that has no column, kept in extra, with counts and an inferred type.

Filled by: Transform.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK, UK	The entity (company) the row belongs to.
object_type	VARCHAR(64)	no	UK	Kind of source object.
field_path	VARCHAR(255)	no	UK	Field path.
prefix	VARCHAR(64)	yes		Prefix.
inferred_type	ENUM('text','number','date','flag','mixed')	no		Inferred type.

Column	Type	Null	Key	Meaning
record_count	BIGINT	no		Record count.
first_seen_at	DATETIME(6)	no		When: first seen.
last_seen_at	DATETIME(6)	no		When: last seen.

Keys and indexes: unique (entity_id, object_type, field_path).

Refers to: entity_id → entities.id.

ledgerbridge_accounting: source figures

ledgerbridge_accounting.stock_values

Purpose: The source's own stock value as of a date (DAT-013, ADR-040): the total its Profit and Loss uses, and by stock group and godown.

Filled by: Validation (as-of date, year ends) and ./dev.ps1 statements (every month end and year end).

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK, UK	The entity (company) the row belongs to.
connection_id	BIGINT UNSIGNED	no	FK	The connection the row came from.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
as_of	DATE	no	UK	As of.
scope	ENUM('total','stock_group','godown','item')	no	UK	total (what the source's profit uses), stock_group, godown or item.
scope_name	VARCHAR(255)	no	UK	Scope name.
opening_value	NUMERIC(20, 4)	yes		Opening value.
closing_value	NUMERIC(20, 4)	yes		Closing value.
integrated	BOOL	yes		Whether the source integrates accounts with inventory (total rows).
read_at	DATETIME(6)	no		When: read.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (entity_id, as_of, scope, scope_name).

Refers to: entity_id → entities.id; connection_id → connections.id.

ledgerbridge_accounting.fx_revaluation_snapshots

Purpose: Each foreign-currency ledger's balance as the source reports it (revalued at current rates) against its book value (FX-004, ADR-037, ADR-040).

Filled by: Validation and ./dev.ps1 statements, for each date.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.

Column	Type	Null	Key	Meaning
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
ledger_id	BIGINT UNSIGNED	no	FK, UK	Refers to ledgers.
connection_id	BIGINT UNSIGNED	no	FK	The connection the row came from.
origin	ENUM('live','backup','file','manual')	no		live or backup (IMP-004).
as_of	DATE	no	UK	Month end, financial year end or validation date (a reliable date in Educational mode, core/dates.py).
currency_code	CHAR(3)	yes		Currency (ISO code).
balance_fc	NUMERIC(20, 4)	yes		The source's own balance in the currency (the foreign part of its closing balance).
book_value	NUMERIC(20, 4)	no		The source's base-currency value of its vouchers (closing balance less the calculated line).
revalued_value	NUMERIC(20, 4)	no		The source's closing balance at current rates.
unrealised_gain_loss	NUMERIC(20, 4)	no		Book value less revalued value (a debit is an unrealised loss).
read_at	DATETIME(6)	no		When: read.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (ledger_id, as_of); index `ix_fx_revaluation_entity_date` (entity_id, as_of).

Refers to: `entity_id` → `entities.id`; `ledger_id` → `ledgers.id`; `connection_id` → `connections.id`.

`ledgerbridge_accounting`: settings for the figures

`ledgerbridge_accounting.short_term_borrowings`

Purpose: Ledgers under Loans (Liability) marked as short-term: the ratios count their credit balance as a current liability (ADR-052, F-BS-008).

Filled by: `./dev.ps1 loans mark` and `loans clear` (audited).

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
ledger_id	BIGINT UNSIGNED	no	FK, UK	Refers to ledgers.
created_at	DATETIME(6)	no		When the row was created (UTC).

Column	Type	Null	Key	Meaning
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (ledger_id).

Refers to: entity_id → entities.id; ledger_id → ledgers.id.

ledgerbridge_reporting: statements, ours and the source's (views on top)

ledgerbridge_reporting.statement_lines

Purpose: Trial Balance, Profit & Loss and Balance Sheet lines, ours and the source's, as of each stored date (RPT-012, ADR-040); the views v_trial_balance, v_profit_loss, v_balance_sheet, v_statement_check and v_statement_open_differences read them.

Filled by: Validation and ./dev.ps1 statements (core/statements.py).

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
entity_id	BIGINT UNSIGNED	no	FK, UK	The entity (company) the row belongs to.
as_of	DATE	no	UK	As of.
statement	ENUM('trial_balance','profit_loss','balance_sheet')	no	UK	Statement.
figures	ENUM('ours','source')	no	UK	ours (built here) or source (the source's own report).
line_no	INTEGER	no	UK	Position of the line in its voucher.
section	VARCHAR(32)	yes		Section.
label	VARCHAR(255)	no		Label.
match_key	VARCHAR(255)	no		The label as both sides are compared.
level	ENUM('main','sub','detail')	no		main, sub (inside a block) or detail (ours only, never compared).
amount	NUMERIC(20, 4)	no		Amount in the base currency, canonical sign (debit +, credit −).
debit	NUMERIC(20, 4)	yes		Debit.
credit	NUMERIC(20, 4)	yes		Credit.
refreshed_at	DATETIME(6)	no		When: refreshed.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (entity_id, as_of, statement, figures, line_no); index ix_statement_lines_match (entity_id, as_of, statement, match_key).

Refers to: entity_id → entities.id.

ledgerbridge_system: connections and sync

ledgerbridge_system.sources

Purpose: Registered connector types (e.g. tally).

Filled by: Seeded on first use.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
code	VARCHAR(32)	no	UK	Short stable code.
name	VARCHAR(255)	no		Name as the source keeps it.
connector_version	VARCHAR(32)	no		Connector version.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (code).

Referred to by: connections.

ledgerbridge_system.agents

Purpose: Connector agents near on-premise sources (Phase 1b).

Filled by: Not filled yet.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
name	VARCHAR(255)	no	UK	Name as the source keeps it.
cert_fingerprint	VARCHAR(128)	yes		Cert fingerprint.
version	VARCHAR(32)	yes		Version.
last_seen_at	DATETIME(6)	yes		When: last seen.
status	ENUM('active','disabled')	no		Current state.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (name).

Referred to by: connections.

ledgerbridge_system.connections

Purpose: Each configured connection: source, origin, companies, settings, status.

Filled by: connect; status by connect -Activate / -Paused.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
source_id	BIGINT UNSIGNED	no	FK	Refers to sources.
name	VARCHAR(255)	no	UK	Name as the source keeps it.
config	JSON	no		Config.
credentials_enc	VARBINARY(4096)	yes		Credentials enc.
agent_id	BIGINT UNSIGNED	yes	FK	Refers to agents.
sync_interval_sec	INTEGER	no		Sync interval sec.
status	ENUM('active','paused','error')	no		Current state.
created_by	VARCHAR(36)	yes		Created by.

Column	Type	Null	Key	Meaning
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (name).

Refers to: source_id → sources.id; agent_id → agents.id.

Referred to by: account_groups, alerts, cost_categories, cost_centres, currency_sources, entity_sources, file_layouts, fx_revaluation_snapshots, godowns, import_batches, item_groups, items, ledgers, parties, raw_records, source_budgets, stock_categories, stock_values, sync_checkpoints, sync_logs, sync_markers, sync_runs, sync_slow_periods, sync_unverified_ranges, tax_units, units, voucher_types, voucher_versions, vouchers.

ledgerbridge_system.sync_markers

Purpose: The last AlterID stored per connection, company and object type (incremental syncs).

Filled by: Sync.

Column	Type	Null	Key	Meaning
connection_id	BIGINT UNSIGNED	no	PK, FK	The connection the row came from.
source_entity_key	VARCHAR(191)	no	PK	The source company's key (Tally: company GUID).
object_type	VARCHAR(64)	no	PK	Kind of source object.
marker_value	VARCHAR(191)	no		Marker value.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: connection_id → connections.id.

ledgerbridge_system.sync_runs

Purpose: Every sync, deletion check and transform run with its status and counts (SYN-005).

Filled by: Sync, deletion check, transform.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
connection_id	BIGINT UNSIGNED	no	FK	The connection the row came from.
run_type	ENUM('incremental','full','import','deletion_check','transform')			Run type.
status	ENUM('running','succeeded','failed','interrupted')			Current state.
started_at	DATETIME(6)	no		When it started.
finished_at	DATETIME(6)	yes		When it finished.
records_received	INTEGER	no		Records received.
records_failed	INTEGER	no		Records failed.
error_summary	TEXT	yes		Error summary.
heartbeat_at	DATETIME(6)	yes		When: heartbeat.
pid	INTEGER	yes		Pid.

Column	Type	Null	Key	Meaning
host	VARCHAR(64)	yes		Host.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: connection_id → connections.id.

Referred to by: alerts, raw_records, sync_checkpoints, sync_unverified_ranges, validation_runs.

ledgerbridge_system.sync_logs

Purpose: Output lines of a background job, for sync watch (ADR-024).

Filled by: Background jobs.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
connection_id	BIGINT UNSIGNED	no	FK	The connection the row came from.
job_id	CHAR(36)	no		Job id.
logged_at	DATETIME(6)	no		When: logged.
line	TEXT	no		Line.

Keys and indexes: index ix_sync_logs_job (job_id, id).

Refers to: connection_id → connections.id.

ledgerbridge_system.sync_checkpoints

Purpose: Chunks of a full sync fetched and stored, so an interrupted one resumes (ADR-022).

Filled by: Sync.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
source_entity_key	VARCHAR(191)	no	UK	The source company's key (Tally: company GUID).
object_type	VARCHAR(64)	no		Kind of source object.
chunk_key	VARCHAR(128)	no	UK	e.g. voucher:2023-04-01..2023-04-30
records	INTEGER	no		Records.
sync_run_id	BIGINT UNSIGNED	yes	FK	The sync run it belongs to.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, source_entity_key, chunk_key).

Refers to: connection_id → connections.id; sync_run_id → sync_runs.id.

`ledgerbridge_system.sync_slow_periods`

Purpose: Months the source couldn't deliver in one request; later runs split them directly.

Filled by: Sync.

Column	Type	Null	Key	Meaning
`connection_id`	BIGINT UNSIGNED	no	PK, FK	The connection the row came from.
`source_entity_key`	VARCHAR(191)	no	PK	The source company's key (Tally: company GUID).
`object_type`	VARCHAR(64)	no	PK	Kind of source object.
`month`	DATE	no	PK	first day of the month
`piece_days`	INTEGER	no		Piece days.
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: `connection_id` → `connections.id`.

`ledgerbridge_system.sync_unverified_ranges`

Purpose: Date ranges whose records couldn't be proven complete (ADR-023).

Filled by: Sync.

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`connection_id`	BIGINT UNSIGNED	no	FK	The connection the row came from.
`source_entity_key`	VARCHAR(191)	no		The source company's key (Tally: company GUID).
`object_type`	VARCHAR(64)	no		Kind of source object.
`period_from`	DATE	no		Period from.
`period_to`	DATE	no		Period to.
`reason`	VARCHAR(255)	no		counts and kinds only, never names
`sync_run_id`	BIGINT UNSIGNED	yes	FK	The sync run it belongs to.
`resolved_at`	DATETIME(6)	yes		When it was resolved (NULL while open).
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: index `ix_sync_unverified_open` (connection_id, source_entity_key, resolved_at).

Refers to: `connection_id` → `connections.id`; `sync_run_id` → `sync_runs.id`.

`ledgerbridge_system.import_batches`

Purpose: Backup or file imports (IMP-003, IMP-004).

Filled by: Imports (later).

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
connection_id	BIGINT UNSIGNED	no	FK	The connection the row came from.
kind	ENUM('backup','file')	no		Kind.
file_name	VARCHAR(255)	yes		File name.
file_sha256	CHAR(64)	yes		File sha256.
period_from	DATE	yes		Period from.
period_to	DATE	yes		Period to.
status	ENUM('pending','running','succeeded','failed')	no		Current state.
created_by	VARCHAR(36)	yes		Created by.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: connection_id → connections.id.

Referred to by: account_groups, cost_categories, cost_centres, currency_sources, godowns, item_groups, items, ledgers, parties, raw_records, source_budgets, stock_categories, tax_units, units, validation_runs, voucher_types, vouchers.

ledgerbridge_system.file_layouts

Purpose: Saved CSV/TXT column mappings (CON-003).

Filled by: Not filled yet.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
connection_id	BIGINT UNSIGNED	no	FK, UK	The connection the row came from.
name	VARCHAR(255)	no	UK	Name as the source keeps it.
column_mapping	JSON	no		Column mapping.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (connection_id, name).

Refers to: connection_id → connections.id.

ledgerbridge_system: validation and alerts

ledgerbridge_system.validation_runs

Purpose: Each validation of an entity as of a date, with counts (VAL-001).

Filled by: Validation after every sync and on validate.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.

Column	Type	Null	Key	Meaning
sync_run_id	BIGINT UNSIGNED	yes	FK	The sync run it belongs to.
import_batch_id	BIGINT UNSIGNED	yes	FK	The import it came from, for imported data.
entity_id	BIGINT UNSIGNED	no	FK	The entity (company) the row belongs to.
as_of	DATE	no		As of.
started_at	DATETIME(6)	no		When it started.
status	ENUM('running','passed','failed')	no		Current state.
checks_passed	INTEGER	no		Checks passed.
checks_failed	INTEGER	no		Checks failed.
thorough	BOOL	yes		Whether the source's controls (counts, stock, bills, year ends) were compared.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: sync_run_id → sync_runs.id; import_batch_id → import_batches.id; entity_id → entities.id.

Referred to by: alerts, validation_issues.

ledgerbridge_system.validation_issues

Purpose: Each failed check of a run, with its code and the two figures; resolved when a later run no longer finds it.

Filled by: Validation.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
validation_run_id	BIGINT UNSIGNED	no	FK	Refers to validation_runs.
check_code	VARCHAR(64)	no		The check (see the error catalogue, LB-VAL-xxx).
severity	ENUM('error','warning','info')	no		Severity.
object_type	VARCHAR(64)	yes		Kind of source object.
object_id	VARCHAR(64)	yes		Object id.
expected_value	NUMERIC(20, 4)	yes		Expected value.
actual_value	NUMERIC(20, 4)	yes		Actual value.
message	TEXT	no		Message.
resolved_at	DATETIME(6)	yes		When it was resolved (NULL while open).
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: validation_run_id → validation_runs.id.

`ledgerbridge_system.alerts`

Purpose: In-app alerts: one open per connection and kind (SYN-006, ADR-019).

Filled by: Sync and validation.

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`kind`	ENUM('sync_failed','detection_check_failed','validation_failed')	no		Kind.
`severity`	ENUM('error','warning')	no		Severity.
`connection_id`	BIGINT UNSIGNED	no	FK	The connection the row came from.
`entity_id`	BIGINT UNSIGNED	yes	FK	The entity (company) the row belongs to.
`sync_run_id`	BIGINT UNSIGNED	yes	FK	The sync run it belongs to.
`validation_run_id`	BIGINT UNSIGNED	yes	FK	Refers to `validation_runs`.
`message`	TEXT	no		Message.
`resolved_at`	DATETIME(6)	yes		When it was resolved (NULL while open).
`resolution`	VARCHAR(255)	yes		why resolved
`acknowledged_at`	DATETIME(6)	yes		When: acknowledged.
`acknowledged_by`	VARCHAR(36)	yes		Acknowledged by.
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: index `ix_alerts_open` (connection_id, kind, resolved_at).

Refers to: `connection_id` → `connections.id`; `entity_id` → `entities.id`; `sync_run_id` → `sync_runs.id`; `validation_run_id` → `validation_runs.id`.

`ledgerbridge_system`: users, roles and access

`ledgerbridge_system.users`

Purpose: Users (same id as the control plane); local password only with AUTH_MODE=local.

Filled by: M5.

Column	Type	Null	Key	Meaning
`id`	CHAR(36)	no	PK	same ID as the control plane
`email`	VARCHAR(255)	no	UK	E-mail address.
`display_name`	VARCHAR(255)	no		Display name.
`status`	ENUM('active','disabled','locked')	no		Current state.
`password_hash`	VARCHAR(255)	yes		Password hash.
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (email).

Referred to by: `user_entity_access`, `user_roles`.

`ledgerbridge_system.roles`

Purpose: Roles.

Filled by: M5 (seeded defaults).

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`code`	VARCHAR(64)	no	UK	Short stable code.
`name`	VARCHAR(255)	no		Name as the source keeps it.
`is_system`	BOOL	no		Whether system.
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (code).

Referred to by: `masking_rules`, `role_permissions`, `user_roles`.

`ledgerbridge_system.permissions`

Purpose: Permission codes, e.g. `validation.view`.

Filled by: M5 (seeded).

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`code`	VARCHAR(64)	no	UK	Short stable code.
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (code).

Referred to by: `role_permissions`.

`ledgerbridge_system.role_permissions`

Purpose: Which role has which permission.

Filled by: M5.

Column	Type	Null	Key	Meaning
`role_id`	BIGINT UNSIGNED	no	PK, FK	Refers to `roles`.
`permission_id`	BIGINT UNSIGNED	no	PK, FK	Refers to `permissions`.
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: `role_id` → `roles.id`; `permission_id` → `permissions.id`.

`ledgerbridge_system.user_roles`

Purpose: Which user has which role.

Filled by: M5.

Column	Type	Null	Key	Meaning
`user_id`	CHAR(36)	no	PK, FK	Refers to `users`.
`role_id`	BIGINT UNSIGNED	no	PK, FK	Refers to `roles`.
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: `user_id` → `users.id`; `role_id` → `roles.id`.

`ledgerbridge_system.user_entity_access`

Purpose: Which entities (and branches) a user may see (ACC-002).

Filled by: M5.

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`user_id`	CHAR(36)	no	FK, UK	Refers to `users`.
`entity_id`	BIGINT UNSIGNED	no	FK, UK	The entity (company) the row belongs to.
`branch_id`	BIGINT UNSIGNED	yes	FK, UK	Refers to `branches`.
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (user_id, entity_id, branch_id).

Refers to: `user_id` → `users.id`; `entity_id` → `entities.id`; `branch_id` → `branches.id`.

`ledgerbridge_system.masking_rules`

Purpose: Masking per role for sensitive fields (ACC-003, AI-015).

Filled by: M5 / M8.

Column	Type	Null	Key	Meaning
`id`	BIGINT UNSIGNED	no	PK	Row id.
`role_id`	BIGINT UNSIGNED	no	FK	Refers to `roles`.
`target`	VARCHAR(64)	no		e.g. party.name, party.pan
`mask_type`	ENUM('hide','partial','hash')	no		Mask type.
`created_at`	DATETIME(6)	no		When the row was created (UTC).
`updated_at`	DATETIME(6)	no		When the row was last changed (UTC).

Refers to: `role_id` → `roles.id`.

ledgerbridge_system: audit and AI log

ledgerbridge_system.audit_log

Purpose: Append-only audit trail (AUD-001).

Filled by: API and workers (M5).

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
occurred_at	DATETIME(6)	no		When: occurred.
user_id	CHAR(36)	yes		User id.
action	VARCHAR(64)	no		Action.
object_type	VARCHAR(64)	yes		Kind of source object.
object_id	VARCHAR(64)	yes		Object id.
entity_id	BIGINT UNSIGNED	yes	FK	The entity (company) the row belongs to.
details	JSON	yes		Details.
ip_address	VARCHAR(45)	yes		Ip address.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: index ix_audit_log_occurred_at (occurred_at); index ix_audit_log_user_id (user_id).

Refers to: entity_id → entities.id.

ledgerbridge_system.ai_query_log

Purpose: One row per AI question (AI-007).

Filled by: M8.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
user_id	CHAR(36)	yes		User id.
question	TEXT	no		Question.
generated_sql	TEXT	yes		Generated sql.
status	ENUM('succeeded','failed','refused')	no		Current state.
row_count	INTEGER	yes		Row count.
duration_ms	INTEGER	yes		Duration ms.
provider	VARCHAR(64)	yes		Provider.
model	VARCHAR(128)	yes		Model.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: index ix_ai_query_log_user_created (user_id, created_at).

ledgerbridge_system: configuration

ledgerbridge_system.kpi_definitions

Purpose: Business health indicators and thresholds (RPT-002).

Filled by: M6.

Column	Type	Null	Key	Meaning
id	BIGINT UNSIGNED	no	PK	Row id.
code	VARCHAR(64)	no	UK	Short stable code.
name	VARCHAR(255)	no		Name as the source keeps it.
formula_view	VARCHAR(128)	no		Formula view.
good_threshold	NUMERIC(20, 4)	yes		Good threshold.
bad_threshold	NUMERIC(20, 4)	yes		Bad threshold.
direction	ENUM('higher_better','lower_better')	no		Direction.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

Keys and indexes: unique (code).

ledgerbridge_system.settings

Purpose: Key-value settings.

Filled by: Configuration.

Column	Type	Null	Key	Meaning
key	VARCHAR(128)	no	PK	Key.
value	JSON	no		Value.
created_at	DATETIME(6)	no		When the row was created (UTC).
updated_at	DATETIME(6)	no		When the row was last changed (UTC).

ledgerbridge_reporting

No tables yet: the reporting views and aggregate tables are built in M6 (designed in schema.md Section 6).