

# Comparative Performance Evaluation of Hadoop on PaaS Proposals by Leveraging HiBench

Uluer Emre Özdil<sup>a,b,\*</sup>, Serkan Ayvaz<sup>a,c,\*</sup>

<sup>a</sup>*Bahçeşehir Üniversitesi, Beşiktaş - İstanbul, Turkey*

<sup>b</sup>*School of Engineering, Big Data Analytics and Management*

<sup>c</sup>*Department of Software Engineering*

---

## Abstract

Big Data's advent emerged in any data-driven domain and scaled up the extent and depth of data and its handling. New approaches leaning on enhanced distributed storage and computing paradigms are invented in an ongoing maturing process to overcome management and running analytics challenges. Within the given context, Hadoop is embraced on a wide scale by beneficiaries from industry and academia since its first release in 2005. Cloud Computing's commercialization started a grand migration movement towards the cloud, impacting Hadoop to transfer its presence from on-premises to virtual machines stored and tamed in extensive data center facilities by global Cloud Service Providers. The CSPs' response to result-focused analytics purposes emerged a service called managed systems where the contractor overtakes the demanding workload of multi-node cluster implementation by providing a pre-configured Hadoop package simplifying the installation process to a matter of property selection, thus eliminating technical know-how requirements on such an implementation. Converting the concept of cloud-based Hadoop from IaaS to PaaS reduced costs commercially presented as pay-as-you-go or pay-per-use. However, there is a payoff; managed Hadoop systems do present a black-box behavior to the end-user who cannot be clear on the inner performance dynamics, hence the benefits by leverag-

---

\*Corresponding authors

Email addresses: [ulueremre@gmail.com](mailto:ulueremre@gmail.com) (Uluer Emre Özdil),  
[serkan.ayvaz@eng.bau.edu.tr](mailto:serkan.ayvaz@eng.bau.edu.tr) (Serkan Ayvaz)

ing them. In the study, we selected three global providers (GCP, Azure, and Alibaba Cloud), activated their Hadoop PaaS services (Dataproc, HDInsight, and e-MapReduce, respectively) within the same geographical region and by promise same computing specifications, and executed several Hadoop workloads of the HiBench Benchmark Suite. The results yield that the same computation specs among CSPs' services do not guarantee close performance outputs to each other, nor consistent performances within themselves. We assume that the pre-configuration work of managed systems done by the contractor plays a weighing role in their performance.

*Keywords:* `elsarticle.cls`, Benchmark Hadoop PaaS, HiBench, Performance evaluation

*2010 MSC:* 00-01, 99-00

---

## 1. Introduction


*Big Data.* An indispensable aspect for enterprises and academia of the information era is Big Data. As the estimated global internet access rate covers a weighing majority of roughly 63% of the global human population by 2020  
5 [1], mobile technology devices become more democratized, sensors and IoT devices the more occupy daily life, and ongoing scientific researches produce vast amounts of data outputs, the Big Data phenomenon gathered itself utilizing overwhelming size with Volume, ever-accelerating growth rate with Velocity, and diverse data structures with Variety, new approaches were forced to mature  
10 in order to ease the maintenance of Big Data and enable extracting valuable insights from it leveraging complex statistical formulae.

*Hadoop* [2]. Frameworks for distributed storage and computation sparked up first by web indexing engines were inherited and developed further by the open-source community yielding what is known as Hadoop and its ecosystem today.  
15 Considering the complexity of dealing with big data, Hadoop represents a modern analytics framework decreasing management efforts and analytics opera-

tions' duration to an acceptable level employing affordable commodity computers. Hadoop comprises three for its core functionality:


- HDFS filesystem for storing extensive data across a cluster of nodes,
- the MapReduce framework developed for distributed computation, and
- YARN for allocating available resources for the requested tasks.

Figure 1: Hadoop Distributed File System

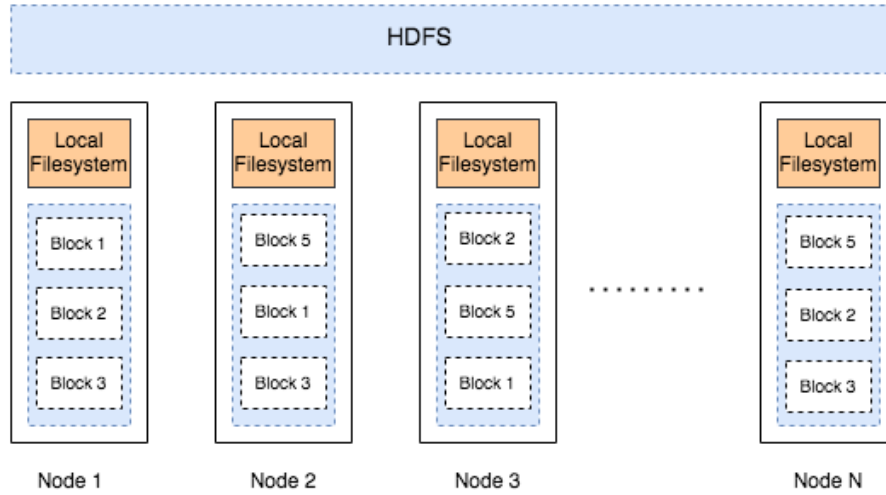


*HDFS*. Hadoop Distributed File System, which stands for HDFS, is developed with inspiration from the guidelines described in a whitepaper about Google's Filesystem (GFS), a distributed storage paradigm to handle petabytes and larger-scale data volumes within a cluster robust to machine failures, published in 2003 [3]. Significant data volumes are chunked and stored within 128 MB blocks, and each block is replicated to different nodes by a factor of 3, these values are the defaults and can be changed. When the data file is requested, related blocks are constructed from the nodes across the cluster. The redundancy of the blocks guarantees availability; in a case where one or more nodes become out of service, requested data blocks are gathered from the available redundant

copies stored on other nodes. HDFS is a co-existing file system on the nodes it is installed, it provides a global distributed view to the files across the cluster, thus listing an HDFS directory is possible from within all nodes, the files on HDFS are listed as they exist on a local filesystem, but the physical parts of the files reside on other physical locations. Figure 1 depicts an overview of HDFS. The architecture of HDFS comprises Namenode, which is a dedicated machine to keep track of the files and folders and respective metadata like block locations across the cluster, and a number of data nodes on which the data blocks are residing [4]. Namenode is a single-point-of-failure, meaning if the namenode is down, the whole Hadoop system is down. To overcome this issue, starting with version 2, Hadoop matured to a High Availability configuration depicted in Figure 2 where there exist two namenodes, one active namenode and one standby namenode communicating with the data nodes and storing edit logs in a shared folder. As the naming refers, the active namenode is in charge, whereas the standby node behaves more like a shadow system. Whenever the active namenode breaks down, the standby namenode gets activated, resulting in no service breakage for the end-user.

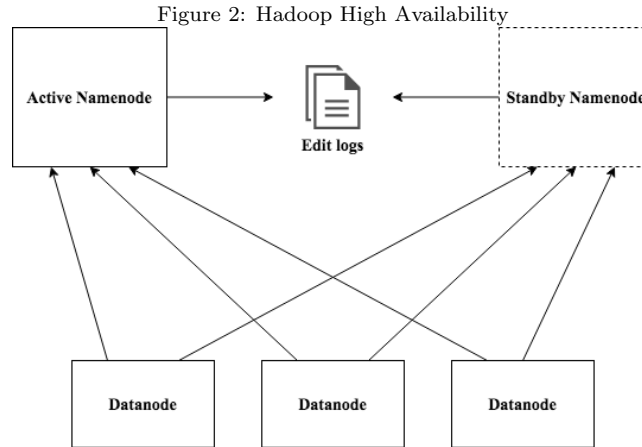

*MapReduce.* Similar to HDFS, Hadoop's MapReduce is the open-source implementation of the MapReduce framework described in a paper [5] published in


2004. An MR flow, as depicted in Figure 3, starts with assigning blocks from HDFS as input splits to mappers, computed intermediate results are then shuffled and passed to reducers where outputs are sent back to the client. Nodes running mappers and reducers provide parallel processing, which can be scaled  
 55 by simply adding new commodity computers. The computation is made on nodes where related data blocks reside, which explains the term data locality; bringing computation to the data eliminates the need for moving data across nodes for computation.

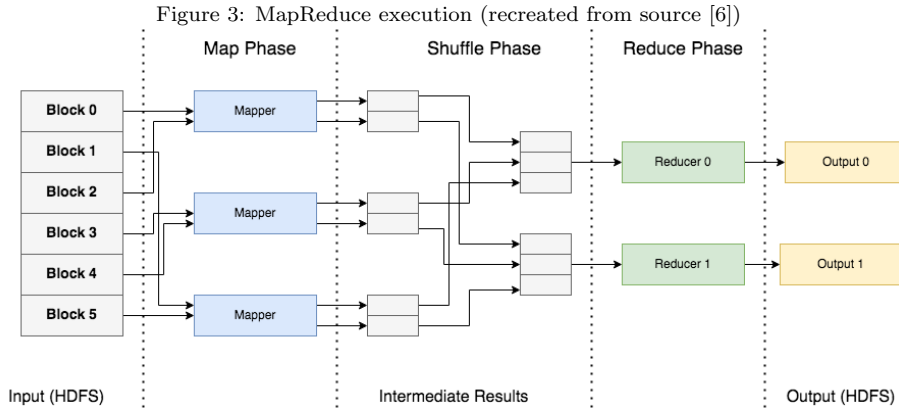

**YARN.** Hadoop version 2.x includes significant architectural improvements in  
 60 terms of resource management. Version 1.x of Hadoop suffered shortcomings due to an overload of its resource management duties, which was handled within MRv1, where job tracker node and task tracker nodes were running the organizational load of MapReduce executions. YARN standing for "Yet Another Resource Negotiator", emerged as an intermediate layer between HDFS and  
 65 MapReduce by taking over some of the load that was previously carried out by MRv1, has become a gate to batch, stream, interactive, and graph processing engines to leverage HDFS file system (Figure 4). After YARN, MRv1 has become MRv2 isolated from resource managerial duties regarding the previous version hence more efficient with processing oriented focus. YARN innovates  
 70 Hadoop by bringing the architectural elements resource manager, which is one

node dedicated to tracking resources across the cluster by availability, and node managers who reside inside each worker node and monitor the containers.

Figure 4: YARN (recreated from source [5])

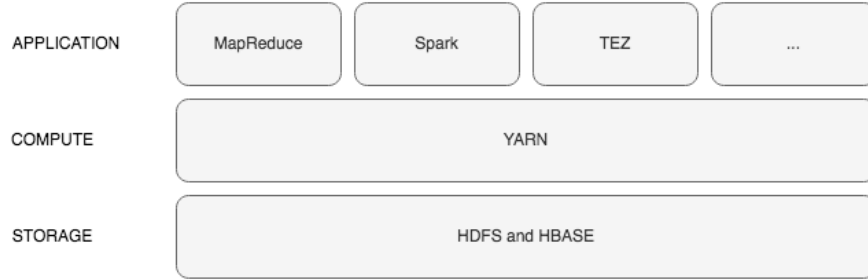

*Cloud Computing.* The commercialization of Cloud Computing in the midst  
 2000s [7] delivered utilization of storage and computing resources to the end-  
 75 users saving them high investments in hardware technology that is soon going  
 to be obsolete and is expensive to maintain. As the migration to the cloud is an  
 ongoing process, Hadoop also slips out from its residence on on-prem infrastruc-  
 ture to the cloud by being implemented on virtual machine instances provided as  
 IaaS platforms by many providers. The Cloud Service Providers embraced the  
 80 need of eliminating Hadoop’s complex implementation process on multi-node  
 VMs by providing managed Hadoop systems, commercially packaged as PaaS,  
 which are pre-installed and pre-configured Hadoop clusters allowing the instal-  
 lation of tens to hundreds of nodes in a matter of minutes by merely determining  
 some settings like hardware specs and node numbers prior the installation. The  
 85 Managed Hadoop system is both a blessing and a curse; by leaving the hard  
 implementation part, which is not necessarily related to the primary analysis  
 objective, to a contractor, the end-user saves time and efforts; including a pay-  
 off, though: By definition, managed systems are prepackaged solutions provided  
 in black-box nature. CSPs apply behind-the-scenes tweaks in terms of reach-  
 90 ing better performance results on selected approaches like memory-intensive or  
 compute-intensive applications. However, from the end-user’s point of view, the

performance of a managed system’s user defined specifications remains uncertain.

*GCP Dataproc [8].* Google’s managed Spark and Hadoop solution, namely Dataproc, is a pre-configured Hadoop on PaaS service built upon pre-installed VM instances on Compute Engine [9], which is another service of GCP. An OS spectrum comprising Debian and/or ubuntu was offered at the date of the study, which are proposed as pre-installed images during the Dataproc installation process. While Hadoop core elements HDFS, YARN, and MapReduce reside as default frameworks, a variety of elements belonging to the Hadoop ecosystem are offered as well. The end-user is also offered to leverage Cloud Storage [10], Google’s proprietary cloud storage service, to keep data in the long term where the Dataproc cluster is meant to be terminated after usage. By means of Web UI or local CLI via API, the end-user can access the Dataproc cluster as well as single VM instances within Compute Engine. Google offers a large number of data centers around the globe.

*Azure HDInsight [11].* Azure’s solution to managed Hadoop and Spark platform is a product of the collaboration with Hortonworks bringing Hortonworks Data Platform (HDP) to a cloud platform [12]. As being so, HDInsight differs in architecture with respect to its conjugates by not being a Hadoop cluster installed on the cloud VM service layer, namely Azure Virtual Machines; instead, it is an HDP platform optimized for the cloud. Another difference is that HDInsight obligates WASB, the Azure blob system, as the storage system, including an option to leverage Data Lake Storage, excluding Hadoop’s native file system HDFS from the options. At the date of the study, Azure was obligating Hadoop to use in High Availability mode with two master nodes hence leaving hardware selection to the end-user.

*Alibaba Cloud e-MapReduce [13].* Alibaba Cloud’s managed Hadoop service e-MapReduce leveraging Apache Hadoop and Apache Spark is placed as a service layer on its Elastic Compute Service (ECS) [14], a similar approach to the one

of GCP's. Alibaba's number of provided data center locations beyond Mainland China are not as numerous as its conjugates hence available in the United States, Europe, Middle East, and the Asia Pacific. Alibaba Cloud's managed service distinct in that its pre-installed Operating System, Aliyun Linux 2, is developed by Alibaba Cloud, a Linux distribution based on CentOS, the open-source version of RedHat Linux. AliyunOS is claimed to provide a stable and reliable environment optimized for the Alibaba Cloud infrastructure and be open source at its GitHub repository [15]. e-MapReduce offers a wide scale of machine types with different specifications for specific purposes like CPU intensive or memory-intensive tasks. As with GCP, on Alibaba Cloud e-MapReduce, the type of storage, whether it shall be HDFS or leverage Alibaba cloud storage, can be specified by the end-user.

*HiBench* [16]. The open-source HiBench implementation, introduced to the community in 2010 [17], is motivated by the aim of providing a comprehensive and representative benchmark for Hadoop, helping evaluate different big data frameworks in terms of speed, throughput, and system utilization. At the date of the study, the current version of HiBench is 7.1, comprising 29 benchmarks categorized in 6 sections (Micro, Machine Learning, SQL, Websearch, Graph, and Streaming). Table 1 lists the Hadoop related workloads in HiBench 7.1 [18] executed in the study. *Sort*: The workload sorts the input data generated by RandomTextWriter. *Wordcount*: Counts the occurrence of words generated by RandomTextWriter. *Terasort*: Subject to sort is the input data generated by the Hadoop TeraGen program. *Dfsioe*: The enhanced version of Hadoop's Dfsio benchmark generating a large number of simultaneous write and read tasks. The enhancement calculates the average IO rate, and average throughput of each map task, and aggregated throughput of the cluster.

HiBench data scales

Here is another HiBench citation [19]



Table 1: HiBench 7.1 - Hadoop-related Workloads

Category	Workload	Dominant Character
Micro	Sort	IO bound
	Terasort	CPU (map), IO (reduce)
	Wordcount	CPU bound
	Dfsioe	IO bound
SQL	Scan	IO bound
	Join	IO bound
	Aggregation	IO bound
ML	Bayes	IO bound (CPU bound in map)
	Kmeans	CPU (iterations), IO (clustering)
Websearch	Nutchindexing	IO bound
	Pagerank	CPU bound

## 2. Related Work

150 HiBench is a tool to measure a specific system’s performing behavior during execution. The conceptualization of conducting a benchmark may arise from different soils. Based on the conductor’s motivation, a benchmark’s use case could be an inner evaluation of a system’s performance before and after some configuration tweaks are set, a comparison of rival / complementary systems, or  
155 putting CSP’s cloud infrastructure services on a scale. The following literature has been searched with finding different use cases of the HiBench benchmarking suite in mind.

Poggi et al. [20] Characterizing BigBench

Poggi et al. [21] the state of SQL on Hadoop [53]

160 Samadi et al. [22] conduct an experimental comparison between Spark and Hadoop installed on virtual machines on Amazon EC2 by leveraging nine among the provided HiBench workloads. Accuracy reasons led the conductors to run the workloads three times, concluding input data scales of 1, 3, and 5 GB, respectively. Based on the outputs comprising duration, throughput, speed up,  
165 and CPU/memory consumption, the conclusion draws Spark consuming less

CPU and performing better on all workload results over Hadoop.

Ahn et al. [23] put Spark on YARN’s performance on the test with HiBench in terms of handling a deluge of data generated by IoT devices. The experiment is run on a cluster with one master and three worker nodes, each node possessing  
170 an Intel Xeon processor with 20 cores and 128GB main memory meaning 60 cores and 384GB memory in total. HiBench workloads Micro (comprising Sort, TeraSort, and Wordcount), SQL (comprising Aggregation, Join, and Scan), and Machine Learning (comprising Bayes, Logistic Regression, Gradient Boosting Tree, Random Forest, and Linear Regression) are leveraged by a chosen data  
175 scale of 30 GB. Spark occupies memory during the whole job execution, which reduces IOs’ negative impact on processor performance. For optimizing resource usage, the conductors modified YARN’s minimum memory allocation and Spark executor settings so that the Spark executors’ overall loads remain below total system memory. Alongside with HiBench’s duration and throughput report,  
180 CPU / memory utilization and disk throughput are profiled as well. The finding of this paper points out that Spark guarantees performance when provided with enough memory.

Han et al. [24] study the impact of memory size on big data processing by means of Hadoop and Spark performance comparison leveraging HiBench’s  
185 k-Means workload as the only benchmark. For each of the specified memory sizes of 4, 8, and 12 GB, iterating through a data scale of 1 to 8 GB, with 1GB increment in between, k-Means benchmark for Hadoop and Spark is executed. The results depict Spark’s overperforming Hadoop unless the total input data size is smaller than 33.5% of the total memory size assigned to worker nodes.  
190 After reaching that ratio, Spark suffers from insufficient memory resources and is led to interoperate with HDFS causing a sharp decrease in its performance and brings Hadoop in throughput and duration performance to the front. The conductors make a second experiment to find out if Spark’s performance can be improved by tweaking the allocation setting for storage memory and shuffle  
195 memory while remaining within the specified memory limitations of 4, 8, and 12 GB. Executing HiBench’s k-means benchmark outputs a report interpreted

by the conductors as Spark show a 5-10% and 15% maximum improvement in processing time.

Ivanov et al. [25] compare the performances of two enterprise-grade applications, DataStax Enterprise (DSE), a production-level implementation of Apache Cassandra with extended features like in-memory computing and advanced security, to name but two, and Cloudera’s Distribution of Hadoop (CDH) comprising core Hadoop elements HDFS and YARN integrated with elements belonging to the Hadoop ecosystem. DSE’s HDFS compatible file system CSF lets Hadoop applications run without any modification. The conductors installed the latest stable releases of both software on equal CPU, memory, and network infrastructure configuration; for both installations, default system parameters have been left with their defaults. HiBench’s three chosen workloads (CPU-bound wordcount, IO-bound dfsioe, and mixed HiveBench) are executed three times; furthermore, the average values have been taken for representativeness. Several conclusions of their study proclaim linearly scaling of both systems by the increase of data size, while CDH outperforms DSE in read-intensive workloads, DSE performs better in write-intensive workloads. Leveraging HiBench is where the study differs in approach related to other studies using the YCSB benchmark suite. HiBench’s results confirm the latter’s output as well.

### 3. Method

In the study, we benchmarked Hadoop on PaaS services of three CSPs in terms of comparing their performances accompanied by respective resource utilization across the worker nodes: GCP Dataproc, Azure HDInsight, and Alibaba Cloud e-MapReduce, each recognized in Gartner’s 2020 Magic Quadrant for Cloud Infrastructure and Platform Services [26] either in leading or in niche section.

We constructed the benchmark study in two use cases: Use Case 1 aims to map the overall performance behaviors of respective CSP’s service within HiBench’s predefined data scales, huge and gigantic. The following benchmarks

have been executed on the clusters of the respective providers: Micro (Sort, Terasort, Wordcount, and Dfsioe), SQL (Scan, Join, and Aggregation), ML (Bayes and Kmeans), and Websearch (Pagerank).

Use Case 2. We picked one benchmark of IO-bound character (Sort), one  
230 benchmark of CPU bound character (Wordcount) and executed these in increasing data scales delivered by HiBench: Tiny, Small, Large, Huge, and Gigantic. The largest predefined HiBench data scale, namely Bigdata, would cross the storage limits of the installed clusters; hence we left it off the execution.

Bound by the availability of their respective hardware and software options,  
235 we selected by providers' promise apparently same or close settings. With respect to our aim to benchmark managed systems as they come out-of-the-box, we put two basic rules to stick for each provider in order to align initial circumstances prior to benchmark execution: Among the CSPs, the respective data center's geographic location shall be the same or close (1), processor number and  
240 memory capacity (by providers' promise) shall be same or as close as possible. Thus Frankfurt is selected as the location for all providers' data centers; within the given options, we selected 8 CPUs/64GB RAM for the master node and 4 CPU's/32 GB RAM for each worker node totaling 12 CPUs and 96GB worker compute power for the cluster. Specified cluster installation options and details  
245 are given in Table 2. Without applying any performance tweak operation to the respective configurations, we immediately executed several Hadoop benchmarks from HiBench's Micro, SQL, ML, and Websearch categories. We only modified the default cluster's configuration in cases where the benchmark was detained from running, which is reported in the Discussion section.

250 We collected system utilization records addressing CPU, Memory, and IO behavior on each worker node of the cluster during the benchmark execution. This approach enabled us to visualize the system utilization on each worker node within the cluster over the respective benchmark's execution time. To provide data locality, if a specific data block to process does not reside on the same  
255 node where there is an available map slot, YARN transfers the respective block to the node with a free slot requiring a network activity, a possible decreasing

impact over the performance. However, due to the small cluster size consisting of 3 nodes, we excluded the network activity track with the assumption data locality condition is provided during the benchmark’s executions and is likely to have the least impact on the performance.

#### 4. Results

HiBench’s Hadoop related benchmarks in groups Micro (Sort, Terasort, Dfsioe, and Wordcount), SQL (Scan, Join, and Aggregation), ML (Bayes and Kmeans), and Websearch (Pagerank) have been executed on all three CSPs managed Hadoop services. Table 3 lists HiBench 7.1 benchmark reports for Use Case 1, Table 4 lists reports for Use Case 2.

*Plots.* During benchmark runtime, resource utilization on worker nodes has been captured. The plots are suggested to be perceived as follows: Top-left, top-right, and bottom-left plots represent CPU (user%), memory (%memused), and IO utilization (read transfers and write transfers per second) on each worker node of the respective cluster over time. CPU utilization lines are given in blue tones; memory utilization lines are given in fuchsia tones, IO-read and IO-write tps’ are represented with orange tones and green tones, respectively. Even though the coloring convention might sound confusing, it gives a clear overview of the utilization behavior of the entire benchmark process over time. The left-hand side x-axis measures CPU/Memory usage in percent; the right-hand side x-axis measures IO-read and IO-write transfers per second. The bottom-right plot represents the comparative benchmark performance outputs of the respective CSPs. duration measure in seconds is expected to be perceived as ”lower is better” while throughput, which is the amount of processed data per second in bytes, is expected to be perceived as ”higher is better”.

For each use case, we provided spider charts, a.k.a. radar plots, to give a comparative overview for system utilization vs. benchmark performances of relevant CSPs. In these plots, normalized average values of the captured CPU, Memory, and IO data on the worker nodes have been taken and averaged a

Table 2: Selected configurations on CSPs’ managed Hadoop services

	<b>GCP</b>	<b>Azure</b>	<b>Alibaba Cloud</b>
Service	Dataproc	HDInsight	e-MapReduce
Region	europe-west3-a	Germany West Central	eu-central-1
Location	Frankfurt	Frankfurt	Frankfurt
Image	1.4-ubuntu18	HDI 3.6	EMR-3.32.0
OS	ubuntu18.04	ubuntu 16.04	Aliyun Linux 2
Hadoop v.	2.9	2.7.3	2.8.5
Java	1.8.0_275	1.8.0_275	1.8.0_252
MASTER NODE			
Machine Type	e2-highmem-8	A8m v2	ecs.se1.2xlarge
Processors	8 vCPU	8 cores	8 vCPU
Memory	64 GB RAM	64 GB RAM	64 GB RAM
Extras	–	1 Master Node clone for HA, 3 extra nodes for Zookeeper	–
WORKER NODES			
# of Nodes	3	3	3
Machine Type	e2-highmem-4	A4m v2	ecs.se1.xlarge
Processors	4 vCPU	4 cores	4 vCPU
Memory	32 GB RAM	32 GB RAM	32 GB RAM
Storage	HDFS 1000 GB	WASB	HDFS 1000 GB
Replication	2	<i>Azure blob storage</i>	2
Block size	128 MB		128 MB

Table 3: Use Case 1 benchmark results

Data Scale: Huge

Benchmark	IDS	Dataproc		HDInsight		e-MapReduce	
		$D_{(s)}$	$T_{(MB/s)}$	$D_{(s)}$	$T_{(MB/s)}$	$D_{(s)}$	$T_{(MB/s)}$
Sort	3.28	70	47.11	131	25.08	111	29.42
Terasort	32.00	667	47.99	858	37.28	1054	30.37
Wordcount	32.85	978	33.60	1470	22.34	889	36.95
Dfsioe-r	26.99	294	91.77	662	40.79	245	110.21
Dfsioe-w	27.16	379	71.73	658	41.30	281	96.49
Scan	2.01	73	27.63	157	12.83	74 (*)	27.19 (*)
Join	1.92	181	10.61	356	5.39	175 (*)	10.95 (*)
Aggregation	0.37	97	3.86	215	1.73	97 (*)	3.85 (*)
Bayes	1.88	2604	0.72	6120	0.31	3017	0.62
Kmeans	20.08	2321	8.65	2313	8.68	2070	9.70
Pagerank	2.99	1544	1.94	3334	0.90	2458	1.22

Data Scale: Gigantic

Benchmark	IDS	Dataproc		HDInsight		e-MapReduce	
		$D_{(s)}$	$T_{(MB/s)}$	$D_{(s)}$	$T_{(MB/s)}$	$D_{(s)}$	$T_{(MB/s)}$
Sort	32.85	715	45.94	787	41.72	896	36.68
Terasort	320.00	9821	32.58	—(**)	—(**)	9660	33.13
Wordcount	328.49	10131	32.42	13596	24.16	8671	37.88
Dfsioe-r	216.03	915	236.11	1886	114.54	660	327.29
Dfsioe-w	217.33	1347	161.39	1914	113.57	1060	205.12
Scan	20.10	457	43.96	514	39.09	407 (*)	49.38 (*)
Join	19.19	595	32.27	761	25.24	594 (*)	32.32 (*)
Aggregation	3.69	523	7.05	594	6.20	565 (*)	6.52 (*)
Bayes	3.77	5350	0.70	12589	0.30	6363	0.60
Kmeans	40.16	4541	8.84	4042	9.94	4034	9.96
Pagerank	19.93	8371	2.38	11779	1.70	13893	1.43

IDS: Input Data Size (GB);  $D_{(s)}$ : duration (sec);  $T_{(MB/s)}$ : throughput (MB/sec)

(\*) Benchmark succeeds after modifying preconfiguration, more on this in Discussion

(\*\*) System failure due to insufficient space on HDFS, more on this in Discussion

Table 4: Use Case 2 benchmark outputs

Benchmark	Dataproc			HDInsight		e-MapReduce	
	IDS	$D_{(s)}$	$T_{(MB/s)}$	$D_{(s)}$	$T_{(MB/s)}$	$D_{(s)}$	$T_{(MB/s)}$
Sort (t)	39.30 KB	36	0.0012	69	0.0006	32	0.0012
Sort (s)	3.28 MB	36	0.09	70	0.0471	31	0.105
Sort (l)	328.50 MB	42	7.86	81	4.07	42	7.74
Sort (h)	3.28 GB	70	47.08	141	23.36	107	30.69
Sort (g)	32.85 GB	694	47.30	699	47.00	883	37.20
Wordcount(t)	38.65 KB	38	0.001	68	0.0006	31	0.0012
Wordcount (s)	348.29 MB	50	6.51	98	3.34	47	7.06
Wordcount (l)	3.28 GB	129	25.45	269	12.20	120	27.27
Wordcount (h)	32.85 GB	952	34.51	1487	22.10	888	37.00
Wordcount (g)	328.49 GB	9749	33.70	13286	24.73	8622	38.10

IDS: Input Data Size;  $D_{(s)}$ : duration (sec);  $T_{(MB/s)}$ : throughput (MB/sec)  
(t): tiny, (s): small, (l): large, (h): huge, (g): gigantic

second time in order to get scalar CPU, Memory, and IO values representing the cluster’s average performance. Combining the aforementioned values with normalized duration and throughput report values of HiBench resulting the spider plots of the paper. Nevertheless, for the spider plots, our recommendation for both perceptions of throughput and duration shall be ”higher is better”. Even though the duration is of lower-is-better nature, for the sake of proper visualization, we needed to display the shortest duration as the most visible among other CSPs. Before taking the average of the IO-read and IO-write data, we removed 0 valued instances; this approach, again, has been taken for the sake of a better visualization of IO utilization.

#### 4.1. Use Case 1 Results

*Sort - Huge (Figure 5).* CPU utilization in GCP and Alibaba condense around 80% to 98%, whereas in Azure, the range widens up between 50% to 90%. Memory loads in GCP and Alibaba among the worker nodes display a harmonic behavior between 20% to 40% and 90% to 100%, respectively, whereas the



memory load in Azure’s worker nodes varies between 10% and 50%. In the second half of the benchmark execution, IO write transfers in GCP and Alibaba show peaks at about 500 tps, wherein Azure IO transfer s limited with 100 tps. GCP carrying out the highest throughput, thus reaching the shortest duration of 70 seconds.

*Sort - Gigantic (Figure 6).* Switching the data scale for Sort benchmark to gigantic, GCP’s processor load condenses around 80% - 95% where its memory load rises to range 80% - 100%; IO write transfers behave at about 500 tps where IO reads reach 1000 tps in the second half of the benchmark process. Azure’s processor and memory performances depict a looser behavior not utilizing the maximum potential, whereas IO-read and IO-write tps’ reach their maximum at 200 and 350, respectively. Alibaba’s resource utilization depicts a high memory load of 90% - 100% dropping to 70% and about 83% on partial nodes in the second half. As so with the processor load behaving between 80% and 100% in the first half dropping to about 50% in the second half where IO write reaches the peak at 800 tps., which results in GCP embarking highest and Azure the second highest throughput, respective durations output in 715 and 758 seconds.

*Terasort - Huge (Figure 7).* GCP depicts a high utilization on processors at a range of 80% - 100%, memory moving from 80% to 100%, and IO behavior 500 tps in overall and peaking at 1000 tps in IO-read, resulting in the highest throughput in 667 seconds response time among other CSPs. Azure’s processor and memory utilization fluctuate in overall execution where memory performance incrementally reaches 100% in one node, a stable IO-write in overall process at about 70 tps peaking at 250 tps reaches the second highest throughput in 858 seconds. Alibaba, with high memory and processor utilization and varying IO tps’s in the overall process, falls back in embarking throughput and resulting in 1054 seconds response time.

*Terasort - Gigantic (Figure 8).* Switching the scale to gigantic causes dramatic changes in resource utilization on all CSPs. During all benchmark processes,

330 GCP depicts very condensed high utilization on the processor at a broad range  
of 30% to about 95%, memory consumption between 95% and 100%, and IO  
read transfer varying between 800 to 1100 tps. Azure, on the other side, fails to  
complete the benchmark on three attempts, suffering from YARN insufficient  
HDFS allocation requested for bringing the job further. IO scores drop to  
335 null, and task raises failure. Alibaba Cloud's resource utilization goes within  
maximum levels where processor utilization depicts a consumption of 80% to  
90% in the overall, memory utilization at it highest during all process, and IO  
reads and writes moving along the 600 tps' and peaking around 1600 tps. With  
a slightly higher value in throughput, Alibaba performs best with 9660 seconds,  
340 followed by GCP with 9821 seconds. Azure disqualifies this session.

*Wordcount - Huge (Figure 9).* GCP performing processor utilization of 75%  
to 100% with a memory consumption between 80% to 95% where IO transfers  
move along 60 tps peaking at about 150 tps reaches second-highest throughput  
with 978 seconds response time. Azure's processor utilization moving along  
345 70% to about 100%, where memory depicts 30% to 50% utilization and lower  
IO transfers peaking at about 60 tps reaches the lowest throughput hence the  
most extended duration of 1470 seconds. Alibaba depicting high processor and  
memory load moving in ranges 70% to 100% and 80% to slightly over 90%  
with IO transfers moving along 200 tps peaking at 300tps to 350tps reaches the  
350 highest throughput hence shortest execution time of 889 seconds.

*Wordcount - Gigantic (Figure 10).* GCP utilizing processor and memory sources  
at their maximum during the overall process, for CPU within 60% up to push-  
ing 100%, memory utilization varying between 60% to 100%, and IO-read and  
IO-write transfers moving along 90 tps and 250 tps, respectively, reaches second-  
355 highest throughput load resulting in 10131 seconds response time. Azure shows  
a dens processor utilization varying between 40% and close to 100%, memory  
consumption is somehow oppressed to stay within the range of 20% up to 50%,  
IO behavior seldomly reacts over 60 tps resulting in the lowest throughput and  
most extended duration of 13596 seconds. Alibaba depicting a high processor

360 utilization within range 85%-100%, relatively more stable memory consumption in the range 85% to 100%, and IO transfers mostly about 300 tps, thus performing highest throughput hence shortest response time of 8671 seconds.

*Dfsioe-read - Huge (Figure 11).* GCP's processor utilization is moving roughly between 80% to 95%, accompanied by memory utilization within range slightly  
365 below and over 70%, IO transfers peaking at 400 tps mostly go along 100 tps to 250 tps performs second highest throughput resulting in 294 seconds of duration. Azure's processor utilization is somewhat limited to between 60% and 90%, whereas the memory utilization behaves between 10% to 50%, generally low IO transfers with two markable IO-read and IO-write condenses reaching peaks  
370 at 2000 tps and 1500 tps, respectively, results in the lowest throughput and 662 seconds of response time. Alibaba, with 245 seconds duration, displays a similar resource utilization pattern with GCP where it differentiates in memory utilization, moving around 90%.

*Dfsioe-read - Gigantic (Figure 12).* Processor utilization in GCP cloud concentrates within the range of 80% to 90%; memory utilization moves around  
375 95% to 100%, whereas IO read transfers moving along about 500 tps brings its performance to second highest throughput with 915 seconds duration. Azure performs within a range of 55% up to 90% in CPU utilization, 20% to 55% in memory utilization, and IO-write activity moving along 70 tps, IO-read showing  
380 a peak at about 470 tps, which results in throughput outputting 1886 seconds response time. Alibaba system utilization moves along 80%-90% range for processing performance, 90%-100% for memory load, and behavior up to 1700 tps IO-write placing its performance to the highest throughput with 660 seconds duration.

385 *Dfsioe-write - Huge (Figure 13).* In GCP, processor utilization moves between 70% and 90%, memory load increments from 20% up to 70%, whereas IO-write transfers move along 500 tps resulting in the second shortest response time 379 seconds. Azure's CPU utilization around 60% to 90%, memory load moves

between 20% and 40%, whereas IO-write transfers vary about 20 tps to 80 tps  
390 peaking at about 120 tps by a duration output of 658 seconds. Alibaba, with  
processor utilization 80% and 95%, incrementing memory load from about 40%  
up to 90%-100%, and IO-write transfers at about 100 tps to 600 tps peaking  
at about 800 tps performs the heaviest throughput, thus reaching the shortest  
response time with 281 seconds.

395 *Dfsioe-write - Gigantic (Figure 14)*. GCP processor utilization moves along a  
broad range hitting up to 90% load, memory load quickly rises to 95%-100%  
range and keeps its position in overall execution, IO-writes move along 500 tps to  
600 tps placing GCP to the second-best performance with 1347 seconds response  
time. Azure shows a CPU utilization in a range of 60% up to 90% until it drops  
400 to about 25% in the 2/3th of the overall process, memory load moves along  
lower 20% to upper 50% until its sudden drop to upper 15% simultaneously  
with CPU utilization where IO-write transfers peak at about 120 tps resulting  
in 1914 seconds response time. Alibaba performing the shortest response time  
with 1060 seconds displays a similar memory and processor utilization behavior  
405 with GCP where it differs in IO-write transfers peaking at about 900 tps.

*Scan - Huge (Figure 15)*. GCP processor utilization condenses between about  
80% and 90% during benchmark execution; memory load depicts movement  
between 20% and 40% accompanied by an IO-write transfer reaching over 500  
tps, which brings GCP to the top performance within this benchmark with 73  
410 seconds. On Azure's side, processor utilization moves along 80%-90% range  
whereas memory load increments from the 15% to the 30%, relatively low  
IO-write transfer peaking at about 85 tps results in lowest throughput and  
157 seconds duration. Alibaba follows a similar pattern like GCP in resource  
utilization with about 90% CPU load, 15% to below 40% memory utilization  
415 but a less dense IO-write transfer peaking at about 550 tps and so reaching a  
close throughput to GCP resulting in 74 seconds response time.

*Scan - Gigantic (Figure 16).* GCP's CPU utilization varying between 50% and 90% with convergence at about 80%, memory load showing similar range with utilization reaching up 100% and IO-write transfers moving between 500 tps and 600 tps results in second-highest throughput by a 457 seconds response time. Azure's CPU utilization condenses between 80% and 90% and memory load incrementing two times from 20% to 40%, IO-write transfer moving along 50 tps to 60 tps peaking at about 200 tps results in 514 seconds duration. Alibaba's processor utilization moves in a relatively higher range between 80% and 95%, incrementing memory load range from 40%-50% to 80%-100% during runtime, and IO-write transfers peaking at about over 500 tps results in the highest throughput, thus the shortest duration of 407 seconds.

*Join - Huge (Figure 17).* GCP processor load moves mainly between 80% and over 90%; memory utilization moves along about 20% and 30%, IO-writes behaving at about 150 tps brings outputs 181 seconds response time. Azure's resource utilization shows a range between 80% and 90% for CPU, varying memory loads moving along below 20% and below 60%, IO-write transfers behave below 60 tps with a peak of 100 tps resulting in a lower throughput and response time of 356 seconds. Resource utilization at Alibaba behaves similarly to GCP in processor and memory load, whereas IO-write peaks at about 260 tps, reaching the highest throughput and a duration of 175 seconds.

*Join - Gigantic (Figure 18).* CPU load in GCP moves along 70% to 90% overall whereas RAM utilization among worker nodes takes a path within 50% to 90% range, IO-write transfers observed in behavior about 100 tps resulting in a throughput outputting 595 seconds of response time. Azure's performance dynamics show a load of 80% to 90% with decreasing utilization on some worker nodes in a later stage, memory utilization moving along the range of 20% up to 60%, and IO-write transfer observations peaking at 120 tps provide the lowest throughput hence the longest response time of 761 seconds. Alibaba is performing a processor utilization of about below 90% to below 100%, memory load behavior moving along 50% to below 70%, and IO-write observation peaking at

350 tps performs a slightly higher throughput than GCP hence a slightly shorter duration of 594 seconds.

*Aggregation - Huge (Figure 19).* GCP processor utilization moving around 80%  
450 to about 95%, memory load behaving between 15% to 40%, and IO-write transfer observed at about 150 tps result in 97 seconds duration. Azure's CPU utilization behaves between 80% and 90%, whereas memory load moves along from 10% to varying utilization among worker nodes up to 30% and below 60%, and IO-write transfers peaking at about 180 tps performs a relatively small  
455 throughput resulting in 215 seconds completion time. Alibaba resource utilization moving along between 80% and 90% for CPU, 10% to 40% in memory, and IO-write transfer average of 26 tps show comparable performance to GCP resulting in the same completion time of 97 seconds.

*Aggregation - Gigantic (Figure 20).* Processor utilization moving between 80%  
460 and 90% in overall execution, memory load between 50% and 70% peaking to below 100%, IO-write transfers reaching a dense behavior at the end reaching 500 tps results in highest throughput and 523 seconds response time. Azure displays a CPU utilization of below 80% to above 90%, mild RAM utilization moving along 30% to 60%, IO-write transfers behaving about 100 tps resulting  
465 in a relative low throughput, and 594 seconds of duration to complete. Alibaba's processor load moves along 80% to below 100%, IO-write transfer behavior scaling from about 50 tps to 400 tps results in 565 seconds response time.

*Bayes - Huge (Figure 21).* GCP in processor behavior moving along about 70% to below 100%, memory load at about 30% with a short peak to below  
470 100% at the first half, an IO-write transfer behavior about 500 tps resulting in highest throughput thus fastest response time of 2604 seconds. Azure displays a split behavior in CPU utilization among worker nodes, where one load moves at about 80% to lower 100% and one node depicts a movement on the minimum at about 20%; memory load on worker nodes also vary from each other by about  
475 20% load difference at the beginning however meeting the similar range starting

at the second half, IO observations depict a low range with the exception at the high IO-write transfer at about 3200 tps at the initial state of the execution result in a relatively low throughput hence the most prolonged duration of 6120 seconds. Alibaba CPU utilization shows varieties among worker nodes in load ranges; RAM utilization condenses at higher levels of 80%, IO transfers moving along 100tps to observable 450 tps resulting in 3017 seconds response time.

*Bayes - Gigantic (Figure 22).* GCP's processor utilization moving along 70% to below 100%, accompanied by memory load incrementing from 40% to 70% becoming stable at 50%, and IO-write transfers moving along 500 tps results in the highest throughput and 5350 seconds of response time. Azure's resource utilization shows the distinction in CPU and memory among worker nodes while two nodes depict higher utilization at about 70% to below 100% for processing and 40%-50% for memory, one node staying at lower levels for respective resources, the observed IO-write transfer move along 100 tps where IO-read transfer peaks at about 650 tps resulting in the lowest performance of 12589 seconds duration. Alibaba depicting different utilization ranges among worker nodes for processing, the memory consumption follows a more balanced load among worker nodes with IO-write transfer moving along 200 tps a relatively lower throughput hence the relatively long duration of 6363 seconds, with respect to GCP.

*Kmeans - Huge (Figure 23).* GCP's CPU performance behaves in the range of about 60% to below 100%, whereas memory utilization moves about 60%, increasing at the reduce phase where IO-write activity also condenses 500 tps. The utilization in Azure depicts itself in a high CPU behavior of about 80% and 90%, a moderate memory consumption moving along 20% up to below 60%, and IO transfers moving along 40 tps results in the second shortest duration. Alibaba utilizing processor and memory in high levels, including drops in processors on particular worker nodes, with an increased IO-write transfer in reduce phase reaches the highest throughput hence shortest duration.

505 *Kmeans - Gigantic (Figure 24)*. In the gigantic data scale, all three services remain their previous utilization behavior in a more condensed manner in IO transfers. Alibaba and Azure competing in throughputs, the resulting outcome is 4034 seconds for Alibaba and 4042 seconds for Azure, GCP's duration does not stand far apart by 4541 seconds.

510 *Pagerank - Huge (Figure 25)*. GCP's processor utilization behavior moves in a higher range at about 70% and below 100%; RAM utilization follows a midlevel path moving along to 50%, including peak points at below 100%, IO transfers vary in the heights at about 500 tps resulting in the best performance by 1544 seconds. Azure performs a high utilization behavior in the processor at about  
515 80% to over 90%, memory load changes between about 20% up to 60%, a lower level range of 100 tps to 150 tps characterizes its IO transfer utilization resulting in 3334 seconds duration. Alibaba's both CPU and memory utilization across worker nodes move between 80% and lower 100%, and IO transfer behavior pushing upper limits at about 600 tps reaches second-highest throughput  
520 resulting in 2458 seconds.

*Pagerank - Gigantic (Figure 26)*. Switching to a gigantic scale, the CPU load of GCP becomes more condense in a range of about 60% up to below 100%, a fluctuating RAM utilization behavior incrementing three times to 100% over the execution time, and an IO transfer at about 500 tps performs the high-  
525 est throughput and shortest duration of 8,371 seconds. Azure's processor load varies between 70% up to below 100%, showing fluctuating memory utilization incrementing from 40% to below 100%, general IO transfers limited to about 200 tps with peak exceptions at about 5000 tps performing the second shortest duration of 11,779 seconds. Alibaba's resource utilization draws condense  
530 load for CPU and memory, pushing the limits in a fluctuating style; IO transfers mostly stay below about 300 tps, peaking at 600 tps to 1200 tps several times during execution, performing the lowest throughput result in the longest duration of 13,893 seconds.



Figure 5: UC1 - Sort (Huge; 3.2 GB)

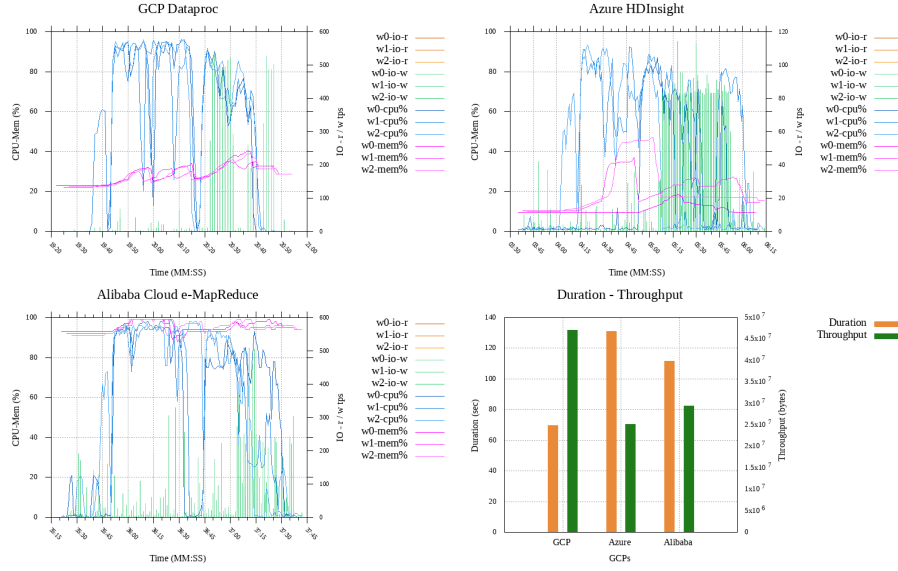


Figure 6: UC1 - Sort (Gigantic; 32 GB)

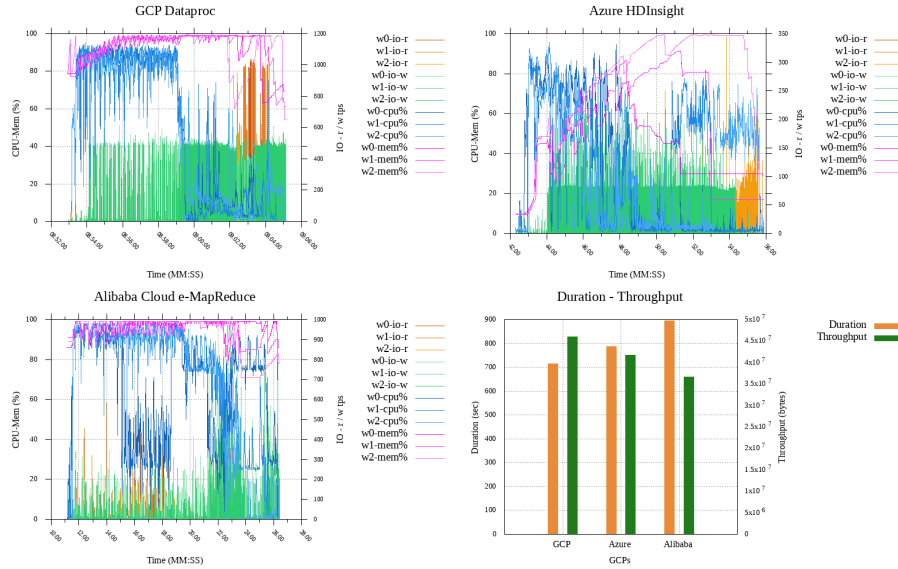


Figure 7: UC1 - Terasort (Huge; 320 MB)

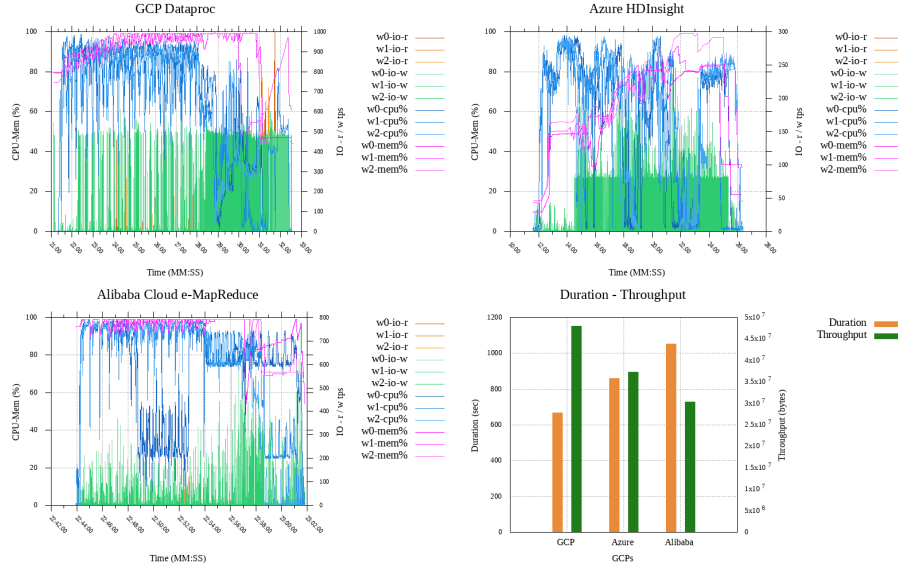


Figure 8: UC1 - Terasort (Gigantic; 3.2 GB)

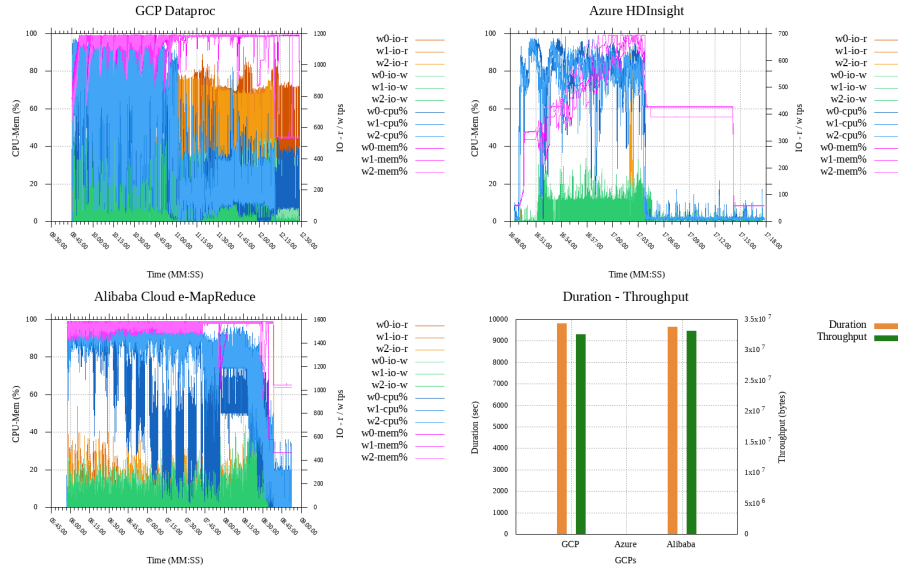


Figure 9: UC1 - Wordcount (Huge; 32 GB)

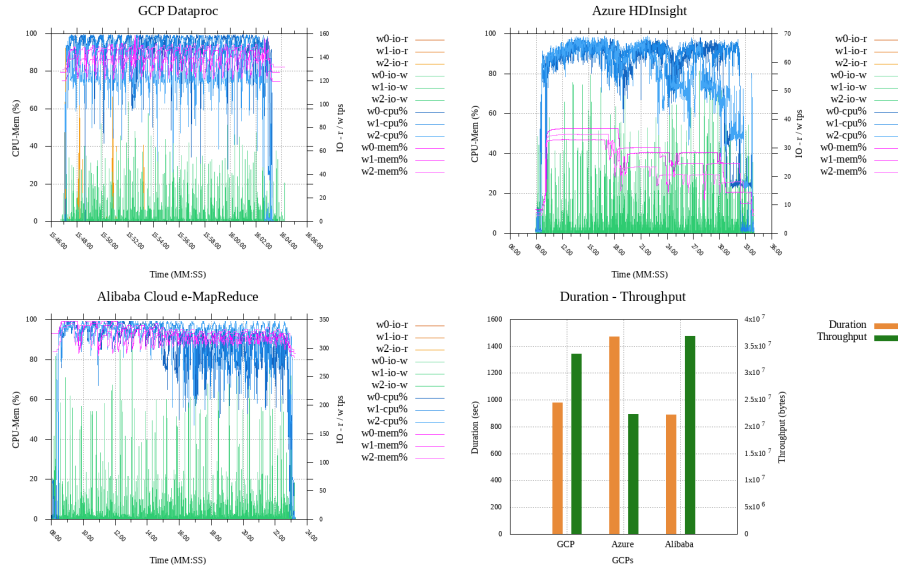


Figure 10: UC1 - Wordcount (Gigantic; 320 GB)

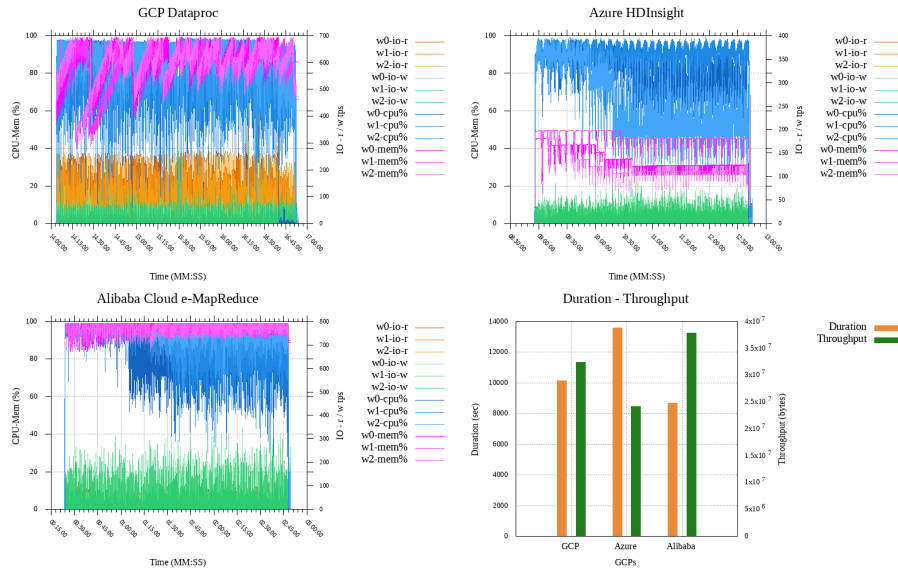


Figure 11: UC1 - Dfsioe-read (Huge; No of Files: 256, File size: 100 MB)

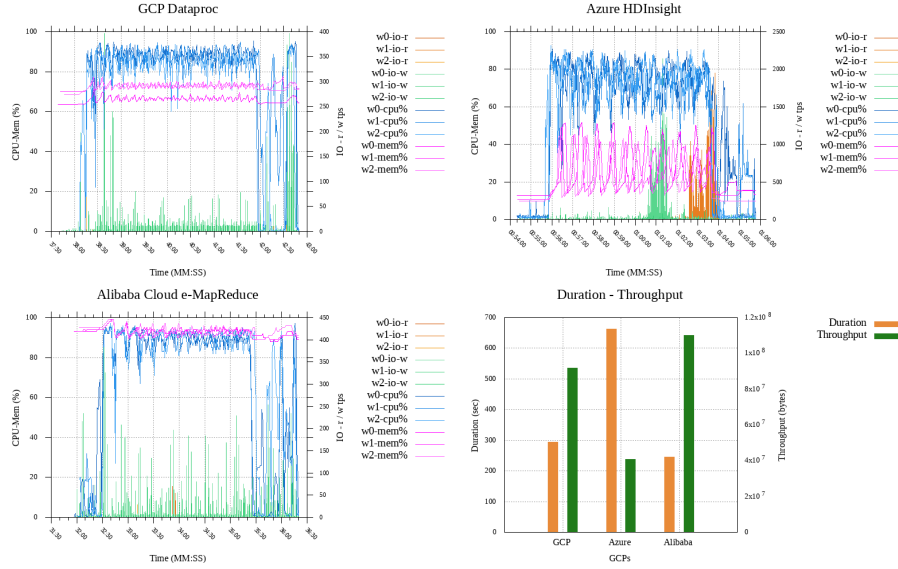


Figure 12: UC1 - Dfsioe-read (Gigantic; No of Files: 512, File size: 400 MB)

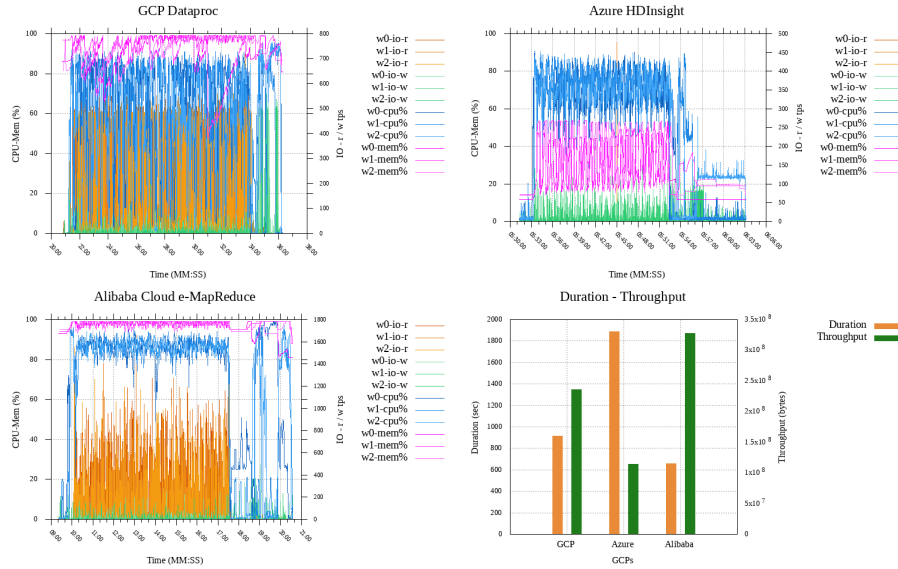


Figure 13: UC1 - Dfsioe-write (Huge; No of Files: 256, File size: 100 MB)

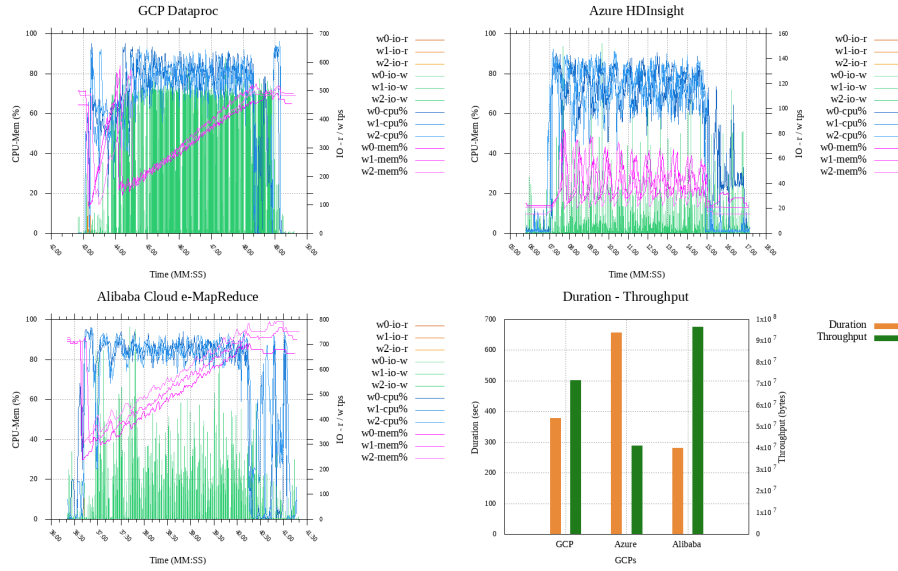


Figure 14: UC1 - Dfsioe-write (Gigantic; No of Files: 512, File size: 400 MB)

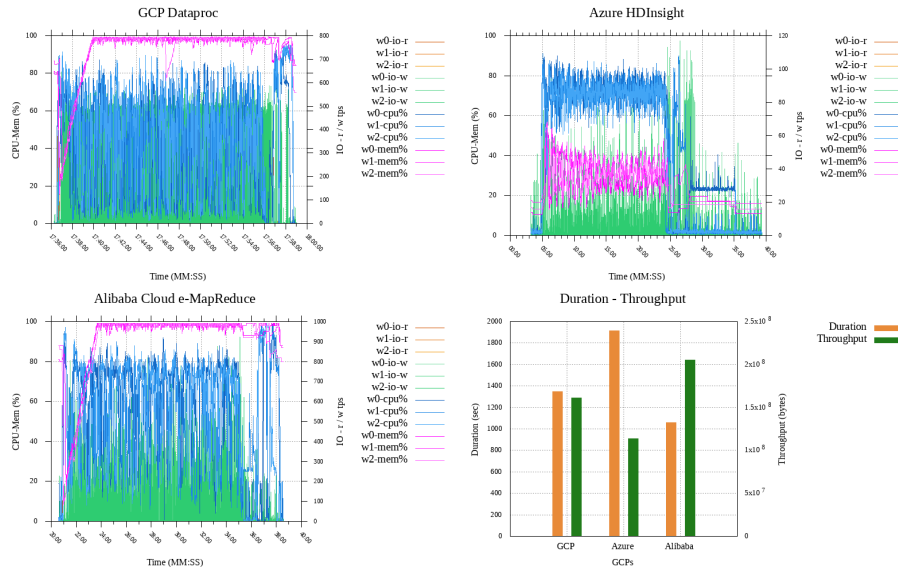


Figure 15: UC1 - Scan (Huge; USERVISITS: 10,000,000 PAGES: 1,200,000)

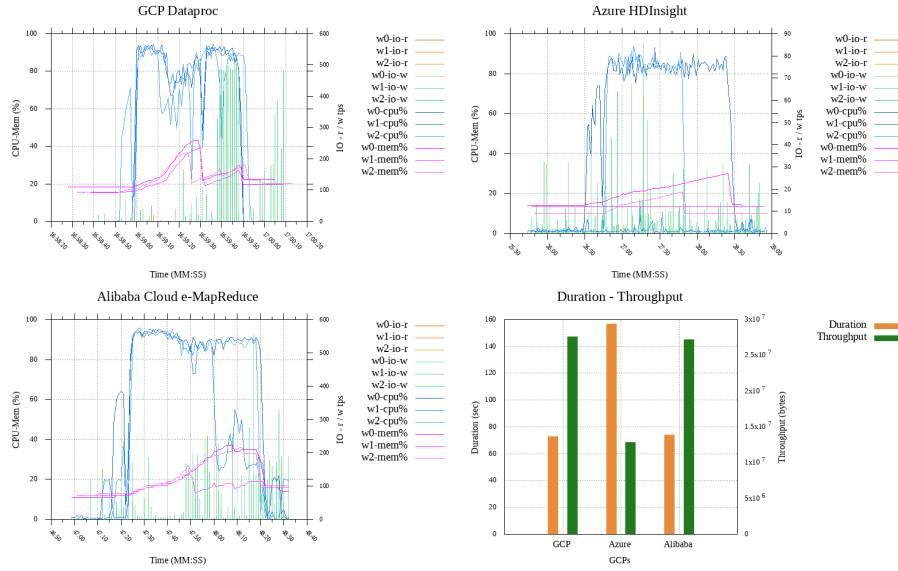


Figure 16: UC1 - Scan (Gigantic; USERVISITS: 100,000,000 PAGES: 12,000,000)

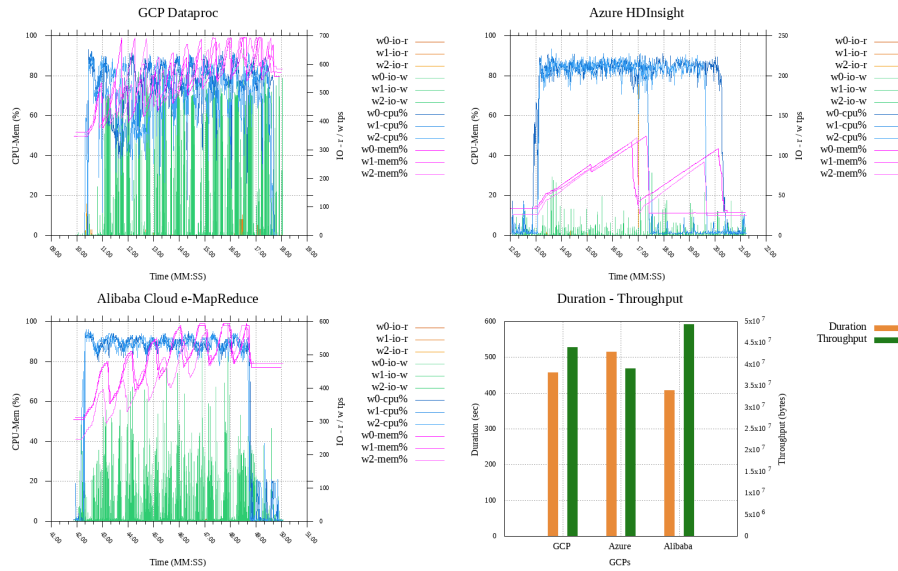


Figure 17: UC1 - Join (Huge; USERVISITS: 10,000,000 PAGES: 1,200,000)

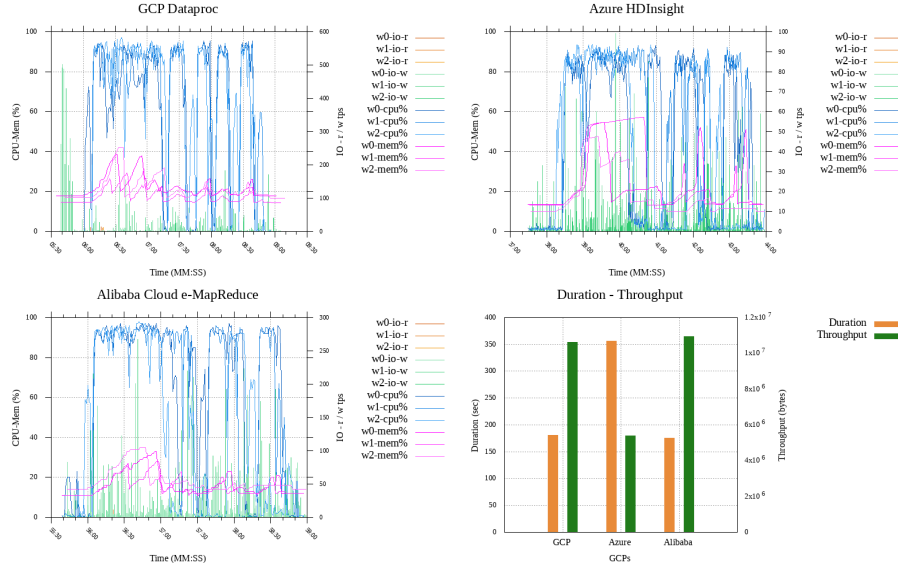


Figure 18: UC1 - Join (Gigantic; USERVISITS: 100,000,000 PAGES: 12,000,000)

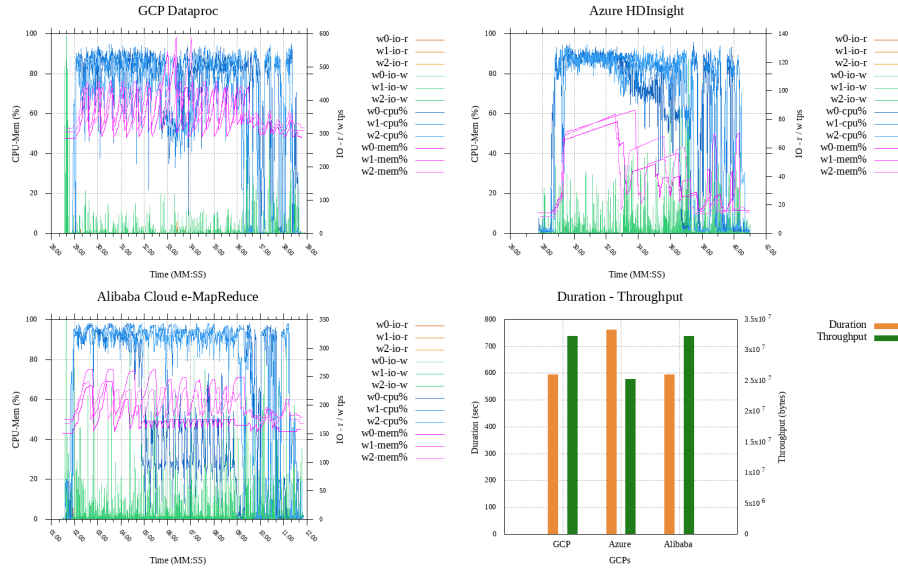


Figure 19: UC1 - Aggregation (Huge; USERVISITS: 10,000,000 PAGES: 1,200,000)

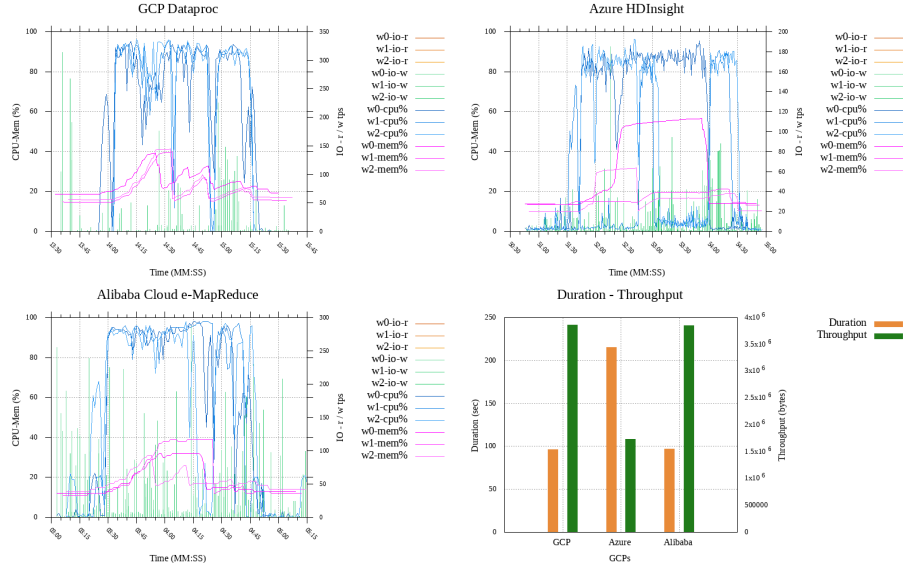


Figure 20: UC1 - Aggregation (Gigantic; USERVISITS: 100,000,000 PAGES: 12,000,000)

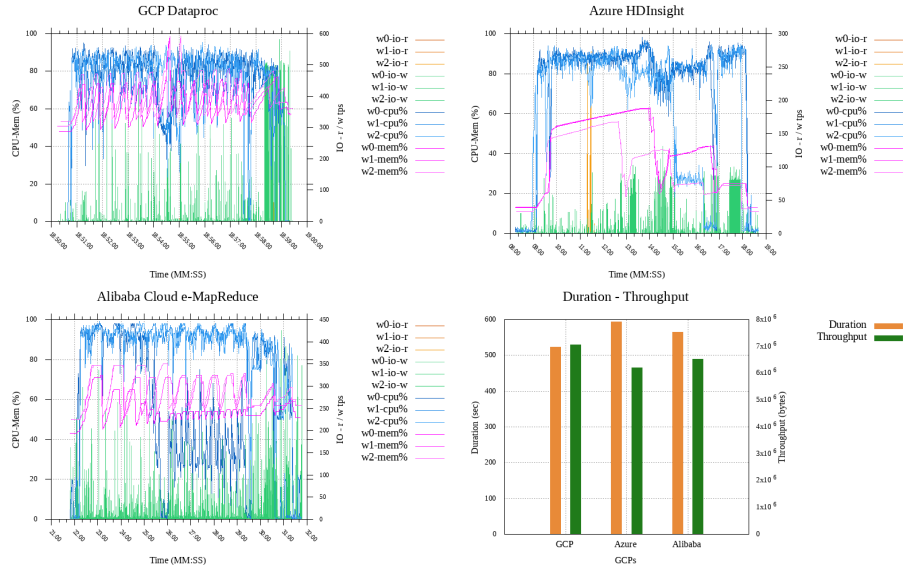




Figure 21: UC1 - Bayes (Huge; PAGES: 500,000 CLASSES: 100 NGRAMS: 2)

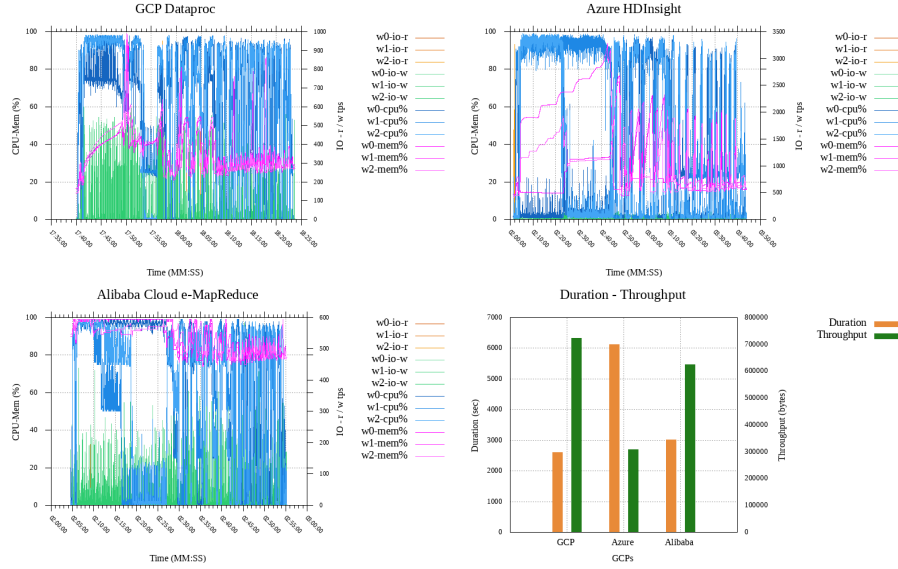


Figure 22: UC1 - Bayes (Gigantic; PAGES: 1,000,000 CLASSES: 100 NGRAMS: 2)

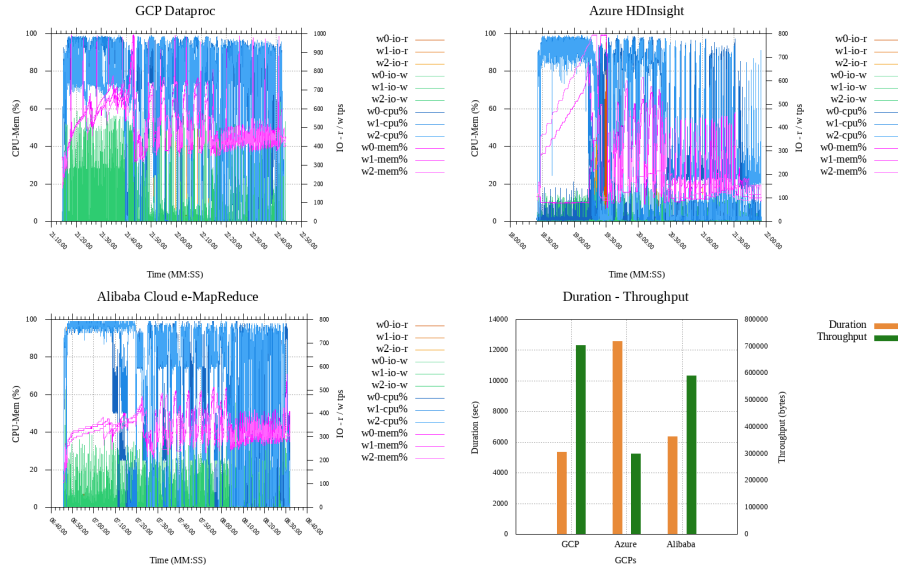


Figure 23: UC1 - Kmeans (Huge; CLUSTERS: 5 DIMENSIONS: 20 SAMPLES: 100,000,000  
SAMP PER INPUT: 20,000,000 MAX IT: 5 K: 10 CONVERGEDIST: 0.5)

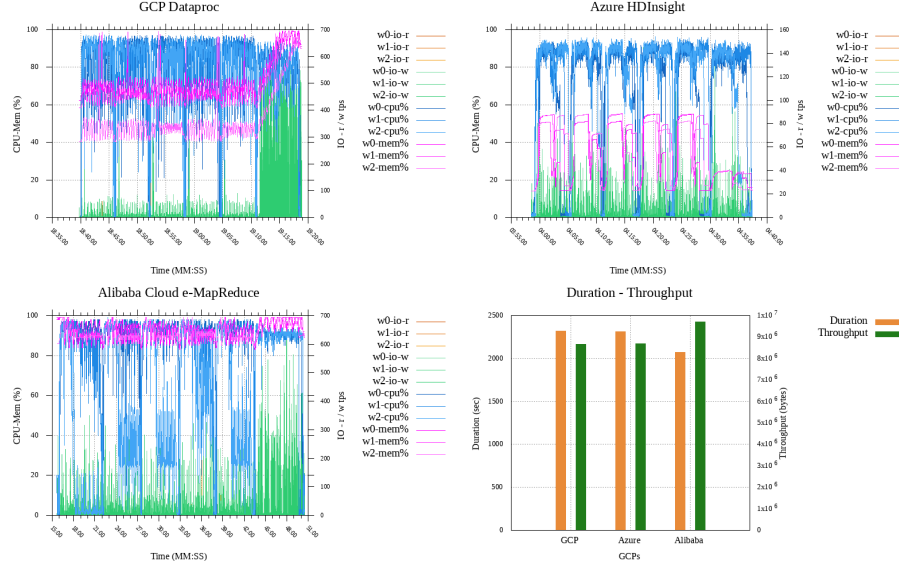


Figure 24: UC1 - Kmeans (Gigantic; CLUSTERS: 5 DIMENSIONS: 20 SAMPLES: 200,000,000 SAMP PER INPUT: 40,000,000 MAX IT: 5 K: 10 CONVERGEDIST: 0.5)

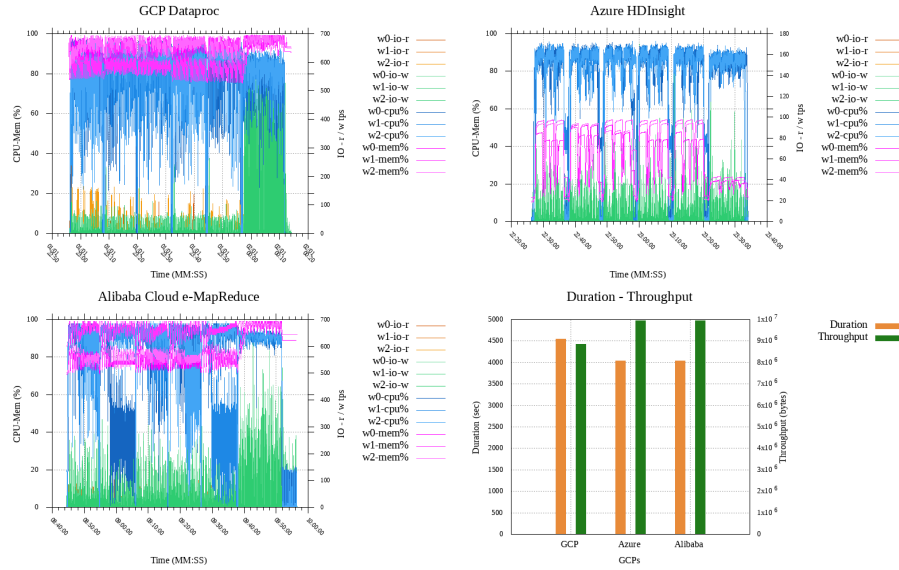


Figure 25: UC1 - Pagerank (Huge; PAGES: 5,000,000 NUM ITERATIONS: 3 BLOCK: 0  
BLOCK WIDTH: 16)


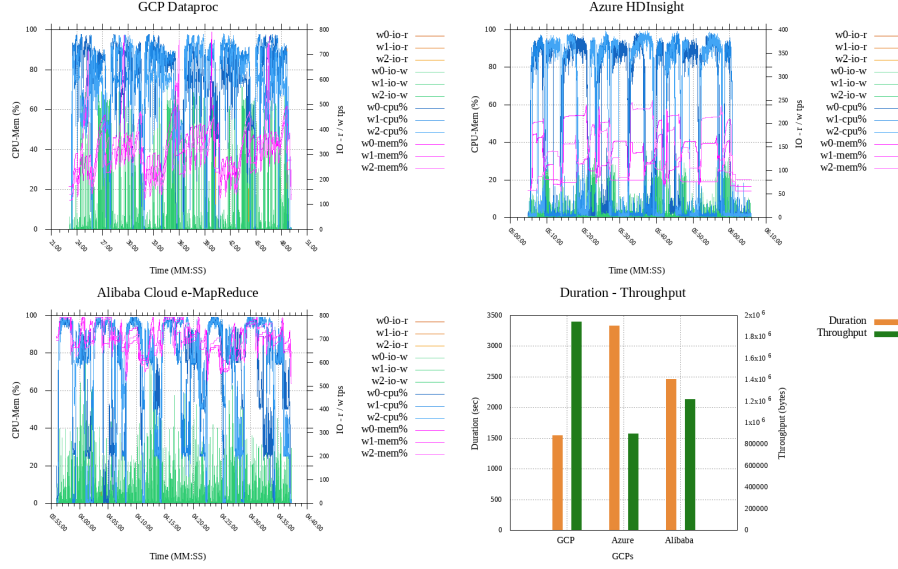


Figure 26: UC1 - Pagerank (Gigantic; PAGES: 30,000,000 NUM ITERATIONS: 3 BLOCK:  
0 BLOCK WIDTH: 16)

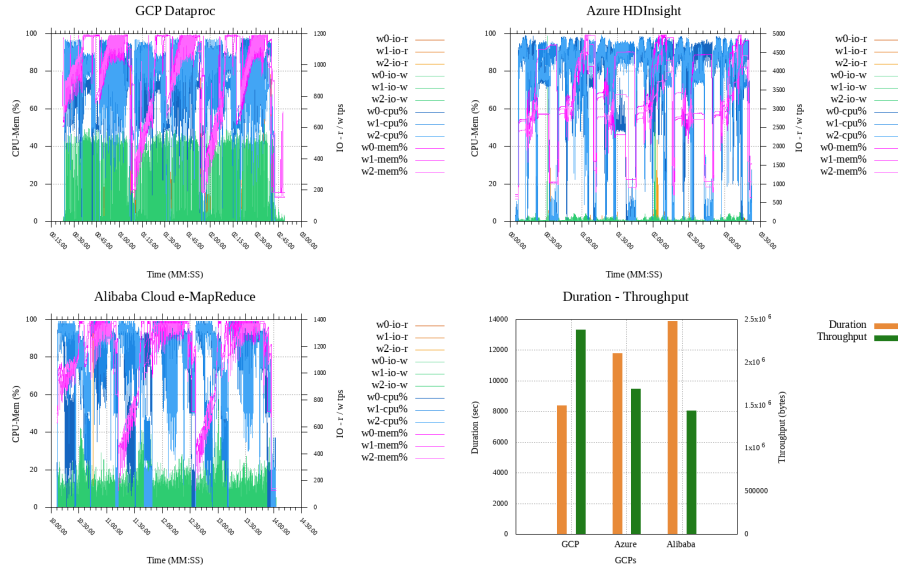

*Use Case 1 Overview.* Figure 27 and Figure 28 project a summarized version of  
 535 the benchmark results in relation with system utilization averages of respective  
 CSPs. In most cases, systems, which can afford more in utilization, are closer to  
 a relatively better performance. The spider plot also depicts the main character  
 of a benchmark whether it is IO-bound like in Sort or CPU-bound as in Word-  
 count, or both, distributed in map and reduce phases as in SQL benchmarks  
 540 Scan, Join, and Aggregation.

#### 4.2. Use Case 2 Results

In this section, we inspect utilization behavior of IO transfers per second for  
 Sort, and a CPU utilization behavior for Wordcount.

*Sort - Tiny, Small, Large, Huge, Gigantic (Figures 29, 30, 31, 32, 33).* In  
 545 the data scales tiny and small, IO transfers of the managed systems remain  
 within similar boundaries; reaching peak points at about 80 tps for GCP, 30  
 tps to 35 tps for Azure, and about 200 tps for Alibaba reaching the highest  
 throughput thus shortest duration in lighter data scales. At 328.5 MB input  
 data size, which corresponds to the data scale large, GCP and Alibaba perform  
 550 with equal duration of 42 seconds, GCP utilizes IO peaking at about 110 tps,  
 whereas Alibaba scores peak at about 189 tps. Azure’s IO utilization peaks  
 at about 80 tps and a duration of 81 seconds. In huge data scale with 3.28  
 GB data size, GCP starts utilizing IO at instances with about 500 tps, thus  
 performing the highest throughput projected in 70 seconds duration. Azure  
 555 shows a condense IO transfer load at around 80 tps and peaking at 140 tps,  
 and results in 140 seconds duration. Switching to huge data scale with 3.2 GB,  
 GCP’s IO transfers push the upper limits at about 500 tps in the reduce phase,  
 thus performing 47MB/s throughput and a duration of 70 seconds; Azure’s IO  
 load draws condense 80 tps behavior peaking at about 140 tps, and results in  
 560 23MB/s duration and 141 seconds duration. Alibaba’s IO load varies at about  
 100 tps to 450 tps, an approx. 31MB/s duration brings 107 seconds response  
 time. In gigantic data scale, an input size of 32GB, GCP remains the level of 500

Figure 27: Use Case 1 - Overview to system utilization in data scale huge


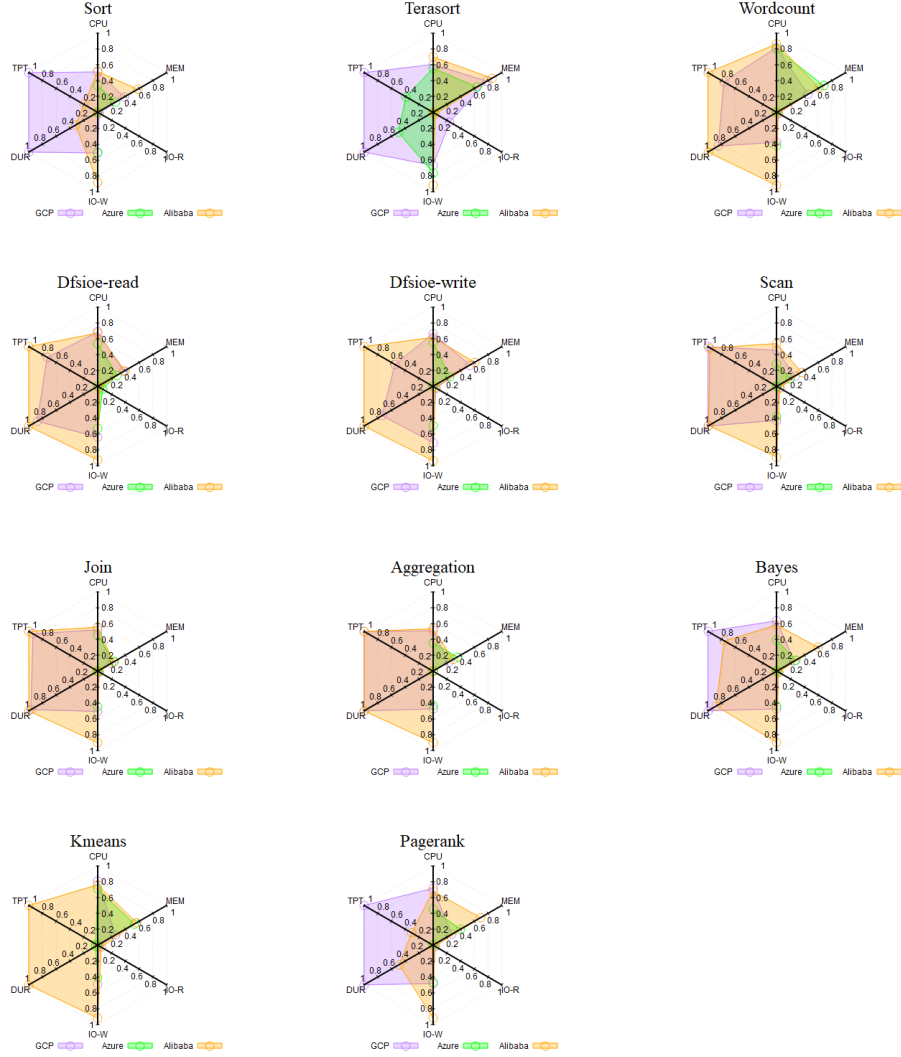


Figure 28: Use Case 1 - Overview to system utilization in data scale gigantic

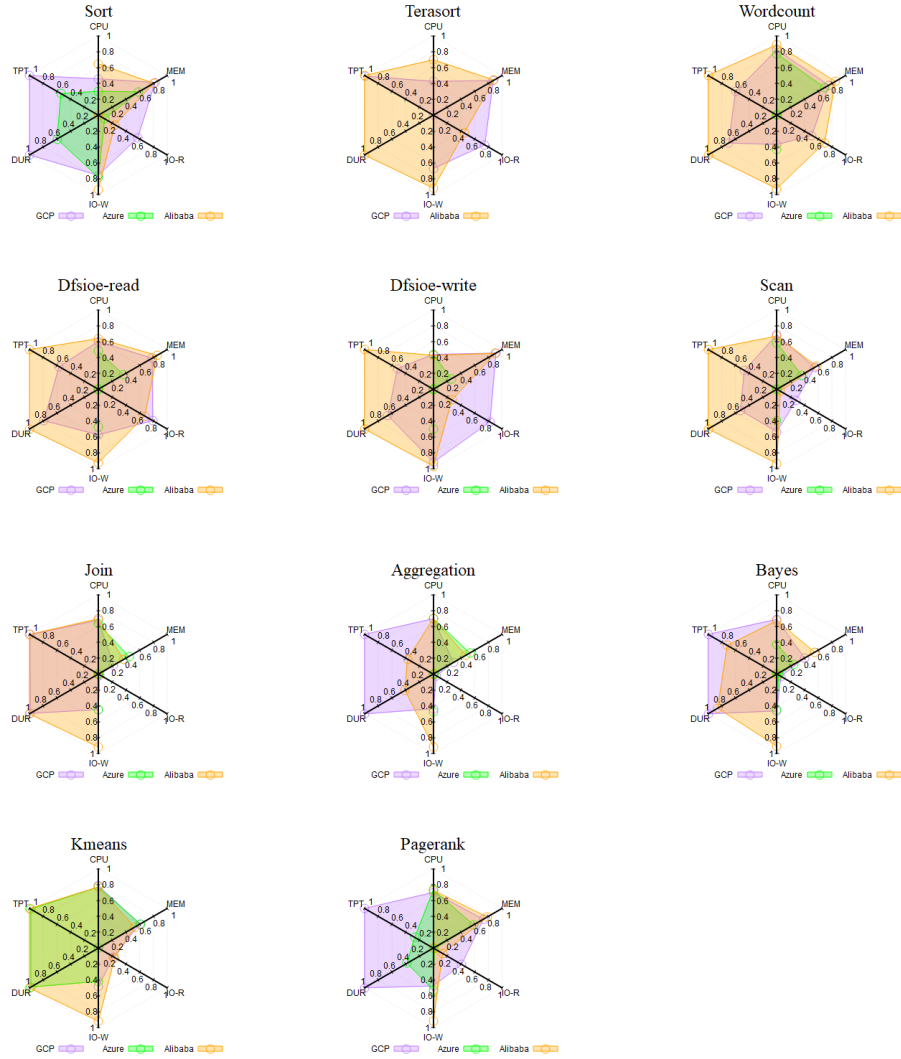

tps in a more condense way, peaking at about 1000 tps in IO-reads, an approx.  
 47 MB/s throughput and 694 seconds of response time. At this scale Azure  
 565 improves its performance greatly, even though IO utilization remains between  
 about 75 tps to 150 tps, carrying out a throughput of 47MB/s, slightly less  
 than GCP, results in a close follower of the best performance duration, by 699  
 seconds. Alibaba's IO activity hits peak at about 800 tps and approx. 400 to  
 500 tps in reduce phase, 37MB/s throughput results in 883 seconds response  
 570 time.

*Wordcount - Tiny, Small, Large, Huge, Gigantic (Figures 34, 35, 36, 37, 38).*

*Overview of Sort benchmark varying data scales (Figure 39).*

*Overview of Wordcount benchmark varying data scales (Figure 40).*

## 5. Discussion

575 *Limitations, workarounds, failures.* One major limitation of the study has been  
 the high-cost of benchmark executions' total running time charged in a pay-  
 per-use manner, which led the conductors to keep benchmarks at only one suc-  
 cessful execution for each workload deviating from the best practice; executing  
 each benchmark thrice and taking the average would have provided more stable  
 580 outcomes, especially in cases where there occurs a very tiny difference between  
 successive performances of respective providers. Another result of the limita-  
 tion mentioned above is that we also left off the largest predefined data scale  
 of HiBench, namely Bigdata. Execution of this benchmark would have pro-  
 vided performance outputs in a vast data scale like 300 GB for Sort, 1.6 TB  
 585 for Wordcount, and 12.000.000 pages by 1.000.000.000 user visits for Aggrega-  
 tion, to name but three. Hence, we recommend the study to be understood in  
 terms of an attempt to bring more clarity to black-box nature managed Hadoop  
 proposals' performance behavior using resource utilization dynamics and as the

Figure 29: UC2 - Sort (Tiny; 32 KB)

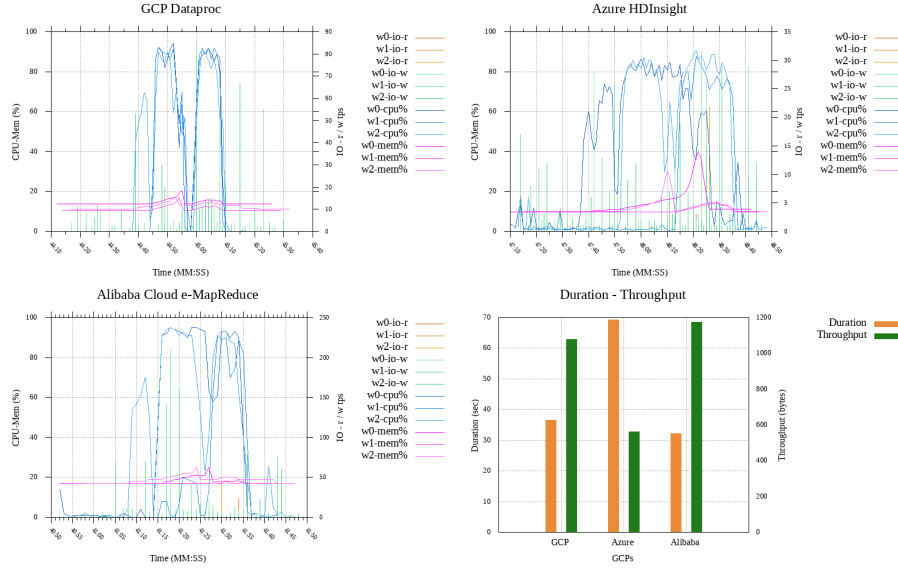


Figure 30: UC2 - Sort (Small; 3.2 MB)

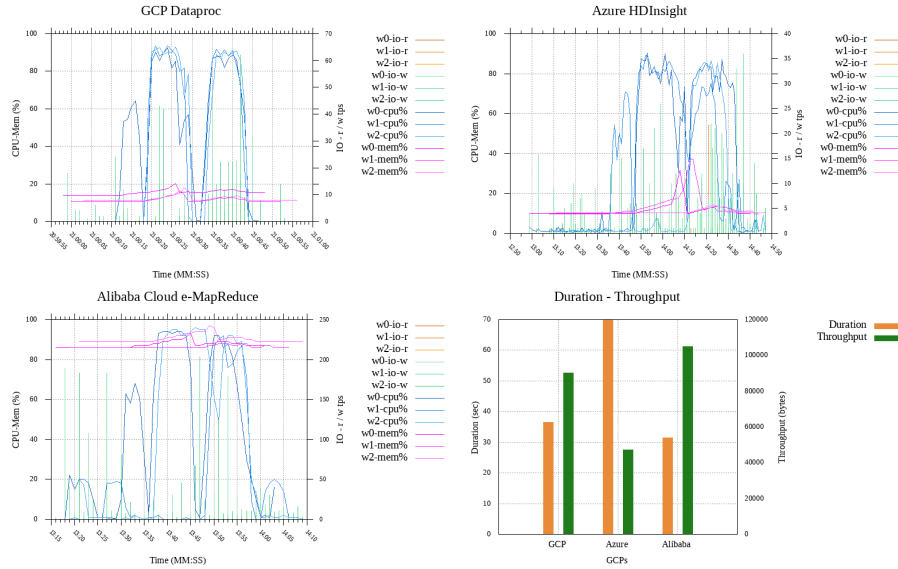




Figure 31: UC2 - Sort (Large; 320 MB)

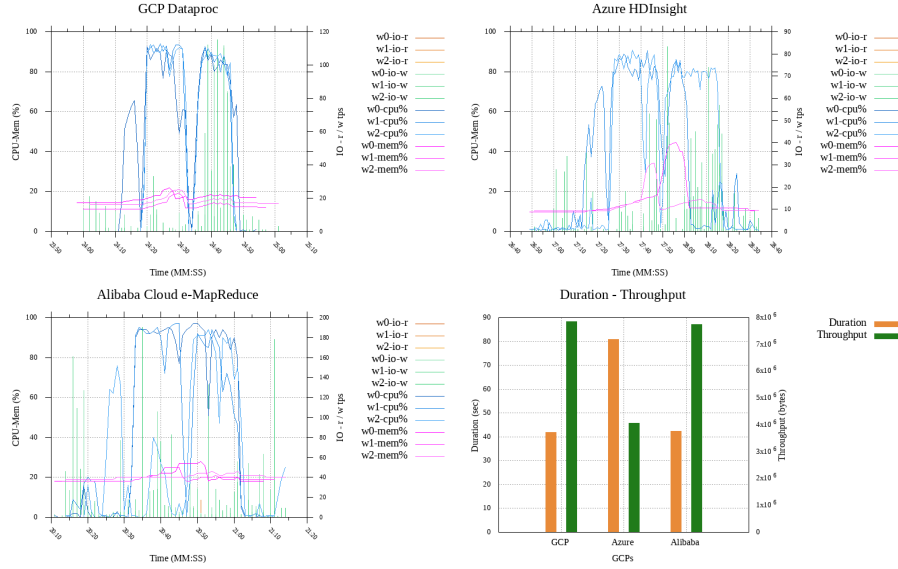


Figure 32: UC2 - Sort (Huge; 3.2 GB)

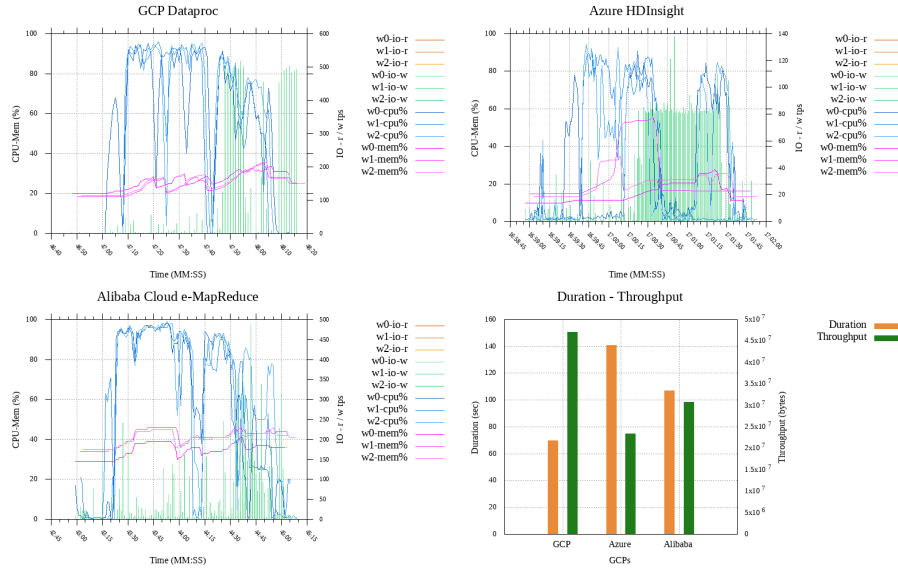


Figure 33: UC2 - Sort (Gigantic; 32 GB)

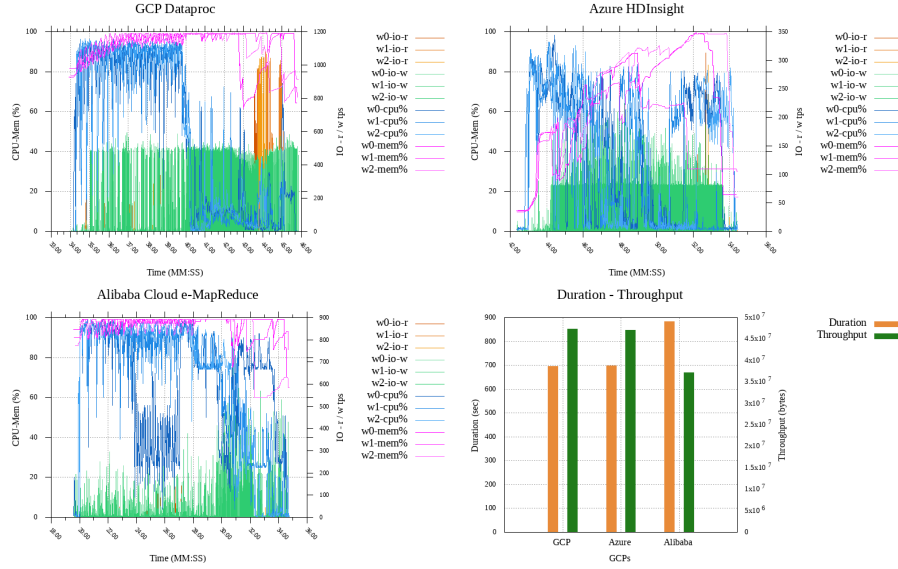


Figure 34: UC2 - Wordcount (Tiny; 32 KB)

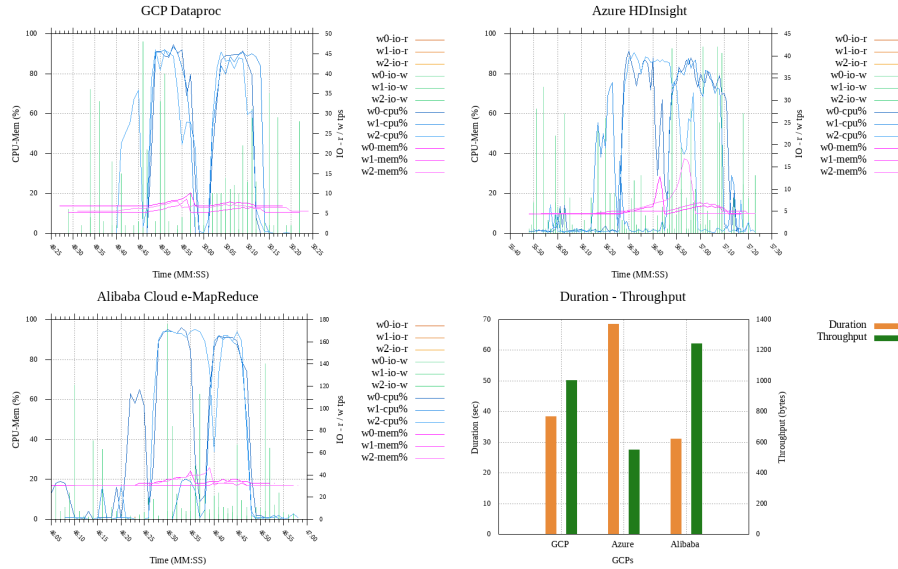


Figure 35: UC2 - Wordcount (Small; 320 MB)

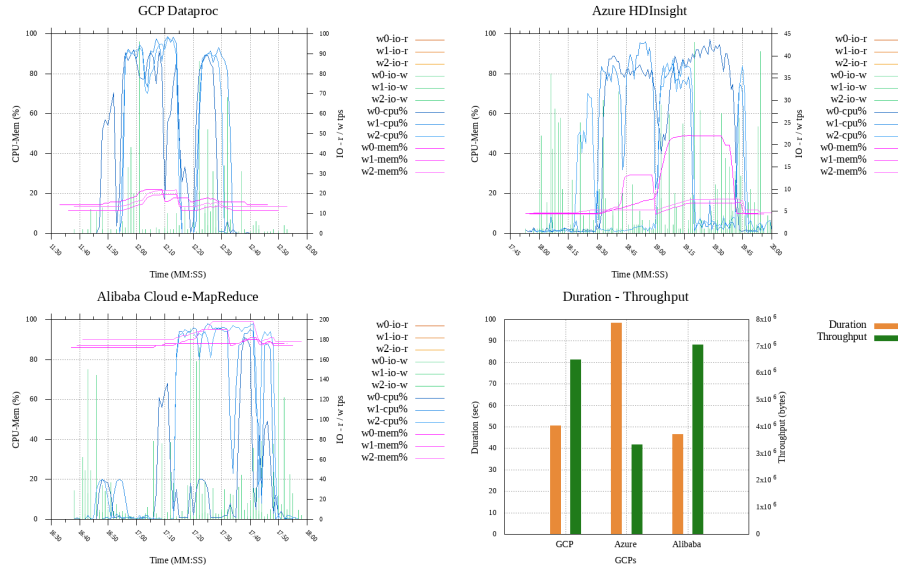


Figure 36: UC2 - Wordcount (Large; 3.2 GB)

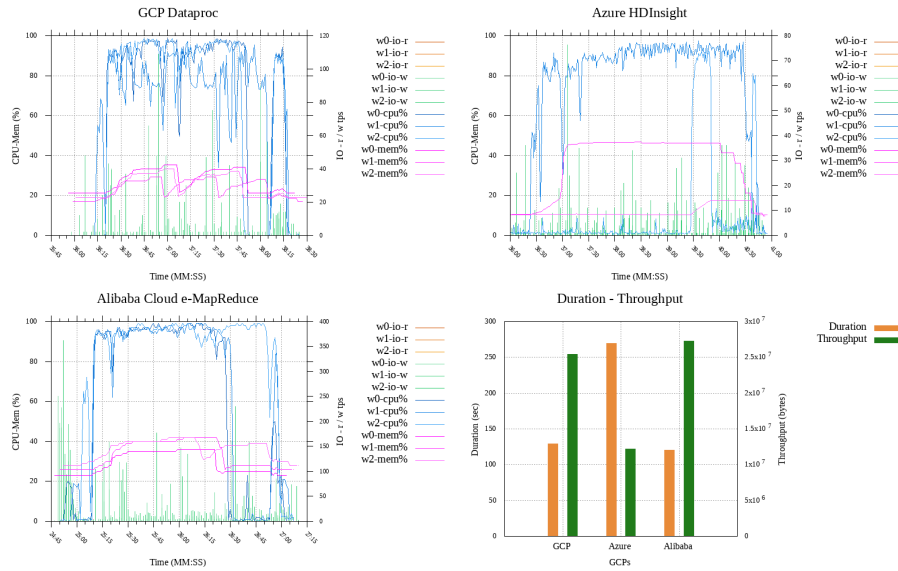


Figure 37: UC2 - Wordcount (Huge; 32 GB)

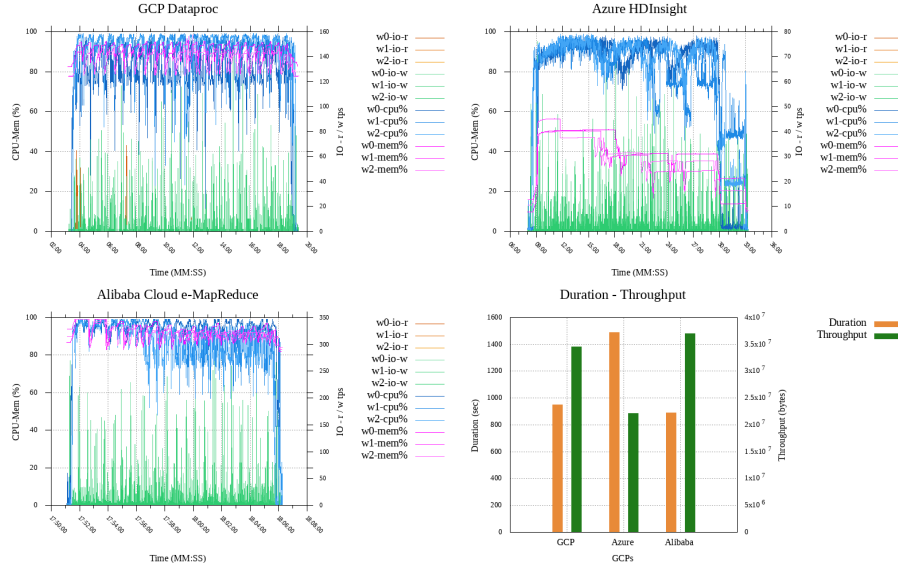


Figure 38: UC2 - Wordcount (Gigantic; 320 GB)

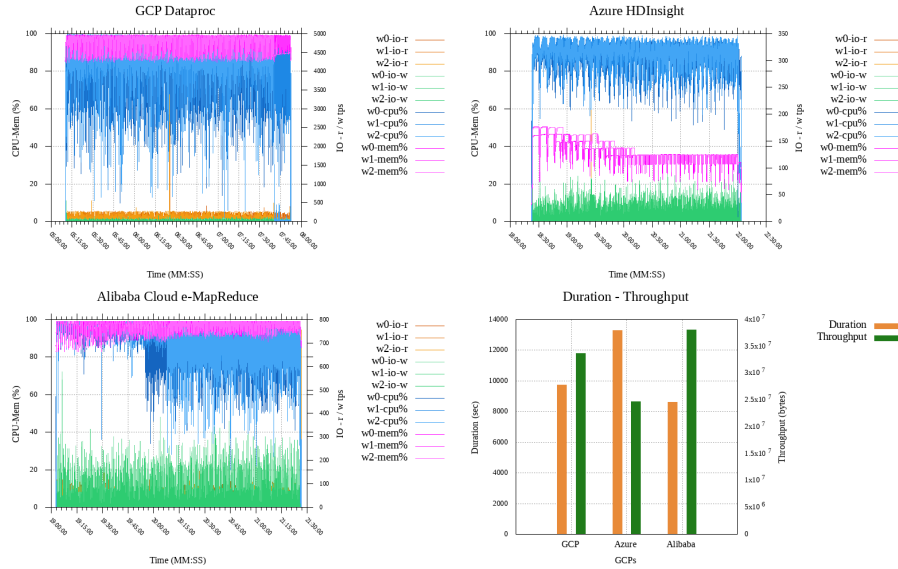


Figure 39: Use Case 2 - Sort performances along with data scales


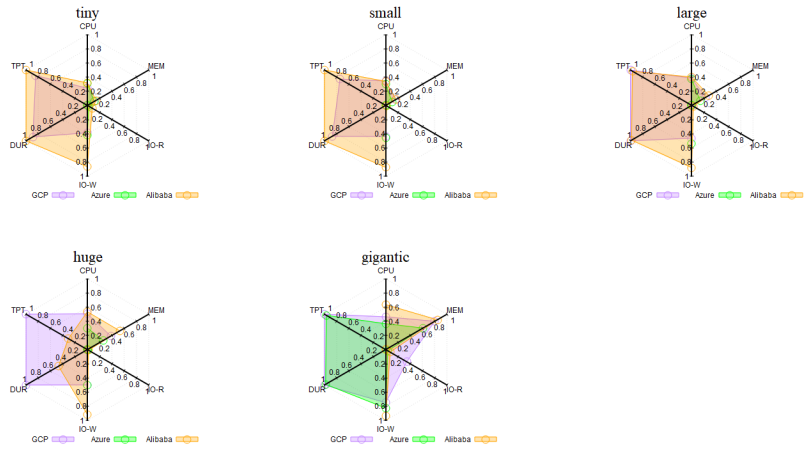


Figure 40: Use Case 2 - Wordcount performances along with data scales

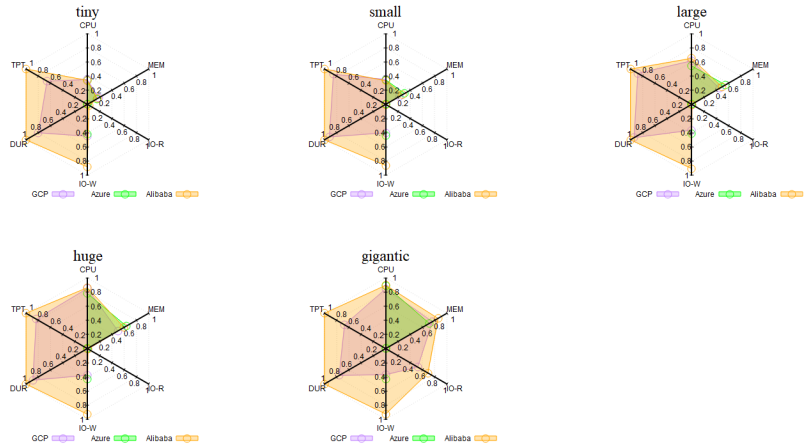

managed services come out-of-the-box without any performance tweaking configurations applied. We do not recommend the study to be understood as a  
590 grading board for the business values of respective managed Hadoop systems.

HiBench comes with dependencies downloaded during its compilation process by Apache Maven. The Hive engine is one of those dependencies leveraged by HiBench for running SQL workloads Scan, Join, and Aggregation. Alibaba's  
595 e-Mapreduce comprises a ready-made Hive hook triggering a Java file to run post-execution transactions for other services within the package. However, this configuration prevented HiBench from starting with respective benchmarks' execution since the HiBench based Hive engine does not include the jar file mentioned above defined for e-MapReduce's specific environment. A workaround  
600 attempt, copying the related jar file to an appropriate directory within HiBench, made the jar file available; however, this time, HiBench's Hive engine of an older version did not support the hook "hive.exec.post.hooks" defined in Alibaba's Hive configuration. At this point, disabling the respective Hive hook from Alibaba e-MapReduce's UI management console apparently solved  
605 this issue and enabled HiBench's SQL workloads to run, but its impact on the respective performance values remains unknown, hence the need to annotate it here. With GCP and Azure, issues of this kind did not occur.

In the Azure environment, the Terasort benchmark running in data scale gigantic failed to complete in all three attempts we conducted where about  
610 20% of map operations were reached. Showing distinction to GCP and Alibaba where the end-user is liberated in choosing HDFS or the respective provider's cloud storage service as the cluster's file system, Azure obligates the user to go with WASB blob storage among other Azure storage services with a promise to Peta-scale. However, after inspecting the failure, it turned out that the  
615 exception is not due to the WASB. Even though WASB is predefined as the cluster's file system, during the application's run time, YARN still leverages the cluster's HDFS file system for storing intermediary results and failing to allocate free space on HDFS reaching specific levels of maps operators. The conductors marked this failure as a structural bottleneck since all end users

620 running Terasort operation at this scale would face the same error, and since resource utilization can be tracked up to the failure point and after, we kept this benchmark by marking it as incomplete. Figure 8 displays system resource utilization on Azure, including the point where the failure occurs.

Along with the resource utilization vs. performance plots both for Use Case 1 and Use Case 2, it is easily recognizable how likely architectures, namely 625 GCP Dataproc and Alibaba Cloud e-MapReduce, both leveraging a more conventional Hadoop installation and infrastructure, follow a similar pattern in utilization over time whereas a different architectural approach distinct in its performance behavior as in Azure’s HDP based HDInsight. To better understand the relative performance dynamics, we gathered and processed the CSPs’ 630 HiBench performances in duration (seconds) in Table 5 and Table 6. Column ”Benchmark” refers to the respective benchmark executed, column ”First” contains the best-performing provider, column ”Second” points out the provider service with the second shortest duration, column ”Third” lists the provider of the longest duration for the respective benchmark. Columns ”-Perf%” display 635 the relatively low performance of the respective provider’s service listed to their left with respect to the best performing service’s value. *Relative Performance Rate = (Shortest duration - Current duration) / Shortest duration*. Relative Performance Rates indicate that in overall alike architectures are close in their results and competitive like performing the same duration in UC1-Aggregation 640 or as close as 0.17% time difference. The farthest distance between GCP and Alibaba is 65.97% in UC2-PageRank.

On the other hand, the Relative Performance Rates in Table 5 and Table 6 depict numerous samples where Azure’s performance falls back the best duration 645 by more than 100%, meaning that performing at least two times slower in the respective benchmarks. A possible reason for the -170.20% and -134.16% low performances in UC1’s Dfsioe’s and -185.76% and -80.57% low performances in UC2’s Dfsioe’s might be the replacement of the native Hadoop filesystem by Azure blob. HDI performances for SQL benchmarks (Scan, Join, and Aggregation) move between -103% and -121% in UC1, whereas in UC2, a better 650

Table 5: Use Case 1 Relative Performance Rates  
Data Scale: Huge

Benchmark	First	Second	-Perf.%	Third	-Perf.%
Sort	GCP	Alibaba	-58.57%	Azure	-87.14%
Terasort	GCP	Azure	-28.64%	Alibaba	-58.02%
Wordcount	Alibaba	GCP	-10.01%	Azure	-65.35%
Dfsioe-r	Alibaba	GCP	-20.00%	Azure	-170.20%
Dfsioe-w	Alibaba	GCP	-34.88%	Azure	-134.16%
Scan	GCP	Alibaba	-1.37%	Azure	-115.07%
Join	Alibaba	GCP	-3.43%	Azure	-103.43%
Aggregation	GCP-Alibaba	—	—	Azure	-121.65%
Bayes	GCP	Alibaba	-15.86%	Azure	-135.02%
Kmeans	Alibaba	Azure	-11.74%	GCP	-12.13%
Pagerank	GCP	Alibaba	-59.20%	Azure	-115.93%

Data Scale: Gigantic					
Benchmark	First	Second	-Perf.%	Third	-Perf.%
Sort	GCP	Azure	-10.07%	Alibaba	-25.31%
Terasort	Alibaba	GCP	-1.67%	Azure	—
Wordcount	Alibaba	GCP	-16.84%	Azure	-56.80%
Dfsioe-r	Alibaba	GCP	-38.64%	Azure	-185.76%
Dfsioe-w	Alibaba	GCP	-27.08%	Azure	-80.57%
Scan	Alibaba	GCP	-12.29%	Azure	-26.29%
Join	Alibaba	GCP	-0.17%	Azure	-28.11%
Aggregation	GCP	Alibaba	-8.03%	Azure	-13.58%
Bayes	GCP	Alibaba	-18.93%	Azure	-135.31%
Kmeans	Alibaba	Azure	-0.20%	GCP	-12.57%
Pagerank	GCP	Azure	-40.71%	Alibaba	-65.97%



Table 6: Use Case 2 Relative Performance Rates

Benchmark	First	Second	-Perf.%	Third	-Perf.%
Sort (t)	Alibaba	GCP	-12.50%	Azure	-115.63%
Sort (s)	Alibaba	GCP	-16.13%	Azure	-125.81%
Sort (l)	GCP-Alibaba	—	—	Azure	-92.86%
Sort (h)	GCP	Alibaba	-52.86%	Azure	-101.43%
Sort (g)	GCP	Azure	-0.72%	Alibaba	-27.23%
Wordcount (t)	Alibaba	GCP	-22.58%	Azure	-119.35%
Wordcount (s)	Alibaba	GCP	-6.38%	Azure	-108.51%
Wordcount (l)	Alibaba	GCP	-7.50%	Azure	-124.17%
Wordcount (h)	Alibaba	GCP	-7.21%	Azure	-67.45%
Wordcount (g)	Alibaba	GCP	-13.07%	Azure	-54.09%

(t): tiny, (s): small, (l): large, (h): huge, (g): gigantic

performance moving along -13% and -28% occurs. Another contradictory case for Azure is in its ML performances, especially in gigantic data scale where for Bayes it low performs at -135.31% whereas for Kmeans it almost scores the best performance, getting the second place by a performance slightly less than  
655 -0.20% with respect to the shortest duration. Why is it so? In our attempt to understand this situation we delved into the execution plans, which are generated initially by Hadoop during execution and also captured and stored by HiBench inside the Reports folder. Table 7 and Table 8 comprise the allocated map and reduce slots by their respective Hadoop cluster for the relevant benchmarks. It turns out that GCP and Alibaba Cloud’s managed services show themselves more capable in resource allocation to respective applications, hence competitive to each other. Another instance of the relative low performance Azure’s, for Bayes benchmark in Use Case 1, might exemplificate a structural shortcome where the execution logs point Java heap space errors, which cause  
660 the job to restart 9 times, thus prolonging the overall duration of the benchmark, and resulting in termination at the end. Azure somewhat lacks to provide free resources enough to stay in competition, this might be resolved with per-

Table 7: Allocated map and reduce slots in SQL benchmarks of Use Case 1

Benchmark	GCP		Azure		Alibaba		Ref.
	Maps	Reduces	Maps	Reduces	Maps	Reduces	
Scan * (h)	24	–	12	–	24	–	<i>Fig.15</i>
Scan * (g)	144	–	36	–	144	–	<i>Fig.16</i>
Join (h)	60	25	48	25	60	25	<i>Fig.17</i>
Join (g)	180	25	72	25	180	25	<i>Fig.18</i>
Aggregation (h)	24	12	12	12	24	12	<i>Fig.19</i>
Aggregation (g)	144	12	36	12	144	12	<i>Fig.20</i>

(h): huge, (g): gigantic  
 \* No reduce operation

formance tuning, though. Having sufficient resources Azure almost outbeats its conjugates in K-means leveraging the very same Mahout engine with Bayes  
 670 benchmark. Scoring its highest (-0.20%) and lowest (-135.31%) relative performances in the same category (ML) is somewhat contradictory but reasonable, when considering the low performance as a structural pre-configuration issue.

## 6. Conclusion and Future Work

Managed Hadoop systems are by CSPs provided cloud service proposals comprising pre-installed and pre-configured Hadoop clusters in order to eliminate  
 675 the hard work on planning and installing Hadoop clusters manually on VM instances hence reducing the cluster installation to a matter of property selection and letting end-users focus only to applications that will run on the cluster. As managed systems come in a black-box nature, respective pre-configurations and their impacts on the cluster performance remains unclear to the end-user. In the  
 680 study, we conducted HiBench benchmarks against Hadoop clusters on PaaS in their proposed form as they come out-of-the-box, provided by respective CSPs. For each CSP, among the proposed installation specifications, we selected the same geographical location as region and by promise apparently the same CPU  
 685 and Memory properties. Our aim is to compare those systems' performance

Table 8: Allocated map and reduce slots in Use Case 2

Benchmark	GCP		Azure		Alibaba		Ref.
	Maps	Reduces	Maps	Reduces	Maps	Reduces	
Sort (t)	11	12	12	12	11	12	<i>Fig.29</i>
Sort (s)	11	12	12	12	11	12	<i>Fig.30</i>
Sort (l)	12	11	12	12	11	11	<i>Fig.31</i>
Sort (h)	24	12	12	12	23	12	<i>Fig.32</i>
Sort (g)	251	12	60	12	252	12	<i>Fig.33</i>
Wordcount (t)	11	12	12	12	11	12	<i>Fig.34</i>
Wordcount (s)	12	11	12	12	12	11	<i>Fig.35</i>
Wordcount (l)	24	11	12	12	23	12	<i>Fig.36</i>
Wordcount (h)	250	11	60	12	252	12	<i>Fig.37</i>
Wordcount (g)	2447	12	612	12	2447	11	<i>Fig.38</i>

(h): huge, (g): gigantic

behaviors by leveraging HiBench Benchmark Suite. We executed Hadoop related benchmarks on all three Hadoop on PaaS services and captured system resource utilization data in the meanwhile. The results yield that Hadoop PaaS offerings by vendors' promise do not necessarily utilize system resources in similar ways hence may highly distinct in some cases. Our assumption is that the pre-configuration choices applied by CSPs impact performance result even with apparently the same hardware settings. The end-users shall be aware of their use cases' requirements and truly understand the default configuration proposals and their respective outcome.

Based on the gained experience, the study might be varied in an approach more sensitive in balancing small performance differences among CSPs. As HiBench offers benchmarks for Spark, graph, and streaming frameworks as well, the comparison can be made from within the respective perspective, also putting other cloud vendors into the scope.

[1] World Internet Users Statistics and 2020 World Population Stats.

URL <https://www.internetworldstats.com/stats.htm>

- [2] Apache Hadoop.  
URL <https://hadoop.apache.org/>
- [3] S. Ghemawat, H. Gobioff, S.-T. Leung, The Google file system, in: Proceedings of the nineteenth ACM symposium on Operating systems principles, Vol. 37, 2003, pp. 29–43, issue: 5. doi:10.1145/1165389.945450.
- [4] T. White, Hadoop: the definitive guide, fourth edition Edition, O'Reilly, Beijing, 2015, oCLC: ocn904818464.
- [5] J. Dean, S. Ghemawat, MapReduce: Simplified data processing on large clusters, 2004, pp. 137–149.
- [6] a. A. T. H. Schtzle, Martin Przyjaciol-Zablocki, Giant Data: MapReduce and Hadoop ADMIN Magazine.  
URL <http://www.admin-magazine.com/HPC/Articles/MapReduce-and-Hadoop>
- [7] Announcing Amazon Elastic Compute Cloud (Amazon EC2) - beta.  
URL <https://aws.amazon.com/about-aws/whats-new/2006/08/24/announcing-amazon-elastic-compute-cloud-amazon-ec2---beta/>
- [8] Dataproc.  
URL <https://cloud.google.com/dataproc>
- [9] Compute Engine: Virtual Machines (VMs).  
URL <https://cloud.google.com/compute>
- [10] Cloud Storage.  
URL <https://cloud.google.com/storage>
- [11] Azure HDInsight - Hadoop, Spark, & Kafka Service | Microsoft Azure.  
URL <https://azure.microsoft.com/en-us/services/hdinsight/>
- [12] Announcing general availability of Azure HDInsight 3.6.  
URL <https://azure.microsoft.com/en-us/blog/announcing-general-availability-of-azure-hdinsight-3-6/>

- [13] What is E-MapReduce? - Product Introduction| Alibaba Cloud Documentation Center.  
 730 URL <https://www.alibabacloud.com/help/doc-detail/28068.htm?spm=a2c63.128256.b99.4.65e270b2YXyKDV>
- [14] Elastic Compute Service (ECS): Elastic & Secure Cloud Servers - Alibaba Cloud.  
 735 URL <https://www.alibabacloud.com/product/ecs>
- [15] Alibaba Cloud Linux OS.  
 URL <https://alibaba.github.io/cloud-kernel/os.html>
- [16] Intel-bigdata/HiBench, original-date: 2012-06-12T07:56:57Z (Jan. 2021).  
 URL <https://github.com/Intel-bigdata/HiBench>
- 740 [17] S. Huang, J. Huang, J. Dai, T. Xie, B. Huang, The HiBench benchmark suite: Characterization of the MapReduce-based data analysis, in: 2010 IEEE 26th International Conference on Data Engineering Workshops (ICDEW 2010), 2010, pp. 41–51. doi:10.1109/ICDEW.2010.5452747.
- [18] Release HiBench-7.1.1 Intel-bigdata/HiBench.  
 745 URL [/Intel-bigdata/HiBench/releases/tag/v7.1.1](https://github.com/Intel-bigdata/HiBench/releases/tag/v7.1.1)
- [19] L. Yi, J. Dai, Experience from Hadoop Benchmarking with HiBench: From Micro-Benchmarks Toward End-to-End Pipelines, in: T. Rabl, N. Raghunath, M. Poess, M. Bhandarkar, H.-A. Jacobsen, C. Baru (Eds.), Advancing Big Data Benchmarks, Vol. 8585, Springer International Publishing, Cham, 2014, pp. 43–48, series Title: Lecture Notes in Computer Science.  
 750 doi:10.1007/978-3-319-10596-3\_4.  
 URL [http://link.springer.com/10.1007/978-3-319-10596-3\\_4](http://link.springer.com/10.1007/978-3-319-10596-3_4)
- [20] N. Poggi, A. Montero, D. Carrera, Characterizing bigbench queries, hive, and spark in multi-cloud environments, Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lec-
- 755

ture Notes in Bioinformatics) 10661 LNCS (2018) 55–74. doi:10.1007/978-3-319-72401-0\_5.

- 760 [21] N. Poggi, J. L. Berral, T. Fenech, D. Carrera, J. Blakeley, U. F. Minhas, N. Vujic, The state of SQL-on-Hadoop in the cloud, in: 2016 IEEE International Conference on Big Data (Big Data), 2016, pp. 1432–1443. doi:10.1109/BigData.2016.7840751.
- [22] Y. Samadi, M. Zbakh, C. Tadonki, Performance comparison between hadoop and spark frameworks using HiBench benchmarks, Concurrency Computation 30 (12). doi:10.1002/cpe.4367.
- 765 [23] H. Ahn, H. Kim, W. You, Performance Study of Spark on YARN Cluster Using HiBench, 2018. doi:10.1109/ICCE-ASIA.2018.8552137.
- [24] S. Han, W. Choi, R. Muwafiq, Y. Nah, Impact of memory size on bigdata processing based on hadoop and spark, Vol. 2017-January, 2017, pp. 275–280. doi:10.1145/3129676.3129688.
- 770 [25] T. Ivanov, R. Niemann, S. Izberovic, M. Rosselli, K. Tolle, R. V. Zicari, Performance Evaluation of Enterprise Big Data Platforms with HiBench, in: 2015 IEEE Trustcom/BigDataSE/ISPA, Vol. 2, 2015, pp. 120–127. doi:10.1109/Trustcom.2015.570.
- [26] Gartner Reprint.
- 775 URL <https://www.gartner.com/doc/reprints?id=1-1ZDZDMTF&ct=200703&st=sb>