

# TR29124 C++ Special Math Functions

## 2.0

Generated by Doxygen 1.8.9.1

Wed Apr 6 2016 22:46:43



# Contents

<b>1</b>	<b>Mathematical Special Functions</b>	<b>1</b>
1.1	Intro . . . . .	1
1.2	Implementation . . . . .	1
1.3	Bibliography . . . . .	1
<b>2</b>	<b>Todo List</b>	<b>3</b>
<b>3</b>	<b>Module Index</b>	<b>5</b>
3.1	Modules . . . . .	5
<b>4</b>	<b>Namespace Index</b>	<b>7</b>
4.1	Namespace List . . . . .	7
<b>5</b>	<b>Class Index</b>	<b>9</b>
5.1	Class List . . . . .	9
<b>6</b>	<b>File Index</b>	<b>11</b>
6.1	File List . . . . .	11
<b>7</b>	<b>Module Documentation</b>	<b>13</b>
7.1	Extended Mathematical Special Functions . . . . .	13
7.1.1	Detailed Description . . . . .	21
7.1.2	Enumeration Type Documentation . . . . .	21
7.1.2.1	anonymous enum . . . . .	21
7.1.3	Function Documentation . . . . .	21
7.1.3.1	airy_ai . . . . .	21
7.1.3.2	airy_aif . . . . .	21
7.1.3.3	airy_ail . . . . .	21
7.1.3.4	airy_bi . . . . .	21
7.1.3.5	airy_bif . . . . .	22
7.1.3.6	airy_bil . . . . .	22

7.1.3.7	<a href="#">bernoulli</a>	22
7.1.3.8	<a href="#">bernoullif</a>	22
7.1.3.9	<a href="#">bernoullil</a>	22
7.1.3.10	<a href="#">bincoef</a>	22
7.1.3.11	<a href="#">bincoeff</a>	22
7.1.3.12	<a href="#">bincoefl</a>	22
7.1.3.13	<a href="#">chebyshev_t</a>	22
7.1.3.14	<a href="#">chebyshev_tf</a>	23
7.1.3.15	<a href="#">chebyshev_tl</a>	23
7.1.3.16	<a href="#">chebyshev_u</a>	23
7.1.3.17	<a href="#">chebyshev_uf</a>	23
7.1.3.18	<a href="#">chebyshev_ul</a>	24
7.1.3.19	<a href="#">chebyshev_v</a>	24
7.1.3.20	<a href="#">chebyshev_vf</a>	24
7.1.3.21	<a href="#">chebyshev_vl</a>	24
7.1.3.22	<a href="#">chebyshev_w</a>	24
7.1.3.23	<a href="#">chebyshev_wf</a>	25
7.1.3.24	<a href="#">chebyshev_wl</a>	25
7.1.3.25	<a href="#">clausen</a>	25
7.1.3.26	<a href="#">clausen</a>	25
7.1.3.27	<a href="#">clausen_c</a>	25
7.1.3.28	<a href="#">clausen_cf</a>	26
7.1.3.29	<a href="#">clausen_cl</a>	26
7.1.3.30	<a href="#">clausen_s</a>	26
7.1.3.31	<a href="#">clausen_sf</a>	26
7.1.3.32	<a href="#">clausen_sl</a>	27
7.1.3.33	<a href="#">clausenf</a>	27
7.1.3.34	<a href="#">clausenf</a>	27
7.1.3.35	<a href="#">clausenl</a>	27
7.1.3.36	<a href="#">clausenl</a>	27
7.1.3.37	<a href="#">comp_ellint_d</a>	27
7.1.3.38	<a href="#">comp_ellint_df</a>	28
7.1.3.39	<a href="#">comp_ellint_dl</a>	28
7.1.3.40	<a href="#">comp_ellint_rf</a>	28
7.1.3.41	<a href="#">comp_ellint_rf</a>	28
7.1.3.42	<a href="#">comp_ellint_rf</a>	28
7.1.3.43	<a href="#">comp_ellint_rg</a>	28

7.1.3.44	<a href="#">comp_ellint_rg</a>	28
7.1.3.45	<a href="#">comp_ellint_rg</a>	29
7.1.3.46	<a href="#">conf_hyperg</a>	29
7.1.3.47	<a href="#">conf_hyperg_lim</a>	29
7.1.3.48	<a href="#">conf_hyperg_limf</a>	29
7.1.3.49	<a href="#">conf_hyperg_liml</a>	30
7.1.3.50	<a href="#">conf_hypergf</a>	30
7.1.3.51	<a href="#">conf_hypergl</a>	30
7.1.3.52	<a href="#">coshint</a>	30
7.1.3.53	<a href="#">coshintf</a>	30
7.1.3.54	<a href="#">coshintl</a>	31
7.1.3.55	<a href="#">cosint</a>	31
7.1.3.56	<a href="#">cosintf</a>	31
7.1.3.57	<a href="#">cosintl</a>	31
7.1.3.58	<a href="#">cyl_hankel_1</a>	31
7.1.3.59	<a href="#">cyl_hankel_1</a>	31
7.1.3.60	<a href="#">cyl_hankel_1f</a>	33
7.1.3.61	<a href="#">cyl_hankel_1f</a>	33
7.1.3.62	<a href="#">cyl_hankel_1l</a>	33
7.1.3.63	<a href="#">cyl_hankel_1l</a>	33
7.1.3.64	<a href="#">cyl_hankel_2</a>	33
7.1.3.65	<a href="#">cyl_hankel_2</a>	33
7.1.3.66	<a href="#">cyl_hankel_2f</a>	34
7.1.3.67	<a href="#">cyl_hankel_2f</a>	34
7.1.3.68	<a href="#">cyl_hankel_2l</a>	34
7.1.3.69	<a href="#">cyl_hankel_2l</a>	34
7.1.3.70	<a href="#">dawson</a>	34
7.1.3.71	<a href="#">dawsonf</a>	35
7.1.3.72	<a href="#">dawsonl</a>	35
7.1.3.73	<a href="#">digamma</a>	35
7.1.3.74	<a href="#">digammaf</a>	35
7.1.3.75	<a href="#">digammal</a>	35
7.1.3.76	<a href="#">dilog</a>	35
7.1.3.77	<a href="#">dilogf</a>	35
7.1.3.78	<a href="#">dilogl</a>	35
7.1.3.79	<a href="#">dirichlet_beta</a>	36
7.1.3.80	<a href="#">dirichlet_betaf</a>	36

7.1.3.81	<a href="#">dirichlet_betal</a>	36
7.1.3.82	<a href="#">dirichlet_eta</a>	36
7.1.3.83	<a href="#">dirichlet_etaf</a>	36
7.1.3.84	<a href="#">dirichlet_etat</a>	36
7.1.3.85	<a href="#">double_factorial</a>	37
7.1.3.86	<a href="#">double_factorialf</a>	37
7.1.3.87	<a href="#">double_factoriall</a>	37
7.1.3.88	<a href="#">ellint_cel</a>	37
7.1.3.89	<a href="#">ellint_celf</a>	37
7.1.3.90	<a href="#">ellint_cell</a>	37
7.1.3.91	<a href="#">ellint_d</a>	37
7.1.3.92	<a href="#">ellint_df</a>	38
7.1.3.93	<a href="#">ellint_dl</a>	38
7.1.3.94	<a href="#">ellint_el1</a>	38
7.1.3.95	<a href="#">ellint_el1f</a>	38
7.1.3.96	<a href="#">ellint_el1l</a>	38
7.1.3.97	<a href="#">ellint_el2</a>	38
7.1.3.98	<a href="#">ellint_el2f</a>	39
7.1.3.99	<a href="#">ellint_el2l</a>	39
7.1.3.100	<a href="#">ellint_el3</a>	39
7.1.3.101	<a href="#">ellint_el3f</a>	39
7.1.3.102	<a href="#">ellint_el3l</a>	39
7.1.3.103	<a href="#">ellint_rc</a>	39
7.1.3.104	<a href="#">ellint_rcf</a>	40
7.1.3.105	<a href="#">ellint_rcl</a>	40
7.1.3.106	<a href="#">ellint_rd</a>	40
7.1.3.107	<a href="#">ellint_rdf</a>	41
7.1.3.108	<a href="#">ellint_rdl</a>	41
7.1.3.109	<a href="#">ellint_rf</a>	41
7.1.3.110	<a href="#">ellint_rff</a>	41
7.1.3.111	<a href="#">ellint_rfl</a>	42
7.1.3.112	<a href="#">ellint_rg</a>	42
7.1.3.113	<a href="#">ellint_rgf</a>	42
7.1.3.114	<a href="#">ellint_rgl</a>	42
7.1.3.115	<a href="#">ellint_rj</a>	43
7.1.3.116	<a href="#">ellint_rjf</a>	43
7.1.3.117	<a href="#">ellint_rjl</a>	43

7.1.3.118 ellnome	43
7.1.3.119 ellnomef	44
7.1.3.120 ellnome1	44
7.1.3.121 expint_e1	44
7.1.3.122 expint_e1f	44
7.1.3.123 expint_e1l	44
7.1.3.124 expint_en	44
7.1.3.125 expint_enf	44
7.1.3.126 expint_enl	44
7.1.3.127 factorial	44
7.1.3.128 factorialf	44
7.1.3.129 factorial1	45
7.1.3.130 fresnel_c	45
7.1.3.131 fresnel_cf	45
7.1.3.132 fresnel_cl	45
7.1.3.133 fresnel_s	45
7.1.3.134 fresnel_sf	45
7.1.3.135 fresnel_sl	45
7.1.3.136 gamma_l	45
7.1.3.137 gamma_lf	46
7.1.3.138 gamma_ll	46
7.1.3.139 gamma_p	46
7.1.3.140 gamma_pf	46
7.1.3.141 gamma_pl	46
7.1.3.142 gamma_q	46
7.1.3.143 gamma_qf	46
7.1.3.144 gamma_ql	46
7.1.3.145 gamma_u	46
7.1.3.146 gamma_uf	46
7.1.3.147 gamma_ul	46
7.1.3.148 gegenbauer	47
7.1.3.149 gegenbauerf	47
7.1.3.150 gegenbauerl	47
7.1.3.151 heuman_lambda	47
7.1.3.152 heuman_lambdaf	47
7.1.3.153 heuman_lambdal	47
7.1.3.154 hurwitz_zeta	47

7.1.3.155 hurwitz_zetaf . . . . .	48
7.1.3.156 hurwitz_zetal . . . . .	48
7.1.3.157 hyperg . . . . .	48
7.1.3.158 hypergf . . . . .	48
7.1.3.159 hypergl . . . . .	48
7.1.3.160 ibeta . . . . .	49
7.1.3.161 ibetac . . . . .	49
7.1.3.162 ibetacf . . . . .	49
7.1.3.163 ibetacl . . . . .	49
7.1.3.164 ibetaf . . . . .	49
7.1.3.165 ibetal . . . . .	50
7.1.3.166 jacobi . . . . .	50
7.1.3.167 jacobi_cn . . . . .	50
7.1.3.168 jacobi_cnf . . . . .	50
7.1.3.169 jacobi_cnl . . . . .	50
7.1.3.170 jacobi_dn . . . . .	51
7.1.3.171 jacobi_dnf . . . . .	51
7.1.3.172 jacobi_dnl . . . . .	51
7.1.3.173 jacobi_sn . . . . .	51
7.1.3.174 jacobi_snf . . . . .	51
7.1.3.175 jacobi_snl . . . . .	52
7.1.3.176 jacobi_zeta . . . . .	52
7.1.3.177 jacobi_zetaf . . . . .	52
7.1.3.178 jacobi_zetal . . . . .	52
7.1.3.179 jacobif . . . . .	52
7.1.3.180 jacobil . . . . .	52
7.1.3.181 lbincoef . . . . .	53
7.1.3.182 lbincoeff . . . . .	53
7.1.3.183 lbincoefl . . . . .	53
7.1.3.184 ldouble_factorial . . . . .	53
7.1.3.185 ldouble_factorialf . . . . .	53
7.1.3.186 ldouble_factoriall . . . . .	53
7.1.3.187 legendre_q . . . . .	53
7.1.3.188 legendre_qf . . . . .	53
7.1.3.189 legendre_ql . . . . .	53
7.1.3.190 lfactorial . . . . .	53
7.1.3.191 lfactorialf . . . . .	53



7.1.3.192 lfactorial	54
7.1.3.193 logint	54
7.1.3.194 logintf	54
7.1.3.195 logintl	54
7.1.3.196 lpochhammer_l	54
7.1.3.197 lpochhammer_lf	54
7.1.3.198 lpochhammer_ll	54
7.1.3.199 lpochhammer_u	55
7.1.3.200 lpochhammer_uf	55
7.1.3.201 lpochhammer_ul	55
7.1.3.202 owens_t	55
7.1.3.203 owens_tf	55
7.1.3.204 owens_tl	55
7.1.3.205 pochhammer_l	56
7.1.3.206 pochhammer_lf	56
7.1.3.207 pochhammer_ll	56
7.1.3.208 pochhammer_u	56
7.1.3.209 pochhammer_uf	56
7.1.3.210 pochhammer_ul	56
7.1.3.211 polylog	56
7.1.3.212 polylogf	56
7.1.3.213 polylogl	57
7.1.3.214 psi	57
7.1.3.215 psif	57
7.1.3.216 psil	57
7.1.3.217 radpoly	57
7.1.3.218 radpolyf	57
7.1.3.219 radpolyl	57
7.1.3.220 sinc	57
7.1.3.221 sinc_pi	58
7.1.3.222 sinc_pif	58
7.1.3.223 sinc_pil	58
7.1.3.224 sincf	58
7.1.3.225 sincl	58
7.1.3.226 sinhc	58
7.1.3.227 sinhc_pi	58
7.1.3.228 sinhc_pif	58

7.1.3.229 <code>sinhc_pil</code> . . . . .	58
7.1.3.230 <code>sinhcf</code> . . . . .	58
7.1.3.231 <code>sinhcl</code> . . . . .	58
7.1.3.232 <code>sinhint</code> . . . . .	59
7.1.3.233 <code>sinhintf</code> . . . . .	59
7.1.3.234 <code>sinhintl</code> . . . . .	59
7.1.3.235 <code>sinint</code> . . . . .	59
7.1.3.236 <code>sinintf</code> . . . . .	59
7.1.3.237 <code>sinintl</code> . . . . .	60
7.1.3.238 <code>sph_bessel_i</code> . . . . .	60
7.1.3.239 <code>sph_bessel_if</code> . . . . .	60
7.1.3.240 <code>sph_bessel_il</code> . . . . .	60
7.1.3.241 <code>sph_bessel_k</code> . . . . .	60
7.1.3.242 <code>sph_bessel_kf</code> . . . . .	60
7.1.3.243 <code>sph_bessel_kl</code> . . . . .	60
7.1.3.244 <code>sph_hankel_1</code> . . . . .	60
7.1.3.245 <code>sph_hankel_1l</code> . . . . .	60
7.1.3.246 <code>sph_hankel_1f</code> . . . . .	61
7.1.3.247 <code>sph_hankel_1f</code> . . . . .	61
7.1.3.248 <code>sph_hankel_1l</code> . . . . .	61
7.1.3.249 <code>sph_hankel_1l</code> . . . . .	61
7.1.3.250 <code>sph_hankel_2</code> . . . . .	61
7.1.3.251 <code>sph_hankel_2</code> . . . . .	61
7.1.3.252 <code>sph_hankel_2f</code> . . . . .	61
7.1.3.253 <code>sph_hankel_2f</code> . . . . .	62
7.1.3.254 <code>sph_hankel_2l</code> . . . . .	62
7.1.3.255 <code>sph_hankel_2l</code> . . . . .	62
7.1.3.256 <code>sph_harmonic</code> . . . . .	62
7.1.3.257 <code>sph_harmonicf</code> . . . . .	62
7.1.3.258 <code>sph_harmonicl</code> . . . . .	62
7.1.3.259 <code>theta_1</code> . . . . .	63
7.1.3.260 <code>theta_1f</code> . . . . .	63
7.1.3.261 <code>theta_1l</code> . . . . .	63
7.1.3.262 <code>theta_2</code> . . . . .	63
7.1.3.263 <code>theta_2f</code> . . . . .	64
7.1.3.264 <code>theta_2l</code> . . . . .	64
7.1.3.265 <code>theta_3</code> . . . . .	64

7.1.3.266	<a href="#">theta_3f</a>	64
7.1.3.267	<a href="#">theta_3l</a>	65
7.1.3.268	<a href="#">theta_4</a>	65
7.1.3.269	<a href="#">theta_4f</a>	65
7.1.3.270	<a href="#">theta_4l</a>	65
7.1.3.271	<a href="#">theta_c</a>	65
7.1.3.272	<a href="#">theta_cf</a>	66
7.1.3.273	<a href="#">theta_cl</a>	66
7.1.3.274	<a href="#">theta_d</a>	66
7.1.3.275	<a href="#">theta_df</a>	66
7.1.3.276	<a href="#">theta_dl</a>	67
7.1.3.277	<a href="#">theta_n</a>	67
7.1.3.278	<a href="#">theta_nf</a>	67
7.1.3.279	<a href="#">theta_nl</a>	67
7.1.3.280	<a href="#">theta_s</a>	67
7.1.3.281	<a href="#">theta_sf</a>	68
7.1.3.282	<a href="#">theta_sl</a>	68
7.1.3.283	<a href="#">zernike</a>	68
7.1.3.284	<a href="#">zernikef</a>	68
7.1.3.285	<a href="#">zernikel</a>	68
7.2	<a href="#">Mathematical Special Functions</a>	69
7.2.1	<a href="#">Detailed Description</a>	70
7.2.2	<a href="#">Function Documentation</a>	71
7.2.2.1	<a href="#">assoc_laguerre</a>	71
7.2.2.2	<a href="#">assoc_laguerref</a>	71
7.2.2.3	<a href="#">assoc_laguerrel</a>	71
7.2.2.4	<a href="#">assoc_legendre</a>	71
7.2.2.5	<a href="#">assoc_legendref</a>	72
7.2.2.6	<a href="#">assoc_legendrel</a>	72
7.2.2.7	<a href="#">beta</a>	72
7.2.2.8	<a href="#">betaf</a>	72
7.2.2.9	<a href="#">betal</a>	73
7.2.2.10	<a href="#">comp_ellint_1</a>	73
7.2.2.11	<a href="#">comp_ellint_1f</a>	73
7.2.2.12	<a href="#">comp_ellint_1l</a>	73
7.2.2.13	<a href="#">comp_ellint_2</a>	74
7.2.2.14	<a href="#">comp_ellint_2f</a>	74

7.2.2.15	<a href="#">comp_ellint_2l</a>	74
7.2.2.16	<a href="#">comp_ellint_3</a>	74
7.2.2.17	<a href="#">comp_ellint_3f</a>	75
7.2.2.18	<a href="#">comp_ellint_3l</a>	75
7.2.2.19	<a href="#">cyl_bessel_i</a>	75
7.2.2.20	<a href="#">cyl_bessel_if</a>	75
7.2.2.21	<a href="#">cyl_bessel_il</a>	76
7.2.2.22	<a href="#">cyl_bessel_j</a>	76
7.2.2.23	<a href="#">cyl_bessel_jf</a>	76
7.2.2.24	<a href="#">cyl_bessel_jl</a>	76
7.2.2.25	<a href="#">cyl_bessel_k</a>	76
7.2.2.26	<a href="#">cyl_bessel_kf</a>	77
7.2.2.27	<a href="#">cyl_bessel_kl</a>	77
7.2.2.28	<a href="#">cyl_neumann</a>	77
7.2.2.29	<a href="#">cyl_neumannf</a>	78
7.2.2.30	<a href="#">cyl_neumannl</a>	78
7.2.2.31	<a href="#">ellint_1</a>	78
7.2.2.32	<a href="#">ellint_1f</a>	78
7.2.2.33	<a href="#">ellint_1l</a>	79
7.2.2.34	<a href="#">ellint_2</a>	79
7.2.2.35	<a href="#">ellint_2f</a>	79
7.2.2.36	<a href="#">ellint_2l</a>	79
7.2.2.37	<a href="#">ellint_3</a>	80
7.2.2.38	<a href="#">ellint_3f</a>	80
7.2.2.39	<a href="#">ellint_3l</a>	80
7.2.2.40	<a href="#">expint</a>	80
7.2.2.41	<a href="#">expintf</a>	81
7.2.2.42	<a href="#">expintl</a>	81
7.2.2.43	<a href="#">hermite</a>	81
7.2.2.44	<a href="#">hermitef</a>	81
7.2.2.45	<a href="#">hermitel</a>	82
7.2.2.46	<a href="#">laguerre</a>	82
7.2.2.47	<a href="#">laguerref</a>	82
7.2.2.48	<a href="#">laguerrel</a>	82
7.2.2.49	<a href="#">legendre</a>	82
7.2.2.50	<a href="#">legendref</a>	83
7.2.2.51	<a href="#">legendrel</a>	83

7.2.2.52	<a href="#">riemann_zeta</a>	83
7.2.2.53	<a href="#">riemann_zetaf</a>	83
7.2.2.54	<a href="#">riemann_zetal</a>	84
7.2.2.55	<a href="#">sph_bessel</a>	84
7.2.2.56	<a href="#">sph_besself</a>	84
7.2.2.57	<a href="#">sph_bessell</a>	84
7.2.2.58	<a href="#">sph_legendre</a>	84
7.2.2.59	<a href="#">sph_legendref</a>	85
7.2.2.60	<a href="#">sph_legendrel</a>	85
7.2.2.61	<a href="#">sph_neumann</a>	85
7.2.2.62	<a href="#">sph_neumannf</a>	85
7.2.2.63	<a href="#">sph_neumannl</a>	86
<b>8</b>	<b>Namespace Documentation</b>	<b>87</b>
8.1	<a href="#">__gnu_cxx Namespace Reference</a>	87
8.2	<a href="#">std Namespace Reference</a>	95
8.3	<a href="#">std::__detail Namespace Reference</a>	97
8.3.1	<a href="#">Enumeration Type Documentation</a>	114
8.3.1.1	<a href="#">anonymous enum</a>	114
8.3.2	<a href="#">Function Documentation</a>	114
8.3.2.1	<a href="#">__airy</a>	114
8.3.2.2	<a href="#">__airy</a>	115
8.3.2.3	<a href="#">__airy_ai</a>	117
8.3.2.4	<a href="#">__airy_arg</a>	117
8.3.2.5	<a href="#">__airy_asymp_absarg_ge_pio3</a>	117
8.3.2.6	<a href="#">__airy_asymp_absarg_lt_pio3</a>	118
8.3.2.7	<a href="#">__airy_bessel_i</a>	118
8.3.2.8	<a href="#">__airy_bessel_k</a>	119
8.3.2.9	<a href="#">__airy_bi</a>	120
8.3.2.10	<a href="#">__airy_hyperg_rational</a>	120
8.3.2.11	<a href="#">__assoc_laguerre</a>	121
8.3.2.12	<a href="#">__assoc_legendre_p</a>	121
8.3.2.13	<a href="#">__bernoulli</a>	121
8.3.2.14	<a href="#">__bernoulli_2n</a>	122
8.3.2.15	<a href="#">__bernoulli_series</a>	122
8.3.2.16	<a href="#">__beta</a>	122
8.3.2.17	<a href="#">__beta_gamma</a>	123

8.3.2.18	<a href="#">__beta_inc</a>	123
8.3.2.19	<a href="#">__beta_inc_cont_frac</a>	124
8.3.2.20	<a href="#">__beta_lgamma</a>	124
8.3.2.21	<a href="#">__beta_product</a>	124
8.3.2.22	<a href="#">__bincoef</a>	125
8.3.2.23	<a href="#">__binomial_cdf</a>	125
8.3.2.24	<a href="#">__binomial_cdfc</a>	125
8.3.2.25	<a href="#">__bose_einstein</a>	126
8.3.2.26	<a href="#">__chebyshev_recur</a>	126
8.3.2.27	<a href="#">__chebyshev_t</a>	126
8.3.2.28	<a href="#">__chebyshev_u</a>	126
8.3.2.29	<a href="#">__chebyshev_v</a>	126
8.3.2.30	<a href="#">__chebyshev_w</a>	127
8.3.2.31	<a href="#">__chi_squared_pdf</a>	127
8.3.2.32	<a href="#">__chi_squared_pdfc</a>	127
8.3.2.33	<a href="#">__chshint</a>	127
8.3.2.34	<a href="#">__chshint_cont_frac</a>	128
8.3.2.35	<a href="#">__chshint_series</a>	128
8.3.2.36	<a href="#">__clamp_0_m2pi</a>	128
8.3.2.37	<a href="#">__clamp_pi</a>	128
8.3.2.38	<a href="#">__clausen</a>	128
8.3.2.39	<a href="#">__clausen</a>	128
8.3.2.40	<a href="#">__clausen_c</a>	129
8.3.2.41	<a href="#">__clausen_c</a>	129
8.3.2.42	<a href="#">__clausen_s</a>	130
8.3.2.43	<a href="#">__clausen_s</a>	130
8.3.2.44	<a href="#">__comp_ellint_1</a>	130
8.3.2.45	<a href="#">__comp_ellint_2</a>	131
8.3.2.46	<a href="#">__comp_ellint_3</a>	131
8.3.2.47	<a href="#">__comp_ellint_d</a>	132
8.3.2.48	<a href="#">__comp_ellint_rf</a>	132
8.3.2.49	<a href="#">__comp_ellint_rg</a>	132
8.3.2.50	<a href="#">__conf_hyperg</a>	132
8.3.2.51	<a href="#">__conf_hyperg_lim</a>	132
8.3.2.52	<a href="#">__conf_hyperg_lim_series</a>	133
8.3.2.53	<a href="#">__conf_hyperg_luke</a>	133
8.3.2.54	<a href="#">__conf_hyperg_series</a>	133

8.3.2.55	<a href="#">__coshint</a>	134
8.3.2.56	<a href="#">__cyl_bessel</a>	134
8.3.2.57	<a href="#">__cyl_bessel_i</a>	134
8.3.2.58	<a href="#">__cyl_bessel_ij_series</a>	135
8.3.2.59	<a href="#">__cyl_bessel_ik</a>	135
8.3.2.60	<a href="#">__cyl_bessel_ik_asymp</a>	136
8.3.2.61	<a href="#">__cyl_bessel_ik_steel</a>	136
8.3.2.62	<a href="#">__cyl_bessel_j</a>	136
8.3.2.63	<a href="#">__cyl_bessel_jn</a>	137
8.3.2.64	<a href="#">__cyl_bessel_jn_asymp</a>	137
8.3.2.65	<a href="#">__cyl_bessel_jn_steel</a>	137
8.3.2.66	<a href="#">__cyl_bessel_k</a>	138
8.3.2.67	<a href="#">__cyl_hankel_1</a>	138
8.3.2.68	<a href="#">__cyl_hankel_1</a>	139
8.3.2.69	<a href="#">__cyl_hankel_2</a>	139
8.3.2.70	<a href="#">__cyl_hankel_2</a>	139
8.3.2.71	<a href="#">__cyl_neumann</a>	140
8.3.2.72	<a href="#">__cyl_neumann_n</a>	140
8.3.2.73	<a href="#">__dawson</a>	141
8.3.2.74	<a href="#">__dawson_const_frac</a>	141
8.3.2.75	<a href="#">__dawson_series</a>	141
8.3.2.76	<a href="#">__debye_region</a>	141
8.3.2.77	<a href="#">__dilog</a>	141
8.3.2.78	<a href="#">__dirichlet_beta</a>	142
8.3.2.79	<a href="#">__dirichlet_beta</a>	142
8.3.2.80	<a href="#">__dirichlet_eta</a>	142
8.3.2.81	<a href="#">__dirichlet_eta</a>	143
8.3.2.82	<a href="#">__double_factorial</a>	143
8.3.2.83	<a href="#">__ellint_1</a>	143
8.3.2.84	<a href="#">__ellint_2</a>	144
8.3.2.85	<a href="#">__ellint_3</a>	144
8.3.2.86	<a href="#">__ellint_cel</a>	145
8.3.2.87	<a href="#">__ellint_d</a>	145
8.3.2.88	<a href="#">__ellint_el1</a>	145
8.3.2.89	<a href="#">__ellint_el2</a>	145
8.3.2.90	<a href="#">__ellint_el3</a>	145
8.3.2.91	<a href="#">__ellint_rc</a>	145

8.3.2.92	<code>__ellint_rd</code>	146
8.3.2.93	<code>__ellint_rf</code>	146
8.3.2.94	<code>__ellint_rg</code>	147
8.3.2.95	<code>__ellint_rj</code>	147
8.3.2.96	<code>__ellnome</code>	148
8.3.2.97	<code>__ellnome_k</code>	148
8.3.2.98	<code>__ellnome_series</code>	148
8.3.2.99	<code>__expint</code>	148
8.3.2.100	<code>__expint</code>	149
8.3.2.101	<code>__expint_asymp</code>	149
8.3.2.102	<code>__expint_E1</code>	150
8.3.2.103	<code>__expint_E1_asymp</code>	150
8.3.2.104	<code>__expint_E1_series</code>	150
8.3.2.105	<code>__expint_Ei</code>	151
8.3.2.106	<code>__expint_Ei_asymp</code>	151
8.3.2.107	<code>__expint_Ei_series</code>	152
8.3.2.108	<code>__expint_En_cont_frac</code>	152
8.3.2.109	<code>__expint_En_recursion</code>	152
8.3.2.110	<code>__expint_En_series</code>	153
8.3.2.111	<code>__expint_large_n</code>	153
8.3.2.112	<code>__f_cdf</code>	154
8.3.2.113	<code>__f_cdfc</code>	154
8.3.2.114	<code>__factorial</code>	154
8.3.2.115	<code>__fermi_dirac</code>	154
8.3.2.116	<code>__fock_airy</code>	155
8.3.2.117	<code>__fpequal</code>	155
8.3.2.118	<code>__fpimag</code>	156
8.3.2.119	<code>__fpimag</code>	157
8.3.2.120	<code>__fpreal</code>	157
8.3.2.121	<code>__fpreal</code>	157
8.3.2.122	<code>__fresnel</code>	157
8.3.2.123	<code>__fresnel_cont_frac</code>	158
8.3.2.124	<code>__fresnel_series</code>	158
8.3.2.125	<code>__gamma</code>	158
8.3.2.126	<code>__gamma_cont_frac</code>	158
8.3.2.127	<code>__gamma_l</code>	158
8.3.2.128	<code>__gamma_p</code>	159



8.3.2.129	<a href="#">__gamma_q</a>	159
8.3.2.130	<a href="#">__gamma_series</a>	159
8.3.2.131	<a href="#">__gamma_temme</a>	159
8.3.2.132	<a href="#">__gamma_u</a>	160
8.3.2.133	<a href="#">__gauss</a>	160
8.3.2.134	<a href="#">__gegenbauer_poly</a>	160
8.3.2.135	<a href="#">__hankel</a>	160
8.3.2.136	<a href="#">__hankel_debye</a>	161
8.3.2.137	<a href="#">__hankel_params</a>	161
8.3.2.138	<a href="#">__hankel_uniform</a>	161
8.3.2.139	<a href="#">__hankel_uniform_olver</a>	162
8.3.2.140	<a href="#">__hankel_uniform_outer</a>	162
8.3.2.141	<a href="#">__hankel_uniform_sum</a>	163
8.3.2.142	<a href="#">__heuman_lambda</a>	163
8.3.2.143	<a href="#">__hurwitz_zeta</a>	163
8.3.2.144	<a href="#">__hurwitz_zeta</a>	164
8.3.2.145	<a href="#">__hurwitz_zeta_euler_maclaurin</a>	164
8.3.2.146	<a href="#">__hydrogen</a>	164
8.3.2.147	<a href="#">__hyperg</a>	164
8.3.2.148	<a href="#">__hyperg_luke</a>	165
8.3.2.149	<a href="#">__hyperg_reflect</a>	165
8.3.2.150	<a href="#">__hyperg_series</a>	165
8.3.2.151	<a href="#">__jacobi_sncndn</a>	167
8.3.2.152	<a href="#">__jacobi_zeta</a>	167
8.3.2.153	<a href="#">__laguerre</a>	167
8.3.2.154	<a href="#">__log_bincoef</a>	167
8.3.2.155	<a href="#">__log_double_factorial</a>	168
8.3.2.156	<a href="#">__log_double_factorial</a>	168
8.3.2.157	<a href="#">__log_factorial</a>	168
8.3.2.158	<a href="#">__log_gamma</a>	168
8.3.2.159	<a href="#">__log_gamma_bernoulli</a>	169
8.3.2.160	<a href="#">__log_gamma_lanczos</a>	169
8.3.2.161	<a href="#">__log_gamma_sign</a>	169
8.3.2.162	<a href="#">__log_gamma_spouge</a>	170
8.3.2.163	<a href="#">__log_pochhammer_l</a>	170
8.3.2.164	<a href="#">__log_pochhammer_u</a>	171
8.3.2.165	<a href="#">__logint</a>	171

8.3.2.166	<code>__owens_t</code>	171
8.3.2.167	<code>__pochhammer_l</code>	172
8.3.2.168	<code>__pochhammer_u</code>	172
8.3.2.169	<code>__poly_hermite</code>	172
8.3.2.170	<code>__poly_hermite_asymp</code>	173
8.3.2.171	<code>__poly_hermite_recursion</code>	173
8.3.2.172	<code>__poly_jacobi</code>	174
8.3.2.173	<code>__poly_laguerre</code>	174
8.3.2.174	<code>__poly_laguerre_hyperg</code>	174
8.3.2.175	<code>__poly_laguerre_large_n</code>	176
8.3.2.176	<code>__poly_laguerre_recursion</code>	176
8.3.2.177	<code>__poly_legendre_p</code>	177
8.3.2.178	<code>__poly_legendre_q</code>	177
8.3.2.179	<code>__poly_radial_jacobi</code>	177
8.3.2.180	<code>__polylog</code>	178
8.3.2.181	<code>__polylog</code>	179
8.3.2.182	<code>__polylog_exp</code>	179
8.3.2.183	<code>__polylog_exp_asymp</code>	180
8.3.2.184	<code>__polylog_exp_int_neg</code>	180
8.3.2.185	<code>__polylog_exp_int_neg</code>	180
8.3.2.186	<code>__polylog_exp_int_pos</code>	181
8.3.2.187	<code>__polylog_exp_int_pos</code>	181
8.3.2.188	<code>__polylog_exp_neg</code>	182
8.3.2.189	<code>__polylog_exp_neg</code>	182
8.3.2.190	<code>__polylog_exp_neg_even</code>	182
8.3.2.191	<code>__polylog_exp_neg_odd</code>	183
8.3.2.192	<code>__polylog_exp_negative_real_part</code>	184
8.3.2.193	<code>__polylog_exp_pos</code>	184
8.3.2.194	<code>__polylog_exp_pos</code>	185
8.3.2.195	<code>__polylog_exp_pos</code>	185
8.3.2.196	<code>__polylog_exp_real_neg</code>	186
8.3.2.197	<code>__polylog_exp_real_neg</code>	186
8.3.2.198	<code>__polylog_exp_real_pos</code>	186
8.3.2.199	<code>__polylog_exp_real_pos</code>	187
8.3.2.200	<code>__psi</code>	187
8.3.2.201	<code>__psi</code>	187
8.3.2.202	<code>__psi_asymp</code>	188

8.3.2.203	<a href="#">__psi_series</a>	188
8.3.2.204	<a href="#">__riemann_zeta</a>	188
8.3.2.205	<a href="#">__riemann_zeta_alt</a>	189
8.3.2.206	<a href="#">__riemann_zeta_euler_maclaurin</a>	189
8.3.2.207	<a href="#">__riemann_zeta_glob</a>	189
8.3.2.208	<a href="#">__riemann_zeta_m_1</a>	190
8.3.2.209	<a href="#">__riemann_zeta_m_1_sum</a>	191
8.3.2.210	<a href="#">__riemann_zeta_product</a>	191
8.3.2.211	<a href="#">__riemann_zeta_sum</a>	191
8.3.2.212	<a href="#">__sinc</a>	192
8.3.2.213	<a href="#">__sinc</a>	192
8.3.2.214	<a href="#">__sinc_pi</a>	192
8.3.2.215	<a href="#">__sincosint</a>	192
8.3.2.216	<a href="#">__sincosint_asymp</a>	193
8.3.2.217	<a href="#">__sincosint_cont_frac</a>	193
8.3.2.218	<a href="#">__sincosint_series</a>	193
8.3.2.219	<a href="#">__sinhc</a>	193
8.3.2.220	<a href="#">__sinhc</a>	193
8.3.2.221	<a href="#">__sinhc_pi</a>	193
8.3.2.222	<a href="#">__sinhint</a>	194
8.3.2.223	<a href="#">__sph_bessel</a>	194
8.3.2.224	<a href="#">__sph_bessel</a>	194
8.3.2.225	<a href="#">__sph_bessel_ik</a>	195
8.3.2.226	<a href="#">__sph_bessel_jn</a>	196
8.3.2.227	<a href="#">__sph_hankel</a>	196
8.3.2.228	<a href="#">__sph_hankel_1</a>	197
8.3.2.229	<a href="#">__sph_hankel_1</a>	197
8.3.2.230	<a href="#">__sph_hankel_2</a>	197
8.3.2.231	<a href="#">__sph_hankel_2</a>	198
8.3.2.232	<a href="#">__sph_harmonic</a>	198
8.3.2.233	<a href="#">__sph_legendre</a>	198
8.3.2.234	<a href="#">__sph_neumann</a>	199
8.3.2.235	<a href="#">__sph_neumann</a>	199
8.3.2.236	<a href="#">__students_t_cdf</a>	200
8.3.2.237	<a href="#">__students_t_cdfc</a>	200
8.3.2.238	<a href="#">__theta_1</a>	200
8.3.2.239	<a href="#">__theta_2</a>	201

8.3.2.240	<a href="#">__theta_2_asymp</a>	201
8.3.2.241	<a href="#">__theta_2_sum</a>	201
8.3.2.242	<a href="#">__theta_3</a>	201
8.3.2.243	<a href="#">__theta_3_asymp</a>	202
8.3.2.244	<a href="#">__theta_3_sum</a>	202
8.3.2.245	<a href="#">__theta_4</a>	202
8.3.2.246	<a href="#">__theta_c</a>	202
8.3.2.247	<a href="#">__theta_d</a>	202
8.3.2.248	<a href="#">__theta_n</a>	202
8.3.2.249	<a href="#">__theta_s</a>	203
8.3.2.250	<a href="#">__zernike</a>	203
8.3.2.251	<a href="#">__znorm1</a>	203
8.3.2.252	<a href="#">__znorm2</a>	203
8.3.2.253	<a href="#">evenzeta</a>	203
8.3.3	<a href="#">Variable Documentation</a>	203
8.3.3.1	<a href="#">_Num_Euler_Maclaurin_zeta</a>	203
8.3.3.2	<a href="#">_S_double_factorial_table</a>	204
8.3.3.3	<a href="#">_S_Euler_Maclaurin_zeta</a>	204
8.3.3.4	<a href="#">_S_factorial_table</a>	204
8.3.3.5	<a href="#">_S_neg_double_factorial_table</a>	204
8.3.3.6	<a href="#">_S_num_double_factorials</a>	204
8.3.3.7	<a href="#">_S_num_double_factorials&lt; double &gt;</a>	204
8.3.3.8	<a href="#">_S_num_double_factorials&lt; float &gt;</a>	204
8.3.3.9	<a href="#">_S_num_double_factorials&lt; long double &gt;</a>	204
8.3.3.10	<a href="#">_S_num_factorials</a>	204
8.3.3.11	<a href="#">_S_num_factorials&lt; double &gt;</a>	205
8.3.3.12	<a href="#">_S_num_factorials&lt; float &gt;</a>	205
8.3.3.13	<a href="#">_S_num_factorials&lt; long double &gt;</a>	205
8.3.3.14	<a href="#">_S_num_neg_double_factorials</a>	205
8.3.3.15	<a href="#">_S_num_neg_double_factorials&lt; double &gt;</a>	205
8.3.3.16	<a href="#">_S_num_neg_double_factorials&lt; float &gt;</a>	205
8.3.3.17	<a href="#">_S_num_neg_double_factorials&lt; long double &gt;</a>	205
8.3.3.18	<a href="#">_S_num_zetam1</a>	205
8.3.3.19	<a href="#">_S_zetam1</a>	205

## 9 Class Documentation

207

9.1	<a href="#">std::__detail::_Factorial_table&lt; _Tp &gt; Struct Template Reference</a>	207
-----	--	-----

9.1.1	Detailed Description	207
9.1.2	Member Data Documentation	207
9.1.2.1	__factorial	207
9.1.2.2	__log_factorial	207
9.1.2.3	__n	207
<b>10</b>	<b>File Documentation</b>	<b>209</b>
10.1	bits/sf_airy.tcc File Reference	209
10.1.1	Detailed Description	211
10.1.2	Macro Definition Documentation	211
10.1.2.1	_GLIBCXX_BITS_SF_AIRY_TCC	211
10.2	bits/sf_bessel.tcc File Reference	211
10.2.1	Detailed Description	213
10.2.2	Macro Definition Documentation	213
10.2.2.1	_GLIBCXX_BITS_SF_BESSEL_TCC	213
10.3	bits/sf_beta.tcc File Reference	213
10.3.1	Detailed Description	215
10.3.2	Macro Definition Documentation	215
10.3.2.1	_GLIBCXX_BITS_SF_BETA_TCC	215
10.4	bits/sf_cardinal.tcc File Reference	215
10.4.1	Macro Definition Documentation	217
10.4.1.1	_GLIBCXX_BITS_SF_CARDINAL_TCC	217
10.5	bits/sf_chebyshev.tcc File Reference	217
10.5.1	Detailed Description	218
10.5.2	Macro Definition Documentation	218
10.5.2.1	_GLIBCXX_SF_CHEBYSHEV_TCC	218
10.6	bits/sf_dawson.tcc File Reference	219
10.6.1	Detailed Description	220
10.6.2	Macro Definition Documentation	220
10.6.2.1	_GLIBCXX_SF_DAWSON_TCC	220
10.7	bits/sf_ellint.tcc File Reference	220
10.7.1	Detailed Description	222
10.7.2	Macro Definition Documentation	222
10.7.2.1	_GLIBCXX_BITS_SF_ELLINT_TCC	222
10.8	bits/sf_expint.tcc File Reference	223
10.8.1	Detailed Description	225
10.8.2	Macro Definition Documentation	225

10.8.2.1	<a href="#">_GLIBCXX_BITS_SF_EXPINT_TCC</a>	225
10.9	<a href="#">bits/sf_fresnel.tcc File Reference</a>	225
10.9.1	<a href="#">Detailed Description</a>	226
10.9.2	<a href="#">Macro Definition Documentation</a>	226
10.9.2.1	<a href="#">_GLIBCXX_SF_FRESNEL_TCC</a>	226
10.10	<a href="#">bits/sf_gamma.tcc File Reference</a>	226
10.10.1	<a href="#">Detailed Description</a>	231
10.10.2	<a href="#">Macro Definition Documentation</a>	232
10.10.2.1	<a href="#">_GLIBCXX_BITS_SF_GAMMA_TCC</a>	232
10.11	<a href="#">bits/sf_gegenbauer.tcc File Reference</a>	232
10.11.1	<a href="#">Detailed Description</a>	233
10.11.2	<a href="#">Macro Definition Documentation</a>	233
10.11.2.1	<a href="#">_GLIBCXX_SF_GEGENBAUER_TCC</a>	233
10.12	<a href="#">bits/sf_hankel.tcc File Reference</a>	233
10.12.1	<a href="#">Detailed Description</a>	236
10.12.2	<a href="#">Macro Definition Documentation</a>	236
10.12.2.1	<a href="#">_GLIBCXX_BITS_SF_HANKEL_TCC</a>	236
10.13	<a href="#">bits/sf_hankel_new.tcc File Reference</a>	236
10.13.1	<a href="#">Macro Definition Documentation</a>	236
10.13.1.1	<a href="#">_GLIBCXX_BITS_SF_HANKEL_NEW_TCC</a>	236
10.14	<a href="#">bits/sf_hermite.tcc File Reference</a>	237
10.14.1	<a href="#">Detailed Description</a>	238
10.14.2	<a href="#">Macro Definition Documentation</a>	238
10.14.2.1	<a href="#">_GLIBCXX_BITS_SF_HERMITE_TCC</a>	238
10.15	<a href="#">bits/sf_hydrogen.tcc File Reference</a>	238
10.15.1	<a href="#">Detailed Description</a>	239
10.15.2	<a href="#">Macro Definition Documentation</a>	239
10.15.2.1	<a href="#">_GLIBCXX_BITS_SF_HYDROGEN_TCC</a>	239
10.16	<a href="#">bits/sf_hyperg.tcc File Reference</a>	239
10.16.1	<a href="#">Detailed Description</a>	241
10.16.2	<a href="#">Macro Definition Documentation</a>	241
10.16.2.1	<a href="#">_GLIBCXX_BITS_SF_HYPERG_TCC</a>	241
10.17	<a href="#">bits/sf_hypint.tcc File Reference</a>	241
10.17.1	<a href="#">Detailed Description</a>	242
10.17.2	<a href="#">Macro Definition Documentation</a>	242
10.17.2.1	<a href="#">_GLIBCXX_SF_HYPINT_TCC</a>	242
10.18	<a href="#">bits/sf_jacobi.tcc File Reference</a>	243

10.18.1 Detailed Description	244
10.18.2 Macro Definition Documentation	244
10.18.2.1 <code>_GLIBCXX_SF_JACOBI_TCC</code>	244
10.19bits/sf_laguerre.tcc File Reference	244
10.19.1 Detailed Description	246
10.19.2 Macro Definition Documentation	246
10.19.2.1 <code>_GLIBCXX_BITS_SF_LAGUERRE_TCC</code>	246
10.20bits/sf_legendre.tcc File Reference	246
10.20.1 Detailed Description	247
10.20.2 Macro Definition Documentation	247
10.20.2.1 <code>_GLIBCXX_BITS_SF_LEGENDRE_TCC</code>	247
10.21bits/sf_mod_bessel.tcc File Reference	247
10.21.1 Detailed Description	249
10.21.2 Macro Definition Documentation	249
10.21.2.1 <code>_GLIBCXX_BITS_SF_MOD_BESSEL_TCC</code>	249
10.22bits/sf_owens_t.tcc File Reference	250
10.22.1 Detailed Description	250
10.22.2 Macro Definition Documentation	250
10.22.2.1 <code>_GLIBCXX_BITS_SF_OWENS_T_TCC</code>	250
10.23bits/sf_polylog.tcc File Reference	251
10.23.1 Detailed Description	253
10.23.2 Macro Definition Documentation	253
10.23.2.1 <code>_GLIBCXX_BITS_SF_POLYLOG_TCC</code>	253
10.24bits/sf_theta.tcc File Reference	253
10.24.1 Detailed Description	255
10.24.2 Macro Definition Documentation	255
10.24.2.1 <code>_GLIBCXX_SF_THETA_TCC</code>	255
10.25bits/sf_trigint.tcc File Reference	256
10.25.1 Detailed Description	257
10.25.2 Macro Definition Documentation	257
10.25.2.1 <code>_GLIBCXX_SF_TRIGINT_TCC</code>	257
10.26bits/sf_zeta.tcc File Reference	257
10.26.1 Detailed Description	259
10.26.2 Macro Definition Documentation	259
10.26.2.1 <code>_GLIBCXX_BITS_SF_ZETA_TCC</code>	259
10.27bits/specfun.h File Reference	260
10.27.1 Detailed Description	270

10.27.2 Macro Definition Documentation . . . . .	270
10.27.2.1 __cpp_lib_math_special_functions . . . . .	270
10.27.2.2 __STDCPP_MATH_SPEC_FUNCS__ . . . . .	270
<b>Index</b>	<b>271</b>



# Chapter 1

## Mathematical Special Functions

### 1.1 Intro

The first significant library upgrade on the road to C++2011, TR1, included a set of 23 mathematical functions that significantly extended the standard transcendental functions inherited from C and declared in `<cmath>`. <http://www.open-std.org/JTC1/SC22/WG21/docs/papers/2005/n1836.pdf> Although most components from TR1 were adopted for C++11 these math functions were left behind out of concern for implementability. The math functions were published as a separate international standard. <http://www.open-std.org/JTC1/SC22/WG21/docs/papers/2010/n3060.pdf>

### 1.2 Implementation

Our implementation centers around template functions that provide...

### 1.3 Bibliography

#### See also

Abramowitz and Stegun: Handbook of Mathematical Functions, with Formulas, Graphs, and Mathematical Tables  
Edited by Milton Abramowitz and Irene A. Stegun, National Bureau of Standards Applied Mathematics Series - 55  
Issued June 1964, Tenth Printing, December 1972, with corrections Electronic versions of A&S abound including both pdf and navigable html.

for example <http://people.math.sfu.ca/~cbm/aands/>

The old A&S has been redone as the NIST Digital Library of Mathematical Functions: <http://dlmf.nist.gov/> This version is far more navigable and includes more recent work.

An Atlas of Functions: with Equator, the Atlas Function Calculator 2nd Edition, by Oldham, Keith B., Myland, Jan, Spanier, Jerome



## Chapter 2

## Todo List

**Member `std::__detail::__dawson_const_frac` (`_Tp __x`)**

this needs some compile-time construction!

**Member `std::__detail::__expint_E1` (`_Tp __x`)**

Find a good asymptotic switch point in  $E_1(x)$ .

**Member `std::__detail::__expint_En_recursion` (`unsigned int __n, _Tp __x`)**

Find a principled starting number for the  $E_n(x)$  downward recursion.



## Chapter 3

# Module Index

### 3.1 Modules

Here is a list of all modules:

Extended Mathematical Special Functions . . . . .	<a href="#">13</a>
Mathematical Special Functions . . . . .	<a href="#">69</a>



## Chapter 4

# Namespace Index

### 4.1 Namespace List

Here is a list of all namespaces with brief descriptions:

<a href="#">__gnu_cxx</a>	87
<a href="#">std</a>	95
<a href="#">std::__detail</a>	97





## Chapter 5

# Class Index

### 5.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

[std::\\_\\_detail::\\_Factorial\\_table<\\_Tp>](#) . . . . . 207



## Chapter 6

# File Index

### 6.1 File List

Here is a list of all files with brief descriptions:

<a href="#">bits/sf_airy.tcc</a>	209
<a href="#">bits/sf_bessel.tcc</a>	211
<a href="#">bits/sf_beta.tcc</a>	213
<a href="#">bits/sf_cardinal.tcc</a>	215
<a href="#">bits/sf_chebyshev.tcc</a>	217
<a href="#">bits/sf_dawson.tcc</a>	219
<a href="#">bits/sf_ellint.tcc</a>	220
<a href="#">bits/sf_expint.tcc</a>	223
<a href="#">bits/sf_fresnel.tcc</a>	225
<a href="#">bits/sf_gamma.tcc</a>	226
<a href="#">bits/sf_gegenbauer.tcc</a>	232
<a href="#">bits/sf_hankel.tcc</a>	233
<a href="#">bits/sf_hankel_new.tcc</a>	236
<a href="#">bits/sf_hermite.tcc</a>	237
<a href="#">bits/sf_hydrogen.tcc</a>	238
<a href="#">bits/sf_hyperg.tcc</a>	239
<a href="#">bits/sf_hypint.tcc</a>	241
<a href="#">bits/sf_jacobi.tcc</a>	243
<a href="#">bits/sf_laguerre.tcc</a>	244
<a href="#">bits/sf_legendre.tcc</a>	246
<a href="#">bits/sf_mod_bessel.tcc</a>	247
<a href="#">bits/sf_owens_t.tcc</a>	250
<a href="#">bits/sf_polylog.tcc</a>	251
<a href="#">bits/sf_theta.tcc</a>	253
<a href="#">bits/sf_trigint.tcc</a>	256
<a href="#">bits/sf_zeta.tcc</a>	257
<a href="#">bits/specfun.h</a>	260



## Chapter 7

# Module Documentation

### 7.1 Extended Mathematical Special Functions

#### Enumerations

- enum { [\\_\\_gnu\\_cxx::\\_\\_GLIBCXX\\_JACOBI\\_SN](#), [\\_\\_gnu\\_cxx::\\_\\_GLIBCXX\\_JACOBI\\_CN](#), [\\_\\_gnu\\_cxx::\\_\\_GLIBCXX\\_JACOBI\\_DN](#), [\\_\\_gnu\\_cxx::\\_\\_GLIBCXX\\_JACOBI\\_DN](#) }

#### Functions

- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp> \\_\\_gnu\\_cxx::airy\\_ai](#) (\_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::airy\\_aif](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::airy\\_ail](#) (long double \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp> \\_\\_gnu\\_cxx::airy\\_bi](#) (\_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::airy\\_bif](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::airy\\_bil](#) (long double \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp> \\_\\_gnu\\_cxx::bernoulli](#) (unsigned int \_\_n)
- float [\\_\\_gnu\\_cxx::bernoullif](#) (unsigned int \_\_n)
- long double [\\_\\_gnu\\_cxx::bernoullil](#) (unsigned int \_\_n)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp> \\_\\_gnu\\_cxx::bincoef](#) (unsigned int \_\_n, unsigned int \_\_k)
- float [\\_\\_gnu\\_cxx::bincoefficient](#) (unsigned int \_\_n, unsigned int \_\_k)
- long double [\\_\\_gnu\\_cxx::bincoefficientl](#) (unsigned int \_\_n, unsigned int \_\_k)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp> \\_\\_gnu\\_cxx::chebyshev\\_t](#) (unsigned int \_\_n, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::chebyshev\\_tf](#) (unsigned int \_\_n, float \_\_x)
- long double [\\_\\_gnu\\_cxx::chebyshev\\_tl](#) (unsigned int \_\_n, long double \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp> \\_\\_gnu\\_cxx::chebyshev\\_u](#) (unsigned int \_\_n, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::chebyshev\\_uf](#) (unsigned int \_\_n, float \_\_x)
- long double [\\_\\_gnu\\_cxx::chebyshev\\_ul](#) (unsigned int \_\_n, long double \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp> \\_\\_gnu\\_cxx::chebyshev\\_v](#) (unsigned int \_\_n, \_Tp \_\_x)

- float [\\_\\_gnu\\_cxx::chebyshev\\_vf](#) (unsigned int \_\_n, float \_\_x)
- long double [\\_\\_gnu\\_cxx::chebyshev\\_vl](#) (unsigned int \_\_n, long double \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp> \\_\\_gnu\\_cxx::chebyshev\\_w](#) (unsigned int \_\_n, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::chebyshev\\_wf](#) (unsigned int \_\_n, float \_\_x)
- long double [\\_\\_gnu\\_cxx::chebyshev\\_wl](#) (unsigned int \_\_n, long double \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp> \\_\\_gnu\\_cxx::clausen](#) (unsigned int \_\_m, \_Tp \_\_w)
- template<typename \_Tp >  
  std::complex< [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp> \\_\\_gnu\\_cxx::clausen](#) (unsigned int \_\_m, std::complex< \_Tp> \_\_w)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp> \\_\\_gnu\\_cxx::clausen\\_c](#) (unsigned int \_\_m, \_Tp \_\_w)
- float [\\_\\_gnu\\_cxx::clausen\\_cf](#) (unsigned int \_\_m, float \_\_w)
- long double [\\_\\_gnu\\_cxx::clausen\\_cl](#) (unsigned int \_\_m, long double \_\_w)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp> \\_\\_gnu\\_cxx::clausen\\_s](#) (unsigned int \_\_m, \_Tp \_\_w)
- float [\\_\\_gnu\\_cxx::clausen\\_sf](#) (unsigned int \_\_m, float \_\_w)
- long double [\\_\\_gnu\\_cxx::clausen\\_sl](#) (unsigned int \_\_m, long double \_\_w)
- float [\\_\\_gnu\\_cxx::clausenf](#) (unsigned int \_\_m, float \_\_w)
- std::complex< float > [\\_\\_gnu\\_cxx::clausenf](#) (unsigned int \_\_m, std::complex< float > \_\_w)
- long double [\\_\\_gnu\\_cxx::clausenl](#) (unsigned int \_\_m, long double \_\_w)
- std::complex< long double > [\\_\\_gnu\\_cxx::clausenl](#) (unsigned int \_\_m, std::complex< long double > \_\_w)
- template<typename \_Tk >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tk> \\_\\_gnu\\_cxx::comp\\_ellint\\_d](#) (\_Tk \_\_k)
- float [\\_\\_gnu\\_cxx::comp\\_ellint\\_df](#) (float \_\_k)
- long double [\\_\\_gnu\\_cxx::comp\\_ellint\\_dl](#) (long double \_\_k)
- float [\\_\\_gnu\\_cxx::comp\\_ellint\\_rf](#) (float \_\_x, float \_\_y)
- long double [\\_\\_gnu\\_cxx::comp\\_ellint\\_rf](#) (long double \_\_x, long double \_\_y)
- template<typename \_Tx, typename \_Ty >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tx, \\_Ty> \\_\\_gnu\\_cxx::comp\\_ellint\\_rf](#) (\_Tx \_\_x, \_Ty \_\_y)
- float [\\_\\_gnu\\_cxx::comp\\_ellint\\_rg](#) (float \_\_x, float \_\_y)
- long double [\\_\\_gnu\\_cxx::comp\\_ellint\\_rg](#) (long double \_\_x, long double \_\_y)
- template<typename \_Tx, typename \_Ty >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tx, \\_Ty> \\_\\_gnu\\_cxx::comp\\_ellint\\_rg](#) (\_Tx \_\_x, \_Ty \_\_y)
- template<typename \_Tpa, typename \_Tpc, typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_3<\\_Tpa, \\_Tpc, \\_Tp>::\\_\\_type \\_\\_gnu\\_cxx::conf\\_hyperg](#) (\_Tpa \_\_a, \_Tpc \_\_c, \_Tp \_\_x)
- template<typename \_Tpc, typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_2<\\_Tpc, \\_Tp>::\\_\\_type \\_\\_gnu\\_cxx::conf\\_hyperg\\_lim](#) (\_Tpc \_\_c, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::conf\\_hyperg\\_limf](#) (float \_\_c, float \_\_x)
- long double [\\_\\_gnu\\_cxx::conf\\_hyperg\\_liml](#) (long double \_\_c, long double \_\_x)
- float [\\_\\_gnu\\_cxx::conf\\_hypergf](#) (float \_\_a, float \_\_c, float \_\_x)
- long double [\\_\\_gnu\\_cxx::conf\\_hypergl](#) (long double \_\_a, long double \_\_c, long double \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp> \\_\\_gnu\\_cxx::coshint](#) (\_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::coshintf](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::coshintl](#) (long double \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp> \\_\\_gnu\\_cxx::cosint](#) (\_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::cosintf](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::cosintl](#) (long double \_\_x)

- `template<typename _Tpnu, typename _Tp>`  
`std::complex< __gnu_cxx::__promote_num_t< _Tpnu, _Tp > > __gnu_cxx::cyl_hankel_1 (_Tpnu __nu, _Tp`  
`__z)`
- `template<typename _Tpnu, typename _Tp>`  
`std::complex< __gnu_cxx::__promote_num_t< _Tpnu, _Tp > > __gnu_cxx::cyl_hankel_1 (std::complex< _Tpnu > __nu, std::complex< _Tp > __x)`
- `std::complex< float > __gnu_cxx::cyl_hankel_1f (float __nu, float __z)`
- `std::complex< float > __gnu_cxx::cyl_hankel_1f (std::complex< float > __nu, std::complex< float > __x)`
- `std::complex< long double > __gnu_cxx::cyl_hankel_1l (long double __nu, long double __z)`
- `std::complex< long double > __gnu_cxx::cyl_hankel_1l (std::complex< long double > __nu, std::complex< long double > __x)`
- `template<typename _Tpnu, typename _Tp>`  
`std::complex< __gnu_cxx::__promote_num_t< _Tpnu, _Tp > > __gnu_cxx::cyl_hankel_2 (_Tpnu __nu, _Tp`  
`__z)`
- `template<typename _Tpnu, typename _Tp>`  
`std::complex< __gnu_cxx::__promote_num_t< _Tpnu, _Tp > > __gnu_cxx::cyl_hankel_2 (std::complex< _Tpnu > __nu, std::complex< _Tp > __x)`
- `std::complex< float > __gnu_cxx::cyl_hankel_2f (float __nu, float __z)`
- `std::complex< float > __gnu_cxx::cyl_hankel_2f (std::complex< float > __nu, std::complex< float > __x)`
- `std::complex< long double > __gnu_cxx::cyl_hankel_2l (long double __nu, long double __z)`
- `std::complex< long double > __gnu_cxx::cyl_hankel_2l (std::complex< long double > __nu, std::complex< long double > __x)`
- `template<typename _Tp>`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::dawson (_Tp __x)`
- `float __gnu_cxx::dawsonf (float __x)`
- `long double __gnu_cxx::dawsonl (long double __x)`
- `template<typename _Tp>`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::digamma (_Tp __z)`
- `float __gnu_cxx::digammaf (float __z)`
- `long double __gnu_cxx::digammal (long double __z)`
- `template<typename _Tp>`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::dilog (_Tp __x)`
- `float __gnu_cxx::dilogf (float __x)`
- `long double __gnu_cxx::dilogl (long double __x)`
- `template<typename _Tp>`  
`_Tp __gnu_cxx::dirichlet_beta (_Tp __x)`
- `float __gnu_cxx::dirichlet_betaf (float __x)`
- `long double __gnu_cxx::dirichlet_betall (long double __x)`
- `template<typename _Tp>`  
`_Tp __gnu_cxx::dirichlet_eta (_Tp __x)`
- `float __gnu_cxx::dirichlet_etaf (float __x)`
- `long double __gnu_cxx::dirichlet_etaall (long double __x)`
- `template<typename _Tp>`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::double_factorial (int __n)`
- `float __gnu_cxx::double_factorialf (int __n)`
- `long double __gnu_cxx::double_factoriall (int __n)`
- `template<typename _Tk, typename _Tp, typename _Ta, typename _Tb>`  
`__gnu_cxx::__promote_num_t< _Tk, _Tp, _Ta, _Tb > __gnu_cxx::ellint_cel (_Tk __k_c, _Tp __p, _Ta __a, _Tb`  
`__b)`
- `float __gnu_cxx::ellint_celf (float __k_c, float __p, float __a, float __b)`
- `long double __gnu_cxx::ellint_cell (long double __k_c, long double __p, long double __a, long double __b)`

- `template<typename _Tk, typename _Tphi >`  
`__gnu_cxx::__promote_num_t< _Tk, _Tphi > __gnu_cxx::ellint_d (_Tk __k, _Tphi __phi)`
- `float __gnu_cxx::ellint_df (float __k, float __phi)`
- `long double __gnu_cxx::ellint_dl (long double __k, long double __phi)`
- `template<typename _Tp, typename _Tk >`  
`__gnu_cxx::__promote_num_t< _Tp, _Tk > __gnu_cxx::ellint_el1 (_Tp __x, _Tk __k_c)`
- `float __gnu_cxx::ellint_el1f (float __x, float __k_c)`
- `long double __gnu_cxx::ellint_el1l (long double __x, long double __k_c)`
- `template<typename _Tp, typename _Tk, typename _Ta, typename _Tb >`  
`__gnu_cxx::__promote_num_t< _Tp, _Tk, _Ta, _Tb > __gnu_cxx::ellint_el2 (_Tp __x, _Tk __k_c, _Ta __a, _Tb __b)`
- `float __gnu_cxx::ellint_el2f (float __x, float __k_c, float __a, float __b)`
- `long double __gnu_cxx::ellint_el2l (long double __x, long double __k_c, long double __a, long double __b)`
- `template<typename _Tx, typename _Tk, typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tx, _Tk, _Tp > __gnu_cxx::ellint_el3 (_Tx __x, _Tk __k_c, _Tp __p)`
- `float __gnu_cxx::ellint_el3f (float __x, float __k_c, float __p)`
- `long double __gnu_cxx::ellint_el3l (long double __x, long double __k_c, long double __p)`
- `template<typename _Tp, typename _Up >`  
`__gnu_cxx::__promote_num_t< _Tp, _Up > __gnu_cxx::ellint_rc (_Tp __x, _Up __y)`
- `float __gnu_cxx::ellint_rcf (float __x, float __y)`
- `long double __gnu_cxx::ellint_rcl (long double __x, long double __y)`
- `template<typename _Tp, typename _Up, typename _Vp >`  
`__gnu_cxx::__promote_num_t< _Tp, _Up, _Vp > __gnu_cxx::ellint_rd (_Tp __x, _Up __y, _Vp __z)`
- `float __gnu_cxx::ellint_rdf (float __x, float __y, float __z)`
- `long double __gnu_cxx::ellint_rdl (long double __x, long double __y, long double __z)`
- `template<typename _Tp, typename _Up, typename _Vp >`  
`__gnu_cxx::__promote_num_t< _Tp, _Up, _Vp > __gnu_cxx::ellint_rf (_Tp __x, _Up __y, _Vp __z)`
- `float __gnu_cxx::ellint_rff (float __x, float __y, float __z)`
- `long double __gnu_cxx::ellint_rfl (long double __x, long double __y, long double __z)`
- `template<typename _Tp, typename _Up, typename _Vp >`  
`__gnu_cxx::__promote_num_t< _Tp, _Up, _Vp > __gnu_cxx::ellint_rg (_Tp __x, _Up __y, _Vp __z)`
- `float __gnu_cxx::ellint_rgf (float __x, float __y, float __z)`
- `long double __gnu_cxx::ellint_rgl (long double __x, long double __y, long double __z)`
- `template<typename _Tp, typename _Up, typename _Vp, typename _Wp >`  
`__gnu_cxx::__promote_num_t< _Tp, _Up, _Vp, _Wp > __gnu_cxx::ellint_rj (_Tp __x, _Up __y, _Vp __z, _Wp __p)`
- `float __gnu_cxx::ellint_rjf (float __x, float __y, float __z, float __p)`
- `long double __gnu_cxx::ellint_rjl (long double __x, long double __y, long double __z, long double __p)`
- `template<typename _Tp >`  
`_Tp __gnu_cxx::ellnome (_Tp __k)`
- `float __gnu_cxx::ellnomef (float __k)`
- `long double __gnu_cxx::ellnomel (long double __k)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::expint_e1 (_Tp __x)`
- `float __gnu_cxx::expint_e1f (float __x)`
- `long double __gnu_cxx::expint_e1l (long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::expint_en (unsigned int __n, _Tp __x)`
- `float __gnu_cxx::expint_enf (unsigned int __n, float __x)`
- `long double __gnu_cxx::expint_enl (unsigned int __n, long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::factorial (unsigned int __n)`



- float [\\_\\_gnu\\_cxx::factorialf](#) (unsigned int \_\_n)
- long double [\\_\\_gnu\\_cxx::factoriall](#) (unsigned int \_\_n)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp> \\_\\_gnu\\_cxx::fresnel\\_c](#) (\_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::fresnel\\_cf](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::fresnel\\_cl](#) (long double \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp> \\_\\_gnu\\_cxx::fresnel\\_s](#) (\_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::fresnel\\_sf](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::fresnel\\_sl](#) (long double \_\_x)
- template<typename \_Tn, typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tn, \\_Tp> \\_\\_gnu\\_cxx::gamma\\_l](#) (\_Tn \_\_n, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::gamma\\_lf](#) (float \_\_n, float \_\_x)
- long double [\\_\\_gnu\\_cxx::gamma\\_ll](#) (long double \_\_n, long double \_\_x)
- template<typename \_Ta, typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Ta, \\_Tp> \\_\\_gnu\\_cxx::gamma\\_p](#) (\_Ta \_\_a, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::gamma\\_pf](#) (float \_\_a, float \_\_x)
- long double [\\_\\_gnu\\_cxx::gamma\\_pl](#) (long double \_\_a, long double \_\_x)
- template<typename \_Ta, typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Ta, \\_Tp> \\_\\_gnu\\_cxx::gamma\\_q](#) (\_Ta \_\_a, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::gamma\\_qf](#) (float \_\_a, float \_\_x)
- long double [\\_\\_gnu\\_cxx::gamma\\_ql](#) (long double \_\_a, long double \_\_x)
- template<typename \_Tn, typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tn, \\_Tp> \\_\\_gnu\\_cxx::gamma\\_u](#) (\_Tn \_\_n, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::gamma\\_uf](#) (float \_\_n, float \_\_x)
- long double [\\_\\_gnu\\_cxx::gamma\\_ul](#) (long double \_\_n, long double \_\_x)
- template<typename \_Talpha, typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Talpha, \\_Tp> \\_\\_gnu\\_cxx::gegenbauer](#) (unsigned int \_\_n, \_Talpha \_\_alpha, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::gegenbauerf](#) (unsigned int \_\_n, float \_\_alpha, float \_\_x)
- long double [\\_\\_gnu\\_cxx::gegenbauerl](#) (unsigned int \_\_n, long double \_\_alpha, long double \_\_x)
- template<typename \_Tk, typename \_Tphi >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tk, \\_Tphi> \\_\\_gnu\\_cxx::heuman\\_lambda](#) (\_Tk \_\_k, \_Tphi \_\_phi)
- float [\\_\\_gnu\\_cxx::heuman\\_lambdaf](#) (float \_\_k, float \_\_phi)
- long double [\\_\\_gnu\\_cxx::heuman\\_lambdal](#) (long double \_\_k, long double \_\_phi)
- template<typename \_Tp, typename \_Up >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp, \\_Up> \\_\\_gnu\\_cxx::hurwitz\\_zeta](#) (\_Tp \_\_s, \_Up \_\_a)
- float [\\_\\_gnu\\_cxx::hurwitz\\_zetaf](#) (float \_\_s, float \_\_a)
- long double [\\_\\_gnu\\_cxx::hurwitz\\_zetal](#) (long double \_\_s, long double \_\_a)
- template<typename \_Tpa, typename \_Tpb, typename \_Tpc, typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_4<\\_Tpa, \\_Tpb, \\_Tpc, \\_Tp>::\\_\\_type \\_\\_gnu\\_cxx::hyperg](#) (\_Tpa \_\_a, \_Tpb \_\_b, \_Tpc \_\_c, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::hypergf](#) (float \_\_a, float \_\_b, float \_\_c, float \_\_x)
- long double [\\_\\_gnu\\_cxx::hypergl](#) (long double \_\_a, long double \_\_b, long double \_\_c, long double \_\_x)
- template<typename \_Ta, typename \_Tb, typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Ta, \\_Tb, \\_Tp> \\_\\_gnu\\_cxx::ibeta](#) (\_Ta \_\_a, \_Tb \_\_b, \_Tp \_\_x)
- template<typename \_Ta, typename \_Tb, typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Ta, \\_Tb, \\_Tp> \\_\\_gnu\\_cxx::ibetac](#) (\_Ta \_\_a, \_Tb \_\_b, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::ibetacf](#) (float \_\_a, float \_\_b, float \_\_x)
- long double [\\_\\_gnu\\_cxx::ibetacl](#) (long double \_\_a, long double \_\_b, long double \_\_x)
- float [\\_\\_gnu\\_cxx::ibetaf](#) (float \_\_a, float \_\_b, float \_\_x)
- long double [\\_\\_gnu\\_cxx::ibetal](#) (long double \_\_a, long double \_\_b, long double \_\_x)

- `template<typename _Talpha, typename _Tbeta, typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Talpha, _Tbeta, _Tp > __gnu_cxx::jacobi (unsigned __n, _Talpha __alpha,`  
`_Tbeta __beta, _Tp __x)`
- `template<typename _Kp, typename _Up >`  
`__gnu_cxx::__promote_num_t< _Kp, _Up > __gnu_cxx::jacobi_cn (_Kp __k, _Up __u)`
- `float __gnu_cxx::jacobi_cnf (float __k, float __u)`
- `long double __gnu_cxx::jacobi_cnl (long double __k, long double __u)`
- `template<typename _Kp, typename _Up >`  
`__gnu_cxx::__promote_num_t< _Kp, _Up > __gnu_cxx::jacobi_dn (_Kp __k, _Up __u)`
- `float __gnu_cxx::jacobi_dnf (float __k, float __u)`
- `long double __gnu_cxx::jacobi_dnl (long double __k, long double __u)`
- `template<typename _Kp, typename _Up >`  
`__gnu_cxx::__promote_num_t< _Kp, _Up > __gnu_cxx::jacobi_sn (_Kp __k, _Up __u)`
- `float __gnu_cxx::jacobi_snf (float __k, float __u)`
- `long double __gnu_cxx::jacobi_snl (long double __k, long double __u)`
- `template<typename _Tk, typename _Tphi >`  
`__gnu_cxx::__promote_num_t< _Tk, _Tphi > __gnu_cxx::jacobi_zeta (_Tk __k, _Tphi __phi)`
- `float __gnu_cxx::jacobi_zetaf (float __k, float __phi)`
- `long double __gnu_cxx::jacobi_zetal (long double __k, long double __phi)`
- `float __gnu_cxx::jacobi (unsigned __n, float __alpha, float __beta, float __x)`
- `long double __gnu_cxx::jacobil (unsigned __n, long double __alpha, long double __beta, long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::lbincoef (unsigned int __n, unsigned int __k)`
- `float __gnu_cxx::lbincoeff (unsigned int __n, unsigned int __k)`
- `long double __gnu_cxx::lbincoefl (unsigned int __n, unsigned int __k)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::ldouble_factorial (int __n)`
- `float __gnu_cxx::ldouble_factorialf (int __n)`
- `long double __gnu_cxx::ldouble_factoriall (int __n)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::legendre_q (unsigned int __n, _Tp __x)`
- `float __gnu_cxx::legendre_qf (unsigned int __n, float __x)`
- `long double __gnu_cxx::legendre_ql (unsigned int __n, long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::lfactorial (unsigned int __n)`
- `float __gnu_cxx::lfactorialf (unsigned int __n)`
- `long double __gnu_cxx::lfactoriall (unsigned int __n)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::logint (_Tp __x)`
- `float __gnu_cxx::logintf (float __x)`
- `long double __gnu_cxx::logintl (long double __x)`
- `template<typename _Tp, typename _Tn >`  
`__gnu_cxx::__promote_num_t< _Tp, _Tn > __gnu_cxx::lpochhammer_l (_Tp __a, _Tn __n)`
- `float __gnu_cxx::lpochhammer_lf (float __a, float __n)`
- `long double __gnu_cxx::lpochhammer_ll (long double __a, long double __n)`
- `template<typename _Tp, typename _Tn >`  
`__gnu_cxx::__promote_num_t< _Tp, _Tn > __gnu_cxx::lpochhammer_u (_Tp __a, _Tn __n)`
- `float __gnu_cxx::lpochhammer_uf (float __a, float __n)`
- `long double __gnu_cxx::lpochhammer_ul (long double __a, long double __n)`
- `template<typename _Tph, typename _Tpa >`  
`__gnu_cxx::__promote_num_t< _Tph, _Tpa > __gnu_cxx::owens_t (_Tph __h, _Tpa __a)`
- `float __gnu_cxx::owens_tf (float __h, float __a)`

- long double [\\_\\_gnu\\_cxx::owens\\_tl](#) (long double \_\_h, long double \_\_a)
- template<typename \_Tp, typename \_Tn >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp, \\_Tn > \\_\\_gnu\\_cxx::pochhammer\\_l](#) (\_Tp \_\_a, \_Tn \_\_n)
- float [\\_\\_gnu\\_cxx::pochhammer\\_lf](#) (float \_\_a, float \_\_n)
- long double [\\_\\_gnu\\_cxx::pochhammer\\_ll](#) (long double \_\_a, long double \_\_n)
- template<typename \_Tp, typename \_Tn >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp, \\_Tn > \\_\\_gnu\\_cxx::pochhammer\\_u](#) (\_Tp \_\_a, \_Tn \_\_n)
- float [\\_\\_gnu\\_cxx::pochhammer\\_uf](#) (float \_\_a, float \_\_n)
- long double [\\_\\_gnu\\_cxx::pochhammer\\_ul](#) (long double \_\_a, long double \_\_n)
- template<typename \_Tp >  
  std::complex< [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp > \\_\\_gnu\\_cxx::polylog](#) (\_Tp \_\_s, std::complex< \_Tp > \_\_w)
- std::complex< float > [\\_\\_gnu\\_cxx::polylogf](#) (float \_\_s, std::complex< float > \_\_w)
- std::complex< long double > [\\_\\_gnu\\_cxx::polylogl](#) (long double \_\_s, std::complex< long double > \_\_w)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp > \\_\\_gnu\\_cxx::psi](#) (\_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::psif](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::psil](#) (long double \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp > \\_\\_gnu\\_cxx::radpoly](#) (unsigned int \_\_n, unsigned int \_\_m, \_Tp \_\_rho)
- float [\\_\\_gnu\\_cxx::radpolyf](#) (unsigned int \_\_n, unsigned int \_\_m, float \_\_rho)
- long double [\\_\\_gnu\\_cxx::radpolyl](#) (unsigned int \_\_n, unsigned int \_\_m, long double \_\_rho)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp > \\_\\_gnu\\_cxx::sinc](#) (\_Tp \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp > \\_\\_gnu\\_cxx::sinc\\_pi](#) (\_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::sinc\\_pif](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::sinc\\_pil](#) (long double \_\_x)
- float [\\_\\_gnu\\_cxx::sincf](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::sincl](#) (long double \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp > \\_\\_gnu\\_cxx::sinhc](#) (\_Tp \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp > \\_\\_gnu\\_cxx::sinhc\\_pi](#) (\_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::sinhc\\_pif](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::sinhc\\_pil](#) (long double \_\_x)
- float [\\_\\_gnu\\_cxx::sinhcf](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::sinhcl](#) (long double \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp > \\_\\_gnu\\_cxx::sinhcint](#) (\_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::sinhcintf](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::sinhcintl](#) (long double \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp > \\_\\_gnu\\_cxx::sinint](#) (\_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::sinintf](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::sinintl](#) (long double \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp > \\_\\_gnu\\_cxx::sph\\_bessel\\_i](#) (unsigned int \_\_n, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::sph\\_bessel\\_if](#) (unsigned int \_\_n, float \_\_x)
- long double [\\_\\_gnu\\_cxx::sph\\_bessel\\_il](#) (unsigned int \_\_n, long double \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp > \\_\\_gnu\\_cxx::sph\\_bessel\\_k](#) (unsigned int \_\_n, \_Tp \_\_x)

- float [\\_\\_gnu\\_cxx::sph\\_bessel\\_kf](#) (unsigned int \_\_n, float \_\_x)
- long double [\\_\\_gnu\\_cxx::sph\\_bessel\\_kl](#) (unsigned int \_\_n, long double \_\_x)
- template<typename \_Tp >  
std::complex< \_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > > [\\_\\_gnu\\_cxx::sph\\_hankel\\_1](#) (unsigned int \_\_n, \_Tp \_\_z)
- template<typename \_Tp >  
std::complex< \_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > > [\\_\\_gnu\\_cxx::sph\\_hankel\\_1](#) (unsigned int \_\_n, std::complex< \_Tp > \_\_x)
- std::complex< float > [\\_\\_gnu\\_cxx::sph\\_hankel\\_1f](#) (unsigned int \_\_n, float \_\_z)
- std::complex< float > [\\_\\_gnu\\_cxx::sph\\_hankel\\_1f](#) (unsigned int \_\_n, std::complex< float > \_\_x)
- std::complex< long double > [\\_\\_gnu\\_cxx::sph\\_hankel\\_1l](#) (unsigned int \_\_n, long double \_\_z)
- std::complex< long double > [\\_\\_gnu\\_cxx::sph\\_hankel\\_1l](#) (unsigned int \_\_n, std::complex< long double > \_\_x)
- template<typename \_Tp >  
std::complex< \_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > > [\\_\\_gnu\\_cxx::sph\\_hankel\\_2](#) (unsigned int \_\_n, \_Tp \_\_z)
- template<typename \_Tp >  
std::complex< \_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > > [\\_\\_gnu\\_cxx::sph\\_hankel\\_2](#) (unsigned int \_\_n, std::complex< \_Tp > \_\_x)
- std::complex< float > [\\_\\_gnu\\_cxx::sph\\_hankel\\_2f](#) (unsigned int \_\_n, float \_\_z)
- std::complex< float > [\\_\\_gnu\\_cxx::sph\\_hankel\\_2f](#) (unsigned int \_\_n, std::complex< float > \_\_x)
- std::complex< long double > [\\_\\_gnu\\_cxx::sph\\_hankel\\_2l](#) (unsigned int \_\_n, long double \_\_z)
- std::complex< long double > [\\_\\_gnu\\_cxx::sph\\_hankel\\_2l](#) (unsigned int \_\_n, std::complex< long double > \_\_x)
- template<typename \_Ttheta, typename \_Tphi >  
std::complex< \_\_gnu\_cxx::\_\_promote\_num\_t< \_Ttheta, \_Tphi > > [\\_\\_gnu\\_cxx::sph\\_harmonic](#) (unsigned int \_\_l, int \_\_m, \_Ttheta \_\_theta, \_Tphi \_\_phi)
- std::complex< float > [\\_\\_gnu\\_cxx::sph\\_harmonicf](#) (unsigned int \_\_l, int \_\_m, float \_\_theta, float \_\_phi)
- std::complex< long double > [\\_\\_gnu\\_cxx::sph\\_harmonicl](#) (unsigned int \_\_l, int \_\_m, long double \_\_theta, long double \_\_phi)
- template<typename \_Tpnu, typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t< \\_Tpnu, \\_Tp >](#) [\\_\\_gnu\\_cxx::theta\\_1](#) (\_Tpnu \_\_nu, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::theta\\_1f](#) (float \_\_nu, float \_\_x)
- long double [\\_\\_gnu\\_cxx::theta\\_1l](#) (long double \_\_nu, long double \_\_x)
- template<typename \_Tpnu, typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t< \\_Tpnu, \\_Tp >](#) [\\_\\_gnu\\_cxx::theta\\_2](#) (\_Tpnu \_\_nu, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::theta\\_2f](#) (float \_\_nu, float \_\_x)
- long double [\\_\\_gnu\\_cxx::theta\\_2l](#) (long double \_\_nu, long double \_\_x)
- template<typename \_Tpnu, typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t< \\_Tpnu, \\_Tp >](#) [\\_\\_gnu\\_cxx::theta\\_3](#) (\_Tpnu \_\_nu, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::theta\\_3f](#) (float \_\_nu, float \_\_x)
- long double [\\_\\_gnu\\_cxx::theta\\_3l](#) (long double \_\_nu, long double \_\_x)
- template<typename \_Tpnu, typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t< \\_Tpnu, \\_Tp >](#) [\\_\\_gnu\\_cxx::theta\\_4](#) (\_Tpnu \_\_nu, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::theta\\_4f](#) (float \_\_nu, float \_\_x)
- long double [\\_\\_gnu\\_cxx::theta\\_4l](#) (long double \_\_nu, long double \_\_x)
- template<typename \_Tpk, typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t< \\_Tpk, \\_Tp >](#) [\\_\\_gnu\\_cxx::theta\\_c](#) (\_Tpk \_\_k, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::theta\\_cf](#) (float \_\_k, float \_\_x)
- long double [\\_\\_gnu\\_cxx::theta\\_cl](#) (long double \_\_k, long double \_\_x)
- template<typename \_Tpk, typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t< \\_Tpk, \\_Tp >](#) [\\_\\_gnu\\_cxx::theta\\_d](#) (\_Tpk \_\_k, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::theta\\_df](#) (float \_\_k, float \_\_x)
- long double [\\_\\_gnu\\_cxx::theta\\_dl](#) (long double \_\_k, long double \_\_x)
- template<typename \_Tpk, typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t< \\_Tpk, \\_Tp >](#) [\\_\\_gnu\\_cxx::theta\\_n](#) (\_Tpk \_\_k, \_Tp \_\_x)

- float `__gnu_cxx::theta_nf` (float `__k`, float `__x`)
- long double `__gnu_cxx::theta_nl` (long double `__k`, long double `__x`)
- template<typename `_Tpk`, typename `_Tp` >  
`__gnu_cxx::__promote_num_t<_Tpk, _Tp>` `__gnu_cxx::theta_s` (`_Tpk` `__k`, `_Tp` `__x`)
- float `__gnu_cxx::theta_sf` (float `__k`, float `__x`)
- long double `__gnu_cxx::theta_sl` (long double `__k`, long double `__x`)
- template<typename `_Trho`, typename `_Tphi` >  
`__gnu_cxx::__promote_num_t<_Trho, _Tphi>` `__gnu_cxx::zernike` (unsigned int `__n`, int `__m`, `_Trho` `__rho`, `_Tphi` `__phi`)
- float `__gnu_cxx::zernikef` (unsigned int `__n`, int `__m`, float `__rho`, float `__phi`)
- long double `__gnu_cxx::zernikel` (unsigned int `__n`, int `__m`, long double `__rho`, long double `__phi`)

### 7.1.1 Detailed Description

A collection of advanced mathematical special functions.

### 7.1.2 Enumeration Type Documentation

#### 7.1.2.1 anonymous enum

Enumerator

`__GLIBCXX_JACOBI_SN`  
`__GLIBCXX_JACOBI_CN`  
`__GLIBCXX_JACOBI_DN`

Definition at line 1469 of file `specfun.h`.

### 7.1.3 Function Documentation

7.1.3.1 template<typename `_Tp` > `__gnu_cxx::__promote_num_t<_Tp>` `__gnu_cxx::airy_ai` (`_Tp` `__x`) [`inline`]

Definition at line 2083 of file `specfun.h`.

7.1.3.2 float `__gnu_cxx::airy_aif` (float `__x`) [`inline`]

Definition at line 2063 of file `specfun.h`.

7.1.3.3 long double `__gnu_cxx::airy_ail` (long double `__x`) [`inline`]

Definition at line 2071 of file `specfun.h`.

7.1.3.4 template<typename `_Tp` > `__gnu_cxx::__promote_num_t<_Tp>` `__gnu_cxx::airy_bi` (`_Tp` `__x`) [`inline`]

Definition at line 2114 of file `specfun.h`.

7.1.3.5 `float __gnu_cxx::airy_bif ( float __x ) [inline]`

Definition at line 2094 of file specfun.h.

7.1.3.6 `long double __gnu_cxx::airy_bil ( long double __x ) [inline]`

Definition at line 2102 of file specfun.h.

7.1.3.7 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::bernoulli ( unsigned int __n ) [inline]`

Return the Bernoulli number of integer order  $n$ .

The Bernoulli numbers are defined by

Parameters

<code>__n</code>	The order.
------------------	------------

Definition at line 2999 of file specfun.h.

7.1.3.8 `float __gnu_cxx::bernoulif ( unsigned int __n ) [inline]`

Definition at line 2980 of file specfun.h.

7.1.3.9 `long double __gnu_cxx::bernoulli ( unsigned int __n ) [inline]`

Definition at line 2984 of file specfun.h.

7.1.3.10 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::bincoef ( unsigned int __n, unsigned int __k ) [inline]`

Definition at line 2950 of file specfun.h.

7.1.3.11 `float __gnu_cxx::bincoeff ( unsigned int __n, unsigned int __k ) [inline]`

Definition at line 2938 of file specfun.h.

7.1.3.12 `long double __gnu_cxx::bincoefl ( unsigned int __n, unsigned int __k ) [inline]`

Definition at line 2942 of file specfun.h.

7.1.3.13 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::chebyshev_t ( unsigned int __n, _Tp __x ) [inline]`

Return the Chebyshev polynomials of the first kind of order  $n$  and argument  $x$ .

The Chebyshev polynomials of the first kind is defined by

## Parameters

<code>__n</code>	
<code>__x</code>	

Definition at line 1650 of file specfun.h.

7.1.3.14 `float __gnu_cxx::chebyshev_tf ( unsigned int __n, float __x ) [inline]`

Return the Chebyshev polynomials of the first kind of order `n` and argument `x`.

## See also

[chebyshev\\_t](#) for details.

Definition at line 1623 of file specfun.h.

7.1.3.15 `long double __gnu_cxx::chebyshev_tl ( unsigned int __n, long double __x ) [inline]`

Return the Chebyshev polynomials of the first kind of order `n` and argument `x`.

## See also

[chebyshev\\_t](#) for details.

Definition at line 1633 of file specfun.h.

7.1.3.16 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::chebyshev_u ( unsigned int __n, _Tp __x ) [inline]`

Return the Chebyshev polynomials of the second kind of order `n` and argument `x`.

The Chebyshev polynomials of the second kind is defined by

## Parameters

<code>__n</code>	
<code>__x</code>	

Definition at line 1692 of file specfun.h.

7.1.3.17 `float __gnu_cxx::chebyshev_uf ( unsigned int __n, float __x ) [inline]`

Return the Chebyshev polynomials of the second kind of order `n` and argument `x`.

## See also

[chebyshev\\_u](#) for details.

Definition at line 1665 of file specfun.h.

7.1.3.18 `long double __gnu_cxx::chebyshev_ul ( unsigned int __n, long double __x ) [inline]`

Return the Chebyshev polynomials of the second kind of order  $n$  and argument  $x$ .

See also

[chebyshev\\_u](#) for details.

Definition at line 1675 of file specfun.h.

7.1.3.19 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::chebyshev_v ( unsigned int __n, _Tp __x ) [inline]`

Return the Chebyshev polynomials of the third kind of order  $n$  and argument  $x$ .

The Chebyshev polynomials of the third kind is defined by

#### Parameters

<code>__n</code>	
<code>__x</code>	

Definition at line 1734 of file specfun.h.

7.1.3.20 `float __gnu_cxx::chebyshev_vf ( unsigned int __n, float __x ) [inline]`

Return the Chebyshev polynomials of the third kind of order  $n$  and argument  $x$ .

See also

[chebyshev\\_v](#) for details.

Definition at line 1707 of file specfun.h.

7.1.3.21 `long double __gnu_cxx::chebyshev_vl ( unsigned int __n, long double __x ) [inline]`

Return the Chebyshev polynomials of the third kind of order  $n$  and argument  $x$ .

See also

[chebyshev\\_v](#) for details.

Definition at line 1717 of file specfun.h.

7.1.3.22 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::chebyshev_w ( unsigned int __n, _Tp __x ) [inline]`

Return the Chebyshev polynomials of the fourth kind of order  $n$  and argument  $x$ .

The Chebyshev polynomials of the fourth kind is defined by



## Parameters

<code>__n</code>	
<code>__x</code>	

Definition at line 1776 of file specfun.h.

**7.1.3.23** `float __gnu_cxx::chebyshev_wf ( unsigned int __n, float __x ) [inline]`

Return the Chebyshev polynomials of the fourth kind of order `n` and argument `x`.

## See also

[chebyshev\\_w](#) for details.

Definition at line 1749 of file specfun.h.

**7.1.3.24** `long double __gnu_cxx::chebyshev_wl ( unsigned int __n, long double __x ) [inline]`

Return the Chebyshev polynomials of the fourth kind of order `n` and argument `x`.

## See also

[chebyshev\\_w](#) for details.

Definition at line 1759 of file specfun.h.

**7.1.3.25** `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::clausen ( unsigned int __m, _Tp __w ) [inline]`

Return the Clausen function of integer order `m` and complex argument `w`.

The Clausen function is defined by

## Parameters

<code>__m</code>	
<code>__w</code>	The complex argument

Definition at line 3719 of file specfun.h.

**7.1.3.26** `template<typename _Tp> std::complex<__gnu_cxx::__promote_num_t<_Tp>> __gnu_cxx::clausen ( unsigned int __m, std::complex<_Tp> __w ) [inline]`

Definition at line 3740 of file specfun.h.

**7.1.3.27** `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::clausen_c ( unsigned int __m, _Tp __w ) [inline]`

Return the Clausen cosine function of order `m` and real argument `x`.

The Clausen cosine function is defined by

## Parameters

<code>__m</code>	
<code>__w</code>	

Definition at line 3680 of file specfun.h.

7.1.3.28 `float __gnu_cxx::clausen_cf ( unsigned int __m, float __w ) [inline]`

Return the Clausen cosine function of order  $m$  and real argument  $x$ .

## See also

[clausen\\_c](#) for details.

Definition at line 3655 of file specfun.h.

7.1.3.29 `long double __gnu_cxx::clausen_cl ( unsigned int __m, long double __w ) [inline]`

Return the Clausen cosine function of order  $m$  and real argument  $x$ .

## See also

[clausen\\_c](#) for details.

Definition at line 3664 of file specfun.h.

7.1.3.30 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::clausen_s ( unsigned int __m, _Tp __w ) [inline]`

Return the Clausen sine function of order  $m$  and real argument  $x$ .

The Clausen sine function is defined by

## Parameters

<code>__m</code>	
<code>__w</code>	

Definition at line 3641 of file specfun.h.

7.1.3.31 `float __gnu_cxx::clausen_sf ( unsigned int __m, float __w ) [inline]`

Return the Clausen sine function of order  $m$  and real argument  $x$ .

## See also

[clausen\\_s](#) for details.

Definition at line 3616 of file specfun.h.

7.1.3.32 `long double __gnu_cxx::clausen_sl( unsigned int __m, long double __w ) [inline]`

Return the Clausen sine function of order  $m$  and real argument  $x$ .

See also

[clausen\\_s](#) for details.

Definition at line 3625 of file `specfun.h`.

7.1.3.33 `float __gnu_cxx::clausenf( unsigned int __m, float __w ) [inline]`

Return the Clausen function of integer order  $m$  and complex argument  $w$ .

See also

[clausen](#) for details.

Definition at line 3694 of file `specfun.h`.

7.1.3.34 `std::complex<float> __gnu_cxx::clausenf( unsigned int __m, std::complex< float > __w ) [inline]`

Definition at line 3728 of file `specfun.h`.

7.1.3.35 `long double __gnu_cxx::clausenl( unsigned int __m, long double __w ) [inline]`

Return the Clausen function of integer order  $m$  and complex argument  $w$ .

See also

[clausen](#) for details.

Definition at line 3703 of file `specfun.h`.

7.1.3.36 `std::complex<long double> __gnu_cxx::clausenl( unsigned int __m, std::complex< long double > __w ) [inline]`

Definition at line 3732 of file `specfun.h`.

7.1.3.37 `template<typename _Tk> __gnu_cxx::__promote_num_t<_Tk> __gnu_cxx::comp_ellint_d( _Tk __k ) [inline]`

Return the complete Legendre elliptic integral  $D$  of  $k$  and  $\phi$ .

The complete Legendre elliptic integral  $D$  is defined by

$$D(k) = \int_0^{\pi/2} \frac{\sin^2 \theta d\theta}{\sqrt{1 - k^2 \sin^2 \theta}}$$

## Parameters

<code>__k</code>	The modulus $-1 \leq k \leq +1$
------------------	---------------------------------

Definition at line 3148 of file specfun.h.

7.1.3.38 `float __gnu_cxx::comp_ellint_df ( float __k ) [inline]`

Definition at line 3129 of file specfun.h.

7.1.3.39 `long double __gnu_cxx::comp_ellint_dl ( long double __k ) [inline]`

Definition at line 3133 of file specfun.h.

7.1.3.40 `float __gnu_cxx::comp_ellint_rf ( float __x, float __y ) [inline]`

Definition at line 2209 of file specfun.h.

7.1.3.41 `long double __gnu_cxx::comp_ellint_rf ( long double __x, long double __y ) [inline]`

Definition at line 2213 of file specfun.h.

7.1.3.42 `template<typename _Tx, typename _Ty> __gnu_cxx::promote_num_t<_Tx, _Ty> __gnu_cxx::comp_ellint_rf ( _Tx __x, _Ty __y ) [inline]`

Definition at line 2221 of file specfun.h.

7.1.3.43 `float __gnu_cxx::comp_ellint_rg ( float __x, float __y ) [inline]`

Return the Carlson complementary elliptic function  $R_G(x, y)$ .

See also

[comp\\_ellint\\_rg](#) for details.

Definition at line 2424 of file specfun.h.

7.1.3.44 `long double __gnu_cxx::comp_ellint_rg ( long double __x, long double __y ) [inline]`

Return the Carlson complementary elliptic function  $R_G(x, y)$ .

See also

[comp\\_ellint\\_rg](#) for details.

Definition at line 2433 of file specfun.h.

7.1.3.45 `template<typename _Tx, typename _Ty> __gnu_cxx::__promote_num_t<_Tx, _Ty> __gnu_cxx::comp_ellint_rg ( _Tx __x, _Ty __y ) [inline]`

Definition at line 2441 of file specfun.h.

7.1.3.46 `template<typename _Tpa, typename _Tpc, typename _Tp> __gnu_cxx::__promote_3<_Tpa, _Tpc, _Tp>::__type __gnu_cxx::conf_hyperg ( _Tpa __a, _Tpc __c, _Tp __x ) [inline]`

Return the confluent hypergeometric function  ${}_1F_1(a; c; x)$  of real numeratorial parameter  $a$ , denominatorial parameter  $c$ , and argument  $x$ .

The confluent hypergeometric function is defined by

$${}_1F_1(a; c; x) = \sum_{n=0}^{\infty} \frac{(a)_n x^n}{(c)_n n!}$$

where the Pochhammer symbol is  $(x)_k = (x)(x+1)\dots(x+k-1)$ ,  $(x)_0 = 1$

Parameters

<code>__a</code>	The numeratorial parameter
<code>__c</code>	The denominatorial parameter
<code>__x</code>	The argument

Definition at line 1142 of file specfun.h.

7.1.3.47 `template<typename _Tpc, typename _Tp> __gnu_cxx::__promote_2<_Tpc, _Tp>::__type __gnu_cxx::conf_hyperg_lim ( _Tpc __c, _Tp __x ) [inline]`

Return the confluent hypergeometric limit function  ${}_0F_1(; c; x)$  of real numeratorial parameter  $c$  and argument  $x$ .

The confluent hypergeometric limit function is defined by

$${}_0F_1(; c; x) = \sum_{n=0}^{\infty} \frac{x^n}{(c)_n n!}$$

where the Pochhammer symbol is  $(x)_k = (x)(x+1)\dots(x+k-1)$ ,  $(x)_0 = 1$

Parameters

<code>__c</code>	The denominatorial parameter
<code>__x</code>	The argument

Definition at line 1238 of file specfun.h.

7.1.3.48 `float __gnu_cxx::conf_hyperg_limf ( float __c, float __x ) [inline]`

Return the confluent hypergeometric limit function  ${}_0F_1(; c; x)$  of `float` numeratorial parameter  $c$  and argument  $x$ .

See also

[conf\\_hyperg\\_lim](#) for details.

Definition at line 1209 of file specfun.h.

7.1.3.49 `long double __gnu_cxx::conf_hyperg_liml ( long double __c, long double __x ) [inline]`

Return the confluent hypergeometric limit function  ${}_0F_1(; c; x)$  of `long double` numeratorial parameter `c` and argument `x`.

See also

[conf\\_hyperg\\_lim](#) for details.

Definition at line 1219 of file `specfun.h`.

7.1.3.50 `float __gnu_cxx::conf_hypergf ( float __a, float __c, float __x ) [inline]`

Return the confluent hypergeometric function  ${}_1F_1(a; c; x)$  of `float` numeratorial parameter `a`, denominatorial parameter `c`, and argument `x`.

See also

[conf\\_hyperg](#) for details.

Definition at line 1110 of file `specfun.h`.

7.1.3.51 `long double __gnu_cxx::conf_hypergl ( long double __a, long double __c, long double __x ) [inline]`

Return the confluent hypergeometric function  ${}_1F_1(a; c; x)$  of `long double` numeratorial parameter `a`, denominatorial parameter `c`, and argument `x`.

See also

[conf\\_hyperg](#) for details.

Definition at line 1121 of file `specfun.h`.

7.1.3.52 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::coshint ( _Tp __x ) [inline]`

Return the hyperbolic cosine integral of argument `x`.

The hyperbolic cosine integral is defined by

Parameters

<code>__x</code>	The argument
------------------	--------------

Definition at line 1462 of file `specfun.h`.

7.1.3.53 `float __gnu_cxx::coshintf ( float __x ) [inline]`

Definition at line 1438 of file `specfun.h`.

7.1.3.54 `long double __gnu_cxx::coshintl ( long double __x ) [inline]`

Return the hyperbolic cosine integral of argument  $x$ .

See also

[coshint](#) for details.

Definition at line 1447 of file specfun.h.

7.1.3.55 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::cosint ( _Tp __x ) [inline]`

Return the cosine integral of argument  $x$ .

The cosine integral is defined by

Parameters

<code>__x</code>	The argument
------------------	--------------

Definition at line 1391 of file specfun.h.

7.1.3.56 `float __gnu_cxx::cosintf ( float __x ) [inline]`

Return the cosine integral of argument  $x$ .

See also

[cosint](#) for details.

Definition at line 1367 of file specfun.h.

7.1.3.57 `long double __gnu_cxx::cosintl ( long double __x ) [inline]`

Return the cosine integral of argument  $x$ .

See also

[cosint](#) for details.

Definition at line 1376 of file specfun.h.

7.1.3.58 `template<typename _Tpnu, typename _Tp> std::complex<__gnu_cxx::__promote_num_t<_Tpnu, _Tp>> __gnu_cxx::cyl_hankel_1 ( _Tpnu __nu, _Tp __z ) [inline]`

Definition at line 1923 of file specfun.h.

7.1.3.59 `template<typename _Tpnu, typename _Tp> std::complex<__gnu_cxx::__promote_num_t<_Tpnu, _Tp>> __gnu_cxx::cyl_hankel_1 ( std::complex<_Tpnu> __nu, std::complex<_Tp> __x ) [inline]`

Return the complex cylindrical Hankel function of the first kind of complex order  $\nu$  and complex argument  $x$ .

The cylindrical Hankel function of the first kind is defined by

$$H_{\nu}^{(1)}(x) = J_{\nu}(x) + iN_{\nu}(x)$$



## Parameters

<code>__nu</code>	The complex order
<code>__x</code>	The complex argument

Definition at line 3342 of file `specfun.h`.

7.1.3.60 `std::complex<float> __gnu_cxx::cyl_hankel_1f( float __nu, float __z ) [inline]`

Definition at line 1911 of file `specfun.h`.

7.1.3.61 `std::complex<float> __gnu_cxx::cyl_hankel_1f( std::complex< float > __nu, std::complex< float > __x ) [inline]`

Return the complex cylindrical Hankel function of the first kind of complex order  $\nu$  and complex argument  $x$ .

## See also

[cyl\\_hankel\\_1](#) for more details.

Definition at line 3315 of file `specfun.h`.

7.1.3.62 `std::complex<long double> __gnu_cxx::cyl_hankel_1l( long double __nu, long double __z ) [inline]`

Definition at line 1915 of file `specfun.h`.

7.1.3.63 `std::complex<long double> __gnu_cxx::cyl_hankel_1l( std::complex< long double > __nu, std::complex< long double > __x ) [inline]`

Return the complex cylindrical Hankel function of the first kind of complex order  $\nu$  and complex argument  $x$ .

## See also

[cyl\\_hankel\\_1](#) for more details.

Definition at line 3325 of file `specfun.h`.

7.1.3.64 `template<typename _Tpnu, typename _Tp> std::complex<__gnu_cxx::__promote_num_t<_Tpnu, _Tp>> __gnu_cxx::cyl_hankel_2( _Tpnu __nu, _Tp __z ) [inline]`

Definition at line 1944 of file `specfun.h`.

7.1.3.65 `template<typename _Tpnu, typename _Tp> std::complex<__gnu_cxx::__promote_num_t<_Tpnu, _Tp>> __gnu_cxx::cyl_hankel_2( std::complex< _Tpnu > __nu, std::complex< _Tp > __x ) [inline]`

Return the complex cylindrical Hankel function of the second kind of complex order  $\nu$  and complex argument  $x$ .

The cylindrical Hankel function of the second kind is defined by

$$H_{\nu}^{(2)}(x) = J_{\nu}(x) - iN_{\nu}(x)$$

## Parameters

<code>__nu</code>	The complex order
<code>__x</code>	The complex argument

Definition at line 3384 of file `specfun.h`.

**7.1.3.66** `std::complex<float> __gnu_cxx::cyl_hankel_2f ( float __nu, float __z ) [inline]`

Definition at line 1932 of file `specfun.h`.

**7.1.3.67** `std::complex<float> __gnu_cxx::cyl_hankel_2f ( std::complex< float > __nu, std::complex< float > __x ) [inline]`

Return the complex cylindrical Hankel function of the second kind of complex order  $\nu$  and complex argument  $x$ .

## See also

[cyl\\_hankel\\_2](#) for more details.

Definition at line 3357 of file `specfun.h`.

**7.1.3.68** `std::complex<long double> __gnu_cxx::cyl_hankel_2l ( long double __nu, long double __z ) [inline]`

Definition at line 1936 of file `specfun.h`.

**7.1.3.69** `std::complex<long double> __gnu_cxx::cyl_hankel_2l ( std::complex< long double > __nu, std::complex< long double > __x ) [inline]`

Return the complex cylindrical Hankel function of the second kind of complex order  $\nu$  and complex argument  $x$ .

## See also

[cyl\\_hankel\\_2](#) for more details.

Definition at line 3367 of file `specfun.h`.

**7.1.3.70** `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::dawson ( _Tp __x ) [inline]`

Return the Dawson integral,  $F(x)$ , for real argument  $x$ .

The Dawson integral is defined by:

$$F(x) = e^{-x^2} \int_0^x e^{y^2} dy$$

and it's derivative is:

$$F'(x) = 1 - 2xF(x)$$

## Parameters

<code>__x</code>	The argument $-\inf < x < \inf$ .
------------------	-----------------------------------

Definition at line 2726 of file `specfun.h`.

**7.1.3.71** `float __gnu_cxx::dawsonf ( float __x ) [inline]`

Return the Dawson integral,  $F(x)$ , for `float` argument `x`.

See also

[dawson](#) for details.

Definition at line 2698 of file `specfun.h`.

**7.1.3.72** `long double __gnu_cxx::dawsonl ( long double __x ) [inline]`

Return the Dawson integral,  $F(x)$ , for `long double` argument `x`.

See also

[dawson](#) for details.

Definition at line 2707 of file `specfun.h`.

**7.1.3.73** `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::digamma ( _Tp __z ) [inline]`

Definition at line 2179 of file `specfun.h`.

**7.1.3.74** `float __gnu_cxx::digammaf ( float __z ) [inline]`

Definition at line 2167 of file `specfun.h`.

**7.1.3.75** `long double __gnu_cxx::digammal ( long double __z ) [inline]`

Definition at line 2171 of file `specfun.h`.

**7.1.3.76** `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::dilog ( _Tp __x ) [inline]`

Definition at line 2200 of file `specfun.h`.

**7.1.3.77** `float __gnu_cxx::dilogf ( float __x ) [inline]`

Definition at line 2188 of file `specfun.h`.

**7.1.3.78** `long double __gnu_cxx::dilogl ( long double __x ) [inline]`

Definition at line 2192 of file `specfun.h`.

**7.1.3.79** `template<typename _Tp> _Tp __gnu_cxx::dirichlet_beta ( _Tp __x ) [inline]`

Return the Dirichlet beta function of real argument  $x$ .

The Dirichlet beta function is defined by

#### Parameters

<code>__x</code>	
------------------	--

Definition at line 3602 of file specfun.h.

**7.1.3.80** `float __gnu_cxx::dirichlet_betaf ( float __x ) [inline]`

Definition at line 3583 of file specfun.h.

**7.1.3.81** `long double __gnu_cxx::dirichlet_betad ( long double __x ) [inline]`

Definition at line 3587 of file specfun.h.

**7.1.3.82** `template<typename _Tp> _Tp __gnu_cxx::dirichlet_eta ( _Tp __x ) [inline]`

Return the Dirichlet eta function of real argument  $x$ .

The Dirichlet eta function is defined by

#### Parameters

<code>__x</code>	
------------------	--

Definition at line 3574 of file specfun.h.

**7.1.3.83** `float __gnu_cxx::dirichlet_etaf ( float __x ) [inline]`

Return the Dirichlet eta function of real argument  $x$ .

#### See also

[dirichlet\\_eta](#) for details.

Definition at line 3550 of file specfun.h.

**7.1.3.84** `long double __gnu_cxx::dirichlet_etad ( long double __x ) [inline]`

Return the Dirichlet eta function of real argument  $x$ .

#### See also

[dirichlet\\_eta](#) for details.

Definition at line 3559 of file specfun.h.

7.1.3.85 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::double_factorial ( int __n ) [inline]`

Definition at line 2887 of file specfun.h.

7.1.3.86 `float __gnu_cxx::double_factorialf ( int __n ) [inline]`

Definition at line 2875 of file specfun.h.

7.1.3.87 `long double __gnu_cxx::double_factoriall ( int __n ) [inline]`

Definition at line 2879 of file specfun.h.

7.1.3.88 `template<typename _Tk, typename _Tp, typename _Ta, typename _Tb> __gnu_cxx::__promote_num_t<_Tk, _Tp, _Ta, _Tb> __gnu_cxx::ellint_cel ( _Tk __k_c, _Tp __p, _Ta __a, _Tb __b ) [inline]`

Return the Bulirsch complete elliptic integral of ...

The Bulirsch complete elliptic integral is defined by

Parameters

<code>__k_c</code>	The complementary modulus $k_c = \sqrt{1 - k^2}$
<code>__p</code>	The
<code>__a</code>	The
<code>__b</code>	The

Definition at line 3300 of file specfun.h.

7.1.3.89 `float __gnu_cxx::ellint_celf ( float __k_c, float __p, float __a, float __b ) [inline]`

Definition at line 3277 of file specfun.h.

7.1.3.90 `long double __gnu_cxx::ellint_cell ( long double __k_c, long double __p, long double __a, long double __b ) [inline]`

Definition at line 3281 of file specfun.h.

7.1.3.91 `template<typename _Tk, typename _Tphi> __gnu_cxx::__promote_num_t<_Tk, _Tphi> __gnu_cxx::ellint_d ( _Tk __k, _Tphi __phi ) [inline]`

Return the incomplete Legendre elliptic integral D of k and  $\phi$ .

The Legendre elliptic integral D is defined by

$$D(k, \phi) = \int_0^\phi \frac{\sin^2 \theta d\theta}{\sqrt{1 - k^2 \sin^2 \theta}}$$

## Parameters

<code>__k</code>	The modulus $-1 \leq k \leq +1$
<code>__phi</code>	The angle

Definition at line 3177 of file specfun.h.

7.1.3.92 `float __gnu_cxx::ellint_df ( float __k, float __phi ) [inline]`

Definition at line 3157 of file specfun.h.

7.1.3.93 `long double __gnu_cxx::ellint_dl ( long double __k, long double __phi ) [inline]`

Definition at line 3161 of file specfun.h.

7.1.3.94 `template<typename _Tp, typename _Tk> __gnu_cxx::__promote_num_t<_Tp, _Tk> __gnu_cxx::ellint_el1 ( _Tp __x, _Tk __k_c ) [inline]`

Return the Bulirsch elliptic integral of the first kind of ...

The Bulirsch elliptic integral of the first kind is defined by

## Parameters

<code>__x</code>	The argument
<code>__k_c</code>	The complementary modulus $k_c = \sqrt{1 - k^2}$

Definition at line 3206 of file specfun.h.

7.1.3.95 `float __gnu_cxx::ellint_el1f ( float __x, float __k_c ) [inline]`

Definition at line 3186 of file specfun.h.

7.1.3.96 `long double __gnu_cxx::ellint_el1l ( long double __x, long double __k_c ) [inline]`

Definition at line 3190 of file specfun.h.

7.1.3.97 `template<typename _Tp, typename _Tk, typename _Ta, typename _Tb> __gnu_cxx::__promote_num_t<_Tp, _Tk, _Ta, _Tb> __gnu_cxx::ellint_el2 ( _Tp __x, _Tk __k_c, _Ta __a, _Tb __b ) [inline]`

Return the Bulirsch elliptic integral of the second kind of ...

The Bulirsch elliptic integral of the second kind is defined by

## Parameters

<code>__x</code>	The argument
<code>__k_c</code>	The complementary modulus $k_c = \sqrt{1 - k^2}$
<code>__a</code>	The
<code>__b</code>	The

Definition at line 3238 of file specfun.h.

7.1.3.98 `float __gnu_cxx::ellint_el2f ( float __x, float __k_c, float __a, float __b )` [inline]

Definition at line 3215 of file specfun.h.

7.1.3.99 `long double __gnu_cxx::ellint_el2l ( long double __x, long double __k_c, long double __a, long double __b )` [inline]

Definition at line 3219 of file specfun.h.

7.1.3.100 `template<typename _Tx, typename _Tk, typename _Tp> __gnu_cxx::__promote_num_t<_Tx, _Tk, _Tp> __gnu_cxx::ellint_el3 ( _Tx __x, _Tk __k_c, _Tp __p )` [inline]

Return the Bulirsch elliptic integral of the third kind of ...

The Bulirsch elliptic integral of the third kind is defined by

## Parameters

<code>__x</code>	The
<code>__k_c</code>	The complementary modulus $k_c = \sqrt{1 - k^2}$
<code>__p</code>	The

Definition at line 3268 of file specfun.h.

7.1.3.101 `float __gnu_cxx::ellint_el3f ( float __x, float __k_c, float __p )` [inline]

Definition at line 3247 of file specfun.h.

7.1.3.102 `long double __gnu_cxx::ellint_el3l ( long double __x, long double __k_c, long double __p )` [inline]

Definition at line 3251 of file specfun.h.

7.1.3.103 `template<typename _Tp, typename _Up> __gnu_cxx::__promote_num_t<_Tp, _Up> __gnu_cxx::ellint_rc ( _Tp __x, _Up __y )` [inline]

Return the Carlson elliptic function  $R_C(x, y) = R_F(x, y, y)$  where  $R_F(x, y, z)$  is the Carlson elliptic function of the first kind.

The Carlson elliptic function is defined by:

$$R_C(x, y) = \frac{1}{2} \int_0^\infty \frac{dt}{(t+x)^{1/2}(t+y)}$$

Based on Carlson's algorithms:

- B. C. Carlson Numer. Math. 33, 1 (1979)
- B. C. Carlson, Special Functions of Applied Mathematics (1977)
- Numerical Recipes in C, 2nd ed, pp. 261-269, by Press, Teukolsky, Vetterling, Flannery (1992)

#### Parameters

<code>__x</code>	The first argument.
<code>__y</code>	The second argument.

Definition at line 2311 of file specfun.h.

7.1.3.104 `float __gnu_cxx::ellint_rcf ( float __x, float __y ) [inline]`

Return the Carlson elliptic function  $R_C(x, y)$ .

See also

[ellint\\_rc](#) for details.

Definition at line 2277 of file specfun.h.

7.1.3.105 `long double __gnu_cxx::ellint_rcl ( long double __x, long double __y ) [inline]`

Return the Carlson elliptic function  $R_C(x, y)$ .

See also

[ellint\\_rc](#) for details.

Definition at line 2286 of file specfun.h.

7.1.3.106 `template<typename _Tp, typename _Up, typename _Vp> __gnu_cxx::__promote_num_t<_Tp, _Up, _Vp> __gnu_cxx::ellint_rd ( _Tp __x, _Up __y, _Vp __z ) [inline]`

Return the Carlson elliptic function of the second kind  $R_D(x, y, z) = R_J(x, y, z, z)$  where  $R_J(x, y, z, p)$  is the Carlson elliptic function of the third kind.

The Carlson elliptic function of the second kind is defined by:

$$R_D(x, y, z) = \frac{3}{2} \int_0^\infty \frac{dt}{(t+x)^{1/2}(t+y)^{1/2}(t+z)^{3/2}}$$

Based on Carlson's algorithms:

- B. C. Carlson Numer. Math. 33, 1 (1979)
- B. C. Carlson, Special Functions of Applied Mathematics (1977)
- Numerical Recipes in C, 2nd ed, pp. 261-269, by Press, Teukolsky, Vetterling, Flannery (1992)



## Parameters

<code>__x</code>	The first of two symmetric arguments.
<code>__y</code>	The second of two symmetric arguments.
<code>__z</code>	The third argument.

Definition at line 2410 of file specfun.h.

7.1.3.107 `float __gnu_cxx::ellint_rdf ( float __x, float __y, float __z ) [inline]`

Return the Carlson elliptic function  $R_D(x, y, z)$ .

See also

[ellint\\_rd](#) for details.

Definition at line 2374 of file specfun.h.

7.1.3.108 `long double __gnu_cxx::ellint_rdl ( long double __x, long double __y, long double __z ) [inline]`

Return the Carlson elliptic function  $R_D(x, y, z)$ .

See also

[ellint\\_rd](#) for details.

Definition at line 2383 of file specfun.h.

7.1.3.109 `template<typename _Tp, typename _Up, typename _Vp> __gnu_cxx::__promote_num_t<_Tp, _Up, _Vp> __gnu_cxx::ellint_rf ( _Tp __x, _Up __y, _Vp __z ) [inline]`

Return the Carlson elliptic function  $R_F(x, y, z)$  of the first kind.

The Carlson elliptic function of the first kind is defined by:

$$R_F(x, y, z) = \frac{1}{2} \int_0^\infty \frac{dt}{(t+x)^{1/2}(t+y)^{1/2}(t+z)^{1/2}}$$

## Parameters

<code>__x</code>	The first of three symmetric arguments.
<code>__y</code>	The second of three symmetric arguments.
<code>__z</code>	The third of three symmetric arguments.

Definition at line 2263 of file specfun.h.

7.1.3.110 `float __gnu_cxx::ellint_rff ( float __x, float __y, float __z ) [inline]`

Return the Carlson elliptic function  $R_F(x, y, z)$ .

See also

[ellint\\_rf](#) for details.

Definition at line 2235 of file specfun.h.

7.1.3.111 `long double __gnu_cxx::ellint_rfl ( long double __x, long double __y, long double __z )` `[inline]`

Return the Carlson elliptic function  $R_F(x, y, z)$ .

See also

[ellint\\_rf](#) for details.

Definition at line 2244 of file specfun.h.

7.1.3.112 `template<typename _Tp, typename _Up, typename _Vp> __gnu_cxx::__promote_num_t<_Tp, _Up, _Vp> __gnu_cxx::ellint_rg ( _Tp __x, _Up __y, _Vp __z )` `[inline]`

Return the symmetric Carlson elliptic function of the second kind  $R_G(x, y, z)$ .

The Carlson symmetric elliptic function of the second kind is defined by:

$$R_G(x, y, z) = \frac{1}{4} \int_0^\infty dt [(t+x)(t+y)(t+z)]^{-1/2} \left( \frac{x}{t+x} + \frac{y}{t+y} + \frac{z}{t+z} \right)$$

Based on Carlson's algorithms:

- B. C. Carlson Numer. Math. 33, 1 (1979)
- B. C. Carlson, Special Functions of Applied Mathematics (1977)
- Numerical Recipes in C, 2nd ed, pp. 261-269, by Press, Teukolsky, Vetterling, Flannery (1992)

Parameters

<code>__x</code>	The first of three symmetric arguments.
<code>__y</code>	The second of three symmetric arguments.
<code>__z</code>	The third of three symmetric arguments.

Definition at line 2490 of file specfun.h.

7.1.3.113 `float __gnu_cxx::ellint_rgf ( float __x, float __y, float __z )` `[inline]`

Return the Carlson elliptic function  $R_G(x, y)$ .

See also

[ellint\\_rg](#) for details.

Definition at line 2455 of file specfun.h.

7.1.3.114 `long double __gnu_cxx::ellint_rgl ( long double __x, long double __y, long double __z )` `[inline]`

Return the Carlson elliptic function  $R_G(x, y)$ .

See also

[ellint\\_rg](#) for details.

Definition at line 2464 of file specfun.h.

```
7.1.3.115  template<typename _Tp, typename _Up, typename _Vp, typename _Wp> __gnu_cxx::__promote_num_t<_Tp, _Up,
            _Vp, _Wp> __gnu_cxx::ellint_rj( _Tp __x, _Up __y, _Vp __z, _Wp __p ) [inline]
```

Return the Carlson elliptic function  $R_J(x, y, z, p)$  of the third kind.

The Carlson elliptic function of the third kind is defined by:

$$R_J(x, y, z, p) = \frac{3}{2} \int_0^\infty \frac{dt}{(t+x)^{1/2}(t+y)^{1/2}(t+z)^{1/2}(t+p)}$$

Based on Carlson's algorithms:

- B. C. Carlson Numer. Math. 33, 1 (1979)
- B. C. Carlson, Special Functions of Applied Mathematics (1977)
- Numerical Recipes in C, 2nd ed, pp. 261-269, by Press, Teukolsky, Vetterling, Flannery (1992)

#### Parameters

<code>__x</code>	The first of three symmetric arguments.
<code>__y</code>	The second of three symmetric arguments.
<code>__z</code>	The third of three symmetric arguments.
<code>__p</code>	The fourth argument.

Definition at line 2360 of file specfun.h.

```
7.1.3.116  float __gnu_cxx::ellint_rjf( float __x, float __y, float __z, float __p ) [inline]
```

Return the Carlson elliptic function  $R_J(x, y, z, p)$ .

See also

[ellint\\_rj](#) for details.

Definition at line 2325 of file specfun.h.

```
7.1.3.117  long double __gnu_cxx::ellint_rjl( long double __x, long double __y, long double __z, long double __p ) [inline]
```

Return the Carlson elliptic function  $R_J(x, y, z, p)$ .

See also

[ellint\\_rj](#) for details.

Definition at line 2334 of file specfun.h.

```
7.1.3.118  template<typename _Tp> _Tp __gnu_cxx::ellnome( _Tp __k ) [inline]
```

Return the elliptic nome function of modulus  $k$ .

The elliptic nome function is defined by

## Parameters

<code>__k</code>	The modulus $-1 \leq k \leq +1$
------------------	---------------------------------

Definition at line 3928 of file specfun.h.

7.1.3.119 `float __gnu_cxx::ellnomef ( float __k ) [inline]`

Definition at line 3909 of file specfun.h.

7.1.3.120 `long double __gnu_cxx::ellnomel ( long double __k ) [inline]`

Definition at line 3913 of file specfun.h.

7.1.3.121 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::expint_e1 ( _Tp __x ) [inline]`

Definition at line 2742 of file specfun.h.

7.1.3.122 `float __gnu_cxx::expint_e1f ( float __x ) [inline]`

Definition at line 2733 of file specfun.h.

7.1.3.123 `long double __gnu_cxx::expint_e1l ( long double __x ) [inline]`

Definition at line 2737 of file specfun.h.

7.1.3.124 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::expint_en ( unsigned int __n, _Tp __x ) [inline]`

Definition at line 2761 of file specfun.h.

7.1.3.125 `float __gnu_cxx::expint_enf ( unsigned int __n, float __x ) [inline]`

Definition at line 2749 of file specfun.h.

7.1.3.126 `long double __gnu_cxx::expint_enl ( unsigned int __n, long double __x ) [inline]`

Definition at line 2753 of file specfun.h.

7.1.3.127 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::factorial ( unsigned int __n ) [inline]`

Definition at line 2866 of file specfun.h.

7.1.3.128 `float __gnu_cxx::factorialf ( unsigned int __n ) [inline]`

Definition at line 2854 of file specfun.h.

7.1.3.129 `long double __gnu_cxx::factorial( unsigned int __n ) [inline]`

Definition at line 2858 of file specfun.h.

7.1.3.130 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::fresnel_c( _Tp __x ) [inline]`

Return the Fresnel cosine integral of argument  $x$ .

The Fresnel cosine integral is defined by

$$C(x) = \int_0^x \cos\left(\frac{\pi}{2}t^2\right)dt$$

#### Parameters

<code>__x</code>	The argument
------------------	--------------

Definition at line 2684 of file specfun.h.

7.1.3.131 `float __gnu_cxx::fresnel_cf( float __x ) [inline]`

Definition at line 2665 of file specfun.h.

7.1.3.132 `long double __gnu_cxx::fresnel_cl( long double __x ) [inline]`

Definition at line 2669 of file specfun.h.

7.1.3.133 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::fresnel_s( _Tp __x ) [inline]`

Return the Fresnel sine integral of argument  $x$ .

The Fresnel sine integral is defined by

$$S(x) = \int_0^x \sin\left(\frac{\pi}{2}t^2\right)dt$$

#### Parameters

<code>__x</code>	The argument
------------------	--------------

Definition at line 2656 of file specfun.h.

7.1.3.134 `float __gnu_cxx::fresnel_sf( float __x ) [inline]`

Definition at line 2637 of file specfun.h.

7.1.3.135 `long double __gnu_cxx::fresnel_sl( long double __x ) [inline]`

Definition at line 2641 of file specfun.h.

7.1.3.136 `template<typename _Tn, typename _Tp> __gnu_cxx::__promote_num_t<_Tn, _Tp> __gnu_cxx::gamma_l( _Tn __n, _Tp __x ) [inline]`

Definition at line 2158 of file specfun.h.

7.1.3.137 `float __gnu_cxx::gamma_lf( float __n, float __x ) [inline]`

Definition at line 2146 of file specfun.h.

7.1.3.138 `long double __gnu_cxx::gamma_ll( long double __n, long double __x ) [inline]`

Definition at line 2150 of file specfun.h.

7.1.3.139 `template<typename _Ta, typename _Tp> __gnu_cxx::__promote_num_t<_Ta, _Tp> __gnu_cxx::gamma_p( _Ta __a, _Tp __x ) [inline]`

Definition at line 3041 of file specfun.h.

7.1.3.140 `float __gnu_cxx::gamma_pf( float __a, float __x ) [inline]`

Definition at line 3029 of file specfun.h.

7.1.3.141 `long double __gnu_cxx::gamma_pl( long double __a, long double __x ) [inline]`

Definition at line 3033 of file specfun.h.

7.1.3.142 `template<typename _Ta, typename _Tp> __gnu_cxx::__promote_num_t<_Ta, _Tp> __gnu_cxx::gamma_q( _Ta __a, _Tp __x ) [inline]`

Definition at line 3062 of file specfun.h.

7.1.3.143 `float __gnu_cxx::gamma_qf( float __a, float __x ) [inline]`

Definition at line 3050 of file specfun.h.

7.1.3.144 `long double __gnu_cxx::gamma_ql( long double __a, long double __x ) [inline]`

Definition at line 3054 of file specfun.h.

7.1.3.145 `template<typename _Tn, typename _Tp> __gnu_cxx::__promote_num_t<_Tn, _Tp> __gnu_cxx::gamma_u( _Tn __n, _Tp __x ) [inline]`

Definition at line 2137 of file specfun.h.

7.1.3.146 `float __gnu_cxx::gamma_uf( float __n, float __x ) [inline]`

Definition at line 2125 of file specfun.h.

7.1.3.147 `long double __gnu_cxx::gamma_ul( long double __n, long double __x ) [inline]`

Definition at line 2129 of file specfun.h.

7.1.3.148 `template<typename _Talpha, typename _Tp> __gnu_cxx::__promote_num_t<_Talpha, _Tp> __gnu_cxx::gegenbauer ( unsigned int __n, _Talpha __alpha, _Tp __x ) [inline]`

Definition at line 1818 of file specfun.h.

7.1.3.149 `float __gnu_cxx::gegenbauerf ( unsigned int __n, float __alpha, float __x ) [inline]`

Definition at line 1806 of file specfun.h.

7.1.3.150 `long double __gnu_cxx::gegenbauerl ( unsigned int __n, long double __alpha, long double __x ) [inline]`

Definition at line 1810 of file specfun.h.

7.1.3.151 `template<typename _Tk, typename _Tphi> __gnu_cxx::__promote_num_t<_Tk, _Tphi> __gnu_cxx::heuman_lambda ( _Tk __k, _Tphi __phi ) [inline]`

Return the Heuman lambda function of  $k$  and  $@c\phi$ .

The complete Heuman lambda function is defined by

#### Parameters

<code>__k</code>	The modulus
<code>__phi</code>	The angle

Definition at line 3120 of file specfun.h.

7.1.3.152 `float __gnu_cxx::heuman_lambdaf ( float __k, float __phi ) [inline]`

Definition at line 3100 of file specfun.h.

7.1.3.153 `long double __gnu_cxx::heuman_lambdal ( long double __k, long double __phi ) [inline]`

Definition at line 3104 of file specfun.h.

7.1.3.154 `template<typename _Tp, typename _Up> __gnu_cxx::__promote_num_t<_Tp, _Up> __gnu_cxx::hurwitz_zeta ( _Tp __s, _Up __a ) [inline]`

Return the Hurwitz zeta function of argument  $s$ , and parameter  $a$ .

The the Hurwitz zeta function is defined by

$$\zeta(s, a) =$$

#### Parameters

<code>__s</code>	The argument
------------------	--------------

<code>__a</code>	The parameter
------------------	---------------

Definition at line 2519 of file specfun.h.

7.1.3.155 `float __gnu_cxx::hurwitz_zetaf ( float __s, float __a ) [inline]`

Definition at line 2499 of file specfun.h.

7.1.3.156 `long double __gnu_cxx::hurwitz_zetal ( long double __s, long double __a ) [inline]`

Definition at line 2503 of file specfun.h.

7.1.3.157 `template<typename _Tpa, typename _Tpb, typename _Tpc, typename _Tp> __gnu_cxx::__promote_4<_Tpa, _Tpb, _Tpc, _Tp>::__type __gnu_cxx::hyperg ( _Tpa __a, _Tpb __b, _Tpc __c, _Tp __x ) [inline]`

Return the hypergeometric function  ${}_2F_1(a, b; c; x)$  of real numeratorial parameters a and b, denominatorial parameter c, and argument x.

The hypergeometric function is defined by

$${}_2F_1(a; c; x) = \sum_{n=0}^{\infty} \frac{(a)_n (b)_n x^n}{(c)_n n!}$$

where the Pochhammer symbol is  $(x)_k = (x)(x+1)\dots(x+k-1)$ ,  $(x)_0 = 1$

Parameters

<code>__a</code>	The first numeratorial parameter
<code>__b</code>	The second numeratorial parameter
<code>__c</code>	The denominatorial parameter
<code>__x</code>	The argument

Definition at line 1191 of file specfun.h.

7.1.3.158 `float __gnu_cxx::hypergf ( float __a, float __b, float __c, float __x ) [inline]`

Return the hypergeometric function  ${}_2F_1(a, b; c; x)$  of @ float numeratorial parameters a and b, denominatorial parameter c, and argument x.

See also

[hyperg](#) for details.

Definition at line 1158 of file specfun.h.

7.1.3.159 `long double __gnu_cxx::hypergl ( long double __a, long double __b, long double __c, long double __x ) [inline]`

Return the hypergeometric function  ${}_2F_1(a, b; c; x)$  of long double numeratorial parameters a and b, denominatorial parameter c, and argument x.

See also

[hyperg](#) for details.

Definition at line 1169 of file specfun.h.



7.1.3.160 `template<typename _Ta, typename _Tb, typename _Tp> __gnu_cxx::__promote_num_t<_Ta, _Tb, _Tp>  
__gnu_cxx::ibeta( _Ta __a, _Tb __b, _Tp __x ) [inline]`

Return the regularized incomplete beta function of parameters *a*, *b*, and argument *x*.

The regularized incomplete beta function is defined by

$$I_x(a, b) = \frac{B_x(a, b)}{B(a, b)}$$

where

$$B_x(a, b) = \int_0^x t^{a-1} (1-t)^{b-1} dt$$

is the non-regularized beta function and  $B(a, b)$  is the usual beta function. ]

Parameters

<code>__a</code>	The first parameter
<code>__b</code>	The second parameter
<code>__x</code>	The argument

Definition at line 2597 of file `specfun.h`.

7.1.3.161 `template<typename _Ta, typename _Tb, typename _Tp> __gnu_cxx::__promote_num_t<_Ta, _Tb, _Tp>  
__gnu_cxx::ibetac( _Ta __a, _Tb __b, _Tp __x ) [inline]`

Return the regularized complementary incomplete beta function of parameters *a*, *b*, and argument *x*.

The regularized complementary incomplete beta function is defined by

$$I_x(a, b) = I_x(a, b)$$

Parameters

<code>__a</code>	The parameter
<code>__b</code>	The parameter
<code>__x</code>	The argument

Definition at line 2628 of file `specfun.h`.

7.1.3.162 `float __gnu_cxx::ibetaf( float __a, float __b, float __x ) [inline]`

Definition at line 2606 of file `specfun.h`.

References `__gnu_cxx::ibetaf()`.

7.1.3.163 `long double __gnu_cxx::ibetac( long double __a, long double __b, long double __x ) [inline]`

Definition at line 2610 of file `specfun.h`.

References `__gnu_cxx::ibetac()`.

7.1.3.164 `float __gnu_cxx::ibetaf( float __a, float __b, float __x ) [inline]`

Return the regularized incomplete beta function of parameters *a*, *b*, and argument *x*.

See `ibeta` for details.

Definition at line 2562 of file `specfun.h`.

Referenced by `__gnu_cxx::ibetaf()`.

7.1.3.165 `long double __gnu_cxx::ibetal ( long double __a, long double __b, long double __x ) [inline]`

Return the regularized incomplete beta function of parameters `a`, `b`, and argument `x`.

See `ibeta` for details.

Definition at line 2572 of file `specfun.h`.

Referenced by `__gnu_cxx::ibetacl()`.

7.1.3.166 `template<typename _Talpha, typename _Tbeta, typename _Tp> __gnu_cxx::__promote_num_t<_Talpha, _Tbeta, _Tp> __gnu_cxx::jacobi ( unsigned __n, _Talpha __alpha, _Tbeta __beta, _Tp __x ) [inline]`

Definition at line 1797 of file `specfun.h`.

References `std::__detail::__beta()`.

7.1.3.167 `template<typename _Kp, typename _Up> __gnu_cxx::__promote_num_t<_Kp, _Up> __gnu_cxx::jacobi_cn ( _Kp __k, _Up __u ) [inline]`

Return the Jacobi elliptic `cn` integral of modulus `k` and argument `u`.

The Jacobi elliptic `cn` integral is defined by

#### Parameters

<code>__k</code>	The modulus
<code>__u</code>	The argument

Definition at line 1561 of file `specfun.h`.

7.1.3.168 `float __gnu_cxx::jacobi_cnf ( float __k, float __u ) [inline]`

Return the Jacobi elliptic `cn` integral of modulus `k` and argument `u`.

See also

[jacobi\\_cn](#) for details.

Definition at line 1530 of file `specfun.h`.

7.1.3.169 `long double __gnu_cxx::jacobi_cnl ( long double __k, long double __u ) [inline]`

Return the Jacobi elliptic `cn` integral of modulus `k` and argument `u`.

See also

[jacobi\\_cn](#) for details.

Definition at line 1542 of file `specfun.h`.

7.1.3.170 `template<typename _Kp, typename _Up> __gnu_cxx::__promote_num_t<_Kp, _Up> __gnu_cxx::jacobi_dn ( _Kp __k, _Up __u ) [inline]`

Return the Jacobi elliptic `dn` integral of modulus `k` and argument `u`.

The Jacobi elliptic `dn` integral is defined by

#### Parameters

<code>__k</code>	The modulus
<code>__u</code>	The argument

Definition at line 1607 of file `specfun.h`.

7.1.3.171 `float __gnu_cxx::jacobi_dnf ( float __k, float __u ) [inline]`

Return the Jacobi elliptic `dn` integral of modulus `k` and argument `u`.

#### See also

[jacobi\\_dn](#) for details.

Definition at line 1576 of file `specfun.h`.

7.1.3.172 `long double __gnu_cxx::jacobi_dnl ( long double __k, long double __u ) [inline]`

Return the Jacobi elliptic `dn` integral of modulus `k` and argument `u`.

#### See also

[jacobi\\_dn](#) for details.

Definition at line 1588 of file `specfun.h`.

7.1.3.173 `template<typename _Kp, typename _Up> __gnu_cxx::__promote_num_t<_Kp, _Up> __gnu_cxx::jacobi_sn ( _Kp __k, _Up __u ) [inline]`

Return the Jacobi elliptic `sn` integral of modulus `k` and argument `u`.

The Jacobi elliptic `sn` integral is defined by

#### Parameters

<code>__k</code>	The modulus
<code>__u</code>	The argument

Definition at line 1515 of file `specfun.h`.

7.1.3.174 `float __gnu_cxx::jacobi_snf ( float __k, float __u ) [inline]`

Return the Jacobi elliptic `sn` integral of modulus `k` and argument `u`.

See also

[jacobi\\_sn](#) for details.

Definition at line 1484 of file specfun.h.

7.1.3.175 `long double __gnu_cxx::jacobi_snl ( long double __k, long double __u ) [inline]`

Return the Jacobi elliptic `sn` integral of modulus `k` and argument `u`.

See also

[jacobi\\_sn](#) for details.

Definition at line 1496 of file specfun.h.

7.1.3.176 `template<typename _Tk, typename _Tphi> __gnu_cxx::__promote_num_t<_Tk, _Tphi> __gnu_cxx::jacobi_zeta ( _Tk __k, _Tphi __phi ) [inline]`

Return the Jacobi zeta function of `k` and  $\phi$ .

The Jacobi zeta function is defined by

#### Parameters

<code>__k</code>	The modulus
<code>__phi</code>	The angle

Definition at line 3091 of file specfun.h.

7.1.3.177 `float __gnu_cxx::jacobi_zetaf ( float __k, float __phi ) [inline]`

Definition at line 3071 of file specfun.h.

7.1.3.178 `long double __gnu_cxx::jacobi_zetal ( long double __k, long double __phi ) [inline]`

Definition at line 3075 of file specfun.h.

7.1.3.179 `float __gnu_cxx::jacobif ( unsigned __n, float __alpha, float __beta, float __x ) [inline]`

Definition at line 1785 of file specfun.h.

References `std::__detail::__beta()`.

7.1.3.180 `long double __gnu_cxx::jacobil ( unsigned __n, long double __alpha, long double __beta, long double __x ) [inline]`

Definition at line 1789 of file specfun.h.

References `std::__detail::__beta()`.

7.1.3.181 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::lbincoef ( unsigned int __n, unsigned int __k ) [inline]`

Definition at line 2971 of file specfun.h.

7.1.3.182 `float __gnu_cxx::lbincoeff ( unsigned int __n, unsigned int __k ) [inline]`

Definition at line 2959 of file specfun.h.

7.1.3.183 `long double __gnu_cxx::lbincoefl ( unsigned int __n, unsigned int __k ) [inline]`

Definition at line 2963 of file specfun.h.

7.1.3.184 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::ldouble_factorial ( int __n ) [inline]`

Definition at line 2929 of file specfun.h.

7.1.3.185 `float __gnu_cxx::ldouble_factorialf ( int __n ) [inline]`

Definition at line 2917 of file specfun.h.

7.1.3.186 `long double __gnu_cxx::ldouble_factoriall ( int __n ) [inline]`

Definition at line 2921 of file specfun.h.

7.1.3.187 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::legendre_q ( unsigned int __n, _Tp __x ) [inline]`

Definition at line 3020 of file specfun.h.

7.1.3.188 `float __gnu_cxx::legendre_qf ( unsigned int __n, float __x ) [inline]`

Definition at line 3008 of file specfun.h.

7.1.3.189 `long double __gnu_cxx::legendre_ql ( unsigned int __n, long double __x ) [inline]`

Definition at line 3012 of file specfun.h.

7.1.3.190 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::lfactorial ( unsigned int __n ) [inline]`

Definition at line 2908 of file specfun.h.

7.1.3.191 `float __gnu_cxx::lfactorialf ( unsigned int __n ) [inline]`

Definition at line 2896 of file specfun.h.

7.1.3.192 `long double __gnu_cxx::lfactorial( unsigned int __n ) [inline]`

Definition at line 2900 of file specfun.h.

7.1.3.193 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::logint( _Tp __x ) [inline]`

Return the logarithmic integral of argument  $x$ .

The logarithmic integral is defined by

#### Parameters

<code>__x</code>	
------------------	--

Definition at line 1315 of file specfun.h.

7.1.3.194 `float __gnu_cxx::logintf( float __x ) [inline]`

Return the logarithmic integral of argument  $x$ .

See also

[logint](#) for details.

Definition at line 1291 of file specfun.h.

7.1.3.195 `long double __gnu_cxx::logintl( long double __x ) [inline]`

Return the logarithmic integral of argument  $x$ .

See also

[logint](#) for details.

Definition at line 1300 of file specfun.h.

7.1.3.196 `template<typename _Tp, typename _Tn> __gnu_cxx::__promote_num_t<_Tp, _Tn> __gnu_cxx::lpochhammer_l( _Tp __a, _Tn __n ) [inline]`

Definition at line 2803 of file specfun.h.

7.1.3.197 `float __gnu_cxx::lpochhammer_lf( float __a, float __n ) [inline]`

Definition at line 2791 of file specfun.h.

7.1.3.198 `long double __gnu_cxx::lpochhammer_ll( long double __a, long double __n ) [inline]`

Definition at line 2795 of file specfun.h.

7.1.3.199 `template<typename _Tp, typename _Tn> __gnu_cxx::__promote_num_t<_Tp, _Tn> __gnu_cxx::lpochhammer_u ( _Tp __a, _Tn __n ) [inline]`

Definition at line 2782 of file specfun.h.

7.1.3.200 `float __gnu_cxx::lpochhammer_uf ( float __a, float __n ) [inline]`

Definition at line 2770 of file specfun.h.

7.1.3.201 `long double __gnu_cxx::lpochhammer_ul ( long double __a, long double __n ) [inline]`

Definition at line 2774 of file specfun.h.

7.1.3.202 `template<typename _Tph, typename _Tpa> __gnu_cxx::__promote_num_t<_Tph, _Tpa> __gnu_cxx::owens_t ( _Tph __h, _Tpa __a ) [inline]`

Return the Owens T function of thing1 `h` and thing2 `a`.

The Owens T function is defined by

$$T(h, a) = \frac{1}{2\pi} \int_0^a \frac{\exp \left[ -\frac{1}{2} h^2 (1 + x^2) \right]}{1 + x^2} dx$$

Parameters

<code>__h</code>	The shape factor
<code>__a</code>	The integration limit

Definition at line 4124 of file specfun.h.

7.1.3.203 `float __gnu_cxx::owens_tf ( float __h, float __a ) [inline]`

Return the Owens T function function of thing `h` and argument `a`.

See also

[owens\\_t](#) for details.

Definition at line 4098 of file specfun.h.

7.1.3.204 `long double __gnu_cxx::owens_tl ( long double __h, long double __a ) [inline]`

Return the Owens T function function of thing `h` and argument `a`.

See also

[owens\\_t](#) for details.

Definition at line 4107 of file specfun.h.

7.1.3.205 `template<typename _Tp, typename _Tn > __gnu_cxx::__promote_num_t<_Tp, _Tn> __gnu_cxx::pochhammer_l ( _Tp __a, _Tn __n ) [inline]`

Definition at line 2845 of file specfun.h.

7.1.3.206 `float __gnu_cxx::pochhammer_lf ( float __a, float __n ) [inline]`

Definition at line 2833 of file specfun.h.

7.1.3.207 `long double __gnu_cxx::pochhammer_ll ( long double __a, long double __n ) [inline]`

Definition at line 2837 of file specfun.h.

7.1.3.208 `template<typename _Tp, typename _Tn > __gnu_cxx::__promote_num_t<_Tp, _Tn> __gnu_cxx::pochhammer_u ( _Tp __a, _Tn __n ) [inline]`

Definition at line 2824 of file specfun.h.

7.1.3.209 `float __gnu_cxx::pochhammer_uf ( float __a, float __n ) [inline]`

Definition at line 2812 of file specfun.h.

7.1.3.210 `long double __gnu_cxx::pochhammer_ul ( long double __a, long double __n ) [inline]`

Definition at line 2816 of file specfun.h.

7.1.3.211 `template<typename _Tp > std::complex<__gnu_cxx::__promote_num_t<_Tp> > __gnu_cxx::polylog ( _Tp __s, std::complex<_Tp> __w ) [inline]`

Return the complex polylogarithm function of real thing  $s$  and complex argument  $w$ .

The polylogarithm function is defined by

#### Parameters

<code>__s</code>	
<code>__w</code>	

Definition at line 3536 of file specfun.h.

7.1.3.212 `std::complex<float> __gnu_cxx::polylogf ( float __s, std::complex< float > __w ) [inline]`

Return the complex polylogarithm function of real thing  $s$  and complex argument  $w$ .

See also

[polylog](#) for details.

Definition at line 3509 of file specfun.h.



7.1.3.213 `std::complex<long double> __gnu_cxx::polylogl ( long double __s, std::complex< long double > __w )` `[inline]`

Return the complex polylogarithm function of real thing  $s$  and complex argument  $w$ .

See also

[polylog](#) for details.

Definition at line 3519 of file `specfun.h`.

7.1.3.214 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::psi ( _Tp __x )` `[inline]`

Return the psi or digamma function of argument  $x$ .

The the psi or digamma function is defined by

$$\psi(x) =$$

Parameters

<code>__x</code>	The parameter
------------------	---------------

Definition at line 2547 of file `specfun.h`.

7.1.3.215 `float __gnu_cxx::psif ( float __x )` `[inline]`

Definition at line 2528 of file `specfun.h`.

7.1.3.216 `long double __gnu_cxx::psil ( long double __x )` `[inline]`

Definition at line 2532 of file `specfun.h`.

7.1.3.217 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::radpoly ( unsigned int __n, unsigned int __m, _Tp __rho )` `[inline]`

Definition at line 1860 of file `specfun.h`.

7.1.3.218 `float __gnu_cxx::radpolyf ( unsigned int __n, unsigned int __m, float __rho )` `[inline]`

Definition at line 1848 of file `specfun.h`.

References `std::__detail::__poly_radial_jacobi()`.

7.1.3.219 `long double __gnu_cxx::radpolyl ( unsigned int __n, unsigned int __m, long double __rho )` `[inline]`

Definition at line 1852 of file `specfun.h`.

References `std::__detail::__poly_radial_jacobi()`.

7.1.3.220 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::sinc ( _Tp __x )` `[inline]`

Definition at line 1277 of file `specfun.h`.

7.1.3.221 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::sinc_pi ( _Tp __x ) [inline]`

Definition at line 1259 of file specfun.h.

7.1.3.222 `float __gnu_cxx::sinc_pif ( float __x ) [inline]`

Definition at line 1247 of file specfun.h.

7.1.3.223 `long double __gnu_cxx::sinc_pil ( long double __x ) [inline]`

Definition at line 1251 of file specfun.h.

7.1.3.224 `float __gnu_cxx::sincf ( float __x ) [inline]`

Definition at line 1268 of file specfun.h.

7.1.3.225 `long double __gnu_cxx::sincl ( long double __x ) [inline]`

Definition at line 1272 of file specfun.h.

7.1.3.226 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::sinhc ( _Tp __x ) [inline]`

Definition at line 1902 of file specfun.h.

7.1.3.227 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::sinhc_pi ( _Tp __x ) [inline]`

Definition at line 1881 of file specfun.h.

7.1.3.228 `float __gnu_cxx::sinhc_pif ( float __x ) [inline]`

Definition at line 1869 of file specfun.h.

7.1.3.229 `long double __gnu_cxx::sinhc_pil ( long double __x ) [inline]`

Definition at line 1873 of file specfun.h.

7.1.3.230 `float __gnu_cxx::sinhcf ( float __x ) [inline]`

Definition at line 1890 of file specfun.h.

7.1.3.231 `long double __gnu_cxx::sinhcl ( long double __x ) [inline]`

Definition at line 1894 of file specfun.h.

7.1.3.232 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::sinhint ( _Tp __x ) [inline]`

Return the hyperbolic sine integral of argument  $x$ .

The sine hyperbolic integral is defined by

#### Parameters

<code>__x</code>	The argument
------------------	--------------

Definition at line 1429 of file `specfun.h`.

7.1.3.233 `float __gnu_cxx::sinhintf ( float __x ) [inline]`

Return the hyperbolic sine integral of argument  $x$ .

See also

[sinhint](#) for details.

Definition at line 1405 of file `specfun.h`.

7.1.3.234 `long double __gnu_cxx::sinhintl ( long double __x ) [inline]`

Return the hyperbolic sine integral of argument  $x$ .

See also

[sinhint](#) for details.

Definition at line 1414 of file `specfun.h`.

7.1.3.235 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::sinint ( _Tp __x ) [inline]`

Return the sine integral of argument  $x$ .

The sine integral is defined by

#### Parameters

<code>__x</code>	The argument
------------------	--------------

Definition at line 1353 of file `specfun.h`.

7.1.3.236 `float __gnu_cxx::sinintf ( float __x ) [inline]`

Return the sine integral of argument  $x$ .

See also

[sinint](#) for details.

Definition at line 1329 of file `specfun.h`.

7.1.3.237 `long double __gnu_cxx::sinintl ( long double __x ) [inline]`

Return the sine integral of argument  $x$ .

See also

[sinint](#) for details.

Definition at line 1338 of file `specfun.h`.

7.1.3.238 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::sph_bessel_i ( unsigned int __n, _Tp __x ) [inline]`

Definition at line 2017 of file `specfun.h`.

7.1.3.239 `float __gnu_cxx::sph_bessel_if ( unsigned int __n, float __x ) [inline]`

Definition at line 1995 of file `specfun.h`.

7.1.3.240 `long double __gnu_cxx::sph_bessel_il ( unsigned int __n, long double __x ) [inline]`

Definition at line 2004 of file `specfun.h`.

7.1.3.241 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::sph_bessel_k ( unsigned int __n, _Tp __x ) [inline]`

Definition at line 2051 of file `specfun.h`.

7.1.3.242 `float __gnu_cxx::sph_bessel_kf ( unsigned int __n, float __x ) [inline]`

Definition at line 2029 of file `specfun.h`.

7.1.3.243 `long double __gnu_cxx::sph_bessel_kl ( unsigned int __n, long double __x ) [inline]`

Definition at line 2038 of file `specfun.h`.

7.1.3.244 `template<typename _Tp> std::complex<__gnu_cxx::__promote_num_t<_Tp> > __gnu_cxx::sph_hankel_1 ( unsigned int __n, _Tp __z ) [inline]`

Definition at line 1965 of file `specfun.h`.

7.1.3.245 `template<typename _Tp> std::complex<__gnu_cxx::__promote_num_t<_Tp> > __gnu_cxx::sph_hankel_1 ( unsigned int __n, std::complex<_Tp> __x ) [inline]`

Return the complex spherical Hankel function of the first kind of non-negative order  $n$  and complex argument  $x$ .

The spherical Hankel function of the first kind is defined by

$$h_n^{(1)}(x) = j_n(x) + in_n(x)$$

## Parameters

<code>__n</code>	The integral order $\geq 0$
<code>__x</code>	The complex argument

Definition at line 3414 of file `specfun.h`.

7.1.3.246 `std::complex<float> __gnu_cxx::sph_hankel_1f( unsigned int __n, float __z ) [inline]`

Definition at line 1953 of file `specfun.h`.

7.1.3.247 `std::complex<float> __gnu_cxx::sph_hankel_1f( unsigned int __n, std::complex< float > __x ) [inline]`

Definition at line 3393 of file `specfun.h`.

7.1.3.248 `std::complex<long double> __gnu_cxx::sph_hankel_1l( unsigned int __n, long double __z ) [inline]`

Definition at line 1957 of file `specfun.h`.

7.1.3.249 `std::complex<long double> __gnu_cxx::sph_hankel_1l( unsigned int __n, std::complex< long double > __x ) [inline]`

Definition at line 3397 of file `specfun.h`.

7.1.3.250 `template<typename _Tp > std::complex<__gnu_cxx::__promote_num_t<_Tp> > __gnu_cxx::sph_hankel_2( unsigned int __n, _Tp __z ) [inline]`

Definition at line 1986 of file `specfun.h`.

7.1.3.251 `template<typename _Tp > std::complex<__gnu_cxx::__promote_num_t<_Tp> > __gnu_cxx::sph_hankel_2( unsigned int __n, std::complex< _Tp > __x ) [inline]`

Return the complex spherical Hankel function of the second kind of non-negative order  $n$  and complex argument  $x$ .

The spherical Hankel function of the second kind is defined by

$$h_n^{(2)}(x) = j_n(x) - in_n(x)$$

## Parameters

<code>__n</code>	The integral order $\geq 0$
<code>__x</code>	The complex argument

Definition at line 3444 of file `specfun.h`.

7.1.3.252 `std::complex<float> __gnu_cxx::sph_hankel_2f( unsigned int __n, float __z ) [inline]`

Definition at line 1974 of file `specfun.h`.

7.1.3.253 `std::complex<float> __gnu_cxx::sph_hankel_2f ( unsigned int __n, std::complex< float > __x ) [inline]`

Definition at line 3423 of file specfun.h.

7.1.3.254 `std::complex<long double> __gnu_cxx::sph_hankel_2l ( unsigned int __n, long double __z ) [inline]`

Definition at line 1978 of file specfun.h.

7.1.3.255 `std::complex<long double> __gnu_cxx::sph_hankel_2l ( unsigned int __n, std::complex< long double > __x ) [inline]`

Definition at line 3427 of file specfun.h.

7.1.3.256 `template<typename _Ttheta , typename _Tphi > std::complex<__gnu_cxx::__promote_num_t<_Ttheta, _Tphi> > __gnu_cxx::sph_harmonic ( unsigned int __l, int __m, _Ttheta __theta, _Tphi __phi ) [inline]`

Return the complex spherical harmonic function of degree  $l$ , order  $m$ , and real zenith angle  $\theta$ , and real azimuth angle  $\phi$ .

The spherical harmonic function is defined by:

$$Y_l^m(\theta, \phi) = (-1)^m \left[ \frac{(2l+1)}{4\pi} \frac{(l-m)!}{(l+m)!} \right] P_l^{|m|}(\cos \theta) \exp^{im\phi}$$

#### Parameters

<code>__l</code>	The order
<code>__m</code>	The degree
<code>__theta</code>	The zenith angle in radians
<code>__phi</code>	The azimuth angle in radians

Definition at line 3494 of file specfun.h.

7.1.3.257 `std::complex<float> __gnu_cxx::sph_harmonicf ( unsigned int __l, int __m, float __theta, float __phi ) [inline]`

Return the complex spherical harmonic function of degree  $l$ , order  $m$ , and real zenith angle  $\theta$ , and real azimuth angle  $\phi$ .

#### See also

[sph\\_harmonic](#) for details.

Definition at line 3459 of file specfun.h.

7.1.3.258 `std::complex<long double> __gnu_cxx::sph_harmonicl ( unsigned int __l, int __m, long double __theta, long double __phi ) [inline]`

Return the complex spherical harmonic function of degree  $l$ , order  $m$ , and real zenith angle  $\theta$ , and real azimuth angle  $\phi$ .

See also

[sph\\_harmonic](#) for details.

Definition at line 3470 of file specfun.h.

```
7.1.3.259  template<typename _Tpnu, typename _Tp> __gnu_cxx::__promote_num_t<_Tpnu, _Tp> __gnu_cxx::theta_1 ( _Tpnu
    __nu, _Tp __x )  [inline]
```

Return the exponential theta-1 function of period `nu` and argument `x`.

The Neville theta-1 function is defined by

$$\theta_1(\nu, x) = \frac{1}{\sqrt{\pi x}} \sum_{j=-\infty}^{+\infty} (-1)^j \exp\left(\frac{-(\nu + j - 1/2)^2}{x}\right)$$

Parameters

<code>__nu</code>	The periodic (period = 2) argument
<code>__x</code>	The argument

Definition at line 3780 of file specfun.h.

```
7.1.3.260  float __gnu_cxx::theta_1f( float __nu, float __x )  [inline]
```

Return the exponential theta-1 function of period `nu` and argument `x`.

See also

[theta\\_1](#) for details.

Definition at line 3754 of file specfun.h.

```
7.1.3.261  long double __gnu_cxx::theta_1l( long double __nu, long double __x )  [inline]
```

Return the exponential theta-1 function of period `nu` and argument `x`.

See also

[theta\\_1](#) for details.

Definition at line 3763 of file specfun.h.

```
7.1.3.262  template<typename _Tpnu, typename _Tp> __gnu_cxx::__promote_num_t<_Tpnu, _Tp> __gnu_cxx::theta_2 ( _Tpnu
    __nu, _Tp __x )  [inline]
```

Return the exponential theta-2 function of period `nu` and argument `x`.

The exponential theta-2 function is defined by

$$\theta_2(\nu, x) = \frac{1}{\sqrt{\pi x}} \sum_{j=-\infty}^{+\infty} (-1)^j \exp\left(\frac{-(\nu + j)^2}{x}\right)$$

## Parameters

<code>__nu</code>	The periodic (period = 2) argument
<code>__x</code>	The argument

Definition at line 3820 of file `specfun.h`.

7.1.3.263 `float __gnu_cxx::theta_2f( float __nu, float __x ) [inline]`

Return the exponential theta-2 function of period `nu` and argument `x`.

## See also

[theta\\_2](#) for details.

Definition at line 3794 of file `specfun.h`.

7.1.3.264 `long double __gnu_cxx::theta_2l( long double __nu, long double __x ) [inline]`

Return the exponential theta-2 function of period `nu` and argument `x`.

## See also

[theta\\_2](#) for details.

Definition at line 3803 of file `specfun.h`.

7.1.3.265 `template<typename _Tpnu, typename _Tp> __gnu_cxx::__promote_num_t<_Tpnu, _Tp> __gnu_cxx::theta_3( _Tpnu __nu, _Tp __x ) [inline]`

Return the exponential theta-3 function of period `nu` and argument `x`.

The exponential theta-3 function is defined by

$$\theta_3(\nu, x) = \frac{1}{\sqrt{\pi x}} \sum_{j=-\infty}^{+\infty} \exp\left(\frac{-(\nu + j)^2}{x}\right)$$

## Parameters

<code>__nu</code>	The periodic (period = 1) argument
<code>__x</code>	The argument

Definition at line 3860 of file `specfun.h`.

7.1.3.266 `float __gnu_cxx::theta_3f( float __nu, float __x ) [inline]`

Return the exponential theta-3 function of period `nu` and argument `x`.

## See also

[theta\\_3](#) for details.

Definition at line 3834 of file `specfun.h`.



7.1.3.267 `long double __gnu_cxx::theta_3l( long double __nu, long double __x )` `[inline]`

Return the exponential theta-3 function of period `nu` and argument `x`.

See also

[theta\\_3](#) for details.

Definition at line 3843 of file `specfun.h`.

7.1.3.268 `template<typename _Tpnu, typename _Tp> __gnu_cxx::__promote_num_t<_Tpnu, _Tp> __gnu_cxx::theta_4( _Tpnu __nu, _Tp __x )` `[inline]`

Return the exponential theta-4 function of period `nu` and argument `x`.

The exponential theta-4 function is defined by

$$\theta_4(\nu, x) = \frac{1}{\sqrt{\pi x}} \sum_{j=-\infty}^{+\infty} \exp\left(\frac{-(\nu + j + 1/2)^2}{x}\right)$$

Parameters

<code>__nu</code>	The periodic (period = 1) argument
<code>__x</code>	The argument

Definition at line 3900 of file `specfun.h`.

7.1.3.269 `float __gnu_cxx::theta_4f( float __nu, float __x )` `[inline]`

Return the exponential theta-4 function of period `nu` and argument `x`.

See also

[theta\\_4](#) for details.

Definition at line 3874 of file `specfun.h`.

7.1.3.270 `long double __gnu_cxx::theta_4l( long double __nu, long double __x )` `[inline]`

Return the exponential theta-4 function of period `nu` and argument `x`.

See also

[theta\\_4](#) for details.

Definition at line 3883 of file `specfun.h`.

7.1.3.271 `template<typename _Tpk, typename _Tp> __gnu_cxx::__promote_num_t<_Tpk, _Tp> __gnu_cxx::theta_c( _Tpk __k, _Tp __x )` `[inline]`

Return the Neville theta-c function of modulus `k` and argument `x`.

The Neville theta-c function is defined by

## Parameters

<code>__k</code>	The modulus $-1 \leq k \leq +1$
<code>__x</code>	The argument

Definition at line 4006 of file specfun.h.

7.1.3.272 `float __gnu_cxx::theta_cf( float __k, float __x ) [inline]`

Return the Neville theta-c function of modulus  $k$  and argument  $x$ .

## See also

[theta\\_c](#) for details.

Definition at line 3981 of file specfun.h.

7.1.3.273 `long double __gnu_cxx::theta_cl( long double __k, long double __x ) [inline]`

Return the Neville theta-c function of modulus  $k$  and argument  $x$ .

## See also

[theta\\_c](#) for details.

Definition at line 3990 of file specfun.h.

7.1.3.274 `template<typename _Tpk, typename _Tp> __gnu_cxx::promote_num_t<_Tpk, _Tp> __gnu_cxx::theta_d( _Tpk __k, _Tp __x ) [inline]`

Return the Neville theta-d function of modulus  $k$  and argument  $x$ .

The Neville theta-d function is defined by

## Parameters

<code>__k</code>	The modulus $-1 \leq k \leq +1$
<code>__x</code>	The argument

Definition at line 4045 of file specfun.h.

7.1.3.275 `float __gnu_cxx::theta_df( float __k, float __x ) [inline]`

Return the Neville theta-d function of modulus  $k$  and argument  $x$ .

## See also

[theta\\_d](#) for details.

Definition at line 4020 of file specfun.h.

7.1.3.276 `long double __gnu_cxx::theta_dl ( long double __k, long double __x ) [inline]`

Return the Neville theta-d function of modulus  $k$  and argument  $x$ .

See also

[theta\\_d](#) for details.

Definition at line 4029 of file specfun.h.

7.1.3.277 `template<typename _Tp, typename _Tp> __gnu_cxx::__promote_num_t<_Tp, _Tp> __gnu_cxx::theta_n ( _Tp __k, _Tp __x ) [inline]`

Return the Neville theta-n function of modulus  $k$  and argument  $x$ .

The Neville theta-n function is defined by

Parameters

<code>__k</code>	The modulus $-1 \leq k \leq +1$
<code>__x</code>	The argument

Definition at line 4084 of file specfun.h.

7.1.3.278 `float __gnu_cxx::theta_nf ( float __k, float __x ) [inline]`

Return the Neville theta-n function of modulus  $k$  and argument  $x$ .

See also

[theta\\_n](#) for details.

Definition at line 4059 of file specfun.h.

7.1.3.279 `long double __gnu_cxx::theta_nl ( long double __k, long double __x ) [inline]`

Return the Neville theta-n function of modulus  $k$  and argument  $x$ .

See also

[theta\\_n](#) for details.

Definition at line 4068 of file specfun.h.

7.1.3.280 `template<typename _Tp, typename _Tp> __gnu_cxx::__promote_num_t<_Tp, _Tp> __gnu_cxx::theta_s ( _Tp __k, _Tp __x ) [inline]`

Return the Neville theta-s function of modulus  $k$  and argument  $x$ .

The Neville theta-s function is defined by

## Parameters

<code>__k</code>	The modulus $-1 \leq k \leq +1$
<code>__x</code>	The argument

Definition at line 3967 of file specfun.h.

7.1.3.281 `float __gnu_cxx::theta_sf ( float __k, float __x ) [inline]`

Return the Neville theta-s function of modulus `k` and argument `x`.

See also

[theta\\_s](#) for details.

Definition at line 3942 of file specfun.h.

7.1.3.282 `long double __gnu_cxx::theta_sl ( long double __k, long double __x ) [inline]`

Return the Neville theta-s function of modulus `k` and argument `x`.

See also

[theta\\_s](#) for details.

Definition at line 3951 of file specfun.h.

7.1.3.283 `template<typename _Trho, typename _Tphi> __gnu_cxx::__promote_num_t<_Trho, _Tphi> __gnu_cxx::zernike ( unsigned int __n, int __m, _Trho __rho, _Tphi __phi ) [inline]`

Definition at line 1839 of file specfun.h.

7.1.3.284 `float __gnu_cxx::zernikef ( unsigned int __n, int __m, float __rho, float __phi ) [inline]`

Definition at line 1827 of file specfun.h.

7.1.3.285 `long double __gnu_cxx::zernikel ( unsigned int __n, int __m, long double __rho, long double __phi ) [inline]`

Definition at line 1831 of file specfun.h.

## 7.2 Mathematical Special Functions

### Functions

- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type std::assoc_laguerre` (unsigned int \_\_n, unsigned int \_\_m, \_Tp \_\_x)
- `float std::assoc_laguerref` (unsigned int \_\_n, unsigned int \_\_m, float \_\_x)
- `long double std::assoc_laguerrel` (unsigned int \_\_n, unsigned int \_\_m, long double \_\_x)
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type std::assoc_legendre` (unsigned int \_\_l, unsigned int \_\_m, \_Tp \_\_x)
- `float std::assoc_legendref` (unsigned int \_\_l, unsigned int \_\_m, float \_\_x)
- `long double std::assoc_legendrel` (unsigned int \_\_l, unsigned int \_\_m, long double \_\_x)
- `template<typename _Tpa, typename _Tpb >`  
`__gnu_cxx::__promote_2< _Tpa, _Tpb >::__type std::beta` (\_Tpa \_\_a, \_Tpb \_\_b)
- `float std::betaf` (float \_\_a, float \_\_b)
- `long double std::betal` (long double \_\_a, long double \_\_b)
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type std::comp_ellint_1` (\_Tp \_\_k)
- `float std::comp_ellint_1f` (float \_\_k)
- `long double std::comp_ellint_1l` (long double \_\_k)
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type std::comp_ellint_2` (\_Tp \_\_k)
- `float std::comp_ellint_2f` (float \_\_k)
- `long double std::comp_ellint_2l` (long double \_\_k)
- `template<typename _Tp, typename _Tpn >`  
`__gnu_cxx::__promote_2< _Tp, _Tpn >::__type std::comp_ellint_3` (\_Tp \_\_k, \_Tpn \_\_nu)
- `float std::comp_ellint_3f` (float \_\_k, float \_\_nu)
- Return the complete elliptic integral of the third kind  $\Pi(k, \nu)$  for float modulus k.*
- `long double std::comp_ellint_3l` (long double \_\_k, long double \_\_nu)
- Return the complete elliptic integral of the third kind  $\Pi(k, \nu)$  for long double modulus k.*
- `template<typename _Tpnu, typename _Tp >`  
`__gnu_cxx::__promote_2< _Tpnu, _Tp >::__type std::cyl_bessel_i` (\_Tpnu \_\_nu, \_Tp \_\_x)
- `float std::cyl_bessel_if` (float \_\_nu, float \_\_x)
- `long double std::cyl_bessel_il` (long double \_\_nu, long double \_\_x)
- `template<typename _Tpnu, typename _Tp >`  
`__gnu_cxx::__promote_2< _Tpnu, _Tp >::__type std::cyl_bessel_j` (\_Tpnu \_\_nu, \_Tp \_\_x)
- `float std::cyl_bessel_jf` (float \_\_nu, float \_\_x)
- `long double std::cyl_bessel_jl` (long double \_\_nu, long double \_\_x)
- `template<typename _Tpnu, typename _Tp >`  
`__gnu_cxx::__promote_2< _Tpnu, _Tp >::__type std::cyl_bessel_k` (\_Tpnu \_\_nu, \_Tp \_\_x)
- `float std::cyl_bessel_kf` (float \_\_nu, float \_\_x)
- `long double std::cyl_bessel_kl` (long double \_\_nu, long double \_\_x)
- `template<typename _Tpnu, typename _Tp >`  
`__gnu_cxx::__promote_2< _Tpnu, _Tp >::__type std::cyl_neumann` (\_Tpnu \_\_nu, \_Tp \_\_x)
- `float std::cyl_neumannf` (float \_\_nu, float \_\_x)
- `long double std::cyl_neumannl` (long double \_\_nu, long double \_\_x)
- `template<typename _Tp, typename _Tpp >`  
`__gnu_cxx::__promote_2< _Tp, _Tpp >::__type std::ellint_1` (\_Tp \_\_k, \_Tpp \_\_phi)
- `float std::ellint_1f` (float \_\_k, float \_\_phi)
- `long double std::ellint_1l` (long double \_\_k, long double \_\_phi)

- `template<typename _Tp, typename _Tpp >`  
`__gnu_cxx::__promote_2< _Tp, _Tpp >::__type std::ellint_2 ( _Tp __k, _Tpp __phi)`
- `float std::ellint_2f (float __k, float __phi)`  
*Return the incomplete elliptic integral of the second kind  $E(k, \phi)$  for `float` argument.*
- `long double std::ellint_2l (long double __k, long double __phi)`  
*Return the incomplete elliptic integral of the second kind  $E(k, \phi)$ .*
- `template<typename _Tp, typename _Tpn, typename _Tpp >`  
`__gnu_cxx::__promote_3< _Tp, _Tpn, _Tpp >::__type std::ellint_3 ( _Tp __k, _Tpn __nu, _Tpp __phi)`  
*Return the incomplete elliptic integral of the third kind  $\Pi(k, \nu, \phi)$ .*
- `float std::ellint_3f (float __k, float __nu, float __phi)`  
*Return the incomplete elliptic integral of the third kind  $\Pi(k, \nu, \phi)$  for `float` argument.*
- `long double std::ellint_3l (long double __k, long double __nu, long double __phi)`  
*Return the incomplete elliptic integral of the third kind  $\Pi(k, \nu, \phi)$ .*
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type std::expint ( _Tp __x)`
- `float std::expintf (float __x)`
- `long double std::expintl (long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type std::hermite (unsigned int __n, _Tp __x)`
- `float std::hermitef (unsigned int __n, float __x)`
- `long double std::hermitel (unsigned int __n, long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type std::laguerre (unsigned int __n, _Tp __x)`
- `float std::laguerref (unsigned int __n, float __x)`
- `long double std::laguerrel (unsigned int __n, long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type std::legendre (unsigned int __l, _Tp __x)`
- `float std::legendref (unsigned int __l, float __x)`
- `long double std::legendrel (unsigned int __l, long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type std::riemann_zeta ( _Tp __s)`
- `float std::riemann_zetaf (float __s)`
- `long double std::riemann_zetal (long double __s)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type std::sph_bessel (unsigned int __n, _Tp __x)`
- `float std::sph_besself (unsigned int __n, float __x)`
- `long double std::sph_bessell (unsigned int __n, long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type std::sph_legendre (unsigned int __l, unsigned int __m, _Tp __theta)`
- `float std::sph_legendref (unsigned int __l, unsigned int __m, float __theta)`
- `long double std::sph_legendrel (unsigned int __l, unsigned int __m, long double __theta)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type std::sph_neumann (unsigned int __n, _Tp __x)`
- `float std::sph_neumannf (unsigned int __n, float __x)`
- `long double std::sph_neumannl (unsigned int __n, long double __x)`

### 7.2.1 Detailed Description

A collection of advanced mathematical special functions.

### 7.2.2 Function Documentation

**7.2.2.1** `template<typename _Tp> __gnu_cxx::__promote<_Tp>::__type std::assoc_laguerre ( unsigned int __n, unsigned int __m, _Tp __x ) [inline]`

Return the associated Laguerre polynomial of order  $n$ , degree  $m$ :  $L_n^m(x)$ .

The associated Laguerre function of real degree  $\alpha$ ,  $L_n^\alpha(x)$ , is defined by

$$L_n^\alpha(x) = \frac{(\alpha+1)_n}{n!} {}_1F_1(-n; \alpha+1; x)$$

where  $(\alpha)_n$  is the Pochhammer symbol and  ${}_1F_1(a; c; x)$  is the confluent hypergeometric function.

The associated Laguerre polynomial is defined for integral degree  $\alpha = m$  by:

$$L_n^m(x) = (-1)^m \frac{d^m}{dx^m} L_{n+m}(x)$$

where the Laguerre polynomial is defined by:

$$L_n(x) = \frac{e^x}{n!} \frac{d^n}{dx^n} (x^n e^{-x})$$

#### Parameters

<code>__n</code>	The order of the Laguerre function.
<code>__m</code>	The degree of the Laguerre function.
<code>__x</code>	The argument of the Laguerre function.

Definition at line 197 of file specfun.h.

**7.2.2.2** `float std::assoc_laguerref ( unsigned int __n, unsigned int __m, float __x ) [inline]`

Return the associated Laguerre polynomial of order  $n$ , degree  $m$ :  $L_n^m(x)$  for `float` argument.

See also

[assoc\\_laguerre](#) for more details.

Definition at line 155 of file specfun.h.

**7.2.2.3** `long double std::assoc_laguerrel ( unsigned int __n, unsigned int __m, long double __x ) [inline]`

Return the associated Laguerre polynomial of order  $n$ , degree  $m$ :  $L_n^m(x)$ .

See also

[assoc\\_laguerre](#) for more details.

Definition at line 165 of file specfun.h.

**7.2.2.4** `template<typename _Tp> __gnu_cxx::__promote<_Tp>::__type std::assoc_legendre ( unsigned int __l, unsigned int __m, _Tp __x ) [inline]`

Return the associated Legendre function of degree  $l$  and order  $m$ .

The associated Legendre function is derived from the Legendre function  $P_l(x)$  by the Rodrigues formula:

$$P_l^m(x) = (1 - x^2)^{m/2} \frac{d^m}{dx^m} P_l(x)$$

#### Parameters

<code>__l</code>	The degree of the associated Legendre function. $l \geq 0$ .
<code>__m</code>	The order of the associated Legendre function. $m \leq l$ .
<code>__x</code>	The argument of the associated Legendre function. $ x  \leq 1$ .

Definition at line 242 of file specfun.h.

**7.2.2.5** `float std::assoc_legendref ( unsigned int __l, unsigned int __m, float __x ) [inline]`

Return the associated Legendre function of degree `l` and order `m` for `float` argument.

See also

[assoc\\_legendre](#) for more details.

Definition at line 212 of file specfun.h.

**7.2.2.6** `long double std::assoc_legendrel ( unsigned int __l, unsigned int __m, long double __x ) [inline]`

Return the associated Legendre function of degree `l` and order `m`.

See also

[assoc\\_legendre](#) for more details.

Definition at line 221 of file specfun.h.

**7.2.2.7** `template<typename _Tpa, typename _Tpb> __gnu_cxx::__promote_2<_Tpa, _Tpb>::__type std::beta ( _Tpa __a, _Tpb __b ) [inline]`

Return the beta function,  $B(a, b)$ , for real parameters `a`, `b`.

The beta function is defined by

$$B(a, b) = \int_0^1 t^{a-1} (1-t)^{b-1} dt = \frac{\Gamma(a)\Gamma(b)}{\Gamma(a+b)}$$

#### Parameters

<code>__a</code>	The first argument of the beta function.
<code>__b</code>	The second argument of the beta function.

Definition at line 283 of file specfun.h.

**7.2.2.8** `float std::betaf ( float __a, float __b ) [inline]`

Return the beta function,  $B(a, b)$ , for `float` parameters `a`, `b`.



See also

[beta](#) for more details.

Definition at line 256 of file specfun.h.

**7.2.2.9** `long double std::betal ( long double __a, long double __b ) [inline]`

Return the beta function,  $B(a, b)$ , for long double parameters a, b.

See also

[beta](#) for more details.

Definition at line 266 of file specfun.h.

**7.2.2.10** `template<typename _Tp> __gnu_cxx::__promote<_Tp>::__type std::comp_ellint_1 ( _Tp __k ) [inline]`

Return the complete elliptic integral of the first kind  $K(k)$  for real modulus k.

The complete elliptic integral of the first kind is defined as

$$K(k) = F(k, \pi/2) = \int_0^{\pi/2} \frac{d\theta}{\sqrt{1 - k^2 \sin^2 \theta}}$$

where  $F(k, \phi)$  is the incomplete elliptic integral of the first kind.

Parameters

<code>__k</code>	The modulus
------------------	-------------

Definition at line 327 of file specfun.h.

**7.2.2.11** `float std::comp_ellint_1f ( float __k ) [inline]`

Return the complete elliptic integral of the first kind  $E(k)$  for float modulus k.

See also

[comp\\_ellint\\_1](#) for details.

Definition at line 298 of file specfun.h.

**7.2.2.12** `long double std::comp_ellint_1l ( long double __k ) [inline]`

Return the complete elliptic integral of the first kind  $E(k)$  for long double modulus k.

See also

[comp\\_ellint\\_1](#) for details.

Definition at line 308 of file specfun.h.

**7.2.2.13** `template<typename _Tp> __gnu_cxx::__promote<_Tp>::__type std::comp_ellint_2( _Tp __k ) [inline]`

Return the complete elliptic integral of the second kind  $E(k)$  for real modulus  $k$ .

The complete elliptic integral of the second kind is defined as

$$E(k, \pi/2) = \int_0^{\pi/2} \sqrt{1 - k^2 \sin^2 \theta} d\theta$$

#### Parameters

<code>__k</code>	The modulus
------------------	-------------

Definition at line 368 of file `specfun.h`.

**7.2.2.14** `float std::comp_ellint_2f( float __k ) [inline]`

Return the complete elliptic integral of the second kind  $E(k)$  for `float` modulus  $k$ .

See also

[comp\\_ellint\\_2](#) for details.

Definition at line 342 of file `specfun.h`.

**7.2.2.15** `long double std::comp_ellint_2l( long double __k ) [inline]`

Return the complete elliptic integral of the second kind  $E(k)$  for long double modulus  $k$ .

See also

[comp\\_ellint\\_2](#) for details.

Definition at line 352 of file `specfun.h`.

**7.2.2.16** `template<typename _Tp, typename _Tpn> __gnu_cxx::__promote_2<_Tp, _Tpn>::__type std::comp_ellint_3( _Tp __k, _Tpn __nu ) [inline]`

Return the complete elliptic integral of the third kind  $\Pi(k, \nu) = \Pi(k, \nu, \pi/2)$  for real modulus  $k$ .

The complete elliptic integral of the third kind is defined as

$$\Pi(k, \nu) = \int_0^{\pi/2} \frac{d\theta}{(1 - \nu \sin^2 \theta) \sqrt{1 - k^2 \sin^2 \theta}}$$

#### Parameters

<code>__k</code>	The modulus of the elliptic function.
------------------	---------------------------------------

<code>__nu</code>	The argument of the elliptic function.
-------------------	--

Definition at line 412 of file `specfun.h`.

**7.2.2.17** `float std::comp_ellint_3f( float __k, float __nu ) [inline]`

Return the complete elliptic integral of the third kind  $\Pi(k, \nu)$  for `float` modulus `k`.

See also

[comp\\_ellint\\_3](#) for details.

Definition at line 383 of file `specfun.h`.

**7.2.2.18** `long double std::comp_ellint_3l( long double __k, long double __nu ) [inline]`

Return the complete elliptic integral of the third kind  $\Pi(k, \nu)$  for `long double` modulus `k`.

See also

[comp\\_ellint\\_3](#) for details.

Definition at line 393 of file `specfun.h`.

**7.2.2.19** `template<typename _Tpnu, typename _Tp> __gnu_cxx::__promote_2<_Tpnu, _Tp>::__type std::cyl_bessel_i( _Tpnu __nu, _Tp __x ) [inline]`

Return the regular modified Bessel function  $I_\nu(x)$  of real order  $\nu$  and argument  $x$ .

The regular modified cylindrical Bessel function is:

$$I_\nu(x) = \sum_{k=0}^{\infty} \frac{(x/2)^{\nu+2k}}{k! \Gamma(\nu + k + 1)}$$

Parameters

<code>__nu</code>	The order of the regular modified Bessel function.
<code>__x</code>	The argument of the regular modified Bessel function.

Definition at line 455 of file `specfun.h`.

**7.2.2.20** `float std::cyl_bessel_if( float __nu, float __x ) [inline]`

Return the regular modified Bessel function  $I_\nu(x)$  of `float` order  $\nu$  and argument  $x$ .

See also

[cyl\\_bessel\\_i](#) for details.

Definition at line 427 of file `specfun.h`.

7.2.2.21 `long double std::cyl_bessel_il( long double __nu, long double __x ) [inline]`

Return the regular modified Bessel function  $I_\nu(x)$  of `long double` order  $\nu$  and argument  $x$ .

See also

[cyl\\_bessel\\_i](#) for setails.

Definition at line 437 of file `specfun.h`.

7.2.2.22 `template<typename _Tpnu, typename _Tp> __gnu_cxx::__promote_2<_Tpnu, _Tp>::__type std::cyl_bessel_j( _Tpnu __nu, _Tp __x ) [inline]`

Return the Bessel function  $J_\nu(x)$  of real order  $\nu$  and argument  $x$ .

The cylindrical Bessel function is:

$$J_\nu(x) = \sum_{k=0}^{\infty} \frac{(-1)^k (x/2)^{\nu+2k}}{k! \Gamma(\nu + k + 1)}$$

Parameters

<code>__nu</code>	The order of the Bessel function.
<code>__x</code>	The argument of the Bessel function.

Definition at line 498 of file `specfun.h`.

7.2.2.23 `float std::cyl_bessel_jf( float __nu, float __x ) [inline]`

Return the Bessel function of the first kind  $J_\nu(x)$  of `float` order  $\nu$  and argument  $x$ .

See also

[cyl\\_bessel\\_j](#) for setails.

Definition at line 470 of file `specfun.h`.

7.2.2.24 `long double std::cyl_bessel_jl( long double __nu, long double __x ) [inline]`

Return the Bessel function of the first kind  $J_\nu(x)$  of `long double` order  $\nu$  and argument  $x$ .

See also

[cyl\\_bessel\\_j](#) for setails.

Definition at line 480 of file `specfun.h`.

7.2.2.25 `template<typename _Tpnu, typename _Tp> __gnu_cxx::__promote_2<_Tpnu, _Tp>::__type std::cyl_bessel_k( _Tpnu __nu, _Tp __x ) [inline]`

Return the irregular modified Bessel function  $K_\nu(x)$  of real order  $\nu$  and argument  $x$ .

The irregular modified Bessel function is defined by:

$$K_{\nu}(x) = \frac{\pi}{2} \frac{I_{-\nu}(x) - I_{\nu}(x)}{\sin \nu\pi}$$

where for integral  $\nu = n$  a limit is taken:  $\lim_{\nu \rightarrow n}$ . For negative argument we have simply:

$$K_{-\nu}(x) = K_{\nu}(x)$$

#### Parameters

<code>__nu</code>	The order of the irregular modified Bessel function.
<code>__x</code>	The argument of the irregular modified Bessel function.

Definition at line 547 of file specfun.h.

**7.2.2.26** `float std::cyl_bessel_kf( float __nu, float __x ) [inline]`

Return the irregular modified Bessel function  $K_{\nu}(x)$  of `float` order  $\nu$  for and argument  $x$ .

See also

[cyl\\_bessel\\_k](#) for details.

Definition at line 513 of file specfun.h.

**7.2.2.27** `long double std::cyl_bessel_kl( long double __nu, long double __x ) [inline]`

Return the irregular modified Bessel function  $K_{\nu}(x)$  of `long double` order  $\nu$  for and argument  $x$ .

See also

[cyl\\_bessel\\_k](#) for details.

Definition at line 523 of file specfun.h.

**7.2.2.28** `template<typename _Tpnu, typename _Tp> __gnu_cxx::__promote_2<_Tpnu, _Tp>::__type std::cyl_neumann( _Tpnu __nu, _Tp __x ) [inline]`

Return the Neumann function  $N_{\nu}(x)$  of real order  $\nu$  and argument  $x$ .

The Neumann function is defined by:

$$N_{\nu}(x) = \frac{J_{\nu}(x) \cos \nu\pi - J_{-\nu}(x)}{\sin \nu\pi}$$

where for integral  $\nu = n$  a limit is taken:  $\lim_{\nu \rightarrow n}$ .

#### Parameters

<code>__nu</code>	The order of the Neumann function.
<code>__x</code>	The argument of the Neumann function.

Definition at line 592 of file specfun.h.

7.2.2.29 `float std::cyl_neumannf ( float __nu, float __x ) [inline]`

Return the Neumann function  $N_\nu(x)$  of `float` order  $\nu$  and argument  $x$ .

See also

[cyl\\_neumann](#) for setails.

Definition at line 562 of file `specfun.h`.

7.2.2.30 `long double std::cyl_neumannl ( long double __nu, long double __x ) [inline]`

Return the Neumann function  $N_\nu(x)$  of `long double` order  $\nu$  and argument  $x$ .

See also

[cyl\\_neumann](#) for setails.

Definition at line 572 of file `specfun.h`.

7.2.2.31 `template<typename _Tp, typename _Tpp > __gnu_cxx::__promote_2<_Tp, _Tpp>::__type std::ellint_1 ( _Tp __k, _Tpp __phi ) [inline]`

Return the incomplete elliptic integral of the first kind  $F(k, \phi)$  for `real` modulus  $k$  and angle  $\phi$ .

The incomplete elliptic integral of the first kind is defined as

$$F(k, \phi) = \int_0^\phi \frac{d\theta}{\sqrt{1 - k^2 \sin^2 \theta}}$$

For  $\phi = \pi/2$  this becomes the complete elliptic integral of the first kind,  $K(k)$ .

See also

[comp\\_ellint\\_1](#).

Parameters

<code>__k</code>	The modulus of the elliptic function.
<code>__phi</code>	The integral limit argument of the elliptic function.

Definition at line 637 of file `specfun.h`.

7.2.2.32 `float std::ellint_1f ( float __k, float __phi ) [inline]`

Return the incomplete elliptic integral of the first kind  $E(k, \phi)$  for `float` modulus  $k$  and angle  $\phi$ .

See also

[ellint\\_1](#) for details.

Definition at line 607 of file `specfun.h`.

7.2.2.33 `long double std::ellint_1( long double __k, long double __phi )` `[inline]`

Return the incomplete elliptic integral of the first kind  $E(k, \phi)$  for `long double` modulus  $k$  and angle  $\phi$ .

See also

[ellint\\_1](#) for details.

Definition at line 617 of file `specfun.h`.

7.2.2.34 `template<typename _Tp, typename _Tpp> __gnu_cxx::__promote_2<_Tp, _Tpp>::__type std::ellint_2( _Tp __k, _Tpp __phi )` `[inline]`

Return the incomplete elliptic integral of the second kind  $E(k, \phi)$ .

The incomplete elliptic integral of the second kind is defined as

$$E(k, \phi) = \int_0^\phi \sqrt{1 - k^2 \sin^2 \theta} d\theta$$

For  $\phi = \pi/2$  this becomes the complete elliptic integral of the second kind,  $E(k)$ .

See also

[comp\\_ellint\\_2](#).

Parameters

<code>__k</code>	The argument of the elliptic function.
<code>__phi</code>	The integral limit argument of the elliptic function.

Returns

The elliptic function of the second kind.

Definition at line 682 of file `specfun.h`.

7.2.2.35 `float std::ellint_2f( float __k, float __phi )` `[inline]`

Return the incomplete elliptic integral of the second kind  $E(k, \phi)$  for `float` argument.

See also

[ellint\\_2](#) for details.

Definition at line 652 of file `specfun.h`.

7.2.2.36 `long double std::ellint_2l( long double __k, long double __phi )` `[inline]`

Return the incomplete elliptic integral of the second kind  $E(k, \phi)$ .

See also

[ellint\\_2](#) for details.

Definition at line 662 of file `specfun.h`.

**7.2.2.37** `template<typename _Tp, typename _Tpn, typename _Tpp> __gnu_cxx::__promote_3<_Tp, _Tpn, _Tpp>::__type  
std::ellint_3 ( _Tp __k, _Tpn __nu, _Tpp __phi ) [inline]`

Return the incomplete elliptic integral of the third kind  $\Pi(k, \nu, \phi)$ .

The incomplete elliptic integral of the third kind is defined by:

$$\Pi(k, \nu, \phi) = \int_0^\phi \frac{d\theta}{(1 - \nu \sin^2 \theta) \sqrt{1 - k^2 \sin^2 \theta}}$$

For  $\phi = \pi/2$  this becomes the complete elliptic integral of the third kind,  $\Pi(k, \nu)$ .

See also

[comp\\_ellint\\_3](#).

Parameters

<code>__k</code>	The modulus of the elliptic function.
<code>__nu</code>	The second argument of the elliptic function.
<code>__phi</code>	The integral limit argument of the elliptic function.

Returns

The elliptic function of the third kind.

Definition at line 731 of file specfun.h.

**7.2.2.38** `float std::ellint_3f ( float __k, float __nu, float __phi ) [inline]`

Return the incomplete elliptic integral of the third kind  $\Pi(k, \nu, \phi)$  for `float` argument.

See also

[ellint\\_3](#) for details.

Definition at line 697 of file specfun.h.

**7.2.2.39** `long double std::ellint_3l ( long double __k, long double __nu, long double __phi ) [inline]`

Return the incomplete elliptic integral of the third kind  $\Pi(k, \nu, \phi)$ .

See also

[ellint\\_3](#) for details.

Definition at line 707 of file specfun.h.

**7.2.2.40** `template<typename _Tp> __gnu_cxx::__promote<_Tp>::__type std::expint ( _Tp __x ) [inline]`

Return the exponential integral  $Ei(x)$  for `real` argument `x`.

The exponential integral is given by

$$Ei(x) = - \int_{-x}^{\infty} \frac{e^t}{t} dt$$



## Parameters

<code>__x</code>	The argument of the exponential integral function.
------------------	--

Definition at line 770 of file specfun.h.

**7.2.2.41** `float std::expintf ( float __x ) [inline]`

Return the exponential integral  $Ei(x)$  for `float` argument `x`.

See also

[expint](#) for details.

Definition at line 745 of file specfun.h.

**7.2.2.42** `long double std::expintl ( long double __x ) [inline]`

Return the exponential integral  $Ei(x)$  for `long double` argument `x`.

See also

[expint](#) for details.

Definition at line 755 of file specfun.h.

**7.2.2.43** `template<typename _Tp> __gnu_cxx::__promote<_Tp>::__type std::hermite ( unsigned int __n, _Tp __x ) [inline]`

Return the Hermite polynomial of order  $n$ ,  $H_n(x)$ , for `real` argument `x`.

The Hermite polynomial is defined by:

$$H_n(x) = (-1)^n e^{x^2} \frac{d^n}{dx^n} e^{-x^2}$$

The Hermite polynomial obeys a reflection formula:

$$H_n(-x) = (-1)^n H_n(x)$$

## Parameters

<code>__n</code>	The order
<code>__x</code>	The argument

Definition at line 817 of file specfun.h.

**7.2.2.44** `float std::hermitef ( unsigned int __n, float __x ) [inline]`

Return the Hermite polynomial of order  $n$ ,  $H_n(x)$ , for `float` argument `x`.

See also

[hermite](#) for details.

Definition at line 785 of file specfun.h.

**7.2.2.45** `long double std::hermitel ( unsigned int __n, long double __x ) [inline]`

Return the Hermite polynomial of order  $n$ ,  $H_n(x)$ , for `long double` argument  $x$ .

See also

[hermite](#) for details.

Definition at line 795 of file `specfun.h`.

**7.2.2.46** `template<typename _Tp> __gnu_cxx::__promote<_Tp>::__type std::laguerre ( unsigned int __n, _Tp __x ) [inline]`

Returns the Laguerre polynomial of degree  $n$ , and argument  $x$ :  $L_n(x)$ .

The Laguerre polynomial is defined by:

$$L_n(x) = \frac{e^x}{n!} \frac{d^n}{dx^n} (x^n e^{-x})$$

Parameters

<code>__n</code>	The order of the Laguerre function.
<code>__x</code>	The argument of the Laguerre function.

Definition at line 859 of file `specfun.h`.

**7.2.2.47** `float std::laguerref ( unsigned int __n, float __x ) [inline]`

Returns the Laguerre polynomial  $L_n(x)$  of degree  $n$  and `float` argument  $x$ .

See also

[laguerre](#) for more details.

Definition at line 832 of file `specfun.h`.

**7.2.2.48** `long double std::laguerrel ( unsigned int __n, long double __x ) [inline]`

Returns the Laguerre polynomial  $L_n(x)$  of degree  $n$  and `long double` argument  $x$ .

See also

[laguerre](#) for more details.

Definition at line 842 of file `specfun.h`.

**7.2.2.49** `template<typename _Tp> __gnu_cxx::__promote<_Tp>::__type std::legendre ( unsigned int __l, _Tp __x ) [inline]`

Return the Legendre polynomial  $P_l(x)$  of degree  $l$  for `real` argument.

The Legendre function of order  $l$  and argument  $x$ ,  $P_l(x)$ , is defined by:

$$P_l(x) = \frac{1}{2^l l!} \frac{d^l}{dx^l} (x^2 - 1)^l$$

## Parameters

<code>__l</code>	The degree $l \geq 0$
<code>__x</code>	The argument $ x  \leq 1$

Definition at line 902 of file specfun.h.

**7.2.2.50** `float std::legendref ( unsigned int __l, float __x ) [inline]`

Return the Legendre polynomial  $P_l(x)$  of degree  $l$  for `float` argument.

See also

[legendre](#) for more details.

Definition at line 874 of file specfun.h.

**7.2.2.51** `long double std::legendrel ( unsigned int __l, long double __x ) [inline]`

Return the Legendre polynomial  $P_l(x)$  of degree  $l$  for `long double` argument.

See also

[legendre](#) for more details.

Definition at line 884 of file specfun.h.

**7.2.2.52** `template<typename _Tp> __gnu_cxx::__promote<_Tp>::__type std::riemann_zeta ( _Tp __s ) [inline]`

Return the Riemann zeta function  $\zeta(s)$  for real argument  $s$ .

The Riemann zeta function is defined by:

$$\zeta(s) = \sum_{k=1}^{\infty} k^{-s} \text{ for } s > 1 \quad \frac{(2\pi)^s}{pi} \sin\left(\frac{\pi s}{2}\right) \Gamma(1-s) \zeta(1-s) \text{ for } s < 1$$

For  $s < 1$  use the reflection formula:

$$\zeta(s) = 2^s \pi^{s-1} \Gamma(1-s) \zeta(1-s)$$

## Parameters

<code>__s</code>	The argument $s \neq 1$
------------------	-------------------------

Definition at line 949 of file specfun.h.

**7.2.2.53** `float std::riemann_zetaf ( float __s ) [inline]`

Return the Riemann zeta function  $\zeta(s)$  for `float` argument  $s$ .

See also

[riemann\\_zeta](#) for more details.

Definition at line 917 of file specfun.h.

**7.2.2.54** `long double std::riemann_zetal ( long double __s ) [inline]`

Return the Riemann zeta function  $\zeta(s)$  for `long double` argument  $s$ .

See also

[riemann\\_zeta](#) for more details.

Definition at line 927 of file specfun.h.

**7.2.2.55** `template<typename _Tp> __gnu_cxx::__promote<_Tp>::__type std::sph_bessel ( unsigned int __n, _Tp __x ) [inline]`

Return the spherical Bessel function  $j_n(x)$  of order  $n$  for real argument  $x \geq 0$ .

The spherical Bessel function is defined by:

$$j_n(x) = \left(\frac{\pi}{2x}\right)^{1/2} J_{n+1/2}(x)$$

Parameters

<code>__n</code>	The non-negative integral order
<code>__x</code>	The non-negative real argument

Definition at line 991 of file specfun.h.

**7.2.2.56** `float std::sph_besself ( unsigned int __n, float __x ) [inline]`

Return the spherical Bessel function  $j_n(x)$  of order  $n$  for `float` argument.

See also

[sph\\_bessel](#) for more details.

Definition at line 964 of file specfun.h.

**7.2.2.57** `long double std::sph_bessell ( unsigned int __n, long double __x ) [inline]`

Return the spherical Bessel function  $j_n(x)$  of order  $n$  for `long double` argument.

See also

[sph\\_bessel](#) for more details.

Definition at line 974 of file specfun.h.

**7.2.2.58** `template<typename _Tp> __gnu_cxx::__promote<_Tp>::__type std::sph_legendre ( unsigned int __l, unsigned int __m, _Tp __theta ) [inline]`

Return the spherical Legendre function of non-negative integral degree  $l$  and order  $m$  and real angle  $\theta$  in radians.

The spherical Legendre function is defined by

$$Y_l^m(\theta, \phi) = (-1)^m \left[ \frac{(2l+1)}{4\pi} \frac{(l-m)!}{(l+m)!} \right] P_l^m(\cos \theta) \exp^{im\phi}$$

## Parameters

<code>__l</code>	The non-negative order $l \geq 0$ .
<code>__m</code>	The non-negative degree $m \geq 0$ and $m \leq l$ .
<code>__theta</code>	The radian polar angle argument

Definition at line 1037 of file specfun.h.

**7.2.2.59** `float std::sph_legendref ( unsigned int __l, unsigned int __m, float __theta ) [inline]`

Return the spherical Legendre function of non-negative integral degree `l` and order `m` and float angle  $\theta$  in radians.

See also

[sph\\_legendre](#) for details.

Definition at line 1006 of file specfun.h.

**7.2.2.60** `long double std::sph_legendrel ( unsigned int __l, unsigned int __m, long double __theta ) [inline]`

Return the spherical Legendre function of non-negative integral degree `l` and order `m` and long double angle  $\theta$  in radians.

See also

[sph\\_legendre](#) for details.

Definition at line 1017 of file specfun.h.

**7.2.2.61** `template<typename _Tp> __gnu_cxx::__promote<_Tp>::__type std::sph_neumann ( unsigned int __n, _Tp __x ) [inline]`

Return the spherical Neumann function of non-negative integral order `n` and non-negative real argument `x`.

The spherical Neumann function is defined by

$$n_n(x) = \left(\frac{\pi}{2x}\right)^{1/2} N_{n+1/2}(x)$$

## Parameters

<code>__n</code>	The non-negative integral order
<code>__x</code>	The non-negative real argument

Definition at line 1079 of file specfun.h.

**7.2.2.62** `float std::sph_neumannf ( unsigned int __n, float __x ) [inline]`

Return the spherical Neumann function of non-negative integral order `n` and non-negative float argument `x`.

See also

[sph\\_neumann](#) for details.

Definition at line 1052 of file specfun.h.

7.2.2.63 `long double std::sph_neumannl ( unsigned int __n, long double __x ) [inline]`

Return the spherical Neumann function of non-negative integral order `n` and non-negative `long double` argument `x`.

See also

[sph\\_neumann](#) for details.

Definition at line 1062 of file `specfun.h`.

## Chapter 8

# Namespace Documentation

### 8.1 `__gnu_cxx` Namespace Reference

#### Enumerations

- enum { [\\_GLIBCXX\\_JACOBI\\_SN](#), [\\_GLIBCXX\\_JACOBI\\_CN](#), [\\_GLIBCXX\\_JACOBI\\_DN](#) }

#### Functions

- template<typename `_Tp` >  
  `__gnu_cxx::__promote_num_t<_Tp>` [airy\\_ai](#) (`_Tp` `__x`)
- float [airy\\_aif](#) (float `__x`)
- long double [airy\\_ail](#) (long double `__x`)
- template<typename `_Tp` >  
  `__gnu_cxx::__promote_num_t<_Tp>` [airy\\_bi](#) (`_Tp` `__x`)
- float [airy\\_bif](#) (float `__x`)
- long double [airy\\_bil](#) (long double `__x`)
- template<typename `_Tp` >  
  `__gnu_cxx::__promote_num_t<_Tp>` [bernoulli](#) (unsigned int `__n`)
- float [bernoullif](#) (unsigned int `__n`)
- long double [bernoullil](#) (unsigned int `__n`)
- template<typename `_Tp` >  
  `__gnu_cxx::__promote_num_t<_Tp>` [bincoef](#) (unsigned int `__n`, unsigned int `__k`)
- float [bincoeff](#) (unsigned int `__n`, unsigned int `__k`)
- long double [bincoefl](#) (unsigned int `__n`, unsigned int `__k`)
- template<typename `_Tp` >  
  `__gnu_cxx::__promote_num_t<_Tp>` [chebyshev\\_t](#) (unsigned int `__n`, `_Tp` `__x`)
- float [chebyshev\\_tf](#) (unsigned int `__n`, float `__x`)
- long double [chebyshev\\_tl](#) (unsigned int `__n`, long double `__x`)
- template<typename `_Tp` >  
  `__gnu_cxx::__promote_num_t<_Tp>` [chebyshev\\_u](#) (unsigned int `__n`, `_Tp` `__x`)
- float [chebyshev\\_uf](#) (unsigned int `__n`, float `__x`)
- long double [chebyshev\\_ul](#) (unsigned int `__n`, long double `__x`)
- template<typename `_Tp` >  
  `__gnu_cxx::__promote_num_t<_Tp>` [chebyshev\\_v](#) (unsigned int `__n`, `_Tp` `__x`)
- float [chebyshev\\_vf](#) (unsigned int `__n`, float `__x`)

- long double [chebyshev\\_vl](#) (unsigned int \_\_n, long double \_\_x)
- template<typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > [chebyshev\\_w](#) (unsigned int \_\_n, \_Tp \_\_x)
- float [chebyshev\\_wf](#) (unsigned int \_\_n, float \_\_x)
- long double [chebyshev\\_wl](#) (unsigned int \_\_n, long double \_\_x)
- template<typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > [clausen](#) (unsigned int \_\_m, \_Tp \_\_w)
- template<typename \_Tp >  
std::complex< \_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > > [clausen](#) (unsigned int \_\_m, std::complex< \_Tp > \_\_w)
- template<typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > [clausen\\_c](#) (unsigned int \_\_m, \_Tp \_\_w)
- float [clausen\\_cf](#) (unsigned int \_\_m, float \_\_w)
- long double [clausen\\_cl](#) (unsigned int \_\_m, long double \_\_w)
- template<typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > [clausen\\_s](#) (unsigned int \_\_m, \_Tp \_\_w)
- float [clausen\\_sf](#) (unsigned int \_\_m, float \_\_w)
- long double [clausen\\_sl](#) (unsigned int \_\_m, long double \_\_w)
- float [clausenf](#) (unsigned int \_\_m, float \_\_w)
- std::complex< float > [clausenf](#) (unsigned int \_\_m, std::complex< float > \_\_w)
- long double [clausenl](#) (unsigned int \_\_m, long double \_\_w)
- std::complex< long double > [clausenl](#) (unsigned int \_\_m, std::complex< long double > \_\_w)
- template<typename \_Tk >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tk > [comp\\_ellint\\_d](#) (\_Tk \_\_k)
- float [comp\\_ellint\\_df](#) (float \_\_k)
- long double [comp\\_ellint\\_dl](#) (long double \_\_k)
- float [comp\\_ellint\\_rf](#) (float \_\_x, float \_\_y)
- long double [comp\\_ellint\\_rf](#) (long double \_\_x, long double \_\_y)
- template<typename \_Tx, typename \_Ty >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tx, \_Ty > [comp\\_ellint\\_rf](#) (\_Tx \_\_x, \_Ty \_\_y)
- float [comp\\_ellint\\_rg](#) (float \_\_x, float \_\_y)
- long double [comp\\_ellint\\_rg](#) (long double \_\_x, long double \_\_y)
- template<typename \_Tx, typename \_Ty >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tx, \_Ty > [comp\\_ellint\\_rg](#) (\_Tx \_\_x, \_Ty \_\_y)
- template<typename \_Tpa, typename \_Tpc, typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_3< \_Tpa, \_Tpc, \_Tp >::\_\_type [conf\\_hyperg](#) (\_Tpa \_\_a, \_Tpc \_\_c, \_Tp \_\_x)
- template<typename \_Tpc, typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_2< \_Tpc, \_Tp >::\_\_type [conf\\_hyperg\\_lim](#) (\_Tpc \_\_c, \_Tp \_\_x)
- float [conf\\_hyperg\\_limf](#) (float \_\_c, float \_\_x)
- long double [conf\\_hyperg\\_liml](#) (long double \_\_c, long double \_\_x)
- float [conf\\_hypergf](#) (float \_\_a, float \_\_c, float \_\_x)
- long double [conf\\_hypergl](#) (long double \_\_a, long double \_\_c, long double \_\_x)
- template<typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > [coshint](#) (\_Tp \_\_x)
- float [coshintf](#) (float \_\_x)
- long double [coshintl](#) (long double \_\_x)
- template<typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > [cosint](#) (\_Tp \_\_x)
- float [cosintf](#) (float \_\_x)
- long double [cosintl](#) (long double \_\_x)
- template<typename \_Tpnu, typename \_Tp >  
std::complex< \_\_gnu\_cxx::\_\_promote\_num\_t< \_Tpnu, \_Tp > > [cyl\\_hankel\\_1](#) (\_Tpnu \_\_nu, \_Tp \_\_z)



- `template<typename _Tpnu, typename _Tp >`  
`std::complex< __gnu_cxx::__promote_num_t< _Tpnu, _Tp > > cyl\_hankel\_1 (std::complex< _Tpnu > __nu,`  
`std::complex< _Tp > __x)`
- `std::complex< float > cyl\_hankel\_1f (float __nu, float __z)`
- `std::complex< float > cyl\_hankel\_1f (std::complex< float > __nu, std::complex< float > __x)`
- `std::complex< long double > cyl\_hankel\_1l (long double __nu, long double __z)`
- `std::complex< long double > cyl\_hankel\_1l (std::complex< long double > __nu, std::complex< long double >`  
`__x)`
- `template<typename _Tpnu, typename _Tp >`  
`std::complex< __gnu_cxx::__promote_num_t< _Tpnu, _Tp > > cyl\_hankel\_2 (_Tpnu __nu, _Tp __z)`
- `template<typename _Tpnu, typename _Tp >`  
`std::complex< __gnu_cxx::__promote_num_t< _Tpnu, _Tp > > cyl\_hankel\_2 (std::complex< _Tpnu > __nu,`  
`std::complex< _Tp > __x)`
- `std::complex< float > cyl\_hankel\_2f (float __nu, float __z)`
- `std::complex< float > cyl\_hankel\_2f (std::complex< float > __nu, std::complex< float > __x)`
- `std::complex< long double > cyl\_hankel\_2l (long double __nu, long double __z)`
- `std::complex< long double > cyl\_hankel\_2l (std::complex< long double > __nu, std::complex< long double >`  
`__x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > dawson (_Tp __x)`
- `float dawsonf (float __x)`
- `long double dawsonl (long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > digamma (_Tp __z)`
- `float digammaf (float __z)`
- `long double digammal (long double __z)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > dilog (_Tp __x)`
- `float dilogf (float __x)`
- `long double dilogl (long double __x)`
- `template<typename _Tp >`  
`_Tp dirichlet\_beta (_Tp __x)`
- `float dirichlet\_betaf (float __x)`
- `long double dirichlet\_betall (long double __x)`
- `template<typename _Tp >`  
`_Tp dirichlet\_eta (_Tp __x)`
- `float dirichlet\_etaf (float __x)`
- `long double dirichlet\_etall (long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > double\_factorial (int __n)`
- `float double\_factorialf (int __n)`
- `long double double\_factoriall (int __n)`
- `template<typename _Tk, typename _Tp, typename _Ta, typename _Tb >`  
`__gnu_cxx::__promote_num_t< _Tk, _Tp, _Ta, _Tb > ellint\_cel (_Tk __k_c, _Tp __p, _Ta __a, _Tb __b)`
- `float ellint\_celf (float __k_c, float __p, float __a, float __b)`
- `long double ellint\_cell (long double __k_c, long double __p, long double __a, long double __b)`
- `template<typename _Tk, typename _Tphi >`  
`__gnu_cxx::__promote_num_t< _Tk, _Tphi > ellint\_d (_Tk __k, _Tphi __phi)`
- `float ellint\_df (float __k, float __phi)`
- `long double ellint\_dll (long double __k, long double __phi)`
- `template<typename _Tp, typename _Tk >`  
`__gnu_cxx::__promote_num_t< _Tp, _Tk > ellint\_el1 (_Tp __x, _Tk __k_c)`

- float [ellint\\_el1f](#) (float \_\_x, float \_\_k\_c)
- long double [ellint\\_el1l](#) (long double \_\_x, long double \_\_k\_c)
- template<typename \_Tp, typename \_Tk, typename \_Ta, typename \_Tb >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp, \_Tk, \_Ta, \_Tb > [ellint\\_el2](#) (\_Tp \_\_x, \_Tk \_\_k\_c, \_Ta \_\_a, \_Tb \_\_b)
- float [ellint\\_el2f](#) (float \_\_x, float \_\_k\_c, float \_\_a, float \_\_b)
- long double [ellint\\_el2l](#) (long double \_\_x, long double \_\_k\_c, long double \_\_a, long double \_\_b)
- template<typename \_Tx, typename \_Tk, typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tx, \_Tk, \_Tp > [ellint\\_el3](#) (\_Tx \_\_x, \_Tk \_\_k\_c, \_Tp \_\_p)
- float [ellint\\_el3f](#) (float \_\_x, float \_\_k\_c, float \_\_p)
- long double [ellint\\_el3l](#) (long double \_\_x, long double \_\_k\_c, long double \_\_p)
- template<typename \_Tp, typename \_Up >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp, \_Up > [ellint\\_rc](#) (\_Tp \_\_x, \_Up \_\_y)
- float [ellint\\_rcf](#) (float \_\_x, float \_\_y)
- long double [ellint\\_rcl](#) (long double \_\_x, long double \_\_y)
- template<typename \_Tp, typename \_Up, typename \_Vp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp, \_Up, \_Vp > [ellint\\_rd](#) (\_Tp \_\_x, \_Up \_\_y, \_Vp \_\_z)
- float [ellint\\_rdf](#) (float \_\_x, float \_\_y, float \_\_z)
- long double [ellint\\_rdl](#) (long double \_\_x, long double \_\_y, long double \_\_z)
- template<typename \_Tp, typename \_Up, typename \_Vp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp, \_Up, \_Vp > [ellint\\_rf](#) (\_Tp \_\_x, \_Up \_\_y, \_Vp \_\_z)
- float [ellint\\_rff](#) (float \_\_x, float \_\_y, float \_\_z)
- long double [ellint\\_rfl](#) (long double \_\_x, long double \_\_y, long double \_\_z)
- template<typename \_Tp, typename \_Up, typename \_Vp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp, \_Up, \_Vp > [ellint\\_rg](#) (\_Tp \_\_x, \_Up \_\_y, \_Vp \_\_z)
- float [ellint\\_rgf](#) (float \_\_x, float \_\_y, float \_\_z)
- long double [ellint\\_rgl](#) (long double \_\_x, long double \_\_y, long double \_\_z)
- template<typename \_Tp, typename \_Up, typename \_Vp, typename \_Wp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp, \_Up, \_Vp, \_Wp > [ellint\\_rj](#) (\_Tp \_\_x, \_Up \_\_y, \_Vp \_\_z, \_Wp \_\_p)
- float [ellint\\_rjf](#) (float \_\_x, float \_\_y, float \_\_z, float \_\_p)
- long double [ellint\\_rjl](#) (long double \_\_x, long double \_\_y, long double \_\_z, long double \_\_p)
- template<typename \_Tp >  
\_Tp [ellnome](#) (\_Tp \_\_k)
- float [ellnomef](#) (float \_\_k)
- long double [ellnomel](#) (long double \_\_k)
- template<typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > [expint\\_e1](#) (\_Tp \_\_x)
- float [expint\\_e1f](#) (float \_\_x)
- long double [expint\\_e1l](#) (long double \_\_x)
- template<typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > [expint\\_en](#) (unsigned int \_\_n, \_Tp \_\_x)
- float [expint\\_enf](#) (unsigned int \_\_n, float \_\_x)
- long double [expint\\_enl](#) (unsigned int \_\_n, long double \_\_x)
- template<typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > [factorial](#) (unsigned int \_\_n)
- float [factorialf](#) (unsigned int \_\_n)
- long double [factoriall](#) (unsigned int \_\_n)
- template<typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > [fresnel\\_c](#) (\_Tp \_\_x)
- float [fresnel\\_cf](#) (float \_\_x)
- long double [fresnel\\_cl](#) (long double \_\_x)
- template<typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > [fresnel\\_s](#) (\_Tp \_\_x)

- float [fresnel\\_sf](#) (float \_\_x)
- long double [fresnel\\_sl](#) (long double \_\_x)
- template<typename \_Tn, typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tn, \_Tp > [gamma\\_l](#) (\_Tn \_\_n, \_Tp \_\_x)
- float [gamma\\_lf](#) (float \_\_n, float \_\_x)
- long double [gamma\\_ll](#) (long double \_\_n, long double \_\_x)
- template<typename \_Ta, typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Ta, \_Tp > [gamma\\_p](#) (\_Ta \_\_a, \_Tp \_\_x)
- float [gamma\\_pf](#) (float \_\_a, float \_\_x)
- long double [gamma\\_pl](#) (long double \_\_a, long double \_\_x)
- template<typename \_Ta, typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Ta, \_Tp > [gamma\\_q](#) (\_Ta \_\_a, \_Tp \_\_x)
- float [gamma\\_qf](#) (float \_\_a, float \_\_x)
- long double [gamma\\_ql](#) (long double \_\_a, long double \_\_x)
- template<typename \_Tn, typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tn, \_Tp > [gamma\\_u](#) (\_Tn \_\_n, \_Tp \_\_x)
- float [gamma\\_uf](#) (float \_\_n, float \_\_x)
- long double [gamma\\_ul](#) (long double \_\_n, long double \_\_x)
- template<typename \_Talpha, typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Talpha, \_Tp > [gegenbauer](#) (unsigned int \_\_n, \_Talpha \_\_alpha, \_Tp \_\_x)
- float [gegenbauerf](#) (unsigned int \_\_n, float \_\_alpha, float \_\_x)
- long double [gegenbauerl](#) (unsigned int \_\_n, long double \_\_alpha, long double \_\_x)
- template<typename \_Tk, typename \_Tphi >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tk, \_Tphi > [heuman\\_lambda](#) (\_Tk \_\_k, \_Tphi \_\_phi)
- float [heuman\\_lambdaf](#) (float \_\_k, float \_\_phi)
- long double [heuman\\_lambdal](#) (long double \_\_k, long double \_\_phi)
- template<typename \_Tp, typename \_Up >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp, \_Up > [hurwitz\\_zeta](#) (\_Tp \_\_s, \_Up \_\_a)
- float [hurwitz\\_zetaf](#) (float \_\_s, float \_\_a)
- long double [hurwitz\\_zetal](#) (long double \_\_s, long double \_\_a)
- template<typename \_Tpa, typename \_Tpb, typename \_Tpc, typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_4< \_Tpa, \_Tpb, \_Tpc, \_Tp >::\_\_type [hyperg](#) (\_Tpa \_\_a, \_Tpb \_\_b, \_Tpc \_\_c, \_Tp \_\_x)
- float [hypergf](#) (float \_\_a, float \_\_b, float \_\_c, float \_\_x)
- long double [hypergl](#) (long double \_\_a, long double \_\_b, long double \_\_c, long double \_\_x)
- template<typename \_Ta, typename \_Tb, typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Ta, \_Tb, \_Tp > [ibeta](#) (\_Ta \_\_a, \_Tb \_\_b, \_Tp \_\_x)
- template<typename \_Ta, typename \_Tb, typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Ta, \_Tb, \_Tp > [ibetac](#) (\_Ta \_\_a, \_Tb \_\_b, \_Tp \_\_x)
- float [ibetacf](#) (float \_\_a, float \_\_b, float \_\_x)
- long double [ibetacdl](#) (long double \_\_a, long double \_\_b, long double \_\_x)
- float [ibetaf](#) (float \_\_a, float \_\_b, float \_\_x)
- long double [ibetal](#) (long double \_\_a, long double \_\_b, long double \_\_x)
- template<typename \_Talpha, typename \_Tbeta, typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Talpha, \_Tbeta, \_Tp > [jacobi](#) (unsigned \_\_n, \_Talpha \_\_alpha, \_Tbeta \_\_beta, \_Tp \_\_x)
- template<typename \_Kp, typename \_Up >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Kp, \_Up > [jacobi\\_cn](#) (\_Kp \_\_k, \_Up \_\_u)
- float [jacobi\\_cnf](#) (float \_\_k, float \_\_u)
- long double [jacobi\\_cnl](#) (long double \_\_k, long double \_\_u)
- template<typename \_Kp, typename \_Up >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Kp, \_Up > [jacobi\\_dn](#) (\_Kp \_\_k, \_Up \_\_u)
- float [jacobi\\_dnf](#) (float \_\_k, float \_\_u)

- long double [jacobi\\_dnl](#) (long double \_\_k, long double \_\_u)
- template<typename \_Kp, typename \_Up >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Kp, \_Up > [jacobi\\_sn](#) (\_Kp \_\_k, \_Up \_\_u)
- float [jacobi\\_snf](#) (float \_\_k, float \_\_u)
- long double [jacobi\\_sn1](#) (long double \_\_k, long double \_\_u)
- template<typename \_Tk, typename \_Tphi >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tk, \_Tphi > [jacobi\\_zeta](#) (\_Tk \_\_k, \_Tphi \_\_phi)
- float [jacobi\\_zetaf](#) (float \_\_k, float \_\_phi)
- long double [jacobi\\_zetal](#) (long double \_\_k, long double \_\_phi)
- float [jacobiif](#) (unsigned \_\_n, float \_\_alpha, float \_\_beta, float \_\_x)
- long double [jacobil](#) (unsigned \_\_n, long double \_\_alpha, long double \_\_beta, long double \_\_x)
- template<typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > [lbincoef](#) (unsigned int \_\_n, unsigned int \_\_k)
- float [lbincoeff](#) (unsigned int \_\_n, unsigned int \_\_k)
- long double [lbincoefl](#) (unsigned int \_\_n, unsigned int \_\_k)
- template<typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > [ldouble\\_factorial](#) (int \_\_n)
- float [ldouble\\_factorialf](#) (int \_\_n)
- long double [ldouble\\_factoriall](#) (int \_\_n)
- template<typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > [legendre\\_q](#) (unsigned int \_\_n, \_Tp \_\_x)
- float [legendre\\_qf](#) (unsigned int \_\_n, float \_\_x)
- long double [legendre\\_ql](#) (unsigned int \_\_n, long double \_\_x)
- template<typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > [lfactorial](#) (unsigned int \_\_n)
- float [lfactorialf](#) (unsigned int \_\_n)
- long double [lfactoriall](#) (unsigned int \_\_n)
- template<typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > [logint](#) (\_Tp \_\_x)
- float [logintf](#) (float \_\_x)
- long double [logintl](#) (long double \_\_x)
- template<typename \_Tp, typename \_Tn >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp, \_Tn > [lpochhammer\\_l](#) (\_Tp \_\_a, \_Tn \_\_n)
- float [lpochhammer\\_lf](#) (float \_\_a, float \_\_n)
- long double [lpochhammer\\_ll](#) (long double \_\_a, long double \_\_n)
- template<typename \_Tp, typename \_Tn >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp, \_Tn > [lpochhammer\\_u](#) (\_Tp \_\_a, \_Tn \_\_n)
- float [lpochhammer\\_uf](#) (float \_\_a, float \_\_n)
- long double [lpochhammer\\_ul](#) (long double \_\_a, long double \_\_n)
- template<typename \_Tph, typename \_Tpa >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tph, \_Tpa > [owens\\_t](#) (\_Tph \_\_h, \_Tpa \_\_a)
- float [owens\\_tf](#) (float \_\_h, float \_\_a)
- long double [owens\\_tl](#) (long double \_\_h, long double \_\_a)
- template<typename \_Tp, typename \_Tn >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp, \_Tn > [pochhammer\\_l](#) (\_Tp \_\_a, \_Tn \_\_n)
- float [pochhammer\\_lf](#) (float \_\_a, float \_\_n)
- long double [pochhammer\\_ll](#) (long double \_\_a, long double \_\_n)
- template<typename \_Tp, typename \_Tn >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp, \_Tn > [pochhammer\\_u](#) (\_Tp \_\_a, \_Tn \_\_n)
- float [pochhammer\\_uf](#) (float \_\_a, float \_\_n)
- long double [pochhammer\\_ul](#) (long double \_\_a, long double \_\_n)

- `template<typename _Tp >`  
`std::complex< __gnu_cxx::__promote_num_t< _Tp > > polylog ( _Tp __s, std::complex< _Tp > __w)`
- `std::complex< float > polylogf (float __s, std::complex< float > __w)`
- `std::complex< long double > polylogl (long double __s, std::complex< long double > __w)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > psi ( _Tp __x)`
- `float psif (float __x)`
- `long double psil (long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > radpoly (unsigned int __n, unsigned int __m, _Tp __rho)`
- `float radpolyf (unsigned int __n, unsigned int __m, float __rho)`
- `long double radpolyl (unsigned int __n, unsigned int __m, long double __rho)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > sinc ( _Tp __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > sinc_pi ( _Tp __x)`
- `float sinc_pif (float __x)`
- `long double sinc_pil (long double __x)`
- `float sincf (float __x)`
- `long double sincl (long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > sinhc ( _Tp __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > sinhc_pi ( _Tp __x)`
- `float sinhc_pif (float __x)`
- `long double sinhc_pil (long double __x)`
- `float sinhcf (float __x)`
- `long double sinhcl (long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > sinhint ( _Tp __x)`
- `float sinhintf (float __x)`
- `long double sinhintl (long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > sinint ( _Tp __x)`
- `float sinintf (float __x)`
- `long double sinintl (long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > sph_bessel_i (unsigned int __n, _Tp __x)`
- `float sph_bessel_if (unsigned int __n, float __x)`
- `long double sph_bessel_il (unsigned int __n, long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > sph_bessel_k (unsigned int __n, _Tp __x)`
- `float sph_bessel_kf (unsigned int __n, float __x)`
- `long double sph_bessel_kl (unsigned int __n, long double __x)`
- `template<typename _Tp >`  
`std::complex< __gnu_cxx::__promote_num_t< _Tp > > sph_hankel_1 (unsigned int __n, _Tp __z)`
- `template<typename _Tp >`  
`std::complex< __gnu_cxx::__promote_num_t< _Tp > > sph_hankel_1 (unsigned int __n, std::complex< _Tp > __x)`
- `std::complex< float > sph_hankel_1f (unsigned int __n, float __z)`
- `std::complex< float > sph_hankel_1f (unsigned int __n, std::complex< float > __x)`
- `std::complex< long double > sph_hankel_1l (unsigned int __n, long double __z)`

- `std::complex< long double > sph_hankel_1l` (unsigned int \_\_n, `std::complex< long double > __x`)
- `template<typename _Tp >`  
`std::complex< __gnu_cxx::__promote_num_t< _Tp > > sph_hankel_2` (unsigned int \_\_n, `_Tp __z`)
- `template<typename _Tp >`  
`std::complex< __gnu_cxx::__promote_num_t< _Tp > > sph_hankel_2` (unsigned int \_\_n, `std::complex< _Tp > __x`)
- `std::complex< float > sph_hankel_2f` (unsigned int \_\_n, `float __z`)
- `std::complex< float > sph_hankel_2f` (unsigned int \_\_n, `std::complex< float > __x`)
- `std::complex< long double > sph_hankel_2l` (unsigned int \_\_n, `long double __z`)
- `std::complex< long double > sph_hankel_2l` (unsigned int \_\_n, `std::complex< long double > __x`)
- `template<typename _Ttheta , typename _Tphi >`  
`std::complex< __gnu_cxx::__promote_num_t< _Ttheta , _Tphi > > sph_harmonic` (unsigned int \_\_l, int \_\_m, `_Ttheta __theta , _Tphi __phi`)
- `std::complex< float > sph_harmonicf` (unsigned int \_\_l, int \_\_m, `float __theta , float __phi`)
- `std::complex< long double > sph_harmonicl` (unsigned int \_\_l, int \_\_m, `long double __theta , long double __phi`)
- `template<typename _Tpnu , typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tpnu , _Tp > theta_1` (`_Tpnu __nu , _Tp __x`)
- `float theta_1f` (`float __nu , float __x`)
- `long double theta_1l` (`long double __nu , long double __x`)
- `template<typename _Tpnu , typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tpnu , _Tp > theta_2` (`_Tpnu __nu , _Tp __x`)
- `float theta_2f` (`float __nu , float __x`)
- `long double theta_2l` (`long double __nu , long double __x`)
- `template<typename _Tpnu , typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tpnu , _Tp > theta_3` (`_Tpnu __nu , _Tp __x`)
- `float theta_3f` (`float __nu , float __x`)
- `long double theta_3l` (`long double __nu , long double __x`)
- `template<typename _Tpnu , typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tpnu , _Tp > theta_4` (`_Tpnu __nu , _Tp __x`)
- `float theta_4f` (`float __nu , float __x`)
- `long double theta_4l` (`long double __nu , long double __x`)
- `template<typename _Tp_k , typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp_k , _Tp > theta_c` (`_Tp_k __k , _Tp __x`)
- `float theta_cf` (`float __k , float __x`)
- `long double theta_cl` (`long double __k , long double __x`)
- `template<typename _Tp_k , typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp_k , _Tp > theta_d` (`_Tp_k __k , _Tp __x`)
- `float theta_df` (`float __k , float __x`)
- `long double theta_dl` (`long double __k , long double __x`)
- `template<typename _Tp_k , typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp_k , _Tp > theta_n` (`_Tp_k __k , _Tp __x`)
- `float theta_nf` (`float __k , float __x`)
- `long double theta_nl` (`long double __k , long double __x`)
- `template<typename _Tp_k , typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp_k , _Tp > theta_s` (`_Tp_k __k , _Tp __x`)
- `float theta_sf` (`float __k , float __x`)
- `long double theta_sl` (`long double __k , long double __x`)
- `template<typename _Trho , typename _Tphi >`  
`__gnu_cxx::__promote_num_t< _Trho , _Tphi > zernike` (unsigned int \_\_n, int \_\_m, `_Trho __rho , _Tphi __phi`)
- `float zernikef` (unsigned int \_\_n, int \_\_m, `float __rho , float __phi`)
- `long double zernikel` (unsigned int \_\_n, int \_\_m, `long double __rho , long double __phi`)

## 8.2 std Namespace Reference

### Namespaces

- [\\_\\_detail](#)

### Functions

- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type assoc\_laguerre (unsigned int __n, unsigned int __m, _Tp __x)`
- `float assoc\_laguerref (unsigned int __n, unsigned int __m, float __x)`
- `long double assoc\_laguerrel (unsigned int __n, unsigned int __m, long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type assoc\_legendre (unsigned int __l, unsigned int __m, _Tp __x)`
- `float assoc\_legendref (unsigned int __l, unsigned int __m, float __x)`
- `long double assoc\_legendrel (unsigned int __l, unsigned int __m, long double __x)`
- `template<typename _Tpa, typename _Tpb >`  
`__gnu_cxx::__promote_2< _Tpa, _Tpb >::__type beta (_Tpa __a, _Tpb __b)`
- `float betaf (float __a, float __b)`
- `long double betal (long double __a, long double __b)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type comp\_ellint\_1 (_Tp __k)`
- `float comp\_ellint\_1f (float __k)`
- `long double comp\_ellint\_1l (long double __k)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type comp\_ellint\_2 (_Tp __k)`
- `float comp\_ellint\_2f (float __k)`
- `long double comp\_ellint\_2l (long double __k)`
- `template<typename _Tp, typename _Tpn >`  
`__gnu_cxx::__promote_2< _Tp, _Tpn >::__type comp\_ellint\_3 (_Tp __k, _Tpn __nu)`
- `float comp\_ellint\_3f (float __k, float __nu)`  
*Return the complete elliptic integral of the third kind  $\Pi(k, \nu)$  for float modulus  $k$ .*
- `long double comp\_ellint\_3l (long double __k, long double __nu)`  
*Return the complete elliptic integral of the third kind  $\Pi(k, \nu)$  for long double modulus  $k$ .*
- `template<typename _Tpnu, typename _Tp >`  
`__gnu_cxx::__promote_2< _Tpnu, _Tp >::__type cyl\_bessel\_i (_Tpnu __nu, _Tp __x)`
- `float cyl\_bessel\_if (float __nu, float __x)`
- `long double cyl\_bessel\_il (long double __nu, long double __x)`
- `template<typename _Tpnu, typename _Tp >`  
`__gnu_cxx::__promote_2< _Tpnu, _Tp >::__type cyl\_bessel\_j (_Tpnu __nu, _Tp __x)`
- `float cyl\_bessel\_jf (float __nu, float __x)`
- `long double cyl\_bessel\_jl (long double __nu, long double __x)`
- `template<typename _Tpnu, typename _Tp >`  
`__gnu_cxx::__promote_2< _Tpnu, _Tp >::__type cyl\_bessel\_k (_Tpnu __nu, _Tp __x)`
- `float cyl\_bessel\_kf (float __nu, float __x)`
- `long double cyl\_bessel\_kl (long double __nu, long double __x)`
- `template<typename _Tpnu, typename _Tp >`  
`__gnu_cxx::__promote_2< _Tpnu, _Tp >::__type cyl\_neumann (_Tpnu __nu, _Tp __x)`
- `float cyl\_neumannf (float __nu, float __x)`
- `long double cyl\_neumannl (long double __nu, long double __x)`

- `template<typename _Tp, typename _Tpp >`  
`__gnu_cxx::__promote_2< _Tp, _Tpp >::__type ellint_1 ( _Tp __k, _Tpp __phi)`
- `float ellint_1f (float __k, float __phi)`
- `long double ellint_1l (long double __k, long double __phi)`
- `template<typename _Tp, typename _Tpp >`  
`__gnu_cxx::__promote_2< _Tp, _Tpp >::__type ellint_2 ( _Tp __k, _Tpp __phi)`
- `float ellint_2f (float __k, float __phi)`  
*Return the incomplete elliptic integral of the second kind  $E(k, \phi)$  for float argument.*
- `long double ellint_2l (long double __k, long double __phi)`  
*Return the incomplete elliptic integral of the second kind  $E(k, \phi)$ .*
- `template<typename _Tp, typename _Tpn, typename _Tpp >`  
`__gnu_cxx::__promote_3< _Tp, _Tpn, _Tpp >::__type ellint_3 ( _Tp __k, _Tpn __nu, _Tpp __phi)`  
*Return the incomplete elliptic integral of the third kind  $\Pi(k, \nu, \phi)$ .*
- `float ellint_3f (float __k, float __nu, float __phi)`  
*Return the incomplete elliptic integral of the third kind  $\Pi(k, \nu, \phi)$  for float argument.*
- `long double ellint_3l (long double __k, long double __nu, long double __phi)`  
*Return the incomplete elliptic integral of the third kind  $\Pi(k, \nu, \phi)$ .*
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type expint ( _Tp __x)`
- `float expintf (float __x)`
- `long double expintl (long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type hermite (unsigned int __n, _Tp __x)`
- `float hermitef (unsigned int __n, float __x)`
- `long double hermitel (unsigned int __n, long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type laguerre (unsigned int __n, _Tp __x)`
- `float laguerref (unsigned int __n, float __x)`
- `long double laguerrel (unsigned int __n, long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type legendre (unsigned int __l, _Tp __x)`
- `float legendref (unsigned int __l, float __x)`
- `long double legendrel (unsigned int __l, long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type riemann_zeta ( _Tp __s)`
- `float riemann_zetaf (float __s)`
- `long double riemann_zetal (long double __s)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type sph_bessel (unsigned int __n, _Tp __x)`
- `float sph_besself (unsigned int __n, float __x)`
- `long double sph_bessell (unsigned int __n, long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type sph_legendre (unsigned int __l, unsigned int __m, _Tp __theta)`
- `float sph_legendref (unsigned int __l, unsigned int __m, float __theta)`
- `long double sph_legendrel (unsigned int __l, unsigned int __m, long double __theta)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type sph_neumann (unsigned int __n, _Tp __x)`
- `float sph_neumannf (unsigned int __n, float __x)`
- `long double sph_neumannl (unsigned int __n, long double __x)`



## 8.3 std::\_\_detail Namespace Reference

### Classes

- struct [\\_Factorial\\_table](#)

### Enumerations

- enum { [SININT](#), [COSINT](#) }

### Functions

- template<typename \_Tp >  
void [\\_\\_airy](#) (\_Tp \_\_z, \_Tp &\_Ai, \_Tp &\_Bi, \_Tp &\_Aip, \_Tp &\_Bip)  
*Compute the Airy functions  $Ai(x)$  and  $Bi(x)$  and their first derivatives  $Ai'(x)$  and  $Bi'(x)$  respectively.*
- template<typename \_Tp >  
void [\\_\\_airy](#) (const std::complex< \_Tp > &\_\_z, \_Tp \_\_eps, std::complex< \_Tp > &\_Ai, std::complex< \_Tp > &\_Aip, std::complex< \_Tp > &\_Bi, std::complex< \_Tp > &\_Bip)  
*This function computes the Airy function  $Ai(z)$  and its first derivative in the complex z-plane.*
- template<typename \_Tp >  
std::complex< \_Tp > [\\_\\_airy\\_ai](#) (std::complex< \_Tp > \_\_z)  
*Return the complex Airy  $Ai$  function.*
- template<typename \_Tp >  
void [\\_\\_airy\\_arg](#) (std::complex< \_Tp > \_\_num2d3, std::complex< \_Tp > \_\_zeta, std::complex< \_Tp > &\_\_argp, std::complex< \_Tp > &\_\_argm)  
*Compute the arguments for the Airy function evaluations carefully to prevent premature overflow. Note that the major work here is in `safe_div`. A faster, but less safe implementation can be obtained without use of `safe_div`.*
- template<typename \_Tp >  
void [\\_\\_airy\\_asymp\\_absarg\\_ge\\_pio3](#) (std::complex< \_Tp > \_\_z, std::complex< \_Tp > &\_Ai, std::complex< \_Tp > &\_Aip, int \_\_sign=-1)  
*This function evaluates  $Ai(z)$  and  $Ai'(z)$  from their asymptotic expansions for  $|arg(z)| < 2 * \pi/3$ . For speed, the number of terms needed to achieve about 16 decimals accuracy is tabled and determined from `abs(z)`.*
- template<typename \_Tp >  
void [\\_\\_airy\\_asymp\\_absarg\\_lt\\_pio3](#) (std::complex< \_Tp > \_\_z, std::complex< \_Tp > &\_Ai, std::complex< \_Tp > &\_Aip)  
*This function evaluates  $Ai(z)$  and  $Ai'(z)$  from their asymptotic expansions for  $|arg(-z)| < \pi/3$ . For speed, the number of terms needed to achieve about 16 decimals accuracy is tabled and determined from `|z|`.*
- template<typename \_Tp >  
void [\\_\\_airy\\_bessel\\_i](#) (const std::complex< \_Tp > &\_\_z, \_Tp \_\_eps, std::complex< \_Tp > &\_Ip1d3, std::complex< \_Tp > &\_Im1d3, std::complex< \_Tp > &\_Ip2d3, std::complex< \_Tp > &\_Im2d3)  
*Compute approximations to the modified Bessel functions of the second kind of orders 1/3 and 2/3 for moderate arguments.*
- template<typename \_Tp >  
void [\\_\\_airy\\_bessel\\_k](#) (const std::complex< \_Tp > &\_\_z, \_Tp \_\_eps, std::complex< \_Tp > &\_Kp1d3, std::complex< \_Tp > &\_Kp2d3)  
*Compute approximations to the modified Bessel functions of the second kind of orders 1/3 and 2/3 for moderate arguments.*
- template<typename \_Tp >  
std::complex< \_Tp > [\\_\\_airy\\_bi](#) (std::complex< \_Tp > \_\_z)  
*Return the complex Airy  $Bi$  function.*
- template<typename \_Tp >  
void [\\_\\_airy\\_hyperg\\_rational](#) (const std::complex< \_Tp > &\_\_z, std::complex< \_Tp > &\_Ai, std::complex< \_Tp > &\_Aip, std::complex< \_Tp > &\_Bi, std::complex< \_Tp > &\_Bip)

This function computes rational approximations to the hypergeometric functions related to the modified Bessel functions of orders  $\nu = + - 1/3$  and  $\nu = -2/3$ . That is,  $A(z)/B(z)$ , Where  $A(z)$  and  $B(z)$  are cubic polynomials with real coefficients, approximates

$$\frac{\Gamma(\nu + 1)}{(z/2)^{\nu}} I_{\nu}(z) = {}_0F_1(; \nu + 1; z^2/4),$$

where the function on the right is a confluent hypergeometric limit function. For  $|z| \leq 1/4$  and  $|\arg(z)| \leq \pi/2$ , the approximations are accurate to about 16 decimals.

- `template<typename _Tp >`  
`_Tp __assoc_laguerre` (unsigned int \_\_n, unsigned int \_\_m, \_Tp \_\_x)  
*This routine returns the associated Laguerre polynomial of order n, degree m:  $L_n^m(x)$ .*
- `template<typename _Tp >`  
`_Tp __assoc_legendre_p` (unsigned int \_\_l, unsigned int \_\_m, \_Tp \_\_x)  
*Return the associated Legendre function by recursion on l and downward recursion on m.*
- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp __bernoulli` (int \_\_n)  
*This returns Bernoulli number  $B_n$ .*
- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp __bernoulli_2n` (int \_\_n)  
*This returns Bernoulli number  $B_n$ .*
- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp __bernoulli_series` (unsigned int \_\_n)  
*This returns Bernoulli numbers from a table or by summation for larger values.*
- `template<typename _Tp >`  
`_Tp __beta` (\_Tp \_\_a, \_Tp \_\_b)  
*Return the beta function  $B(a, b)$ .*
- `template<typename _Tp >`  
`_Tp __beta_gamma` (\_Tp \_\_a, \_Tp \_\_b)  
*Return the beta function:  $B(a, b)$ .*
- `template<typename _Tp >`  
`_Tp __beta_inc` (\_Tp \_\_a, \_Tp \_\_b, \_Tp \_\_x)
- `template<typename _Tp >`  
`_Tp __beta_inc_cont_frac` (\_Tp \_\_a, \_Tp \_\_b, \_Tp \_\_x)
- `template<typename _Tp >`  
`_Tp __beta_lgamma` (\_Tp \_\_a, \_Tp \_\_b)  
*Return the beta function  $B(a, b)$  using the log gamma functions.*
- `template<typename _Tp >`  
`_Tp __beta_product` (\_Tp \_\_a, \_Tp \_\_b)  
*Return the beta function  $B(x, y)$  using the product form.*
- `template<typename _Tp >`  
`_Tp __bincoef` (unsigned int \_\_n, unsigned int \_\_k)  
*Return the binomial coefficient. The binomial coefficient is given by:*

$$\binom{n}{k} = \frac{n!}{(n-k)!k!}$$

- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp __binomial_cdf` (\_Tp \_\_p, unsigned int \_\_n, unsigned int \_\_k)  
*Return the binomial cumulative distribution function.*
- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp __binomial_cdfc` (\_Tp \_\_p, unsigned int \_\_n, unsigned int \_\_k)  
*Return the complementary binomial cumulative distribution function.*

- template<typename \_Tp >  
\_Tp [\\_\\_bose\\_einstein](#) (\_Tp \_\_s, \_Tp \_\_x)
- template<typename \_Tp >  
\_Tp [\\_\\_chebyshev\\_recur](#) (unsigned int \_\_n, \_Tp \_\_x, \_Tp \_C0, \_Tp \_C1)
- template<typename \_Tp >  
\_Tp [\\_\\_chebyshev\\_t](#) (unsigned int \_\_n, \_Tp \_\_x)
- template<typename \_Tp >  
\_Tp [\\_\\_chebyshev\\_u](#) (unsigned int \_\_n, \_Tp \_\_x)
- template<typename \_Tp >  
\_Tp [\\_\\_chebyshev\\_v](#) (unsigned int \_\_n, \_Tp \_\_x)
- template<typename \_Tp >  
\_Tp [\\_\\_chebyshev\\_w](#) (unsigned int \_\_n, \_Tp \_\_x)
- template<typename \_Tp >  
\_GLIBCXX14\_CONSTEXPR \_Tp [\\_\\_chi\\_squared\\_pdf](#) (\_Tp \_\_chi2, unsigned int \_\_nu)  
*Return the chi-squared probability function. This returns the probability that the observed chi-squared for a correct model is less than the value  $\chi^2$ .*
- template<typename \_Tp >  
\_GLIBCXX14\_CONSTEXPR \_Tp [\\_\\_chi\\_squared\\_pdfc](#) (\_Tp \_\_chi2, unsigned int \_\_nu)  
*Return the complementary chi-squared probability function. This returns the probability that the observed chi-squared for a correct model is greater than the value  $\chi^2$ .*
- template<typename \_Tp >  
std::pair< \_Tp, \_Tp > [\\_\\_chshint](#) (\_Tp \_\_x, \_Tp &\_Chi, \_Tp &\_Shi)  
*This function returns the hyperbolic cosine  $Chi(x)$  and hyperbolic sine  $Shi(x)$  integrals as a pair.*
- template<typename \_Tp >  
void [\\_\\_chshint\\_cont\\_frac](#) (\_Tp \_\_t, \_Tp &\_Chi, \_Tp &\_Shi)  
*This function computes the hyperbolic cosine  $Chi(x)$  and hyperbolic sine  $Shi(x)$  integrals by continued fraction for positive argument.*
- template<typename \_Tp >  
void [\\_\\_chshint\\_series](#) (\_Tp \_\_t, \_Tp &\_Chi, \_Tp &\_Shi)  
*This function computes the hyperbolic cosine  $Chi(x)$  and hyperbolic sine  $Shi(x)$  integrals by series summation for positive argument.*
- template<typename \_Tp >  
std::complex< \_Tp > [\\_\\_clamp\\_0\\_m2pi](#) (std::complex< \_Tp > \_\_w)
- template<typename \_Tp >  
std::complex< \_Tp > [\\_\\_clamp\\_pi](#) (std::complex< \_Tp > \_\_w)
- template<typename \_Tp >  
std::complex< \_Tp > [\\_\\_clausen](#) (unsigned int \_\_m, std::complex< \_Tp > \_\_w)
- template<typename \_Tp >  
\_Tp [\\_\\_clausen](#) (unsigned int \_\_m, \_Tp \_\_w)
- template<typename \_Tp >  
\_Tp [\\_\\_clausen\\_c](#) (unsigned int \_\_m, std::complex< \_Tp > \_\_w)
- template<typename \_Tp >  
\_Tp [\\_\\_clausen\\_c](#) (unsigned int \_\_m, \_Tp \_\_w)
- template<typename \_Tp >  
\_Tp [\\_\\_clausen\\_s](#) (unsigned int \_\_m, std::complex< \_Tp > \_\_w)
- template<typename \_Tp >  
\_Tp [\\_\\_clausen\\_s](#) (unsigned int \_\_m, \_Tp \_\_w)
- template<typename \_Tp >  
\_Tp [\\_\\_comp\\_ellint\\_1](#) (\_Tp \_\_k)  
*Return the complete elliptic integral of the first kind  $K(k)$  using the Carlson formulation.*
- template<typename \_Tp >  
\_Tp [\\_\\_comp\\_ellint\\_2](#) (\_Tp \_\_k)

*Return the complete elliptic integral of the second kind  $E(k)$  using the Carlson formulation.*

- `template<typename _Tp >`  
`_Tp __comp_ellint_3 (_Tp __k, _Tp __nu)`

*Return the complete elliptic integral of the third kind  $\Pi(k, \nu) = \Pi(k, \nu, \pi/2)$  using the Carlson formulation.*

- `template<typename _Tp >`  
`_Tp __comp_ellint_d (_Tp __k)`
- `template<typename _Tp >`  
`_Tp __comp_ellint_rf (_Tp __x, _Tp __y)`
- `template<typename _Tp >`  
`_Tp __comp_ellint_rg (_Tp __x, _Tp __y)`
- `template<typename _Tp >`  
`_Tp __conf_hyperg (_Tp __a, _Tp __c, _Tp __x)`

*Return the confluent hypergeometric function  ${}_1F_1(a; c; x)$ .*

- `template<typename _Tp >`  
`_Tp __conf_hyperg_lim (_Tp __c, _Tp __x)`

*Return the confluent hypergeometric limit function  ${}_0F_1(-; c; x)$ .*

- `template<typename _Tp >`  
`_Tp __conf_hyperg_lim_series (_Tp __c, _Tp __x)`

*This routine returns the confluent hypergeometric limit function by series expansion.*

- `template<typename _Tp >`  
`_Tp __conf_hyperg_luke (_Tp __a, _Tp __c, _Tp __xin)`

*Return the hypergeometric function  ${}_1F_1(a; c; x)$  by an iterative procedure described in Luke, Algorithms for the Computation of Mathematical Functions.*

- `template<typename _Tp >`  
`_Tp __conf_hyperg_series (_Tp __a, _Tp __c, _Tp __x)`

*This routine returns the confluent hypergeometric function by series expansion.*

- `template<typename _Tp >`  
`_Tp __coshint (const _Tp __x)`

*Return the hyperbolic cosine integral  $li(x)$ .*

- `template<typename _Tp >`  
`std::complex< _Tp > __cyl_bessel (std::complex< _Tp > __nu, std::complex< _Tp > __z)`

*Return the complex cylindrical Bessel function.*

- `template<typename _Tp >`  
`_Tp __cyl_bessel_i (_Tp __nu, _Tp __x)`

*Return the regular modified Bessel function of order  $\nu$ :  $I_\nu(x)$ .*

- `template<typename _Tp >`  
`_Tp __cyl_bessel_ij_series (_Tp __nu, _Tp __x, _Tp __sgn, unsigned int __max_iter)`

*This routine returns the cylindrical Bessel functions of order  $\nu$ :  $J_\nu$  or  $I_\nu$  by series expansion.*

- `template<typename _Tp >`  
`void __cyl_bessel_ik (_Tp __nu, _Tp __x, _Tp &_Inu, _Tp &_Knu, _Tp &_Ipnu, _Tp &_Kpnu)`

*Return the modified cylindrical Bessel functions and their derivatives of order  $\nu$  by various means.*

- `template<typename _Tp >`  
`void __cyl_bessel_ik_asymp (_Tp __nu, _Tp __x, _Tp &_Inu, _Tp &_Knu, _Tp &_Ipnu, _Tp &_Kpnu)`

*This routine computes the asymptotic modified cylindrical Bessel and functions of order  $\nu$ :  $I_\nu(x)$ ,  $N_\nu(x)$ . Use this for  $x \gg nu^2 + 1$ .*

- `template<typename _Tp >`  
`void __cyl_bessel_ik_steud (_Tp __nu, _Tp __x, _Tp &_Inu, _Tp &_Knu, _Tp &_Ipnu, _Tp &_Kpnu)`

*Compute the modified Bessel functions  $I_\nu(x)$  and  $K_\nu(x)$  and their first derivatives  $I'_\nu(x)$  and  $K'_\nu(x)$  respectively. These four functions are computed together for numerical stability.*

- `template<typename _Tp >`  
`_Tp __cyl_bessel_j(_Tp __nu, _Tp __x)`  
*Return the Bessel function of order  $\nu$ :  $J_\nu(x)$ .*
- `template<typename _Tp >`  
`void __cyl_bessel_jn(_Tp __nu, _Tp __x, _Tp &_Jnu, _Tp &_Nnu, _Tp &_Jpnu, _Tp &_Npnu)`  
*Return the cylindrical Bessel functions and their derivatives of order  $\nu$  by various means.*
- `template<typename _Tp >`  
`void __cyl_bessel_jn_asymp(_Tp __nu, _Tp __x, _Tp &_Jnu, _Tp &_Nnu, _Tp &_Jpnu, _Tp &_Npnu)`  
*This routine computes the asymptotic cylindrical Bessel and Neumann functions of order  $\nu$ :  $J_\nu(x)$ ,  $N_\nu(x)$ . Use this for  $x \gg nu^2 + 1$ .*
- `template<typename _Tp >`  
`void __cyl_bessel_jn_steed(_Tp __nu, _Tp __x, _Tp &_Jnu, _Tp &_Nnu, _Tp &_Jpnu, _Tp &_Npnu)`  
*Compute the Bessel  $J_\nu(x)$  and Neumann  $N_\nu(x)$  functions and their first derivatives  $J'_\nu(x)$  and  $N'_\nu(x)$  respectively. These four functions are computed together for numerical stability.*
- `template<typename _Tp >`  
`_Tp __cyl_bessel_k(_Tp __nu, _Tp __x)`  
*Return the irregular modified Bessel function  $K_\nu(x)$  of order  $\nu$ .*
- `template<typename _Tp >`  
`std::complex<_Tp> __cyl_hankel_1(_Tp __nu, _Tp __x)`  
*Return the cylindrical Hankel function of the first kind  $H_\nu^{(1)}(x)$ .*
- `template<typename _Tp >`  
`std::complex<_Tp> __cyl_hankel_1(std::complex<_Tp> __nu, std::complex<_Tp> __z)`  
*Return the complex cylindrical Hankel function of the first kind.*
- `template<typename _Tp >`  
`std::complex<_Tp> __cyl_hankel_2(_Tp __nu, _Tp __x)`  
*Return the cylindrical Hankel function of the second kind  $H_n^{(2)}u(x)$ .*
- `template<typename _Tp >`  
`std::complex<_Tp> __cyl_hankel_2(std::complex<_Tp> __nu, std::complex<_Tp> __z)`  
*Return the complex cylindrical Hankel function of the second kind.*
- `template<typename _Tp >`  
`std::complex<_Tp> __cyl_neumann(std::complex<_Tp> __nu, std::complex<_Tp> __z)`  
*Return the complex cylindrical Neumann function.*
- `template<typename _Tp >`  
`_Tp __cyl_neumann_n(_Tp __nu, _Tp __x)`  
*Return the Neumann function of order  $\nu$ :  $N_\nu(x)$ .*
- `template<typename _Tp >`  
`_Tp __dawson(_Tp __x)`  
*Return the Dawson integral,  $F(x)$ , for real argument  $x$ .*
- `template<typename _Tp >`  
`_Tp __dawson_const_frac(_Tp __x)`  
*Compute the Dawson integral using a sampling theorem representation.*
- `template<typename _Tp >`  
`_Tp __dawson_series(_Tp __x)`  
*Compute the Dawson integral using the series expansion.*
- `template<typename _Tp >`  
`void __debye_region(std::complex<_Tp> __alpha, int &__indexr, char &__aorb)`
- `template<typename _Tp >`  
`_Tp __dilog(_Tp __x)`  
*Compute the dilogarithm function  $Li_2(x)$  by summation for  $x \leq 1$ .*

- `template<typename _Tp >`  
`_Tp __dirichlet_beta (std::complex< _Tp > __w)`
- `template<typename _Tp >`  
`_Tp __dirichlet_beta (_Tp __w)`
- `template<typename _Tp >`  
`std::complex< _Tp > __dirichlet_eta (std::complex< _Tp > __w)`
- `template<typename _Tp >`  
`_Tp __dirichlet_eta (_Tp __w)`
- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp __double_factorial (int __n)`  
*Return the double factorial of the integer  $n$ .*
- `template<typename _Tp >`  
`_Tp __ellint_1 (_Tp __k, _Tp __phi)`  
*Return the incomplete elliptic integral of the first kind  $F(k, \phi)$  using the Carlson formulation.*
- `template<typename _Tp >`  
`_Tp __ellint_2 (_Tp __k, _Tp __phi)`  
*Return the incomplete elliptic integral of the second kind  $E(k, \phi)$  using the Carlson formulation.*
- `template<typename _Tp >`  
`_Tp __ellint_3 (_Tp __k, _Tp __nu, _Tp __phi)`  
*Return the incomplete elliptic integral of the third kind  $\Pi(k, \nu, \phi)$  using the Carlson formulation.*
- `template<typename _Tp >`  
`_Tp __ellint_cel (_Tp __k_c, _Tp __p, _Tp __a, _Tp __b)`
- `template<typename _Tp >`  
`_Tp __ellint_d (_Tp __k, _Tp __phi)`
- `template<typename _Tp >`  
`_Tp __ellint_el1 (_Tp __x, _Tp __k_c)`
- `template<typename _Tp >`  
`_Tp __ellint_el2 (_Tp __x, _Tp __k_c, _Tp __a, _Tp __b)`
- `template<typename _Tp >`  
`_Tp __ellint_el3 (_Tp __x, _Tp __k_c, _Tp __p)`
- `template<typename _Tp >`  
`_Tp __ellint_rc (_Tp __x, _Tp __y)`  
*Return the Carlson elliptic function  $R_C(x, y) = R_F(x, y, y)$  where  $R_F(x, y, z)$  is the Carlson elliptic function of the first kind.*
- `template<typename _Tp >`  
`_Tp __ellint_rd (_Tp __x, _Tp __y, _Tp __z)`  
*Return the Carlson elliptic function of the second kind  $R_D(x, y, z) = R_J(x, y, z, z)$  where  $R_J(x, y, z, p)$  is the Carlson elliptic function of the third kind.*
- `template<typename _Tp >`  
`_Tp __ellint_rf (_Tp __x, _Tp __y, _Tp __z)`  
*Return the Carlson elliptic function  $R_F(x, y, z)$  of the first kind.*
- `template<typename _Tp >`  
`_Tp __ellint_rg (_Tp __x, _Tp __y, _Tp __z)`  
*Return the symmetric Carlson elliptic function of the second kind  $R_G(x, y, z)$ .*
- `template<typename _Tp >`  
`_Tp __ellint_rj (_Tp __x, _Tp __y, _Tp __z, _Tp __p)`  
*Return the Carlson elliptic function  $R_J(x, y, z, p)$  of the third kind.*
- `template<typename _Tp >`  
`_Tp __ellnome (_Tp __k)`
- `template<typename _Tp >`  
`_Tp __ellnome_k (_Tp __k)`

- `template<typename _Tp >`  
`_Tp __ellnome_series (_Tp __k)`
- `template<typename _Tp >`  
`_Tp __expint (unsigned int __n, _Tp __x)`  
*Return the exponential integral  $E_n(x)$ .*
- `template<typename _Tp >`  
`_Tp __expint (_Tp __x)`  
*Return the exponential integral  $Ei(x)$ .*
- `template<typename _Tp >`  
`_Tp __expint_asymp (unsigned int __n, _Tp __x)`  
*Return the exponential integral  $E_n(x)$  for large argument.*
- `template<typename _Tp >`  
`_Tp __expint_E1 (_Tp __x)`  
*Return the exponential integral  $E_1(x)$ .*
- `template<typename _Tp >`  
`_Tp __expint_E1_asymp (_Tp __x)`  
*Return the exponential integral  $E_1(x)$  by asymptotic expansion.*
- `template<typename _Tp >`  
`_Tp __expint_E1_series (_Tp __x)`  
*Return the exponential integral  $E_1(x)$  by series summation. This should be good for  $x < 1$ .*
- `template<typename _Tp >`  
`_Tp __expint_Ei (_Tp __x)`  
*Return the exponential integral  $Ei(x)$ .*
- `template<typename _Tp >`  
`_Tp __expint_Ei_asymp (_Tp __x)`  
*Return the exponential integral  $Ei(x)$  by asymptotic expansion.*
- `template<typename _Tp >`  
`_Tp __expint_Ei_series (_Tp __x)`  
*Return the exponential integral  $Ei(x)$  by series summation.*
- `template<typename _Tp >`  
`_Tp __expint_En_cont_frac (unsigned int __n, _Tp __x)`  
*Return the exponential integral  $E_n(x)$  by continued fractions.*
- `template<typename _Tp >`  
`_Tp __expint_En_recursion (unsigned int __n, _Tp __x)`  
*Return the exponential integral  $E_n(x)$  by recursion. Use upward recursion for  $x < n$  and downward recursion (Miller's algorithm) otherwise.*
- `template<typename _Tp >`  
`_Tp __expint_En_series (unsigned int __n, _Tp __x)`  
*Return the exponential integral  $E_n(x)$  by series summation.*
- `template<typename _Tp >`  
`_Tp __expint_large_n (unsigned int __n, _Tp __x)`  
*Return the exponential integral  $E_n(x)$  for large order.*
- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp __f_cdf (_Tp __F, unsigned int __nu1, unsigned int __nu2)`  
*Return the F-distribution propability function. This returns the probability that the observed chi-square for a correct model exceeds the value  $\chi^2$ .*
- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp __f_cdfc (_Tp __F, unsigned int __nu1, unsigned int __nu2)`  
*Return the F-distribution propability function. This returns the probability that the observed chi-square for a correct model exceeds the value  $\chi^2$ .*

- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp __factorial (unsigned int __n)`  
*Return the factorial of the integer  $n$ .*
- `template<typename _Tp >`  
`_Tp __fermi_dirac (_Tp __s, _Tp __x)`
- `template<typename _Tp >`  
`void __fock_airy (_Tp __x, std::complex< _Tp > &__w1, std::complex< _Tp > &__w2, std::complex< _Tp > &__w1p, std::complex< _Tp > &__w2p)`  
*Compute the Fock-type Airy functions  $w_1(x)$  and  $w_2(x)$  and their first derivatives  $w_1'(x)$  and  $w_2'(x)$  respectively.*  

$$w_1(x) = \sqrt{\pi}(Ai(x) + iBi(x))$$

$$w_2(x) = \sqrt{\pi}(Ai(x) - iBi(x))$$
- `template<typename _Tp >`  
`bool __fpequal (const _Tp &__a, const _Tp &__b)`
- `template<typename _Tp >`  
`bool __fpimag (const std::complex< _Tp > &__w)`
- `template<typename _Tp >`  
`bool __fpimag (const _Tp)`
- `template<typename _Tp >`  
`bool __fpreal (const std::complex< _Tp > &__w)`
- `template<typename _Tp >`  
`bool __fpreal (const _Tp)`
- `template<typename _Tp >`  
`std::complex< _Tp > __fresnel (const _Tp __x)`  
*Return the Fresnel cosine and sine integrals as a complex number  $\$f[C(x) + iS(x)]$ .*
- `template<typename _Tp >`  
`void __fresnel_cont_frac (const _Tp __ax, _Tp &__Cf, _Tp &__Sf)`  
*This function computes the Fresnel cosine and sine integrals by continued fractions for positive argument.*
- `template<typename _Tp >`  
`void __fresnel_series (const _Tp __ax, _Tp &__Cf, _Tp &__Sf)`  
*This function returns the Fresnel cosine and sine integrals as a pair by series expansion for positive argument.*
- `template<typename _Tp >`  
`_Tp __gamma (_Tp __x)`  
*Return  $\Gamma(x)$ .*
- `template<typename _Tp >`  
`std::pair< _Tp, _Tp > __gamma_cont_frac (_Tp __a, _Tp __x)`
- `template<typename _Tp >`  
`_Tp __gamma_l (_Tp __a, _Tp __x)`  
*Return the lower incomplete gamma function. The lower incomplete gamma function is defined by*  

$$\gamma(a, x) = \int_0^x e^{-t} t^{a-1} dt (a > 0)$$
- `template<typename _Tp >`  
`_Tp __gamma_p (_Tp __a, _Tp __x)`  
*Return the regularized lower incomplete gamma function. The regularized lower incomplete gamma function is defined by*  

$$P(a, x) = \frac{\gamma(a, x)}{\Gamma(a)}$$
  
*where  $\Gamma(a)$  is the gamma function and*  

$$\gamma(a, x) = \int_0^x e^{-t} t^{a-1} dt (a > 0)$$
  
*is the lower incomplete gamma function.*



- template<typename \_Tp >  
\_Tp [\\_\\_gamma\\_q](#) (\_Tp \_\_a, \_Tp \_\_x)

Return the regularized upper incomplete gamma function. The regularized upper incomplete gamma function is defined by

$$Q(a, x) = \frac{\Gamma(a, x)}{\Gamma(a)}$$

where  $\Gamma(a)$  is the gamma function and

$$\Gamma(a, x) = \int_x^\infty e^{-t} t^{a-1} dt (a > 0)$$

is the upper incomplete gamma function.

- template<typename \_Tp >  
std::pair<\_Tp, \_Tp> [\\_\\_gamma\\_series](#) (\_Tp \_\_a, \_Tp \_\_x)
- template<typename \_Tp >  
void [\\_\\_gamma\\_temme](#) (\_Tp \_\_mu, \_Tp &\_\_gam1, \_Tp &\_\_gam2, \_Tp &\_\_gampl, \_Tp &\_\_gammi)

Compute the gamma functions required by the Temme series expansions of  $N_\nu(x)$  and  $K_\nu(x)$ .

$$\Gamma_1 = \frac{1}{2\mu} \left[ \frac{1}{\Gamma(1-\mu)} - \frac{1}{\Gamma(1+\mu)} \right]$$

and

$$\Gamma_2 = \frac{1}{2} \left[ \frac{1}{\Gamma(1-\mu)} + \frac{1}{\Gamma(1+\mu)} \right]$$

where  $-1/2 \leq \mu \leq 1/2$  is  $\mu = \nu - N$  and  $N$  is the nearest integer to  $\nu$ . The values of  $\Gamma(1+\mu)$  and  $\Gamma(1-\mu)$  are returned as well.

- template<typename \_Tp >  
\_Tp [\\_\\_gamma\\_u](#) (\_Tp \_\_a, \_Tp \_\_x)

Return the upper incomplete gamma function. The lower incomplete gamma function is defined by

$$\Gamma(a, x) = \int_x^\infty e^{-t} t^{a-1} dt (a > 0)$$

- template<typename \_Tp >  
\_Tp [\\_\\_gauss](#) (\_Tp \_\_x)
- template<typename \_Tp >  
\_Tp [\\_\\_gegenbauer\\_poly](#) (unsigned int \_\_n, \_Tp \_\_alpha, \_Tp \_\_x)
- template<typename \_Tp >  
void [\\_\\_hankel](#) (std::complex<\_Tp> \_\_nu, std::complex<\_Tp> \_\_z, std::complex<\_Tp> &\_\_H1, std::complex<\_Tp> &\_\_H2, std::complex<\_Tp> &\_\_H1p, std::complex<\_Tp> &\_\_H2p)
- template<typename \_Tp >  
void [\\_\\_hankel\\_debye](#) (std::complex<\_Tp> \_\_nu, std::complex<\_Tp> \_\_z, std::complex<\_Tp> \_\_alpha, int \_\_indexr, char &\_\_aorb, int &\_\_morn, std::complex<\_Tp> &\_\_H1, std::complex<\_Tp> &\_\_H2, std::complex<\_Tp> &\_\_H1p, std::complex<\_Tp> &\_\_H2p)
- template<typename \_Tp >  
void [\\_\\_hankel\\_params](#) (std::complex<\_Tp> \_\_nu, std::complex<\_Tp> \_\_zhat, std::complex<\_Tp> &\_\_p, std::complex<\_Tp> &\_\_p2, std::complex<\_Tp> &\_\_nup2, std::complex<\_Tp> &\_\_num2, std::complex<\_Tp> &\_\_num1d3, std::complex<\_Tp> &\_\_num2d3, std::complex<\_Tp> &\_\_num4d3, std::complex<\_Tp> &\_\_zeta, std::complex<\_Tp> &\_\_zetaphf, std::complex<\_Tp> &\_\_zetamhf, std::complex<\_Tp> &\_\_zetam3hf, std::complex<\_Tp> &\_\_zetat)

Compute parameters depending on  $z$  and  $nu$  that appear in the uniform asymptotic expansions of the Hankel functions and their derivatives, except the arguments to the Airy functions.

- template<typename \_Tp >  
void [\\_\\_hankel\\_uniform](#) (std::complex<\_Tp> \_\_nu, std::complex<\_Tp> \_\_z, std::complex<\_Tp> &\_\_H1, std::complex<\_Tp> &\_\_H2, std::complex<\_Tp> &\_\_H1p, std::complex<\_Tp> &\_\_H2p)

This routine computes the uniform asymptotic approximations of the Hankel functions and their derivatives including a patch for the case when the order equals or nearly equals the argument. At such points, Olver's expressions have zero denominators (and numerators) resulting in numerical problems. This routine averages results from four surrounding points in the complex plane to obtain the result in such cases.

- `template<typename _Tp >`  
`void __hankel_uniform_olver (std::complex< _Tp > __nu, std::complex< _Tp > __z, std::complex< _Tp > &__H1, std::complex< _Tp > &__H2, std::complex< _Tp > &__H1p, std::complex< _Tp > &__H2p)`

Compute approximate values for the Hankel functions of the first and second kinds using Olver's uniform asymptotic expansion to of order *nu* along with their derivatives.

- `template<typename _Tp >`  
`void __hankel_uniform_outer (std::complex< _Tp > __nu, std::complex< _Tp > __z, _Tp __eps, std::complex< _Tp > &__zhat, std::complex< _Tp > &__1dnsq, std::complex< _Tp > &__num1d3, std::complex< _Tp > &__num2d3, std::complex< _Tp > &__p, std::complex< _Tp > &__p2, std::complex< _Tp > &__etm3h, std::complex< _Tp > &__etrat, std::complex< _Tp > &__Aip, std::complex< _Tp > &__o4dp, std::complex< _Tp > &__Aim, std::complex< _Tp > &__o4dm, std::complex< _Tp > &__od2p, std::complex< _Tp > &__od0dp, std::complex< _Tp > &__od2m, std::complex< _Tp > &__od0dm)`

Compute outer factors and associated functions of *z* and *nu* appearing in Olver's uniform asymptotic expansions of the Hankel functions of the first and second kinds and their derivatives. The various functions of *z* and *nu* returned by *hankel\_uniform\_outer* are available for use in computing further terms in the expansions.

- `template<typename _Tp >`  
`void __hankel_uniform_sum (std::complex< _Tp > __p, std::complex< _Tp > __p2, std::complex< _Tp > &__num2, std::complex< _Tp > &__zetam3hf, std::complex< _Tp > &__Aip, std::complex< _Tp > &__o4dp, std::complex< _Tp > &__Aim, std::complex< _Tp > &__o4dm, std::complex< _Tp > &__od2p, std::complex< _Tp > &__od0dp, std::complex< _Tp > &__od2m, std::complex< _Tp > &__od0dm, _Tp __eps, std::complex< _Tp > &__H1sum, std::complex< _Tp > &__H1psum, std::complex< _Tp > &__H2sum, std::complex< _Tp > &__H2psum)`

Compute the sums in appropriate linear combinations appearing in Olver's uniform asymptotic expansions for the Hankel functions of the first and second kinds and their derivatives, using up to *n* terms (less than 5) to achieve relative error *eps*.

- `template<typename _Tp >`  
`_Tp __heuman_lambda (_Tp __k, _Tp __phi)`

- `template<typename _Tp >`  
`_Tp __hurwitz_zeta (_Tp __s, _Tp __a)`

Return the Hurwitz zeta function  $\zeta(s, a)$  for all  $s \neq 1$  and  $a > -1$ .

- `template<typename _Tp >`  
`std::complex< FType > __hurwitz_zeta (const _Tp __s, std::complex< _Tp > __a)`

- `template<typename _Tp >`  
`_Tp __hurwitz_zeta_euler_maclaurin (_Tp __s, _Tp __a)`

Return the Hurwitz zeta function  $\zeta(s, a)$  for all  $s \neq 1$  and  $a > -1$ .

- `template<typename _Tp >`  
`std::complex< _Tp > __hydrogen (const unsigned int __n, const unsigned int __l, const unsigned int __m, const _Tp __Z, const _Tp __r, const _Tp __theta, const _Tp __phi)`

- `template<typename _Tp >`  
`_Tp __hyperg (_Tp __a, _Tp __b, _Tp __c, _Tp __x)`

Return the hypergeometric function  ${}_2F_1(a, b; c; x)$ .

- `template<typename _Tp >`  
`_Tp __hyperg_luke (_Tp __a, _Tp __b, _Tp __c, _Tp __xin)`

Return the hypergeometric function  ${}_2F_1(a, b; c; x)$  by an iterative procedure described in Luke, *Algorithms for the Computation of Mathematical Functions*.

- `template<typename _Tp >`  
`_Tp __hyperg_reflect (_Tp __a, _Tp __b, _Tp __c, _Tp __x)`

Return the hypergeometric function  ${}_2F_1(a, b; c; x)$  by the reflection formulae in Abramowitz & Stegun formula 15.3.6 for  $d = c - a - b$  not integral and formula 15.3.11 for  $d = c - a - b$  integral. This assumes  $a, b, c \neq$  negative integer.

- `template<typename _Tp >`  
`_Tp __hyperg_series (_Tp __a, _Tp __b, _Tp __c, _Tp __x)`  
*Return the hypergeometric function  ${}_2F_1(a, b; c; x)$  by series expansion.*
- `template<typename _Tp >`  
`std::tuple< _Tp, _Tp, _Tp > __jacobi_sncndn (_Tp __k, _Tp __u)`
- `template<typename _Tp >`  
`_Tp __jacobi_zeta (_Tp __k, _Tp __phi)`
- `template<typename _Tp >`  
`_Tp __laguerre (unsigned int __n, _Tp __x)`  
*This routine returns the Laguerre polynomial of order  $n$ :  $L_n(x)$ .*
- `template<typename _Tp >`  
`_Tp __log_bincoef (unsigned int __n, unsigned int __k)`  
*Return the logarithm of the binomial coefficient. The binomial coefficient is given by:*

$$\binom{n}{k} = \frac{n!}{(n-k)!k!}$$

- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp __log_double_factorial (_Tp __x)`
- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp __log_double_factorial (int __n)`  
*Return the logarithm of the double factorial of the integer  $n$ .*
- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp __log_factorial (unsigned int __n)`  
*Return the logarithm of the factorial of the integer  $n$ .*
- `template<typename _Tp >`  
`_Tp __log_gamma (_Tp __x)`  
*Return  $\log(|\Gamma(x)|)$ . This will return values even for  $x < 0$ . To recover the sign of  $\Gamma(x)$  for any argument use `__log_gamma_sign`.*
- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp __log_gamma_bernoulli (_Tp __x)`  
*Return  $\log(\Gamma(x))$  by asymptotic expansion with Bernoulli number coefficients. This is like Sterling's approximation.*
- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp __log_gamma_lanczos (_Tp __x)`  
*Return  $\log(\Gamma(x))$  by the Lanczos method. This method dominates all others on the positive axis I think.*
- `template<typename _Tp >`  
`_Tp __log_gamma_sign (_Tp __x)`  
*Return the sign of  $\Gamma(x)$ . At nonpositive integers zero is returned.*
- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp __log_gamma_spouge (_Tp __z)`  
*Return  $\Gamma(z)$  by the Spouge algorithm:*

$$\Gamma(z+1) = (z+a)^{z+1/2} e^{-z-a} \left[ \sqrt{2\pi} \sum_{k=1}^{\lceil a \rceil + 1} \frac{c_k(a)}{z+k} \right]$$

where

$$c_k(a) = \frac{(-1)^{k-1}}{(k-1)!} (a-k)^{k-1/2} e^{a-k}$$

and the error is bounded by

$$\epsilon(a) < a^{-1/2} (2\pi)^{-a-1/2}$$

- `template<typename _Tp >`

`_Tp __log_pochhammer_l(_Tp __a, _Tp __n)`

Return the logarithm of the lower Pochhammer symbol or the falling factorial function. The lower Pochhammer symbol is defined by

$$(a)_n = \prod_{k=0}^{n-1} (a - k), (a)_0 = 1 = \Gamma(a + 1) / \Gamma(a - n + 1)$$

In particular,  $(n)_n = n!$ . Thus this function returns

$$\ln[(a)_n] = \Gamma(a + 1) - \Gamma(a - n + 1), \ln[(a)_0] = 0$$

Many notations exist:

$$a^{\overline{n}}$$

,

$$\left\{ \begin{matrix} a \\ n \end{matrix} \right\}$$

, and others.

- `template<typename _Tp >`

`_Tp __log_pochhammer_u(_Tp __a, _Tp __n)`

Return the logarithm of the (upper) Pochhammer symbol or the rising factorial function. The Pochhammer symbol is defined by

$$(a)_n = \prod_{k=0}^{n-1} (a + k), (a)_0 = 1 = \Gamma(a + n) / \Gamma(a)$$

Thus this function returns

$$\ln[(a)_n] = \Gamma(a + n) - \Gamma(a), \ln[(a)_0] = 0$$

Many notations exist:

$$a^{\overline{n}}$$

,

$$\left[ \begin{matrix} a \\ n \end{matrix} \right]$$

, and others.

- `template<typename _Tp >`

`_Tp __logint(const _Tp __x)`

Return the logarithmic integral  $li(x)$ .

- `template<typename _Tp >`

`_Tp __owens_t(_Tp __h, _Tp __a)`

- `template<typename _Tp >`

`_Tp __pochhammer_l(_Tp __a, _Tp __n)`

Return the logarithm of the lower Pochhammer symbol or the falling factorial function. The lower Pochhammer symbol is defined by

$$(a)_n = \prod_{k=0}^{n-1} (a - k), (a)_0 = 1 = \Gamma(a + 1) / \Gamma(a - n + 1)$$

In particular,  $(n)_n = n!$ .

- `template<typename _Tp >`

`_Tp __pochhammer_u(_Tp __a, _Tp __n)`

Return the (upper) Pochhammer function or the rising factorial function. The Pochhammer symbol is defined by

$$(a)_n = \prod_{k=0}^{n-1} (a + k), (a)_0 = 1 = \Gamma(a + n) / \Gamma(a)$$

Many notations exist:

$$a^{\overline{n}}$$

,

$$\left[ \begin{matrix} a \\ n \end{matrix} \right]$$

, and others.

- `template<typename _Tp >`  
`_Tp __poly_hermite (unsigned int __n, _Tp __x)`  
*This routine returns the Hermite polynomial of order  $n$ :  $H_n(x)$ .*
- `template<typename _Tp >`  
`_Tp __poly_hermite_asyp (unsigned int __n, _Tp __x)`  
*This routine returns the Hermite polynomial of large order  $n$ :  $H_n(x)$ . We assume here that  $x \geq 0$ .*
- `template<typename _Tp >`  
`_Tp __poly_hermite_recursion (unsigned int __n, _Tp __x)`  
*This routine returns the Hermite polynomial of order  $n$ :  $H_n(x)$  by recursion on  $n$ .*
- `template<typename _Tp >`  
`_Tp __poly_jacobi (unsigned int __n, _Tp __alpha, _Tp __beta, _Tp __x)`
- `template<typename _Tpa, typename _Tp >`  
`_Tp __poly_laguerre (unsigned int __n, _Tpa __alpha1, _Tp __x)`  
*This routine returns the associated Laguerre polynomial of order  $n$ , degree  $\alpha$ :  $L_n^\alpha(x)$ .*
- `template<typename _Tpa, typename _Tp >`  
`_Tp __poly_laguerre_hyperg (unsigned int __n, _Tpa __alpha1, _Tp __x)`  
*Evaluate the polynomial based on the confluent hypergeometric function in a safe way, with no restriction on the arguments.*
- `template<typename _Tpa, typename _Tp >`  
`_Tp __poly_laguerre_large_n (unsigned __n, _Tpa __alpha1, _Tp __x)`  
*This routine returns the associated Laguerre polynomial of order  $n$ , degree  $\alpha$  for large  $n$ . Abramowitz & Stegun, 13.5.21.*
- `template<typename _Tpa, typename _Tp >`  
`_Tp __poly_laguerre_recursion (unsigned int __n, _Tpa __alpha1, _Tp __x)`  
*This routine returns the associated Laguerre polynomial of order  $n$ , degree  $\alpha$ :  $L_n^\alpha(x)$  by recursion.*
- `template<typename _Tp >`  
`_Tp __poly_legendre_p (unsigned int __l, _Tp __x)`  
*Return the Legendre polynomial by upward recursion on order  $l$ .*
- `template<typename _Tp >`  
`_Tp __poly_legendre_q (unsigned int __l, _Tp __x)`  
*Return the Legendre function of the second kind by upward recursion on order  $l$ .*
- `template<typename _Tp >`  
`_Tp __poly_radial_jacobi (unsigned int __n, unsigned int __m, _Tp __rho)`
- `template<typename _Tp >`  
`_Tp __polylog (_Tp __s, _Tp __x)`
- `template<typename _Tp >`  
`std::complex< _Tp > __polylog (_Tp __s, std::complex< _Tp > __w)`
- `template<typename _Tp, typename ArgType >`  
`__gnu_cxx::__promote_num_t< std::complex< _Tp >, ArgType > __polylog_exp (_Tp __s, ArgType __w)`
- `template<typename _Tp >`  
`std::complex< _Tp > __polylog_exp_asyp (const _Tp __s, std::complex< _Tp > __w)`
- `template<typename _Tp >`  
`std::complex< _Tp > __polylog_exp_int_neg (const int __s, std::complex< _Tp > __w)`
- `template<typename _Tp >`  
`std::complex< _Tp > __polylog_exp_int_neg (const int __s, _Tp __w)`
- `template<typename _Tp >`  
`std::complex< _Tp > __polylog_exp_int_pos (const unsigned int __s, std::complex< _Tp > __w)`
- `template<typename _Tp >`  
`std::complex< _Tp > __polylog_exp_int_pos (const unsigned int __s, _Tp __w)`
- `template<typename _Tp >`  
`std::complex< _Tp > __polylog_exp_neg (_Tp __s, std::complex< _Tp > __w)`
- `template<typename _Tp >`  
`std::complex< _Tp > __polylog_exp_neg (int __s, std::complex< _Tp > __w)`

- `template<typename _Tp, int __sigma>`  
`std::complex< _Tp > __polylog_exp_neg_even` (unsigned int \_\_n, std::complex< \_Tp > \_\_w)
- `template<typename _Tp, int __sigma>`  
`std::complex< _Tp > __polylog_exp_neg_odd` (unsigned int \_\_n, std::complex< \_Tp > \_\_w)
- `template<typename _PowTp, typename _Tp >`  
`_Tp __polylog_exp_negative_real_part` (\_PowTp \_\_s, \_Tp \_\_w)
- `template<typename _Tp >`  
`std::complex< _Tp > __polylog_exp_pos` (unsigned int \_\_s, std::complex< \_Tp > \_\_w)
- `template<typename _Tp >`  
`std::complex< _Tp > __polylog_exp_pos` (unsigned int \_\_s, \_Tp \_\_w)
- `template<typename _Tp >`  
`std::complex< _Tp > __polylog_exp_pos` (\_Tp \_\_s, std::complex< \_Tp > \_\_w)
- `template<typename _Tp >`  
`std::complex< _Tp > __polylog_exp_real_neg` (\_Tp \_\_s, std::complex< \_Tp > \_\_w)
- `template<typename _Tp >`  
`std::complex< _Tp > __polylog_exp_real_neg` (\_Tp \_\_s, \_Tp \_\_w)
- `template<typename _Tp >`  
`std::complex< _Tp > __polylog_exp_real_pos` (\_Tp \_\_s, std::complex< \_Tp > \_\_w)
- `template<typename _Tp >`  
`std::complex< _Tp > __polylog_exp_real_pos` (\_Tp \_\_s, \_Tp \_\_w)
- `template<typename _Tp >`  
`_Tp __psi` (\_Tp \_\_x)

*Return the digamma function. The digamma or  $\psi(x)$  function is defined by*

$$\psi(x) = \frac{\Gamma'(x)}{\Gamma(x)}$$

*For negative argument the reflection formula is used:*

$$\psi(x) = \psi(1-x) - \pi \cot(\pi x)$$

- `template<typename _Tp >`  
`_Tp __psi` (unsigned int \_\_n, \_Tp \_\_x)  
*Return the polygamma function  $\psi^{(n)}(x)$ .*

- `template<typename _Tp >`  
`_Tp __psi_asymp` (\_Tp \_\_x)  
*Return the digamma function for large argument. The digamma or  $\psi(x)$  function is defined by*

$$\psi(x) = \frac{\Gamma'(x)}{\Gamma(x)}$$

- `template<typename _Tp >`  
`_Tp __psi_series` (\_Tp \_\_x)  
*Return the digamma function by series expansion. The digamma or  $\psi(x)$  function is defined by*

$$\psi(x) = \frac{\Gamma'(x)}{\Gamma(x)}$$

- `template<typename _Tp >`  
`_Tp __riemann_zeta` (\_Tp \_\_s)  
*Return the Riemann zeta function  $\zeta(s)$ .*
- `template<typename _Tp >`  
`_Tp __riemann_zeta_alt` (\_Tp \_\_s)

Evaluate the Riemann zeta function  $\zeta(s)$  by an alternate series for  $s > 0$ .

- `template<typename _Tp >`  
`_Tp __riemann_zeta_euler_maclaurin (_Tp __s)`

Evaluate the Riemann zeta function  $\zeta(s)$  by an alternate series for  $s > 0$ .

- `template<typename _Tp >`  
`_Tp __riemann_zeta_glob (_Tp __s)`

Evaluate the Riemann zeta function by series for all  $s \neq 1$ . Convergence is great until largish negative numbers. Then the convergence of the  $> 0$  sum gets better.

- `template<typename _Tp >`  
`_Tp __riemann_zeta_m_1 (_Tp __s)`

Return the Riemann zeta function  $\zeta(s) - 1$ .

- `template<typename _Tp >`  
`_Tp __riemann_zeta_m_1_sum (_Tp __s)`

Return the Riemann zeta function  $\zeta(s) - 1$  by summation for  $s > 1$ . This is a small remainder for large  $s$ .

- `template<typename _Tp >`  
`_Tp __riemann_zeta_product (_Tp __s)`

Compute the Riemann zeta function  $\zeta(s)$  using the product over prime factors.

- `template<typename _Tp >`  
`_Tp __riemann_zeta_sum (_Tp __s)`

Compute the Riemann zeta function  $\zeta(s)$  by summation for  $s > 1$ .

- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t<_Tp> __sinc (_Tp __a, _Tp __x)`

Return the generalized sinus cardinal function

$$\text{sinc}_a(x) = \frac{\sin(\pi x/a)}{(\pi x/a)}$$

- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t<_Tp> __sinc (_Tp __x)`

Return the normalized sinus cardinal function

$$\text{sinc}(x) = \frac{\sin(\pi x)}{\pi x}$$

- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t<_Tp> __sinc_pi (_Tp __x)`

Return the unnormalized sinus cardinal function

$$\text{sinc}_\pi(x) = \frac{\sin(x)}{x}$$

- `template<typename _Tp >`  
`std::pair<_Tp, _Tp> __sincosint (_Tp __x)`

This function returns the sine  $Si(x)$  and cosine  $Ci(x)$  integrals as a pair.

- `template<typename _Tp >`  
`void __sincosint_asymp (_Tp __t, _Tp &_Si, _Tp &_Ci)`

This function computes the sine  $Si(x)$  and cosine  $Ci(x)$  integrals by asymptotic series summation for positive argument.

- `template<typename _Tp >`  
`void __sincosint_cont_frac (_Tp __t, _Tp &_Si, _Tp &_Ci)`

This function computes the sine  $Si(x)$  and cosine  $Ci(x)$  integrals by continued fraction for positive argument.

- `template<typename _Tp >`  
`void __sincosint_series (_Tp __t, _Tp &_Si, _Tp &_Ci)`

This function computes the sine  $Si(x)$  and cosine  $Ci(x)$  integrals by series summation for positive argument.

- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __sinhc ( _Tp __a, _Tp __x)`

*Return the generalized hyperbolic sinus cardinal function*

$$\sinhc_a(x) = \frac{\sinh(\pi x/a)}{\pi x/a}$$

- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __sinhc ( _Tp __x)`

*Return the normalized hyperbolic sinus cardinal function*

$$\sinhc(x) = \frac{\sinh(\pi x)}{\pi x}$$

- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __sinhc_pi ( _Tp __x)`

*Return the unnormalized hyperbolic sinus cardinal function*

$$\sinhc_\pi(x) = \frac{\sinh(x)}{x}$$

- `template<typename _Tp >`  
`_Tp __sinhint (const _Tp __x)`

*Return the hyperbolic sine integral  $li(x)$ .*

- `template<typename _Tp >`  
`_Tp __sph_bessel (unsigned int __n, _Tp __x)`

*Return the spherical Bessel function  $j_n(x)$  of order  $n$  and non-negative real argument  $x$ .*

- `template<typename _Tp >`  
`std::complex< _Tp > __sph_bessel (unsigned int __n, std::complex< _Tp > __z)`

*Return the complex spherical Bessel function.*

- `template<typename _Tp >`  
`void __sph_bessel_ik (unsigned int __n, _Tp __x, _Tp &__i_n, _Tp &__k_n, _Tp &__ip_n, _Tp &__kp_n)`

*Compute the spherical modified Bessel functions  $i_n(x)$  and  $k_n(x)$  and their first derivatives  $i'_n(x)$  and  $k'_n(x)$  respectively.*

- `template<typename _Tp >`  
`void __sph_bessel_jn (unsigned int __n, _Tp __x, _Tp &__j_n, _Tp &__n_n, _Tp &__jp_n, _Tp &__np_n)`

*Compute the spherical Bessel  $j_n(x)$  and Neumann  $n_n(x)$  functions and their first derivatives  $j'_n(x)$  and  $n'_n(x)$  respectively.*

- `template<typename _Tp >`  
`void __sph_hankel (unsigned int __n, std::complex< _Tp > __z, std::complex< _Tp > &__H1, std::complex< _Tp > &__H1p, std::complex< _Tp > &__H2, std::complex< _Tp > &__H2p)`

*Helper to compute complex spherical Hankel functions and their derivatives.*

- `template<typename _Tp >`  
`std::complex< _Tp > __sph_hankel_1 (unsigned int __n, _Tp __x)`

*Return the spherical Hankel function of the first kind  $h_n^{(1)}(x)$ .*

- `template<typename _Tp >`  
`std::complex< _Tp > __sph_hankel_1 (unsigned int __n, std::complex< _Tp > __z)`

*Return the complex spherical Hankel function of the first kind.*

- `template<typename _Tp >`  
`std::complex< _Tp > __sph_hankel_2 (unsigned int __n, _Tp __x)`

*Return the spherical Hankel function of the second kind  $h_n^{(2)}(x)$ .*

- `template<typename _Tp >`  
`std::complex< _Tp > __sph_hankel_2 (unsigned int __n, std::complex< _Tp > __z)`



*Return the complex spherical Hankel function of the second kind.*

- template<typename \_Tp >  
std::complex< \_Tp > [\\_\\_sph\\_harmonic](#) (unsigned int \_\_l, int \_\_m, \_Tp \_\_theta, \_Tp \_\_phi)

*Return the spherical harmonic function.*

- template<typename \_Tp >  
\_Tp [\\_\\_sph\\_legendre](#) (unsigned int \_\_l, unsigned int \_\_m, \_Tp \_\_theta)

*Return the spherical associated Legendre function.*

- template<typename \_Tp >  
\_Tp [\\_\\_sph\\_neumann](#) (unsigned int \_\_n, \_Tp \_\_x)

*Return the spherical Neumann function  $n_n(x)$  of order  $n$  and non-negative real argument  $x$ .*

- template<typename \_Tp >  
std::complex< \_Tp > [\\_\\_sph\\_neumann](#) (unsigned int \_\_n, std::complex< \_Tp > \_\_z)

*Return the complex spherical Neumann function.*

- template<typename \_Tp >  
\_GLIBCXX14\_CONSTEXPR \_Tp [\\_\\_students\\_t\\_cdf](#) (\_Tp \_\_t, unsigned int \_\_nu)

*Return the Students  $T$  probability function.*

- template<typename \_Tp >  
\_GLIBCXX14\_CONSTEXPR \_Tp [\\_\\_students\\_t\\_cdfc](#) (\_Tp \_\_t, unsigned int \_\_nu)

*Return the complement of the Students  $T$  probability function.*

- template<typename \_Tp >  
\_Tp [\\_\\_theta\\_1](#) (\_Tp \_\_nu, \_Tp \_\_x)
- template<typename \_Tp >  
\_Tp [\\_\\_theta\\_2](#) (\_Tp \_\_nu, \_Tp \_\_x)
- template<typename \_Tp >  
\_Tp [\\_\\_theta\\_2\\_asymp](#) (\_Tp \_\_nu, \_Tp \_\_x)
- template<typename \_Tp >  
\_Tp [\\_\\_theta\\_2\\_sum](#) (\_Tp \_\_nu, \_Tp \_\_x)
- template<typename \_Tp >  
\_Tp [\\_\\_theta\\_3](#) (\_Tp \_\_nu, \_Tp \_\_x)
- template<typename \_Tp >  
\_Tp [\\_\\_theta\\_3\\_asymp](#) (\_Tp \_\_nu, \_Tp \_\_x)
- template<typename \_Tp >  
\_Tp [\\_\\_theta\\_3\\_sum](#) (\_Tp \_\_nu, \_Tp \_\_x)
- template<typename \_Tp >  
\_Tp [\\_\\_theta\\_4](#) (\_Tp \_\_nu, \_Tp \_\_x)
- template<typename \_Tp >  
\_Tp [\\_\\_theta\\_c](#) (\_Tp \_\_k, \_Tp \_\_x)
- template<typename \_Tp >  
\_Tp [\\_\\_theta\\_d](#) (\_Tp \_\_k, \_Tp \_\_x)
- template<typename \_Tp >  
\_Tp [\\_\\_theta\\_n](#) (\_Tp \_\_k, \_Tp \_\_x)
- template<typename \_Tp >  
\_Tp [\\_\\_theta\\_s](#) (\_Tp \_\_k, \_Tp \_\_x)
- template<typename \_Tp >  
\_\_gnu\_cxx::\_\_promote\_num\_t< \_Tp > [\\_\\_zernike](#) (unsigned int \_\_n, int \_\_m, \_Tp \_\_rho, \_Tp \_\_phi)
- template<typename \_Tp >  
\_Tp [\\_\\_znorm1](#) (\_Tp \_\_x)
- template<typename \_Tp >  
\_Tp [\\_\\_znorm2](#) (\_Tp \_\_x)
- template<typename \_Tp = double>  
\_Tp [evenzeta](#) (unsigned int \_\_k)

## Variables

- constexpr size\_t [\\_Num\\_Euler\\_Maclaurin\\_zeta](#) = 100
- constexpr [\\_Factorial\\_table](#)< long double > [\\_S\\_double\\_factorial\\_table](#) [301]
- constexpr long double [\\_S\\_Euler\\_Maclaurin\\_zeta](#) [[\\_Num\\_Euler\\_Maclaurin\\_zeta](#)]
- constexpr [\\_Factorial\\_table](#)< long double > [\\_S\\_factorial\\_table](#) [171]
- constexpr [\\_Factorial\\_table](#)< long double > [\\_S\\_neg\\_double\\_factorial\\_table](#) [999]
- template<typename [\\_Tp](#) >  
constexpr std::size\_t [\\_S\\_num\\_double\\_factorials](#) = 0
- template<>  
constexpr std::size\_t [\\_S\\_num\\_double\\_factorials](#)< double > = 301
- template<>  
constexpr std::size\_t [\\_S\\_num\\_double\\_factorials](#)< float > = 57
- template<>  
constexpr std::size\_t [\\_S\\_num\\_double\\_factorials](#)< long double > = 301
- template<typename [\\_Tp](#) >  
constexpr std::size\_t [\\_S\\_num\\_factorials](#) = 0
- template<>  
constexpr std::size\_t [\\_S\\_num\\_factorials](#)< double > = 171
- template<>  
constexpr std::size\_t [\\_S\\_num\\_factorials](#)< float > = 35
- template<>  
constexpr std::size\_t [\\_S\\_num\\_factorials](#)< long double > = 171
- template<typename [\\_Tp](#) >  
constexpr std::size\_t [\\_S\\_num\\_neg\\_double\\_factorials](#) = 0
- template<>  
constexpr std::size\_t [\\_S\\_num\\_neg\\_double\\_factorials](#)< double > = 150
- template<>  
constexpr std::size\_t [\\_S\\_num\\_neg\\_double\\_factorials](#)< float > = 27
- template<>  
constexpr std::size\_t [\\_S\\_num\\_neg\\_double\\_factorials](#)< long double > = 999
- constexpr size\_t [\\_S\\_num\\_zetam1](#) = 33
- constexpr long double [\\_S\\_zetam1](#) [[\\_S\\_num\\_zetam1](#)]

### 8.3.1 Enumeration Type Documentation

#### 8.3.1.1 anonymous enum

Enumerator

***SININT***

***COSINT***

Definition at line 42 of file `sf_trigint.tcc`.

### 8.3.2 Function Documentation

#### 8.3.2.1 template<typename [\\_Tp](#) > void std::\_\_detail::\_\_airy ( [\\_Tp](#) [\\_z](#), [\\_Tp](#) & [\\_Ai](#), [\\_Tp](#) & [\\_Bi](#), [\\_Tp](#) & [\\_Aip](#), [\\_Tp](#) & [\\_Bip](#) )

Compute the Airy functions  $Ai(x)$  and  $Bi(x)$  and their first derivatives  $Ai'(x)$  and  $Bi'(x)$  respectively.

## Parameters

<code>__z</code>	The argument of the Airy functions.
<code>_Ai</code>	The output Airy function of the first kind.
<code>_Bi</code>	The output Airy function of the second kind.
<code>_Aip</code>	The output derivative of the Airy function of the first kind.
<code>_Bip</code>	The output derivative of the Airy function of the second kind.

Definition at line 486 of file `sf_mod_bessel.tcc`.

References `__cyl_bessel_ik()`, and `__cyl_bessel_jn()`.

**8.3.2.2** `template<typename _Tp> void std::__detail::__airy ( const std::complex<_Tp> & __z, _Tp __eps, std::complex<_Tp> & __Ai, std::complex<_Tp> & __Aip, std::complex<_Tp> & __Bi, std::complex<_Tp> & __Bip )`

This function computes the Airy function  $Ai(z)$  and its first derivative in the complex  $z$ -plane.

The algorithm used exploits numerous representations of the Airy function and its derivative. The representations are recorded here for reference:

$$(1a) Ai(z) = \frac{\sqrt{z}}{3} (I_{-1/3}(\zeta) - I_{1/3}(\zeta))$$

$$(1b) Bi(z) = \sqrt{\frac{z}{3}} (I_{-1/3}(\zeta) + I_{1/3}(\zeta))$$

$$(2) Ai(z) = \frac{\sqrt{z/3}}{\pi} K_{1/3}(\zeta) = \frac{2^{2/3} 3^{-5/6}}{\sqrt{(\pi)}} z \exp(-\zeta) U(5/6; 5/3; 2\zeta)$$

$$(3a) Ai(-z) = \frac{\sqrt{z}}{3} (J_{-1/3}(\zeta) + J_{1/3}(\zeta))$$

$$(3b) Bi(-z) = \sqrt{\frac{z}{3}} (J_{-1/3}(\zeta) - J_{1/3}(\zeta))$$

$$(4a) Ai'(z) = \frac{z}{3} (I_{2/3}(\zeta) - I_{-2/3}(\zeta))$$

$$(4b) Bi'(z) = \frac{z}{\sqrt{3}} (I_{-2/3}(\zeta) + I_{2/3}(\zeta))$$

$$(5a) Ai'(z) = -\frac{z}{\pi\sqrt{3}} K(2/3)(\zeta) = -\frac{4^{2/3} 3^{-7/6}}{\sqrt{(\pi)}} z^2 \exp(-\zeta) U(7/6; 7/3; 2\zeta)$$

$$(6a) Ai'(-z) = \frac{z}{3} (J_{2/3}(\zeta) - J_{-2/3}(\zeta)),$$

$$(6b) Bi'(-z) = \frac{z}{\sqrt{3}} (J_{-2/3}(\zeta) + J_{2/3}(\zeta)),$$

Where  $\zeta = -\frac{2}{3}z^{3/2}$  and  $U(a; b; z)$  is the confluent hypergeometric function defined in

## See also

Stegun, I. A. and Abramowitz, M., Handbook of Mathematical Functions, Natl. Bureau of Standards, AMS 55, pp 504-515, 1964.

The asymptotic expansions derivable from these representations and Hankel's asymptotic expansions for the Bessel functions are used for large modulus of  $z$ . The implementation has taken advantage of the error bounds given in

**See also**

Olver, F. W. J., Error Bounds for Asymptotic Expansions, with an Application to Cylinder Functions of Large Argument, in Asymptotic Solutions of Differential Equations (Wilcox, Ed.), Wiley and Sons, pp 163-183, 1964

and

**See also**

Olver, F. W. J., Asymptotics and Special Functions, Academic Press, pp 266-268, 1974.

For small modulus of  $z$ , a rational approximation is used. This approximant is derived from

Luke, Y. L., Mathematical Functions and their Approximations, Academic Press, pp 361-363, 1975.

The identities given below are for Bessel functions of the first kind in terms of modified Bessel functions of the first kind are also used with the rational approximant.

For moderate modulus of  $z$ , three techniques are used. Two use a backward recursion algorithm with (1), (3), (4), and (6). The third uses the confluent hypergeometric representations given by (2) and (5). The backward recursion algorithm generates values of the modified Bessel functions of the first kind of orders  $+ \text{ or } - 1/3$  and  $+ \text{ or } - 2/3$  for  $z$  in the right half plane. Values for the corresponding Bessel functions of the first kind are recovered via the identities

$$J_\nu(z) = \exp(\nu\pi i/2) I_\nu(z \exp(-\pi i/2)), 0 \leq \arg(z) \leq \pi/2$$

and

$$J_\nu(z) = \exp(-\nu\pi i/2) I_\nu(z \exp(\pi i/2)), -\pi/2 \leq \arg(z) < 0.$$

The particular backward recursion algorithm used is discussed in

**See also**

Olver, F. W. J., Numerical solution of second-order linear difference equations, NBS J. Res., Series B, VOL 71B, pp 111-129, 1967.

Olver, F. W. J. and Sookne, D. J., Note on backward recurrence algorithms, Math. Comp. Vol 26, No. 120, pp 941-947, Oct. 1972

Sookne, D. J., Bessel Functions I and J of Complex Argument and Integer Order, NBS J. Res., Series B, Vol 77B, Nos 3& 4, pp 111-113, July-December, 1973.

The following paper was also useful

**See also**

Cody, W. J., Preliminary report on software for the modified Bessel functions of the first kind, Applied Mathematics Division, Argonne National Laboratory, Tech. Memo. no. 357.

A backward recursion algorithm is also used to compute the confluent hypergeometric function. The recursion relations and a convergence theorem are given in

**See also**

Wimp, J., On the computation of Tricomi's psi function, Computing, Vol 13, pp 195-203, 1974.

## Parameters

in	<code>__z</code>	The argument at which the Airy function and its derivative are computed.
in	<code>__eps</code>	Relative error required. Currently, eps is used only in the backward recursion algorithms.
out	<code>_Ai</code>	The value computed for $Ai(z)$ .
out	<code>_Aip</code>	The value computed for $Ai'(z)$ .
out	<code>_Bi</code>	The value computed for $Bi(z)$ .
out	<code>_Bip</code>	The value computed for $Bi'(z)$ .

Definition at line 1008 of file sf\_airy.tcc.

References `__airy_asymp_absarg_ge_pio3()`, `__airy_asymp_absarg_lt_pio3()`, `__airy_bessel_i()`, `__airy_bessel_k()`, and `__airy_hyperg_rational()`.

Referenced by `__airy_ai()`, `__airy_bi()`, `__hankel_uniform_outer()`, and `__poly_hermite_asymp()`.

### 8.3.2.3 `template<typename _Tp> std::complex<_Tp> std::__detail::__airy_ai ( std::complex<_Tp> __z )`

Return the complex Airy  $Ai$  function.

Definition at line 1145 of file sf\_airy.tcc.

References `__airy()`.

### 8.3.2.4 `template<typename _Tp> void std::__detail::__airy_arg ( std::complex<_Tp> __num2d3, std::complex<_Tp> __zeta, std::complex<_Tp> & __argp, std::complex<_Tp> & __argm )`

Compute the arguments for the Airy function evaluations carefully to prevent premature overflow. Note that the major work here is in `safe_div`. A faster, but less safe implementation can be obtained without use of `safe_div`.

## Parameters

in	<code>__num2d3</code>	$\nu^{(-2/3)}$ - output from <code>hankel_params</code> .
in	<code>__zeta</code>	$\zeta$ in the uniform asymptotic expansions - output from <code>hankel_params</code> .
out	<code>__argp</code>	$\exp(+2\pi i/3) * \nu^{(2/3)} * \zeta$ .
out	<code>__argm</code>	$\exp(-2\pi i/3) * \nu^{(2/3)} * \zeta$ .

## Exceptions

<code>std::runtime_error.</code>
----------------------------------

Definition at line 241 of file sf\_hankel.tcc.

Referenced by `__hankel_uniform_outer()`.

### 8.3.2.5 `template<typename _Tp> void std::__detail::__airy_asymp_absarg_ge_pio3 ( std::complex<_Tp> __z, std::complex<_Tp> & __Ai, std::complex<_Tp> & __Aip, int __sign = -1 )`

This function evaluates  $Ai(z)$  and  $Ai'(z)$  from their asymptotic expansions for  $|arg(z)| < 2 * \pi/3$ . For speed, the number of terms needed to achieve about 16 decimals accuracy is tabled and determined from `abs(z)`.

Note that for the sake of speed and the fact that this function is to be called by another, checks for valid arguments are not made.

See also

Digital Library of Mathematical Functions Sec. 9.7 Asymptotic Expansions <http://dlmf.nist.gov/9.7>

#### Parameters

in	<code>__z</code>	Complex input variable set equal to the value at which $Ai(z)$ and $Bi(z)$ and their derivative are evaluated. This function assumes $ z  > 15$ and $ arg(z)  < 2\pi/3$ .
in, out	<code>_Ai</code>	The value computed for $Ai(z)$ .
in, out	<code>_Aip</code>	The value computed for $Ai'(z)$ .
in	<code>__sign</code>	The sign of the series terms and exponent. The default (-1) gives the Airy Ai functions for $ arg(z)  < \pi$ . The value +1 gives the Airy Bi functions for $ arg(z)  < \pi/3$ .

Definition at line 71 of file `sf_airy.tcc`.

Referenced by `__airy()`.

**8.3.2.6** `template<typename _Tp> void std::__detail::__airy_asyp_absarg_lt_pio3 ( std::complex<_Tp> __z, std::complex<_Tp> &_Ai, std::complex<_Tp> &_Aip )`

This function evaluates  $Ai(z)$  and  $Ai'(z)$  from their asymptotic expansions for  $|arg(-z)| < \pi/3$ . For speed, the number of terms needed to achieve about 16 decimals accuracy is tabled and determined from  $|z|$ .

Note that for the sake of speed and the fact that this function is to be called by another, checks for valid arguments are not made. Hence, an error return is not needed. This function assumes  $|z| > 15$  and  $|arg(-z)| < \pi/3$ .

#### Parameters

in	<code>__z</code>	The value at which the Airy function and its derivative are evaluated.
out	<code>_Ai</code>	The computed value of the Airy function $Ai(z)$ .
out	<code>_Aip</code>	The computed value of the Airy function derivative $Ai'(z)$ .

Definition at line 187 of file `sf_airy.tcc`.

Referenced by `__airy()`.

**8.3.2.7** `template<typename _Tp> void std::__detail::__airy_bessel_i ( const std::complex<_Tp> &__z, _Tp __eps, std::complex<_Tp> &_lp1d3, std::complex<_Tp> &_lm1d3, std::complex<_Tp> &_lp2d3, std::complex<_Tp> &_lm2d3 )`

Compute the modified Bessel functions of the first kind of orders  $+1/3$  and  $+2/3$  needed to compute the Airy functions and their derivatives from their representation in terms of the modified Bessel functions. This function is only used for  $z$  less than two in modulus and in the closed right half plane. This stems from the fact that the values of the modified Bessel functions occurring in the representations of the Airy functions and their derivatives are almost equal for  $z$  large in the right half plane. This means that loss of significance occurs if these representations are used for  $z$  too large in magnitude. This algorithm is also not used for  $z$  too small, since a low order rational approximation can be used instead.

This routine is an implementation of a modified version of Miller's backward recurrence algorithm for computation by from the recurrence relation

$$I_{\nu-1} = (2\nu/z)I_{\nu} + I_{\nu+1}$$

satisfied by the modified Bessel functions of the first kind. the normalization relationship used is

$$\frac{z/2)^{\nu} e^z}{\Gamma(\nu+1)} = I_{\nu}(z) + 2 \sum_{k=1}^{\infty} \frac{(k+\nu)\Gamma(2\nu+k)}{k!\Gamma(1+2\nu)} I_{\nu+k}(z).$$

This modification of the algorithm is given in part in

Olver, F. W. J. and Sookne, D. J., Note on Backward Recurrence Algorithms, Math. of Comp., Vol. 26, no. 120, Oct. 1972.

And further elaborated for the Bessel functions in

Sookne, D. J., Bessel Functions I and J of Complex Argument and Integer Order, J. Res. NBS - Series B, Vol 77B, Nos. 3 & 4, July-December, 1973.

Insight was also gained from

Cody, W. J., Preliminary Report on Software for the Modified Bessel Functions of the First Kind, Argonne National Laboratory, Applied Mathematics Division, Tech. Memo. No. 357, August, 1980.

Cody implements the algorithm of Sookne for fractional order and nonnegative real argument. Like Cody, we do not change the convergence testing mechanism in any substantial way. However, we do trim the overhead by making the additional assumption that performing the convergence test for the functions of order 2/3 will suffice for order 1/3 as well. This assumption has not been established by rigorous analysis at this time. For the sake of speed the convergence tests are performed in the 1-norm instead of the usual Euclidean norm used in the complex plane using the inequality

$$|x| + |y| \leq \sqrt{2} \sqrt{x^2 + y^2}$$

#### Parameters

in	<code>__z</code>	The argument of the modified Bessel functions.
in	<code>__eps</code>	The maximum relative error required in the results.
out	<code>_lp1d3</code>	The value of $I_{\lfloor + 1/3 \rfloor}(z)$ .
out	<code>_lm1d3</code>	The value of $I_{\lfloor - 1/3 \rfloor}(z)$ .
out	<code>_lp2d3</code>	The value of $I_{\lfloor + 2/3 \rfloor}(z)$ .
out	<code>_lm2d3</code>	The value of $I_{\lfloor - 2/3 \rfloor}(z)$ .

Definition at line 393 of file `sf_airy.tcc`.

Referenced by `__airy()`.

**8.3.2.8** `template<typename _Tp> void std::__detail::__airy_bessel_k ( const std::complex<_Tp> & __z, _Tp __eps, std::complex<_Tp> & _Kp1d3, std::complex<_Tp> & _Kp2d3 )`

Compute approximations to the modified Bessel functions of the second kind of orders 1/3 and 2/3 for moderate arguments.

This routine computes

$$E_{\nu}(z) = \exp z \sqrt{2z/\pi} K_{\nu}(z), \text{ for } \nu = 1/3 \text{ and } \nu = 2/3$$

using a rational approximation given in

Luke, Y. L., Mathematical functions and their approximations, Academic Press, pp 366-367, 1975.

Though the approximation converges in  $|\arg(z)| \leq \pi$ , The convergence weakens as  $\text{abs}(\arg(z))$  increases. Also, in the case of real order between 0 and 1, convergence weakens as the order approaches 1. For these reasons, we only use this code for  $|\arg(z)| \leq 3\pi/4$  and the convergence test is performed only for order 2/3.

The coding of this function is also influenced by the fact that it will only be used for about  $2 \leq |z| \leq 15$ . Hence, certain considerations of overflow, underflow, and loss of significance are unimportant for our purpose.

## Parameters

in	<code>__z</code>	The value for which the quantity $E_{nu}$ is to be computed. it is recommended that $abs(z)$ not be too small and that $ arg(z)  \leq 3\pi/4$ .
in	<code>__eps</code>	The maximum relative error allowable in the computed results. The relative error test is based on the comparison of successive iterates.
out	<code>_Kp1d3</code>	The value computed for $E_{+1/3}(z)$ .
out	<code>_Kp2d3</code>	The value computed for $E_{+2/3}(z)$ .

## Note

In the worst case, say,  $z = 2$  and  $arg(z) = 3\pi/4$ , 20 iterations should give 7 or 8 decimals of accuracy.

Definition at line 607 of file `sf_airy.tcc`.

Referenced by `__airy()`.

### 8.3.2.9 `template<typename _Tp> std::complex<_Tp> std::__detail::__airy_bi ( std::complex<_Tp> __z )`

Return the complex Airy Bi function.

Definition at line 1158 of file `sf_airy.tcc`.

References `__airy()`.

### 8.3.2.10 `template<typename _Tp> void std::__detail::__airy_hyperg_rational ( const std::complex<_Tp> & __z, std::complex<_Tp> & _Ai, std::complex<_Tp> & _Aip, std::complex<_Tp> & _Bi, std::complex<_Tp> & _Bip )`

This function computes rational approximations to the hypergeometric functions related to the modified Bessel functions of orders  $\nu = + - 1/3$  and  $\nu = -2/3$ . That is,  $A(z)/B(z)$ , Where  $A(z)$  and  $B(z)$  are cubic polynomials with real coefficients, approximates

$$\frac{\Gamma(\nu + 1)}{(z/2)^{\nu}} I_{\nu}(z) = {}_0F_1(; \nu + 1; z^2/4),$$

where the function on the right is a confluent hypergeometric limit function. For  $|z| \leq 1/4$  and  $|arg(z)| \leq \pi/2$ , the approximations are accurate to about 16 decimals.

For further details including the four term recurrence relation satisfied by the numerator and denominator polynomials in the higher order approximants, see

Luke, Y.L., Mathematical Functions and their Approximations, Academic Press, pp 361-363, 1975.

An asymptotic expression for the error is given as well as other useful expressions in the event one wants to extend this function to incorporate higher order approximants.

Note also that for the sake of speed and the fact that this function will be driven by another, checks that are not absolutely necessary are not made.

## Parameters

in	<code>__z</code>	The argument at which the hypergeometric given above is to be evaluated. Since the approximation is of fixed order, $ z $ must be small to ensure sufficient accuracy of the computed results.
----	------------------	--



out	<code>_Ai</code>	The Airy function $Ai(z)$ .
out	<code>_Aip</code>	The Airy function derivative $Ai'(z)$ .
out	<code>_Bi</code>	The Airy function $Bi(z)$ .
out	<code>_Bip</code>	The Airy function derivative $Bi'(z)$ .

Definition at line 791 of file `sf_airy.tcc`.

Referenced by `__airy()`.

#### 8.3.2.11 `template<typename _Tp> _Tp std::__detail::__assoc_laguerre ( unsigned int __n, unsigned int __m, _Tp __x )`

This routine returns the associated Laguerre polynomial of order  $n$ , degree  $m$ :  $L_n^m(x)$ .

The associated Laguerre polynomial is defined for integral  $\alpha = m$  by:

$$L_n^m(x) = (-1)^m \frac{d^m}{dx^m} L_{n+m}(x)$$

where the Laguerre polynomial is defined by:

$$L_n(x) = \frac{e^x}{n!} \frac{d^n}{dx^n} (x^n e^{-x})$$

##### Parameters

<code>__n</code>	The order
<code>__m</code>	The degree
<code>__x</code>	The argument

##### Returns

The value of the associated Laguerre polynomial of order  $n$ , degree  $m$ , and argument  $x$ .

Definition at line 292 of file `sf_laguerre.tcc`.

Referenced by `__hydrogen()`.

#### 8.3.2.12 `template<typename _Tp> _Tp std::__detail::__assoc_legendre_p ( unsigned int __l, unsigned int __m, _Tp __x )`

Return the associated Legendre function by recursion on  $l$  and downward recursion on  $m$ .

The associated Legendre function is derived from the Legendre function  $P_l(x)$  by the Rodrigues formula:

$$P_l^m(x) = (1 - x^2)^{m/2} \frac{d^m}{dx^m} P_l(x)$$

##### Parameters

<code>__l</code>	The order of the associated Legendre function. $l \geq 0$ .
<code>__m</code>	The order of the associated Legendre function. $m \leq l$ .
<code>__x</code>	The argument of the associated Legendre function. $ x  \leq 1$ .

Definition at line 175 of file `sf_legendre.tcc`.

References `__poly_legendre_p()`.

#### 8.3.2.13 `template<typename _Tp> _GLIBCXX14_CONSTEXPR _Tp std::__detail::__bernoulli ( int __n )`

This returns Bernoulli number  $B_n$ .

## Parameters

<code>__n</code>	the order n of the Bernoulli number.
------------------	--------------------------------------

## Returns

The Bernoulli number of order n.

Definition at line 1673 of file sf\_gamma.tcc.

**8.3.2.14** `template<typename _Tp > _GLIBCXX14_CONSTEXPR _Tp std::__detail::__bernoulli_2n ( int __n )`

This returns Bernoulli number  $B_n$ .

## Parameters

<code>__n</code>	the order n of the Bernoulli number.
------------------	--------------------------------------

## Returns

The Bernoulli number of order n.

Definition at line 1685 of file sf\_gamma.tcc.

**8.3.2.15** `template<typename _Tp > _GLIBCXX14_CONSTEXPR _Tp std::__detail::__bernoulli_series ( unsigned int __n )`

This returns Bernoulli numbers from a table or by summation for larger values.

Upward recursion is unstable.

## Parameters

<code>__n</code>	the order n of the Bernoulli number.
------------------	--------------------------------------

## Returns

The Bernoulli number of order n.

Definition at line 1608 of file sf\_gamma.tcc.

**8.3.2.16** `template<typename _Tp > _Tp std::__detail::__beta ( _Tp __a, _Tp __b )`

Return the beta function  $B(a, b)$ .

The beta function is defined by

$$B(a, b) = \int_0^1 t^{a-1} (1-t)^{b-1} dt = \frac{\Gamma(a)\Gamma(b)}{\Gamma(a+b)}$$

## Parameters

<code>__a</code>	The first argument of the beta function.
<code>__b</code>	The second argument of the beta function.

**Returns**

The beta function.

Definition at line 173 of file sf\_beta.tcc.

References `__beta_lgamma()`.

Referenced by `__poly_jacobi()`, `__gnu_cxx::jacobi()`, `__gnu_cxx::jacobif()`, and `__gnu_cxx::jacobil()`.

**8.3.2.17** `template<typename _Tp> _Tp std::__detail::__beta_gamma ( _Tp __a, _Tp __b )`

Return the beta function:  $B(a, b)$ .

The beta function is defined by

$$B(a, b) = \int_0^1 t^{a-1} (1-t)^{b-1} dt = \frac{\Gamma(a)\Gamma(b)}{\Gamma(a+b)}$$

**Parameters**

<code>__a</code>	The first argument of the beta function.
<code>__b</code>	The second argument of the beta function.

**Returns**

The beta function.

Definition at line 75 of file sf\_beta.tcc.

References `__gamma()`.

**8.3.2.18** `template<typename _Tp> _Tp std::__detail::__beta_inc ( _Tp __a, _Tp __b, _Tp __x )`

Return the regularized incomplete beta function,  $I_x(a, b)$ , of arguments `a`, `b`, and `x`.

The regularized incomplete beta function is defined by:

$$I_x(a, b) = \frac{B_x(a, b)}{B(a, b)}$$

where

$$B_x(a, b) = \int_0^x t^{a-1} (1-t)^{b-1} dt$$

is the non-regularized beta function and  $B(a, b)$  is the usual beta function.

**Parameters**

<code>__a</code>	The first parameter
------------------	---------------------

<code>__b</code>	The second parameter
<code>__x</code>	The argument

Definition at line 262 of file sf\_beta.tcc.

References `__beta_inc_cont_frac()`.

Referenced by `__binomial_cdf()`, `__binomial_cdfc()`, `__f_cdf()`, `__f_cdfc()`, `__students_t_cdf()`, and `__students_t_cdfc()`.

### 8.3.2.19 `template<typename _Tp> _Tp std::__detail::__beta_inc_cont_frac ( _Tp __a, _Tp __b, _Tp __x )`

Return the regularized incomplete beta function,  $I_x(a, b)$ , of arguments  $a$ ,  $b$ , and  $x$ .

#### Parameters

<code>__a</code>	The first parameter
<code>__b</code>	The second parameter
<code>__x</code>	The argument

Definition at line 193 of file sf\_beta.tcc.

Referenced by `__beta_inc()`.

### 8.3.2.20 `template<typename _Tp> _Tp std::__detail::__beta_lgamma ( _Tp __a, _Tp __b )`

Return the beta function  $B(a, b)$  using the log gamma functions.

The beta function is defined by

$$B(a, b) = \int_0^1 t^{a-1} (1-t)^{b-1} dt = \frac{\Gamma(a)\Gamma(b)}{\Gamma(a+b)}$$

#### Parameters

<code>__a</code>	The first argument of the beta function.
<code>__b</code>	The second argument of the beta function.

#### Returns

The beta function.

Definition at line 109 of file sf\_beta.tcc.

References `__log_gamma()`.

Referenced by `__beta()`.

### 8.3.2.21 `template<typename _Tp> _Tp std::__detail::__beta_product ( _Tp __a, _Tp __b )`

Return the beta function  $B(x, y)$  using the product form.

The beta function is defined by

$$B(a, b) = \int_0^1 t^{a-1} (1-t)^{b-1} dt = \frac{\Gamma(a)\Gamma(b)}{\Gamma(a+b)}$$

Here, we employ the product form:

$$B(a, b) = \frac{a+b}{ab} \prod_{k=1}^{\infty} \frac{1 + (a+b)/k}{(1 + a/k)(1 + b/k)}$$

## Parameters

<code>__a</code>	The first argument of the beta function.
<code>__b</code>	The second argument of the beta function.

## Returns

The beta function.

Definition at line 140 of file sf\_beta.tcc.

### 8.3.2.22 `template<typename _Tp> _Tp std::__detail::__bincoef ( unsigned int __n, unsigned int __k )`

Return the binomial coefficient. The binomial coefficient is given by:

$$\binom{n}{k} = \frac{n!}{(n-k)!k!}$$

.

## Parameters

<code>__n</code>	The first argument of the binomial coefficient.
<code>__k</code>	The second argument of the binomial coefficient.

## Returns

The binomial coefficient.

Definition at line 1888 of file sf\_gamma.tcc.

### 8.3.2.23 `template<typename _Tp> _GLIBCXX14_CONSTEXPR _Tp std::__detail::__binomial_cdf ( _Tp __p, unsigned int __n, unsigned int __k )`

Return the binomial cumulative distribution function.

The binomial cumulative distribution function is related to the incomplete beta function:

$$P(p|n, k) = I_p(k, n - k + 1)$$

## Parameters

<code>__p</code>	
<code>__n</code>	
<code>__k</code>	

Definition at line 404 of file sf\_beta.tcc.

References `__beta_inc()`.

### 8.3.2.24 `template<typename _Tp> _GLIBCXX14_CONSTEXPR _Tp std::__detail::__binomial_cdfc ( _Tp __p, unsigned int __n, unsigned int __k )`

Return the complementary binomial cumulative distribution function.

The binomial cumulative distribution function is related to the incomplete beta function:

$$Q(p|n, k) = I_{1-p}(n - k + 1, k)$$

## Parameters

<code>__p</code>	
<code>__n</code>	
<code>__k</code>	

Definition at line 434 of file sf\_beta.tcc.

References `__beta_inc()`.

**8.3.2.25** `template<typename _Tp> _Tp std::__detail::__bose_einstein ( _Tp __s, _Tp __x )`

Return the Bose-Einstein integral of real order `s` and real argument `x`.

## See also

[https://en.wikipedia.org/wiki/Clausen\\_function](https://en.wikipedia.org/wiki/Clausen_function)  
<http://dlmf.nist.gov/25.12#iii>

## Parameters

<code>__s</code>	The order <code>s</code> $\geq 0$ .
<code>__x</code>	The real argument.

## Returns

The real Fermi-Dirac cosine sum `G_s(x)`,

Definition at line 1398 of file sf\_polylog.tcc.

References `__polylog_exp()`.

**8.3.2.26** `template<typename _Tp> _Tp std::__detail::__chebyshev_recur ( unsigned int __n, _Tp __x, _Tp __C0, _Tp __C1 )`

Definition at line 44 of file sf\_chebyshev.tcc.

Referenced by `__chebyshev_t()`, `__chebyshev_u()`, `__chebyshev_v()`, and `__chebyshev_w()`.

**8.3.2.27** `template<typename _Tp> _Tp std::__detail::__chebyshev_t ( unsigned int __n, _Tp __x )`

Definition at line 58 of file sf\_chebyshev.tcc.

References `__chebyshev_recur()`.

**8.3.2.28** `template<typename _Tp> _Tp std::__detail::__chebyshev_u ( unsigned int __n, _Tp __x )`

Definition at line 73 of file sf\_chebyshev.tcc.

References `__chebyshev_recur()`.

**8.3.2.29** `template<typename _Tp> _Tp std::__detail::__chebyshev_v ( unsigned int __n, _Tp __x )`

Definition at line 88 of file sf\_chebyshev.tcc.

References `__chebyshev_recur()`.

8.3.2.30 `template<typename _Tp> _Tp std::__detail::__chebyshev_w ( unsigned int __n, _Tp __x )`

Definition at line 103 of file `sf_chebyshev.tcc`.

References `__chebyshev_recur()`.

8.3.2.31 `template<typename _Tp> _GLIBCXX14_CONSTEXPR _Tp std::__detail::__chi_squared_pdf ( _Tp __chi2, unsigned int __nu )`

Return the chi-squared propability function. This returns the probability that the observed chi-squared for a correct model is less than the value  $\chi^2$ .

The chi-squared propability function is related to the normalized lower incomplete gamma function:

$$P(\chi^2|\nu) = \Gamma_P\left(\frac{\nu}{2}, \frac{\chi^2}{2}\right)$$

Definition at line 2544 of file `sf_gamma.tcc`.

References `__gamma_p()`.

8.3.2.32 `template<typename _Tp> _GLIBCXX14_CONSTEXPR _Tp std::__detail::__chi_squared_pdfc ( _Tp __chi2, unsigned int __nu )`

Return the complementary chi-squared propability function. This returns the probability that the observed chi-squared for a correct model is greater than the value  $\chi^2$ .

The complementary chi-squared propability function is related to the normalized upper incomplete gamma function:

$$Q(\chi^2|\nu) = \Gamma_Q\left(\frac{\nu}{2}, \frac{\chi^2}{2}\right)$$

Definition at line 2568 of file `sf_gamma.tcc`.

References `__gamma_q()`.

8.3.2.33 `template<typename _Tp> std::pair<_Tp, _Tp> std::__detail::__chshint ( _Tp __x, _Tp & __Chi, _Tp & __Shi )`

This function returns the hyperbolic cosine  $Chi(x)$  and hyperbolic sine  $Shi(x)$  integrals as a pair.

The hyperbolic cosine integral is defined by:

$$Chi(x) = \gamma_E + \log(x) + \int_0^x dt \frac{\cosh(t) - 1}{t}$$

The hyperbolic sine integral is defined by:

$$Shi(x) = \int_0^x dt \frac{\sinh(t)}{t}$$

Definition at line 162 of file `sf_hypint.tcc`.

References `__chshint_cont_frac()`, and `__chshint_series()`.

**8.3.2.34** `template<typename _Tp> void std::__detail::__chshint_cont_frac ( _Tp __t, _Tp & _Chi, _Tp & _Shi )`

This function computes the hyperbolic cosine  $Chi(x)$  and hyperbolic sine  $Shi(x)$  integrals by continued fraction for positive argument.

Definition at line 50 of file sf\_hypint.tcc.

Referenced by `__chshint()`.

**8.3.2.35** `template<typename _Tp> void std::__detail::__chshint_series ( _Tp __t, _Tp & _Chi, _Tp & _Shi )`

This function computes the hyperbolic cosine  $Chi(x)$  and hyperbolic sine  $Shi(x)$  integrals by series summation for positive argument.

Definition at line 93 of file sf\_hypint.tcc.

Referenced by `__chshint()`.

**8.3.2.36** `template<typename _Tp> std::complex<_Tp> std::__detail::__clamp_0_m2pi ( std::complex<_Tp> __w )`

Definition at line 136 of file sf\_polylog.tcc.

Referenced by `__polylog_exp_int_neg()`, `__polylog_exp_int_pos()`, `__polylog_exp_real_neg()`, and `__polylog_exp_real_pos()`.

**8.3.2.37** `template<typename _Tp> std::complex<_Tp> std::__detail::__clamp_pi ( std::complex<_Tp> __w )`

Definition at line 123 of file sf\_polylog.tcc.

Referenced by `__polylog_exp_int_neg()`, `__polylog_exp_int_pos()`, `__polylog_exp_real_neg()`, and `__polylog_exp_real_pos()`.

**8.3.2.38** `template<typename _Tp> std::complex<_Tp> std::__detail::__clausen ( unsigned int __m, std::complex<_Tp> __w )`

Return Clausen's function of integer order  $m$  and complex argument  $w$ . The notation and connection to polylog is from Wikipedia

#### Parameters

<code>__m</code>	The non-negative integral order.
<code>__w</code>	The complex argument.

#### Returns

The complex Clausen function.

Definition at line 1227 of file sf\_polylog.tcc.

References `__polylog_exp()`.

**8.3.2.39** `template<typename _Tp> _Tp std::__detail::__clausen ( unsigned int __m, _Tp __w )`

Return Clausen's function of integer order  $m$  and real argument  $w$ . The notation and connection to polylog is from Wikipedia



## Parameters

<code>__m</code>	The integer order $m \geq 1$ .
<code>__w</code>	The real argument.

## Returns

The Clausen function.

Definition at line 1251 of file sf\_polylog.tcc.

References `__polylog_exp()`.

8.3.2.40 `template<typename _Tp> _Tp std::__detail::__clausen_c( unsigned int __m, std::complex<_Tp> __w )`

Return Clausen's cosine sum  $Cl_m$  for positive integer order  $m$  and complex argument  $w$ .

## See also

[https://en.wikipedia.org/wiki/Clausen\\_function](https://en.wikipedia.org/wiki/Clausen_function)

## Parameters

<code>__m</code>	The integer order $m \geq 1$ .
<code>__w</code>	The real argument.

## Returns

The Clausen cosine sum  $Cl_m(w)$ ,

Definition at line 1326 of file sf\_polylog.tcc.

References `__polylog_exp()`.

8.3.2.41 `template<typename _Tp> _Tp std::__detail::__clausen_c( unsigned int __m, _Tp __w )`

Return Clausen's cosine sum  $Cl_m$  for positive integer order  $m$  and real argument  $w$ .

## See also

[https://en.wikipedia.org/wiki/Clausen\\_function](https://en.wikipedia.org/wiki/Clausen_function)

## Parameters

<code>__m</code>	The integer order $m \geq 1$ .
<code>__w</code>	The real argument.

## Returns

The real Clausen cosine sum  $Cl_m(w)$ ,

Definition at line 1351 of file sf\_polylog.tcc.

References `__polylog_exp()`.

8.3.2.42 `template<typename _Tp> _Tp std::__detail::__clausen_s ( unsigned int __m, std::complex<_Tp> __w )`

Return Clausen's sine sum  $Sl_m$  for positive integer order  $m$  and complex argument  $w$ .

See also

[https://en.wikipedia.org/wiki/Clausen\\_function](https://en.wikipedia.org/wiki/Clausen_function)

#### Parameters

<code>__m</code>	The integer order $m \geq 1$ .
<code>__w</code>	The complex argument.

#### Returns

The Clausen sine sum  $Sl_m(w)$ ,

Definition at line 1276 of file `sf_polylog.tcc`.

References `__polylog_exp()`.

8.3.2.43 `template<typename _Tp> _Tp std::__detail::__clausen_s ( unsigned int __m, _Tp __w )`

Return Clausen's sine sum  $Sl_m$  for positive integer order  $m$  and real argument  $w$ .

See also

[https://en.wikipedia.org/wiki/Clausen\\_function](https://en.wikipedia.org/wiki/Clausen_function)

#### Parameters

<code>__m</code>	The integer order $m \geq 1$ .
<code>__w</code>	The complex argument.

#### Returns

The Clausen sine sum  $Sl_m(w)$ ,

Definition at line 1301 of file `sf_polylog.tcc`.

References `__polylog_exp()`.

8.3.2.44 `template<typename _Tp> _Tp std::__detail::__comp_ellint_1 ( _Tp __k )`

Return the complete elliptic integral of the first kind  $K(k)$  using the Carlson formulation.

The complete elliptic integral of the first kind is defined as

$$K(k) = F(k, \pi/2) = \int_0^{\pi/2} \frac{d\theta}{\sqrt{1 - k^2 \sin^2 \theta}}$$

where  $F(k, \phi)$  is the incomplete elliptic integral of the first kind.

## Parameters

<code>__k</code>	The modulus of the complete elliptic function.
------------------	--

## Returns

The complete elliptic function of the first kind.

Definition at line 565 of file sf\_ellint.tcc.

References `__comp_ellint_rf()`.

Referenced by `__ellint_1()`, `__ellnome_k()`, `__jacobi_zeta()`, `__theta_c()`, `__theta_d()`, `__theta_n()`, and `__theta_s()`.

### 8.3.2.45 `template<typename _Tp> _Tp std::__detail::__comp_ellint_2 ( _Tp __k )`

Return the complete elliptic integral of the second kind  $E(k)$  using the Carlson formulation.

The complete elliptic integral of the second kind is defined as

$$E(k, \pi/2) = \int_0^{\pi/2} \sqrt{1 - k^2 \sin^2 \theta} d\theta$$

## Parameters

<code>__k</code>	The modulus of the complete elliptic function.
------------------	--

## Returns

The complete elliptic function of the second kind.

Definition at line 638 of file sf\_ellint.tcc.

References `__ellint_rd()`, and `__ellint_rf()`.

Referenced by `__ellint_2()`.

### 8.3.2.46 `template<typename _Tp> _Tp std::__detail::__comp_ellint_3 ( _Tp __k, _Tp __nu )`

Return the complete elliptic integral of the third kind  $\Pi(k, \nu) = \Pi(k, \nu, \pi/2)$  using the Carlson formulation.

The complete elliptic integral of the third kind is defined as

$$\Pi(k, \nu) = \int_0^{\pi/2} \frac{d\theta}{(1 - \nu \sin^2 \theta) \sqrt{1 - k^2 \sin^2 \theta}}$$

## Parameters

<code>__k</code>	The argument of the elliptic function.
<code>__nu</code>	The second argument of the elliptic function.

## Returns

The complete elliptic function of the third kind.

Definition at line 727 of file sf\_ellint.tcc.

References `__ellint_rf()`, and `__ellint_rj()`.

Referenced by `__ellint_3()`.

**8.3.2.47** `template<typename _Tp> _Tp std::__detail::__comp_ellint_d ( _Tp __k )`

Return the complete Legendre elliptic integral D.

Definition at line 832 of file `sf_ellint.tcc`.

References `__ellint_rd()`.

**8.3.2.48** `template<typename _Tp> _Tp std::__detail::__comp_ellint_rf ( _Tp __x, _Tp __y )`

Definition at line 235 of file `sf_ellint.tcc`.

Referenced by `__comp_ellint_1()`, and `__ellint_rf()`.

**8.3.2.49** `template<typename _Tp> _Tp std::__detail::__comp_ellint_rg ( _Tp __x, _Tp __y )`

Definition at line 346 of file `sf_ellint.tcc`.

Referenced by `__ellint_rg()`.

**8.3.2.50** `template<typename _Tp> _Tp std::__detail::__conf_hyperg ( _Tp __a, _Tp __c, _Tp __x )`

Return the confluent hypergeometric function  ${}_1F_1(a; c; x)$ .

Parameters

<code>__a</code>	The <i>numerator</i> parameter.
<code>__c</code>	The <i>denominator</i> parameter.
<code>__x</code>	The argument of the confluent hypergeometric function.

Returns

The confluent hypergeometric function.

Definition at line 281 of file `sf_hyperg.tcc`.

References `__conf_hyperg_luke()`, and `__conf_hyperg_series()`.

**8.3.2.51** `template<typename _Tp> _Tp std::__detail::__conf_hyperg_lim ( _Tp __c, _Tp __x )`

Return the confluent hypergeometric limit function  ${}_0F_1(-; c; x)$ .

Parameters

<code>__c</code>	The <i>denominator</i> parameter.
<code>__x</code>	The argument of the confluent hypergeometric limit function.

Returns

The confluent limit hypergeometric function.

Definition at line 109 of file `sf_hyperg.tcc`.

References `__conf_hyperg_lim_series()`.

### 8.3.2.52 `template<typename _Tp> _Tp std::__detail::__conf_hyperg_lim_series ( _Tp __c, _Tp __x )`

This routine returns the confluent hypergeometric limit function by series expansion.

$${}_0F_1(-; c; x) = \Gamma(c) \sum_{n=0}^{\infty} \frac{1}{\Gamma(c+n)} \frac{x^n}{n!}$$

If a and b are integers and a < 0 and either b > 0 or b < a then the series is a polynomial with a finite number of terms.

#### Parameters

<code>__c</code>	The "denominator" parameter.
<code>__x</code>	The argument of the confluent hypergeometric limit function.

#### Returns

The confluent hypergeometric limit function.

Definition at line 76 of file `sf_hyperg.tcc`.

Referenced by `__conf_hyperg_lim()`.

### 8.3.2.53 `template<typename _Tp> _Tp std::__detail::__conf_hyperg_luke ( _Tp __a, _Tp __c, _Tp __xin )`

Return the hypergeometric function  ${}_1F_1(a; c; x)$  by an iterative procedure described in Luke, Algorithms for the Computation of Mathematical Functions.

Like the case of the  ${}_2F_1$  rational approximations, these are probably guaranteed to converge for  $x < 0$ , barring gross numerical instability in the pre-asymptotic regime.

Definition at line 176 of file `sf_hyperg.tcc`.

Referenced by `__conf_hyperg()`.

### 8.3.2.54 `template<typename _Tp> _Tp std::__detail::__conf_hyperg_series ( _Tp __a, _Tp __c, _Tp __x )`

This routine returns the confluent hypergeometric function by series expansion.

$${}_1F_1(a; c; x) = \frac{\Gamma(c)}{\Gamma(a)} \sum_{n=0}^{\infty} \frac{\Gamma(a+n)}{\Gamma(c+n)} \frac{x^n}{n!}$$

#### Parameters

<code>__a</code>	The "numerator" parameter.
<code>__c</code>	The "denominator" parameter.
<code>__x</code>	The argument of the confluent hypergeometric function.

#### Returns

The confluent hypergeometric function.

Definition at line 141 of file `sf_hyperg.tcc`.

Referenced by `__conf_hyperg()`.

**8.3.2.55** `template<typename _Tp> _Tp std::__detail::__coshint ( const _Tp __x )`

Return the hyperbolic cosine integral  $li(x)$ .

The hyperbolic cosine integral is given by

$$Chi(x) = (Ei(x) - E_1(x))/2$$

#### Parameters

<code>__x</code>	The argument of the hyperbolic cosine integral function.
------------------	--

#### Returns

The hyperbolic cosine integral.

Definition at line 558 of file `sf_expint.tcc`.

References `__expint_E1()`, and `__expint_Ei()`.

**8.3.2.56** `template<typename _Tp> std::complex<_Tp> std::__detail::__cyl_bessel ( std::complex<_Tp> __nu, std::complex<_Tp> __z )`

Return the complex cylindrical Bessel function.

#### Parameters

<code>in</code>	<code>__nu</code>	The order for which the cylindrical Bessel function is evaluated.
<code>in</code>	<code>__z</code>	The argument at which the cylindrical Bessel function is evaluated.

#### Returns

The complex cylindrical Bessel function.

Definition at line 1222 of file `sf_hankel.tcc`.

References `__hankel()`.

**8.3.2.57** `template<typename _Tp> _Tp std::__detail::__cyl_bessel_i ( _Tp __nu, _Tp __x )`

Return the regular modified Bessel function of order  $\nu$ :  $I_\nu(x)$ .

The regular modified cylindrical Bessel function is:

$$I_\nu(x) = \sum_{k=0}^{\infty} \frac{(x/2)^{\nu+2k}}{k! \Gamma(\nu + k + 1)}$$

#### Parameters

<code>__nu</code>	The order of the regular modified Bessel function.
-------------------	--

<code>__x</code>	The argument of the regular modified Bessel function.
------------------	---

**Returns**

The output regular modified Bessel function.

Definition at line 375 of file `sf_mod_bessel.tcc`.

References `__cyl_bessel_ij_series()`, and `__cyl_bessel_ik()`.

**8.3.2.58** `template<typename _Tp> _Tp std::__detail::__cyl_bessel_ij_series ( _Tp __nu, _Tp __x, _Tp __sgn, unsigned int __max_iter )`

This routine returns the cylindrical Bessel functions of order  $\nu$ :  $J_\nu$  or  $I_\nu$  by series expansion.

The modified cylindrical Bessel function is:

$$Z_\nu(x) = \sum_{k=0}^{\infty} \frac{\sigma^k (x/2)^{\nu+2k}}{k! \Gamma(\nu + k + 1)}$$

where  $\sigma = +1$  or  $-1$  for  $Z = I$  or  $J$  respectively.

See Abramowitz & Stegun, 9.1.10 Abramowitz & Stegun, 9.6.7 (1) Handbook of Mathematical Functions, ed. Milton Abramowitz and Irene A. Stegun, Dover Publications, Equation 9.1.10 p. 360 and Equation 9.6.10 p. 375

**Parameters**

<code>__nu</code>	The order of the Bessel function.
<code>__x</code>	The argument of the Bessel function.
<code>__sgn</code>	The sign of the alternate terms -1 for the Bessel function of the first kind. +1 for the modified Bessel function of the first kind.
<code>__max_iter</code>	The maximum number of iterations for sum.

**Returns**

The output Bessel function.

Definition at line 413 of file `sf_bessel.tcc`.

References `__log_gamma()`.

Referenced by `__cyl_bessel_i()`, and `__cyl_bessel_j()`.

**8.3.2.59** `template<typename _Tp> void std::__detail::__cyl_bessel_ik ( _Tp __nu, _Tp __x, _Tp &_Inu, _Tp &_Knu, _Tp &_Ipnu, _Tp &_Kpnu )`

Return the modified cylindrical Bessel functions and their derivatives of order  $\nu$  by various means.

**Parameters**

<code>__nu</code>	The order of the Bessel functions.
<code>__x</code>	The argument of the Bessel functions.

<code>_Inu</code>	The output regular modified Bessel function.
<code>_Knu</code>	The output irregular modified Bessel function.
<code>_Ipnu</code>	The output derivative of the regular modified Bessel function.
<code>_Kpnu</code>	The output derivative of the irregular modified Bessel function.

Definition at line 316 of file `sf_mod_bessel.tcc`.

References `__cyl_bessel_ik_asymp()`, and `__cyl_bessel_ik_steel()`.

Referenced by `__airy()`, `__cyl_bessel_i()`, `__cyl_bessel_k()`, and `__sph_bessel_ik()`.

**8.3.2.60** `template<typename _Tp> void std::__detail::__cyl_bessel_ik_asymp ( _Tp __nu, _Tp __x, _Tp & _Inu, _Tp & _Knu, _Tp & _Ipnu, _Tp & _Kpnu )`

This routine computes the asymptotic modified cylindrical Bessel and functions of order  $\nu$ :  $I_\nu(x)$ ,  $N_\nu(x)$ . Use this for  $x \gg \nu^2 + 1$ .

References: (1) Handbook of Mathematical Functions, ed. Milton Abramowitz and Irene A. Stegun, Dover Publications, Section 9 p. 364, Equations 9.2.5-9.2.10

#### Parameters

<code>__nu</code>	The order of the Bessel functions.
<code>__x</code>	The argument of the Bessel functions.
<code>_Inu</code>	The output regular modified Bessel function.
<code>_Knu</code>	The output irregular modified Bessel function.
<code>_Ipnu</code>	The output derivative of the regular modified Bessel function.
<code>_Kpnu</code>	The output derivative of the irregular modified Bessel function.

Definition at line 81 of file `sf_mod_bessel.tcc`.

Referenced by `__cyl_bessel_ik()`, and `__cyl_bessel_ik_steel()`.

**8.3.2.61** `template<typename _Tp> void std::__detail::__cyl_bessel_ik_steel ( _Tp __nu, _Tp __x, _Tp & _Inu, _Tp & _Knu, _Tp & _Ipnu, _Tp & _Kpnu )`

Compute the modified Bessel functions  $I_\nu(x)$  and  $K_\nu(x)$  and their first derivatives  $I'_\nu(x)$  and  $K'_\nu(x)$  respectively. These four functions are computed together for numerical stability.

#### Parameters

<code>__nu</code>	The order of the Bessel functions.
<code>__x</code>	The argument of the Bessel functions.
<code>_Inu</code>	The output regular modified Bessel function.
<code>_Knu</code>	The output irregular modified Bessel function.
<code>_Ipnu</code>	The output derivative of the regular modified Bessel function.
<code>_Kpnu</code>	The output derivative of the irregular modified Bessel function.

Definition at line 152 of file `sf_mod_bessel.tcc`.

References `__cyl_bessel_ik_asymp()`, and `__gamma_temme()`.

Referenced by `__cyl_bessel_ik()`.

**8.3.2.62** `template<typename _Tp> _Tp std::__detail::__cyl_bessel_j ( _Tp __nu, _Tp __x )`

Return the Bessel function of order  $\nu$ :  $J_\nu(x)$ .



The cylindrical Bessel function is:

$$J_\nu(x) = \sum_{k=0}^{\infty} \frac{(-1)^k (x/2)^{\nu+2k}}{k! \Gamma(\nu + k + 1)}$$

#### Parameters

<code>__nu</code>	The order of the Bessel function.
<code>__x</code>	The argument of the Bessel function.

#### Returns

The output Bessel function.

Definition at line 503 of file `sf_bessel.tcc`.

References `__cyl_bessel_ij_series()`, and `__cyl_bessel_jn()`.

**8.3.2.63** `template<typename _Tp> void std::__detail::__cyl_bessel_jn ( _Tp __nu, _Tp __x, _Tp & _Jnu, _Tp & _Nnu, _Tp & _Jpnu, _Tp & _Npnu )`

Return the cylindrical Bessel functions and their derivatives of order  $\nu$  by various means.

Definition at line 442 of file `sf_bessel.tcc`.

References `__cyl_bessel_jn_asymp()`, and `__cyl_bessel_jn_stepped()`.

Referenced by `__airy()`, `__cyl_bessel_j()`, `__cyl_hankel_1()`, `__cyl_hankel_2()`, `__cyl_neumann_n()`, and `__sph_bessel_jn()`.

**8.3.2.64** `template<typename _Tp> void std::__detail::__cyl_bessel_jn_asymp ( _Tp __nu, _Tp __x, _Tp & _Jnu, _Tp & _Nnu, _Tp & _Jpnu, _Tp & _Npnu )`

This routine computes the asymptotic cylindrical Bessel and Neumann functions of order  $\nu$ :  $J_\nu(x)$ ,  $N_\nu(x)$ . Use this for  $x \gg \nu^2 + 1$ .

References: (1) Handbook of Mathematical Functions, ed. Milton Abramowitz and Irene A. Stegun, Dover Publications, Section 9 p. 364, Equations 9.2.5-9.2.10

#### Parameters

	<code>__nu</code>	The order of the Bessel functions.
	<code>__x</code>	The argument of the Bessel functions.
out	<code>_Jnu</code>	The Bessel function of the first kind.
out	<code>_Nnu</code>	The Neumann function (Bessel function of the second kind).
out	<code>_Jpnu</code>	The Bessel function of the first kind.
out	<code>_Npnu</code>	The Neumann function (Bessel function of the second kind).

Definition at line 79 of file `sf_bessel.tcc`.

Referenced by `__cyl_bessel_jn()`, and `__cyl_bessel_jn_stepped()`.

**8.3.2.65** `template<typename _Tp> void std::__detail::__cyl_bessel_jn_stepped ( _Tp __nu, _Tp __x, _Tp & _Jnu, _Tp & _Nnu, _Tp & _Jpnu, _Tp & _Npnu )`

Compute the Bessel  $J_\nu(x)$  and Neumann  $N_\nu(x)$  functions and their first derivatives  $J'_\nu(x)$  and  $N'_\nu(x)$  respectively. These four functions are computed together for numerical stability.

## Parameters

	<code>__nu</code>	The order of the Bessel functions.
	<code>__x</code>	The argument of the Bessel functions.
out	<code>_Jnu</code>	The output Bessel function of the first kind.
out	<code>_Nnu</code>	The output Neumann function (Bessel function of the second kind).
out	<code>_Jpnu</code>	The output derivative of the Bessel function of the first kind.
out	<code>_Npnu</code>	The output derivative of the Neumann function.

Definition at line 197 of file `sf_bessel.tcc`.

References `__cyl_bessel_jn_asymp()`, and `__gamma_temme()`.

Referenced by `__cyl_bessel_jn()`.

**8.3.2.66** `template<typename _Tp> _Tp std::__detail::__cyl_bessel_k ( _Tp __nu, _Tp __x )`

Return the irregular modified Bessel function  $K_\nu(x)$  of order  $\nu$ .

The irregular modified Bessel function is defined by:

$$K_\nu(x) = \frac{\pi}{2} \frac{I_{-\nu}(x) - I_\nu(x)}{\sin \nu\pi}$$

where for integral  $\nu = n$  a limit is taken:  $\lim_{\nu \rightarrow n}$ . For negative argument we have simply:

$$K_{-\nu}(x) = K_\nu(x)$$

## Parameters

<code>__nu</code>	The order of the irregular modified Bessel function.
<code>__x</code>	The argument of the irregular modified Bessel function.

## Returns

The output irregular modified Bessel function.

Definition at line 413 of file `sf_mod_bessel.tcc`.

References `__cyl_bessel_ik()`.

**8.3.2.67** `template<typename _Tp> std::complex<_Tp> std::__detail::__cyl_hankel_1 ( _Tp __nu, _Tp __x )`

Return the cylindrical Hankel function of the first kind  $H_\nu^{(1)}(x)$ .

The cylindrical Hankel function of the first kind is defined by:

$$H_\nu^{(1)}(x) = J_\nu(x) + iN_\nu(x)$$

## Parameters

<code>__nu</code>	The order of the spherical Neumann function.
-------------------	--

<code>__x</code>	The argument of the spherical Neumann function.
------------------	---

**Returns**

The output spherical Neumann function.

Definition at line 568 of file `sf_bessel.tcc`.

References `__cyl_bessel_jn()`.

**8.3.2.68** `template<typename _Tp> std::complex<_Tp> std::__detail::__cyl_hankel_1 ( std::complex<_Tp> __nu, std::complex<_Tp> __z )`

Return the complex cylindrical Hankel function of the first kind.

**Parameters**

<code>in</code>	<code>__nu</code>	The order for which the cylindrical Hankel function of the first kind is evaluated.
<code>in</code>	<code>__z</code>	The argument at which the cylindrical Hankel function of the first kind is evaluated.

**Returns**

The complex cylindrical Hankel function of the first kind.

Definition at line 1190 of file `sf_hankel.tcc`.

References `__hankel()`.

**8.3.2.69** `template<typename _Tp> std::complex<_Tp> std::__detail::__cyl_hankel_2 ( _Tp __nu, _Tp __x )`

Return the cylindrical Hankel function of the second kind  $H_n^{(2)}u(x)$ .

The cylindrical Hankel function of the second kind is defined by:

$$H_\nu^{(2)}(x) = J_\nu(x) - iN_\nu(x)$$

**Parameters**

<code>__nu</code>	The order of the spherical Neumann function.
<code>__x</code>	The argument of the spherical Neumann function.

**Returns**

The output spherical Neumann function.

Definition at line 604 of file `sf_bessel.tcc`.

References `__cyl_bessel_jn()`.

**8.3.2.70** `template<typename _Tp> std::complex<_Tp> std::__detail::__cyl_hankel_2 ( std::complex<_Tp> __nu, std::complex<_Tp> __z )`

Return the complex cylindrical Hankel function of the second kind.

**Parameters**

in	<code>__nu</code>	The order for which the cylindrical Hankel function of the second kind is evaluated.
in	<code>__z</code>	The argument at which the cylindrical Hankel function of the second kind is evaluated.

**Returns**

The complex cylindrical Hankel function of the second kind.

Definition at line 1206 of file sf\_hankel.tcc.

References `__hankel()`.

**8.3.2.71** `template<typename _Tp> std::complex<_Tp> std::__detail::__cyl_neumann ( std::complex<_Tp> __nu, std::complex<_Tp> __z )`

Return the complex cylindrical Neumann function.

**Parameters**

in	<code>__nu</code>	The order for which the cylindrical Neumann function is evaluated.
in	<code>__z</code>	The argument at which the cylindrical Neumann function is evaluated.

**Returns**

The complex cylindrical Neumann function.

Definition at line 1238 of file sf\_hankel.tcc.

References `__hankel()`.

**8.3.2.72** `template<typename _Tp> _Tp std::__detail::__cyl_neumann_n ( _Tp __nu, _Tp __x )`

Return the Neumann function of order  $\nu$ :  $N_\nu(x)$ .

The Neumann function is defined by:

$$N_\nu(x) = \frac{J_\nu(x) \cos \nu\pi - J_{-\nu}(x)}{\sin \nu\pi}$$

where for integral  $\nu = n$  a limit is taken:  $\lim_{\nu \rightarrow n}$ .

**Parameters**

<code>__nu</code>	The order of the Neumann function.
<code>__x</code>	The argument of the Neumann function.

**Returns**

The output Neumann function.

Definition at line 538 of file sf\_bessel.tcc.

References `__cyl_bessel_jn()`.

8.3.2.73 `template<typename _Tp> _Tp std::__detail::__dawson ( _Tp __x )`

Return the Dawson integral,  $F(x)$ , for real argument  $x$ .

The Dawson integral is defined by:

$$F(x) = e^{-x^2} \int_0^x e^{y^2} dy$$

and it's derivative is:

$$F'(x) = 1 - 2xF(x)$$

#### Parameters

<code>__x</code>	The argument $-inf < x < inf$ .
------------------	---------------------------------

Definition at line 233 of file `sf_dawson.tcc`.

References `__dawson_const_frac()`, and `__dawson_series()`.

8.3.2.74 `template<typename _Tp> _Tp std::__detail::__dawson_const_frac ( _Tp __x )`

Compute the Dawson integral using a sampling theorem representation.

**Todo** this needs some compile-time construction!

Definition at line 71 of file `sf_dawson.tcc`.

Referenced by `__dawson()`.

8.3.2.75 `template<typename _Tp> _Tp std::__detail::__dawson_series ( _Tp __x )`

Compute the Dawson integral using the series expansion.

Definition at line 47 of file `sf_dawson.tcc`.

Referenced by `__dawson()`.

8.3.2.76 `template<typename _Tp> void std::__detail::__debye_region ( std::complex<_Tp> __alpha, int & __indexr, char & __aorb )`

Compute the Debye region in the complex plane.

Definition at line 54 of file `sf_hankel.tcc`.

Referenced by `__hankel()`.

8.3.2.77 `template<typename _Tp> _Tp std::__detail::__dilog ( _Tp __x )`

Compute the dilogarithm function  $Li_2(x)$  by summation for  $x \leq 1$ .

The Riemann zeta function is defined by:

$$Li_2(x) = \sum_{k=1}^{\infty} \frac{1}{k^s} \text{ for } s > 1$$

For  $|x|$  near 1 use the reflection formulae:

$$Li_2(-x) + Li_2(1-x) = \frac{\pi^2}{6} - \ln(x) \ln(1-x)$$

$$Li_2(-x) - Li_2(1-x) - \frac{1}{2}Li_2(1-x^2) = -\frac{\pi^2}{12} - \ln(x)\ln(1-x)$$

For  $x < 1$  use the reflection formula:

$$Li_2(1-x) - Li_2\left(1 - \frac{1}{1-x}\right) - \frac{1}{2}(\ln(x))^2$$

Definition at line 194 of file sf\_zeta.tcc.

### 8.3.2.78 `template<typename _Tp> _Tp std::__detail::__dirichlet_beta ( std::complex<_Tp> __w )`

Return the Dirichlet beta function. Currently,  $w$  must be real (complex type but negligible imaginary part.) Otherwise `std::domain_error` is thrown.

#### Parameters

<code>__w</code>	The complex (but on-real-axis) argument.
------------------	--

#### Returns

The Dirichlet Beta function of real argument.

#### Exceptions

<code>std::domain_error</code>	if the argument has a significant imaginary part.
--------------------------------	---

Definition at line 1189 of file sf\_polylog.tcc.

References `__fpequal()`, and `__polylog()`.

### 8.3.2.79 `template<typename _Tp> _Tp std::__detail::__dirichlet_beta ( _Tp __w )`

Return the Dirichlet beta function for real argument.

#### Parameters

<code>__w</code>	The real argument.
------------------	--------------------

#### Returns

The Dirichlet Beta function of real argument.

Definition at line 1208 of file sf\_polylog.tcc.

References `__polylog()`.

### 8.3.2.80 `template<typename _Tp> std::complex<_Tp> std::__detail::__dirichlet_eta ( std::complex<_Tp> __w )`

Return the Dirichlet eta function. Currently,  $w$  must be real (complex type but negligible imaginary part.) Otherwise `std::domain_error` is thrown.

## Parameters

<code>__w</code>	The complex (but on-real-axis) argument.
------------------	--

## Returns

The complex Dirichlet eta function.

## Exceptions

<code>std::domain_error</code>	if the argument has a significant imaginary part.
--------------------------------	---

Definition at line 1152 of file sf\_polylog.tcc.

References `__fpequal()`, and `__polylog()`.

**8.3.2.81** `template<typename _Tp> _Tp std::__detail::__dirichlet_eta ( _Tp __w )`

Return the Dirichlet eta function for real argument.

## Parameters

<code>__w</code>	The real argument.
------------------	--------------------

## Returns

The Dirichlet eta function.

Definition at line 1170 of file sf\_polylog.tcc.

References `__polylog()`.

**8.3.2.82** `template<typename _Tp> _GLIBCXX14_CONSTEXPR _Tp std::__detail::__double_factorial ( int __n )`

Return the double factorial of the integer n.

The double factorial is defined for integral n by:

$$n!! = 135\dots(n-2)n, \text{ odd } n!! = 246\dots(n-2)n, \text{ even } n!! = 10!! = 1$$

The double factorial is defined for odd negative integers in the obvious way:

$$(-2m-1)!! = 1/(1(-1)(-3)\dots(-2m+1)(-2m-1)) = \frac{(-1)^m}{(2m-1)!!}$$

for  $n = -2m - 1$ .

Definition at line 2480 of file sf\_gamma.tcc.

References `__factorial()`, `__log_double_factorial()`, `_S_double_factorial_table`, and `_S_neg_double_factorial_table`.

**8.3.2.83** `template<typename _Tp> _Tp std::__detail::__ellint_1 ( _Tp __k, _Tp __phi )`

Return the incomplete elliptic integral of the first kind  $F(k, \phi)$  using the Carlson formulation.

The incomplete elliptic integral of the first kind is defined as

$$F(k, \phi) = \int_0^\phi \frac{d\theta}{\sqrt{1 - k^2 \sin^2 \theta}}$$

## Parameters

<code>__k</code>	The argument of the elliptic function.
<code>__phi</code>	The integral limit argument of the elliptic function.

## Returns

The elliptic function of the first kind.

Definition at line 594 of file `sf_ellint.tcc`.

References `__comp_ellint_1()`, and `__ellint_rf()`.

### 8.3.2.84 `template<typename _Tp> _Tp std::__detail::__ellint_2 ( _Tp __k, _Tp __phi )`

Return the incomplete elliptic integral of the second kind  $E(k, \phi)$  using the Carlson formulation.

The incomplete elliptic integral of the second kind is defined as

$$E(k, \phi) = \int_0^\phi \sqrt{1 - k^2 \sin^2 \theta} d\theta$$

## Parameters

<code>__k</code>	The argument of the elliptic function.
<code>__phi</code>	The integral limit argument of the elliptic function.

## Returns

The elliptic function of the second kind.

Definition at line 673 of file `sf_ellint.tcc`.

References `__comp_ellint_2()`, `__ellint_rd()`, and `__ellint_rf()`.

### 8.3.2.85 `template<typename _Tp> _Tp std::__detail::__ellint_3 ( _Tp __k, _Tp __nu, _Tp __phi )`

Return the incomplete elliptic integral of the third kind  $\Pi(k, \nu, \phi)$  using the Carlson formulation.

The incomplete elliptic integral of the third kind is defined as

$$\Pi(k, \nu, \phi) = \int_0^\phi \frac{d\theta}{(1 - \nu \sin^2 \theta) \sqrt{1 - k^2 \sin^2 \theta}}$$

## Parameters

<code>__k</code>	The argument of the elliptic function.
<code>__nu</code>	The second argument of the elliptic function.
<code>__phi</code>	The integral limit argument of the elliptic function.

## Returns

The elliptic function of the third kind.

Definition at line 768 of file `sf_ellint.tcc`.

References `__comp_ellint_3()`, `__ellint_rf()`, and `__ellint_rj()`.



**8.3.2.86** `template<typename _Tp> _Tp std::__detail::__ellint_cel ( _Tp __k_c, _Tp __p, _Tp __a, _Tp __b )`

Return the Bulirsch complete elliptic integrals.

Definition at line 920 of file sf\_ellint.tcc.

References `__ellint_rf()`, and `__ellint_rj()`.

**8.3.2.87** `template<typename _Tp> _Tp std::__detail::__ellint_d ( _Tp __k, _Tp __phi )`

Return the Legendre elliptic integral D.

Definition at line 809 of file sf\_ellint.tcc.

References `__ellint_rd()`.

**8.3.2.88** `template<typename _Tp> _Tp std::__detail::__ellint_el1 ( _Tp __x, _Tp __k_c )`

Return the Bulirsch elliptic integrals of the first kind.

Definition at line 848 of file sf\_ellint.tcc.

References `__ellint_rf()`.

**8.3.2.89** `template<typename _Tp> _Tp std::__detail::__ellint_el2 ( _Tp __x, _Tp __k_c, _Tp __a, _Tp __b )`

Return the Bulirsch elliptic integrals of the second kind.

Definition at line 869 of file sf\_ellint.tcc.

References `__ellint_rd()`, and `__ellint_rf()`.

**8.3.2.90** `template<typename _Tp> _Tp std::__detail::__ellint_el3 ( _Tp __x, _Tp __k_c, _Tp __p )`

Return the Bulirsch elliptic integrals of the third kind.

Definition at line 894 of file sf\_ellint.tcc.

References `__ellint_rf()`, and `__ellint_rj()`.

**8.3.2.91** `template<typename _Tp> _Tp std::__detail::__ellint_rc ( _Tp __x, _Tp __y )`

Return the Carlson elliptic function  $R_C(x, y) = R_F(x, y, y)$  where  $R_F(x, y, z)$  is the Carlson elliptic function of the first kind.

The Carlson elliptic function is defined by:

$$R_C(x, y) = \frac{1}{2} \int_0^\infty \frac{dt}{(t+x)^{1/2}(t+y)}$$

Based on Carlson's algorithms:

- B. C. Carlson Numer. Math. 33, 1 (1979)
- B. C. Carlson, Special Functions of Applied Mathematics (1977)
- Numerical Recipes in C, 2nd ed, pp. 261-269, by Press, Teukolsky, Vetterling, Flannery (1992)

## Parameters

<code>__x</code>	The first argument.
<code>__y</code>	The second argument.

## Returns

The Carlson elliptic function.

Definition at line 81 of file `sf_ellint.tcc`.

Referenced by `__ellint_rf()`, and `__ellint_rj()`.

**8.3.2.92** `template<typename _Tp> _Tp std::__detail::__ellint_rd ( _Tp __x, _Tp __y, _Tp __z )`

Return the Carlson elliptic function of the second kind  $R_D(x, y, z) = R_J(x, y, z, z)$  where  $R_J(x, y, z, p)$  is the Carlson elliptic function of the third kind.

The Carlson elliptic function of the second kind is defined by:

$$R_D(x, y, z) = \frac{3}{2} \int_0^\infty \frac{dt}{(t+x)^{1/2}(t+y)^{1/2}(t+z)^{3/2}}$$

Based on Carlson's algorithms:

- B. C. Carlson Numer. Math. 33, 1 (1979)
- B. C. Carlson, Special Functions of Applied Mathematics (1977)
- Numerical Recipes in C, 2nd ed, pp. 261-269, by Press, Teukolsky, Vetterling, Flannery (1992)

## Parameters

<code>__x</code>	The first of two symmetric arguments.
<code>__y</code>	The second of two symmetric arguments.
<code>__z</code>	The third argument.

## Returns

The Carlson elliptic function of the second kind.

Definition at line 163 of file `sf_ellint.tcc`.

Referenced by `__comp_ellint_2()`, `__comp_ellint_d()`, `__ellint_2()`, `__ellint_d()`, `__ellint_el2()`, `__ellint_rg()`, and `__ellint_rj()`.

**8.3.2.93** `template<typename _Tp> _Tp std::__detail::__ellint_rf ( _Tp __x, _Tp __y, _Tp __z )`

Return the Carlson elliptic function  $R_F(x, y, z)$  of the first kind.

The Carlson elliptic function of the first kind is defined by:

$$R_F(x, y, z) = \frac{1}{2} \int_0^\infty \frac{dt}{(t+x)^{1/2}(t+y)^{1/2}(t+z)^{1/2}}$$

## Parameters

<code>__x</code>	The first of three symmetric arguments.
<code>__y</code>	The second of three symmetric arguments.
<code>__z</code>	The third of three symmetric arguments.

## Returns

The Carlson elliptic function of the first kind.

Definition at line 277 of file `sf_ellint.tcc`.

References `__comp_ellint_rf()`, and `__ellint_rc()`.

Referenced by `__comp_ellint_2()`, `__comp_ellint_3()`, `__ellint_1()`, `__ellint_2()`, `__ellint_3()`, `__ellint_cel()`, `__ellint_el1()`, `__ellint_el2()`, `__ellint_el3()`, and `__heuman_lambda()`.

**8.3.2.94** `template<typename _Tp> _Tp std::__detail::__ellint_rg ( _Tp __x, _Tp __y, _Tp __z )`

Return the symmetric Carlson elliptic function of the second kind  $R_G(x, y, z)$ .

The Carlson symmetric elliptic function of the second kind is defined by:

$$R_G(x, y, z) = \frac{1}{4} \int_0^\infty dt [(t+x)(t+y)(t+z)]^{-1/2} \left( \frac{x}{t+x} + \frac{y}{t+y} + \frac{z}{t+z} \right)$$

Based on Carlson's algorithms:

- B. C. Carlson Numer. Math. 33, 1 (1979)
- B. C. Carlson, Special Functions of Applied Mathematics (1977)
- Numerical Recipes in C, 2nd ed, pp. 261-269, by Press, Teukolsky, Vetterling, Flannery (1992)

## Parameters

<code>__x</code>	The first of three symmetric arguments.
<code>__y</code>	The second of three symmetric arguments.
<code>__z</code>	The third of three symmetric arguments.

## Returns

The Carlson symmetric elliptic function of the second kind.

Definition at line 408 of file `sf_ellint.tcc`.

References `__comp_ellint_rg()`, and `__ellint_rd()`.

**8.3.2.95** `template<typename _Tp> _Tp std::__detail::__ellint_rj ( _Tp __x, _Tp __y, _Tp __z, _Tp __p )`

Return the Carlson elliptic function  $R_J(x, y, z, p)$  of the third kind.

The Carlson elliptic function of the third kind is defined by:

$$R_J(x, y, z, p) = \frac{3}{2} \int_0^\infty \frac{dt}{(t+x)^{1/2}(t+y)^{1/2}(t+z)^{1/2}(t+p)}$$

Based on Carlson's algorithms:

- B. C. Carlson Numer. Math. 33, 1 (1979)
- B. C. Carlson, Special Functions of Applied Mathematics (1977)
- Numerical Recipes in C, 2nd ed, pp. 261-269, by Press, Teukolsky, Vetterling, Flannery (1992)

#### Parameters

<code>__x</code>	The first of three symmetric arguments.
<code>__y</code>	The second of three symmetric arguments.
<code>__z</code>	The third of three symmetric arguments.
<code>__p</code>	The fourth argument.

#### Returns

The Carlson elliptic function of the fourth kind.

Definition at line 456 of file `sf_ellint.tcc`.

References `__ellint_rc()`, and `__ellint_rd()`.

Referenced by `__comp_ellint_3()`, `__ellint_3()`, `__ellint_cel()`, `__ellint_el3()`, `__heuman_lambda()`, and `__jacobi_zeta()`.

#### 8.3.2.96 `template<typename _Tp> _Tp std::__detail::__ellnome ( _Tp __k )`

Return the elliptic nome given the modulus `k`.

Definition at line 292 of file `sf_theta.tcc`.

References `__ellnome_k()`, and `__ellnome_series()`.

Referenced by `__theta_c()`, `__theta_d()`, `__theta_n()`, and `__theta_s()`.

#### 8.3.2.97 `template<typename _Tp> _Tp std::__detail::__ellnome_k ( _Tp __k )`

Use the arithmetic-geometric mean to calculate the elliptic nome given the , `k`.

Definition at line 278 of file `sf_theta.tcc`.

References `__comp_ellint_1()`.

Referenced by `__ellnome()`.

#### 8.3.2.98 `template<typename _Tp> _Tp std::__detail::__ellnome_series ( _Tp __k )`

Use MacLaurin series to calculate the elliptic nome given the , `k`.

Definition at line 262 of file `sf_theta.tcc`.

Referenced by `__ellnome()`.

#### 8.3.2.99 `template<typename _Tp> _Tp std::__detail::__expint ( unsigned int __n, _Tp __x )`

Return the exponential integral  $E_n(x)$ .

The exponential integral is given by

$$E_n(x) = \int_1^\infty \frac{e^{-xt}}{t^n} dt$$

This is something of an extension.

## Parameters

<code>__n</code>	The order of the exponential integral function.
<code>__x</code>	The argument of the exponential integral function.

## Returns

The exponential integral.

Definition at line 474 of file sf\_expint.tcc.

References `__expint_E1()`, and `__expint_En_recursion()`.

Referenced by `__logint()`.

**8.3.2.100** `template<typename _Tp> _Tp std::__detail::__expint ( _Tp __x )`

Return the exponential integral  $Ei(x)$ .

The exponential integral is given by

$$Ei(x) = - \int_{-x}^{\infty} \frac{e^t}{t} dt$$

## Parameters

<code>__x</code>	The argument of the exponential integral function.
------------------	--

## Returns

The exponential integral.

Definition at line 514 of file sf\_expint.tcc.

References `__expint_Ei()`.

**8.3.2.101** `template<typename _Tp> _Tp std::__detail::__expint_asymp ( unsigned int __n, _Tp __x )`

Return the exponential integral  $E_n(x)$  for large argument.

The exponential integral is given by

$$E_n(x) = \int_1^{\infty} \frac{e^{-xt}}{t^n} dt$$

This is something of an extension.

## Parameters

<code>__n</code>	The order of the exponential integral function.
<code>__x</code>	The argument of the exponential integral function.

## Returns

The exponential integral.

Definition at line 406 of file sf\_expint.tcc.

8.3.2.102 `template<typename _Tp> _Tp std::__detail::__expint_E1 ( _Tp __x )`

Return the exponential integral  $E_1(x)$ .

The exponential integral is given by

$$E_1(x) = \int_1^{\infty} \frac{e^{-xt}}{t} dt$$

#### Parameters

<code>__x</code>	The argument of the exponential integral function.
------------------	--

#### Returns

The exponential integral.

**Todo** Find a good asymptotic switch point in  $E_1(x)$ .

**Todo** Find a good asymptotic switch point in  $E_1(x)$ .

Definition at line 375 of file `sf_expint.tcc`.

References `__expint_E1_asymp()`, `__expint_E1_series()`, `__expint_Ei()`, and `__expint_En_cont_frac()`.

Referenced by `__coshint()`, `__expint()`, `__expint_Ei()`, `__expint_En_recursion()`, and `__sinhint()`.

8.3.2.103 `template<typename _Tp> _Tp std::__detail::__expint_E1_asymp ( _Tp __x )`

Return the exponential integral  $E_1(x)$  by asymptotic expansion.

The exponential integral is given by

$$E_1(x) = \int_1^{\infty} \frac{e^{-xt}}{t} dt$$

#### Parameters

<code>__x</code>	The argument of the exponential integral function.
------------------	--

#### Returns

The exponential integral.

Definition at line 112 of file `sf_expint.tcc`.

Referenced by `__expint_E1()`.

8.3.2.104 `template<typename _Tp> _Tp std::__detail::__expint_E1_series ( _Tp __x )`

Return the exponential integral  $E_1(x)$  by series summation. This should be good for  $x < 1$ .

The exponential integral is given by

$$E_1(x) = \int_1^{\infty} \frac{e^{-xt}}{t} dt$$

## Parameters

<code>__x</code>	The argument of the exponential integral function.
------------------	--

## Returns

The exponential integral.

Definition at line 75 of file sf\_expint.tcc.

Referenced by `__expint_E1()`.

**8.3.2.105** `template<typename _Tp> _Tp std::__detail::__expint_Ei ( _Tp __x )`

Return the exponential integral  $Ei(x)$ .

The exponential integral is given by

$$Ei(x) = - \int_{-x}^{\infty} \frac{e^t}{t} dt$$

## Parameters

<code>__x</code>	The argument of the exponential integral function.
------------------	--

## Returns

The exponential integral.

Definition at line 351 of file sf\_expint.tcc.

References `__expint_E1()`, `__expint_Ei_asymp()`, and `__expint_Ei_series()`.

Referenced by `__coshint()`, `__expint()`, `__expint_E1()`, and `__sinhint()`.

**8.3.2.106** `template<typename _Tp> _Tp std::__detail::__expint_Ei_asymp ( _Tp __x )`

Return the exponential integral  $Ei(x)$  by asymptotic expansion.

The exponential integral is given by

$$Ei(x) = - \int_{-x}^{\infty} \frac{e^t}{t} dt$$

## Parameters

<code>__x</code>	The argument of the exponential integral function.
------------------	--

## Returns

The exponential integral.

Definition at line 318 of file sf\_expint.tcc.

Referenced by `__expint_Ei()`.

8.3.2.107 `template<typename _Tp> _Tp std::__detail::__expint_Ei_series ( _Tp __x )`

Return the exponential integral  $Ei(x)$  by series summation.

The exponential integral is given by

$$Ei(x) = - \int_{-x}^{\infty} \frac{e^t}{t} dt$$

#### Parameters

<code>__x</code>	The argument of the exponential integral function.
------------------	--

#### Returns

The exponential integral.

Definition at line 286 of file `sf_expint.tcc`.

Referenced by `__expint_Ei()`.

8.3.2.108 `template<typename _Tp> _Tp std::__detail::__expint_En_cont_frac ( unsigned int __n, _Tp __x )`

Return the exponential integral  $E_n(x)$  by continued fractions.

The exponential integral is given by

$$E_n(x) = \int_1^{\infty} \frac{e^{-xt}}{t^n} dt$$

#### Parameters

<code>__n</code>	The order of the exponential integral function.
<code>__x</code>	The argument of the exponential integral function.

#### Returns

The exponential integral.

Definition at line 195 of file `sf_expint.tcc`.

Referenced by `__expint_E1()`.

8.3.2.109 `template<typename _Tp> _Tp std::__detail::__expint_En_recursion ( unsigned int __n, _Tp __x )`

Return the exponential integral  $E_n(x)$  by recursion. Use upward recursion for  $x < n$  and downward recursion (Miller's algorithm) otherwise.

The exponential integral is given by

$$E_n(x) = \int_1^{\infty} \frac{e^{-xt}}{t^n} dt$$



## Parameters

<code>__n</code>	The order of the exponential integral function.
<code>__x</code>	The argument of the exponential integral function.

## Returns

The exponential integral.

**Todo** Find a principled starting number for the  $E_n(x)$  downward recursion.

Definition at line 240 of file sf\_expint.tcc.

References `__expint_E1()`.

Referenced by `__expint()`.

8.3.2.110 `template<typename _Tp> _Tp std::__detail::__expint_En_series ( unsigned int __n, _Tp __x )`

Return the exponential integral  $E_n(x)$  by series summation.

The exponential integral is given by

$$E_n(x) = \int_1^\infty \frac{e^{-xt}}{t^n} dt$$

## Parameters

<code>__n</code>	The order of the exponential integral function.
<code>__x</code>	The argument of the exponential integral function.

## Returns

The exponential integral.

Definition at line 149 of file sf\_expint.tcc.

References `__psi()`.

8.3.2.111 `template<typename _Tp> _Tp std::__detail::__expint_large_n ( unsigned int __n, _Tp __x )`

Return the exponential integral  $E_n(x)$  for large order.

The exponential integral is given by

$$E_n(x) = \int_1^\infty \frac{e^{-xt}}{t^n} dt$$

This is something of an extension.

## Parameters

<code>__n</code>	The order of the exponential integral function.
<code>__x</code>	The argument of the exponential integral function.

## Returns

The exponential integral.

Definition at line 440 of file sf\_expint.tcc.

**8.3.2.112** `template<typename _Tp > _GLIBCXX14_CONSTEXPR _Tp std::__detail::__f_cdf ( _Tp __F, unsigned int __nu1, unsigned int __nu2 )`

Return the F-distribution propability function. This returns the probability that the observed chi-square for a correct model exceeds the value  $\chi^2$ .

The f-distribution propability function is related to the incomplete beta function:

$$Q(F|\nu_1, \nu_2) = I_{\frac{\nu_2}{\nu_2 + \nu_1 F}}\left(\frac{\nu_2}{2}, \frac{\nu_1}{2}\right)$$

Parameters

<code>__nu1</code>	
<code>__nu2</code>	

Definition at line 349 of file sf\_beta.tcc.

References `__beta_inc()`.

**8.3.2.113** `template<typename _Tp > _GLIBCXX14_CONSTEXPR _Tp std::__detail::__f_cdfc ( _Tp __F, unsigned int __nu1, unsigned int __nu2 )`

Return the F-distribution propability function. This returns the probability that the observed chi-square for a correct model exceeds the value  $\chi^2$ .

The f-distribution propability function is related to the incomplete beta function:

$$P(F|\nu_1, \nu_2) = 1 - I_{\frac{\nu_2}{\nu_2 + \nu_1 F}}\left(\frac{\nu_2}{2}, \frac{\nu_1}{2}\right) = 1 - Q(F|\nu_1, \nu_2)$$

Parameters

<code>__F</code>	
<code>__nu1</code>	
<code>__nu2</code>	

Definition at line 378 of file sf\_beta.tcc.

References `__beta_inc()`.

**8.3.2.114** `template<typename _Tp > _GLIBCXX14_CONSTEXPR _Tp std::__detail::__factorial ( unsigned int __n )`

Return the factorial of the integer n.

The factorial is:

$$n! = 12... (n-1)n, 0! = 1$$

Definition at line 2422 of file sf\_gamma.tcc.

References `_S_factorial_table`.

Referenced by `__double_factorial()`.

**8.3.2.115** `template<typename _Tp > _Tp std::__detail::__fermi_dirac ( _Tp __s, _Tp __x )`

Return the Fermi-Dirac integral of real order s and real argument x.

See also

[https://en.wikipedia.org/wiki/Clausen\\_function](https://en.wikipedia.org/wiki/Clausen_function)  
<http://dlmf.nist.gov/25.12#iii>

Parameters

<code>__s</code>	The order $s \geq 0$ .
<code>__x</code>	The real argument.

Returns

The real Fermi-Dirac cosine sum  $F_s(x)$ ,

Definition at line 1376 of file sf\_polylog.tcc.

References `__polylog_exp()`.

8.3.2.116 `template<typename _Tp> void std::__detail::__fock_airy ( _Tp __x, std::complex<_Tp> & __w1, std::complex<_Tp> & __w2, std::complex<_Tp> & __w1p, std::complex<_Tp> & __w2p )`

Compute the Fock-type Airy functions  $w_1(x)$  and  $w_2(x)$  and their first derivatives  $w'_1(x)$  and  $w'_2(x)$  respectively.

$$w_1(x) = \sqrt{\pi}(Ai(x) + iBi(x))$$

$$w_2(x) = \sqrt{\pi}(Ai(x) - iBi(x))$$

.

Parameters

<code>__x</code>	The argument of the Airy functions.
<code>__w1</code>	The output Fock-type Airy function of the first kind.
<code>__w2</code>	The output Fock-type Airy function of the second kind.
<code>__w1p</code>	The output derivative of the Fock-type Airy function of the first kind.
<code>__w2p</code>	The output derivative of the Fock-type Airy function of the second kind.

Definition at line 569 of file sf\_mod\_bessel.tcc.

8.3.2.117 `template<typename _Tp> bool std::__detail::__fpequal ( const _Tp & __a, const _Tp & __b )`

A function to reliably compare two floating point numbers.

Parameters

<code>__a</code>	the left hand side.
<code>__b</code>	the right hand side

Returns

returns true if a and b are equal to zero or differ only by  $\max(a, b) * 5 * eps$

Definition at line 62 of file sf\_polylog.tcc.

Referenced by `__dirichlet_beta()`, `__dirichlet_eta()`, `__fpimag()`, `__fpreal()`, `__polylog()`, `__polylog_exp_asymp()`, `__polylog_exp_int_neg()`, `__polylog_exp_int_pos()`, `__polylog_exp_neg()`, `__polylog_exp_neg_even()`, `__polylog_exp_neg_odd()`, `__polylog_exp_negative_real_part()`, `__polylog_exp_pos()`, and `__polylog_exp_real_pos()`.

8.3.2.118 `template<typename _Tp> bool std::__detail::__fpimag ( const std::complex< _Tp> & __w )`

A function to reliably test a complex number for imaginyness [?].

## Parameters

<code>__w</code>	The complex argument.
------------------	-----------------------

## Returns

`true` if  $Re(w)$  is zero within  $5 * epsilon$ , `false` otherwise.

Definition at line 107 of file `sf_polylog.tcc`.

References `__fpequal()`.

**8.3.2.119** `template<typename _Tp> bool std::__detail::__fpimag ( const _Tp )`

Definition at line 117 of file `sf_polylog.tcc`.

**8.3.2.120** `template<typename _Tp> bool std::__detail::__fpreal ( const std::complex< _Tp> & __w )`

A function to reliably test a complex number for realness.

## Parameters

<code>__w</code>	The complex argument.
------------------	-----------------------

## Returns

`true` if  $Im(w)$  is zero within  $5 * epsilon$ , `false` otherwise.

Definition at line 84 of file `sf_polylog.tcc`.

References `__fpequal()`.

Referenced by `__polylog_exp_int_pos()`, and `__polylog_exp_real_pos()`.

**8.3.2.121** `template<typename _Tp> bool std::__detail::__fpreal ( const _Tp )`

Definition at line 94 of file `sf_polylog.tcc`.

**8.3.2.122** `template<typename _Tp> std::complex< _Tp> std::__detail::__fresnel ( const _Tp __x )`

Return the Fresnel cosine and sine integrals as a complex number  $C(x) + iS(x)$ .

The Fresnel cosine integral is defined by:

$$C(x) = \int_0^x \cos\left(\frac{\pi}{2}t^2\right)dt$$

The Fresnel sine integral is defined by:

$$S(x) = \int_0^x \sin\left(\frac{\pi}{2}t^2\right)dt$$

## Parameters

<code>__x</code>	The argument
------------------	--------------

Definition at line 166 of file `sf_fresnel.tcc`.

References `__fresnel_cont_frac()`, and `__fresnel_series()`.

**8.3.2.123** `template<typename _Tp> void std::__detail::__fresnel_cont_frac ( const _Tp __ax, _Tp & _Cf, _Tp & _Sf )`

This function computes the Fresnel cosine and sine integrals by continued fractions for positive argument.

Definition at line 105 of file `sf_fresnel.tcc`.

Referenced by `__fresnel()`.

**8.3.2.124** `template<typename _Tp> void std::__detail::__fresnel_series ( const _Tp __ax, _Tp & _Cf, _Tp & _Sf )`

This function returns the Fresnel cosine and sine integrals as a pair by series expansion for positive argument.

Definition at line 48 of file `sf_fresnel.tcc`.

Referenced by `__fresnel()`.

**8.3.2.125** `template<typename _Tp> _Tp std::__detail::__gamma ( _Tp __x )`

Return  $\Gamma(x)$ .

## Parameters

<code>__x</code>	The argument of the gamma function.
------------------	-------------------------------------

## Returns

The gamma function.

Definition at line 1918 of file `sf_gamma.tcc`.

References `__log_gamma()`.

Referenced by `__beta_gamma()`, and `__riemann_zeta()`.

**8.3.2.126** `template<typename _Tp> std::pair<_Tp, _Tp> std::__detail::__gamma_cont_frac ( _Tp __a, _Tp __x )`

Definition at line 1964 of file `sf_gamma.tcc`.

Referenced by `__gamma_l()`, `__gamma_p()`, `__gamma_q()`, and `__gamma_u()`.

**8.3.2.127** `template<typename _Tp> _Tp std::__detail::__gamma_l ( _Tp __a, _Tp __x )`

Return the lower incomplete gamma function. The lower incomplete gamma function is defined by

$$\gamma(a, x) = \int_0^x e^{-t} t^{a-1} dt (a > 0)$$

.

Definition at line 2070 of file sf\_gamma.tcc.

References `__gamma_cont_frac()`, and `__gamma_series()`.

**8.3.2.128** `template<typename _Tp> _Tp std::__detail::__gamma_p ( _Tp __a, _Tp __x )`

Return the regularized lower incomplete gamma function. The regularized lower incomplete gamma function is defined by

$$P(a, x) = \frac{\gamma(a, x)}{\Gamma(a)}$$

where  $\Gamma(a)$  is the gamma function and

$$\gamma(a, x) = \int_0^x e^{-t} t^{a-1} dt (a > 0)$$

is the lower incomplete gamma function.

Definition at line 2013 of file sf\_gamma.tcc.

References `__gamma_cont_frac()`, and `__gamma_series()`.

Referenced by `__chi_squared_pdf()`.

**8.3.2.129** `template<typename _Tp> _Tp std::__detail::__gamma_q ( _Tp __a, _Tp __x )`

Return the regularized upper incomplete gamma function. The regularized upper incomplete gamma function is defined by

$$Q(a, x) = \frac{\Gamma(a, x)}{\Gamma(a)}$$

where  $\Gamma(a)$  is the gamma function and

$$\Gamma(a, x) = \int_x^\infty e^{-t} t^{a-1} dt (a > 0)$$

is the upper incomplete gamma function.

Definition at line 2044 of file sf\_gamma.tcc.

References `__gamma_cont_frac()`, and `__gamma_series()`.

Referenced by `__chi_squared_pdfc()`.

**8.3.2.130** `template<typename _Tp> std::pair<_Tp, _Tp> std::__detail::__gamma_series ( _Tp __a, _Tp __x )`

Definition at line 1930 of file sf\_gamma.tcc.

Referenced by `__gamma_l()`, `__gamma_p()`, `__gamma_q()`, and `__gamma_u()`.

**8.3.2.131** `template<typename _Tp> void std::__detail::__gamma_temme ( _Tp __mu, _Tp & __gam1, _Tp & __gam2, _Tp & __gampl, _Tp & __gammi )`

Compute the gamma functions required by the Temme series expansions of  $N_\nu(x)$  and  $K_\nu(x)$ .

$$\Gamma_1 = \frac{1}{2\mu} \left[ \frac{1}{\Gamma(1-\mu)} - \frac{1}{\Gamma(1+\mu)} \right]$$

and

$$\Gamma_2 = \frac{1}{2} \left[ \frac{1}{\Gamma(1-\mu)} + \frac{1}{\Gamma(1+\mu)} \right]$$

where  $-1/2 \leq \mu \leq 1/2$  is  $\mu = \nu - N$  and  $N$  is the nearest integer to  $\nu$ . The values of  $\Gamma(1+\mu)$  and  $\Gamma(1-\mu)$  are returned as well.

The accuracy requirements on this are exquisite.

#### Parameters

	<code>__mu</code>	The input parameter of the gamma functions.
out	<code>__gam1</code>	The output function $\Gamma_1(\mu)$
out	<code>__gam2</code>	The output function $\Gamma_2(\mu)$
out	<code>__gampl</code>	The output function $\Gamma(1+\mu)$
out	<code>__gammi</code>	The output function $\Gamma(1-\mu)$

Definition at line 163 of file `sf_bessel.tcc`.

Referenced by `__cyl_bessel_ik_steel()`, and `__cyl_bessel_jn_steel()`.

**8.3.2.132** `template<typename _Tp> _Tp std::__detail::__gamma_u ( _Tp __a, _Tp __x )`

Return the upper incomplete gamma function. The lower incomplete gamma function is defined by

$$\Gamma(a, x) = \int_x^\infty e^{-t} t^{a-1} dt (a > 0)$$

.

Definition at line 2102 of file `sf_gamma.tcc`.

References `__gamma_cont_frac()`, and `__gamma_series()`.

**8.3.2.133** `template<typename _Tp> _Tp std::__detail::__gauss ( _Tp __x )`

The CDF of the normal distribution. i.e. the integrated lower tail of the normal PDF.

Definition at line 70 of file `sf_owens.t.tcc`.

**8.3.2.134** `template<typename _Tp> _Tp std::__detail::__gegenbauer_poly ( unsigned int __n, _Tp __alpha, _Tp __x )`

Definition at line 44 of file `sf_gegenbauer.tcc`.

**8.3.2.135** `template<typename _Tp> void std::__detail::__hankel ( std::complex< _Tp> __nu, std::complex< _Tp> __z, std::complex< _Tp> & __H1, std::complex< _Tp> & __H2, std::complex< _Tp> & __H1p, std::complex< _Tp> & __H2p )`

#### Parameters

in	<code>__nu</code>	The order for which the Hankel functions are evaluated.
in	<code>__z</code>	The argument at which the Hankel functions are evaluated.



out	<code>_H1</code>	The Hankel function of the first kind.
out	<code>_H1p</code>	The derivative of the Hankel function of the first kind.
out	<code>_H2</code>	The Hankel function of the second kind.
out	<code>_H2p</code>	The derivative of the Hankel function of the second kind.

Definition at line 1127 of file `sf_hankel.tcc`.

References `__debye_region()`, `__hankel_debye()`, and `__hankel_uniform()`.

Referenced by `__cyl_bessel()`, `__cyl_hankel_1()`, `__cyl_hankel_2()`, `__cyl_neumann()`, and `__sph_hankel()`.

**8.3.2.136** `template<typename _Tp> void std::__detail::__hankel_debye ( std::complex<_Tp> __nu, std::complex<_Tp> __z, std::complex<_Tp> __alpha, int __indexr, char &__aorb, int &__morn, std::complex<_Tp> &_H1, std::complex<_Tp> &_H2, std::complex<_Tp> &_H1p, std::complex<_Tp> &_H2p )`

#### Parameters

in	<code>__nu</code>	The order for which the Hankel functions are evaluated.
in	<code>__z</code>	The argument at which the Hankel functions are evaluated.
in	<code>__alpha</code>	
in	<code>__indexr</code>	
out	<code>__aorb</code>	
out	<code>__morn</code>	
out	<code>_H1</code>	The Hankel function of the first kind.
out	<code>_H1p</code>	The derivative of the Hankel function of the first kind.
out	<code>_H2</code>	The Hankel function of the second kind.
out	<code>_H2p</code>	The derivative of the Hankel function of the second kind.

Definition at line 959 of file `sf_hankel.tcc`.

Referenced by `__hankel()`.

**8.3.2.137** `template<typename _Tp> void std::__detail::__hankel_params ( std::complex<_Tp> __nu, std::complex<_Tp> __zhat, std::complex<_Tp> &__p, std::complex<_Tp> &__p2, std::complex<_Tp> &__nup2, std::complex<_Tp> &__num2, std::complex<_Tp> &__num1d3, std::complex<_Tp> &__num2d3, std::complex<_Tp> &__num4d3, std::complex<_Tp> &__zeta, std::complex<_Tp> &__zetaphf, std::complex<_Tp> &__zetamhf, std::complex<_Tp> &__zetam3hf, std::complex<_Tp> &__zetrat )`

Compute parameters depending on `z` and `nu` that appear in the uniform asymptotic expansions of the Hankel functions and their derivatives, except the arguments to the Airy functions.

Definition at line 110 of file `sf_hankel.tcc`.

Referenced by `__hankel_uniform_outer()`.

**8.3.2.138** `template<typename _Tp> void std::__detail::__hankel_uniform ( std::complex<_Tp> __nu, std::complex<_Tp> __z, std::complex<_Tp> &_H1, std::complex<_Tp> &_H2, std::complex<_Tp> &_H1p, std::complex<_Tp> &_H2p )`

This routine computes the uniform asymptotic approximations of the Hankel functions and their derivatives including a patch for the case when the order equals or nearly equals the argument. At such points, Olver's expressions have zero denominators (and numerators) resulting in numerical problems. This routine averages results from four surrounding points in the complex plane to obtain the result in such cases.

## Parameters

in	<code>__nu</code>	The order for which the Hankel functions are evaluated.
in	<code>__z</code>	The argument at which the Hankel functions are evaluated.
out	<code>_H1</code>	The Hankel function of the first kind.
out	<code>_H1p</code>	The derivative of the Hankel function of the first kind.
out	<code>_H2</code>	The Hankel function of the second kind.
out	<code>_H2p</code>	The derivative of the Hankel function of the second kind.

Definition at line 904 of file `sf_hankel.tcc`.

References `__hankel_uniform_olver()`.

Referenced by `__hankel()`.

```
8.3.2.139 template<typename _Tp> void std::__detail::__hankel_uniform_olver ( std::complex<_Tp> __nu, std::complex<_Tp>
    > __z, std::complex<_Tp> &_H1, std::complex<_Tp> &_H2, std::complex<_Tp> &_H1p, std::complex<_Tp>
    > &_H2p )
```

Compute approximate values for the Hankel functions of the first and second kinds using Olver's uniform asymptotic expansion to of order `nu` along with their derivatives.

## Parameters

in	<code>__nu</code>	The order for which the Hankel functions are evaluated.
in	<code>__z</code>	The argument at which the Hankel functions are evaluated.
out	<code>_H1</code>	The Hankel function of the first kind.
out	<code>_H1p</code>	The derivative of the Hankel function of the first kind.
out	<code>_H2</code>	The Hankel function of the second kind.
out	<code>_H2p</code>	The derivative of the Hankel function of the second kind.

Definition at line 818 of file `sf_hankel.tcc`.

References `__hankel_uniform_outer()`, and `__hankel_uniform_sum()`.

Referenced by `__hankel_uniform()`.

```
8.3.2.140 template<typename _Tp> void std::__detail::__hankel_uniform_outer ( std::complex<_Tp> __nu, std::complex<
    _Tp> __z, _Tp __eps, std::complex<_Tp> &__zhat, std::complex<_Tp> &__1dnsq, std::complex<_Tp>
    &__num1d3, std::complex<_Tp> &__num2d3, std::complex<_Tp> &__p, std::complex<_Tp> &__p2,
    std::complex<_Tp> &__etm3h, std::complex<_Tp> &__etrat, std::complex<_Tp> &__Aip, std::complex<
    _Tp> &__o4dp, std::complex<_Tp> &__Aim, std::complex<_Tp> &__o4dm, std::complex<_Tp> &__od2p,
    std::complex<_Tp> &__od0dp, std::complex<_Tp> &__od2m, std::complex<_Tp> &__od0dm )
```

Compute outer factors and associated functions of `z` and `nu` appearing in Olver's uniform asymptotic expansions of the Hankel functions of the first and second kinds and their derivatives. The various functions of `z` and `nu` returned by `hankel_uniform_outer` are available for use in computing further terms in the expansions.

Definition at line 273 of file `sf_hankel.tcc`.

References `__airy()`, `__airy_arg()`, and `__hankel_params()`.

Referenced by `__hankel_uniform_olver()`.

8.3.2.141 `template<typename _Tp> void std::__detail::__hankel_uniform_sum ( std::complex<_Tp> __p, std::complex<_Tp> __p2, std::complex<_Tp> __num2, std::complex<_Tp> __zetam3hf, std::complex<_Tp> __Aip, std::complex<_Tp> __o4dp, std::complex<_Tp> __Aim, std::complex<_Tp> __o4dm, std::complex<_Tp> __od2p, std::complex<_Tp> __od0dp, std::complex<_Tp> __od2m, std::complex<_Tp> __od0dm, _Tp __eps, std::complex<_Tp> & __H1sum, std::complex<_Tp> & __H1psum, std::complex<_Tp> & __H2sum, std::complex<_Tp> & __H2psum )`

Compute the sums in appropriate linear combinations appearing in Olver's uniform asymptotic expansions for the Hankel functions of the first and second kinds and their derivatives, using up to nterms (less than 5) to achieve relative error eps.

#### Parameters

in	<code>__p</code>	
in	<code>__p2</code>	
in	<code>__num2</code>	
in	<code>__zetam3hf</code>	
in	<code>__Aip</code>	The Airy function value $Ai()$ .
in	<code>__o4dp</code>	
in	<code>__Aim</code>	The Airy function value $Ai()$ .
in	<code>__o4dm</code>	
in	<code>__od2p</code>	
in	<code>__od0dp</code>	
in	<code>__od2m</code>	
in	<code>__od0dm</code>	
in	<code>__eps</code>	The error tolerance
out	<code>__H1sum</code>	The Hankel function of the first kind.
out	<code>__H1psum</code>	The derivative of the Hankel function of the first kind.
out	<code>__H2sum</code>	The Hankel function of the second kind.
out	<code>__H2psum</code>	The derivative of the Hankel function of the second kind.

Definition at line 351 of file `sf_hankel.tcc`.

Referenced by `__hankel_uniform_olver()`.

8.3.2.142 `template<typename _Tp> _Tp std::__detail::__heuman_lambda ( _Tp __k, _Tp __phi )`

Return the Heuman lambda function.

Definition at line 941 of file `sf_ellint.tcc`.

References `__ellint_rf()`, and `__ellint_rj()`.

8.3.2.143 `template<typename _Tp> _Tp std::__detail::__hurwitz_zeta ( _Tp __s, _Tp __a )`

Return the Hurwitz zeta function  $\zeta(s, a)$  for all  $s \neq 1$  and  $a > -1$ .

The Hurwitz zeta function is defined by:

$$\zeta(s, a) = \sum_{n=0}^{\infty} \frac{1}{(n+a)^s}$$

The Riemann zeta function is a special case:

$$\zeta(s) = \zeta(s, 1)$$

## Parameters

<code>__s</code>	The argument $s! = 1$
<code>__a</code>	The scale parameter $a > -1$

Definition at line 702 of file `sf_zeta.tcc`.

References `__hurwitz_zeta_euler_maclaurin()`.

**8.3.2.144** `template<typename _Tp> std::complex<FType> std::__detail::__hurwitz_zeta ( const _Tp __s, std::complex<_Tp> __a )`

Return the Hurwitz Zeta function for real  $s$  and complex  $a$ .

## Parameters

<code>s</code>	<code>__s</code>
<code>x</code>	<code>__a</code>

Definition at line 1120 of file `sf_polylog.tcc`.

Referenced by `__psi()`.

**8.3.2.145** `template<typename _Tp> _Tp std::__detail::__hurwitz_zeta_euler_maclaurin ( _Tp __s, _Tp __a )`

Return the Hurwitz zeta function  $\zeta(s, a)$  for all  $s \neq 1$  and  $a > -1$ .

## See also

An efficient algorithm for accelerating the convergence of oscillatory series, useful for computing the polylogarithm and Hurwitz zeta functions, Linas Vep

## Parameters

<code>__s</code>	The argument $s! = 1$
<code>__a</code>	The scale parameter $a > -1$

Definition at line 560 of file `sf_zeta.tcc`.

References `_S_Euler_Maclaurin_zeta`.

Referenced by `__hurwitz_zeta()`.

**8.3.2.146** `template<typename _Tp> std::complex<_Tp> std::__detail::__hydrogen ( const unsigned int __n, const unsigned int __l, const unsigned int __m, const _Tp __Z, const _Tp __r, const _Tp __theta, const _Tp __phi )`

Definition at line 44 of file `sf_hydrogen.tcc`.

References `__assoc_laguerre()`, `__psi()`, and `__sph_legendre()`.

**8.3.2.147** `template<typename _Tp> _Tp std::__detail::__hyperg ( _Tp __a, _Tp __b, _Tp __c, _Tp __x )`

Return the hypergeometric function  ${}_2F_1(a, b; c; x)$ .

The hypergeometric function is defined by

$${}_2F_1(a, b; c; x) = \frac{\Gamma(c)}{\Gamma(a)\Gamma(b)} \sum_{n=0}^{\infty} \frac{\Gamma(a+n)\Gamma(b+n)}{\Gamma(c+n)} \frac{x^n}{n!}$$

## Parameters

<code>__a</code>	The first <i>numerator</i> parameter.
<code>__b</code>	The second <i>numerator</i> parameter.
<code>__c</code>	The <i>denominator</i> parameter.
<code>__x</code>	The argument of the confluent hypergeometric function.

## Returns

The confluent hypergeometric function.

Definition at line 776 of file `sf_hyperg.tcc`.

References `__hyperg_luke()`, `__hyperg_reflect()`, `__hyperg_series()`, `__log_gamma()`, and `__log_gamma_sign()`.

**8.3.2.148** `template<typename _Tp> _Tp std::__detail::__hyperg_luke ( _Tp __a, _Tp __b, _Tp __c, _Tp __xin )`

Return the hypergeometric function  ${}_2F_1(a, b; c; x)$  by an iterative procedure described in Luke, Algorithms for the Computation of Mathematical Functions.

Definition at line 352 of file `sf_hyperg.tcc`.

Referenced by `__hyperg()`.

**8.3.2.149** `template<typename _Tp> _Tp std::__detail::__hyperg_reflect ( _Tp __a, _Tp __b, _Tp __c, _Tp __x )`

Return the hypergeometric function  ${}_2F_1(a, b; c; x)$  by the reflection formulae in Abramowitz & Stegun formula 15.3.6 for  $d = c - a - b$  not integral and formula 15.3.11 for  $d = c - a - b$  integral. This assumes  $a, b, c \neq$  negative integer.

The hypergeometric function is defined by

$${}_2F_1(a, b; c; x) = \frac{\Gamma(c)}{\Gamma(a)\Gamma(b)} \sum_{n=0}^{\infty} \frac{\Gamma(a+n)\Gamma(b+n)}{\Gamma(c+n)} \frac{x^n}{n!}$$

The reflection formula for nonintegral  $d = c - a - b$  is:

$${}_2F_1(a, b; c; x) = \frac{\Gamma(c)\Gamma(d)}{\Gamma(c-a)\Gamma(c-b)} {}_2F_1(a, b; 1-d; 1-x) + \frac{\Gamma(c)\Gamma(-d)}{\Gamma(a)\Gamma(b)} {}_2F_1(c-a, c-b; 1+d; 1-x)$$

The reflection formula for integral  $m = c - a - b$  is:

$${}_2F_1(a, b; a+b+m; x) = \frac{\Gamma(m)\Gamma(a+b+m)}{\Gamma(a+m)\Gamma(b+m)} \sum_{k=0}^{m-1} \frac{(m+a)_k(m+b)_k}{k!(1-m)_k} -$$

Definition at line 486 of file `sf_hyperg.tcc`.

References `__hyperg_series()`, `__log_gamma()`, `__log_gamma_sign()`, and `__psi()`.

Referenced by `__hyperg()`.

**8.3.2.150** `template<typename _Tp> _Tp std::__detail::__hyperg_series ( _Tp __a, _Tp __b, _Tp __c, _Tp __x )`

Return the hypergeometric function  ${}_2F_1(a, b; c; x)$  by series expansion.

The hypergeometric function is defined by

$${}_2F_1(a, b; c; x) = \frac{\Gamma(c)}{\Gamma(a)\Gamma(b)} \sum_{n=0}^{\infty} \frac{\Gamma(a+n)\Gamma(b+n)}{\Gamma(c+n)} \frac{x^n}{n!}$$

This works and it's pretty fast.

## Parameters

<code>__a</code>	The first <i>numerator</i> parameter.
<code>__b</code>	The second <i>numerator</i> parameter.
<code>__c</code>	The <i>denominator</i> parameter.
<code>__x</code>	The argument of the confluent hypergeometric function.

## Returns

The confluent hypergeometric function.

Definition at line 321 of file `sf_hyperg.tcc`.

Referenced by `__hyperg()`, and `__hyperg_reflect()`.

**8.3.2.151** `template<typename _Tp> std::tuple<_Tp, _Tp, _Tp> std::__detail::__jacobi_sncndn ( _Tp __k, _Tp __u )`

Return a tuple of the three primary Jacobi elliptic functions:  $sn(k, u)$ ,  $cn(k, u)$ ,  $dn(k, u)$ .

Definition at line 414 of file `sf_theta.tcc`.

**8.3.2.152** `template<typename _Tp> _Tp std::__detail::__jacobi_zeta ( _Tp __k, _Tp __phi )`

Return the Jacobi zeta function.

Definition at line 971 of file `sf_ellint.tcc`.

References `__comp_ellint_1()`, and `__ellint_rj()`.

**8.3.2.153** `template<typename _Tp> _Tp std::__detail::__laguerre ( unsigned int __n, _Tp __x )`

This routine returns the Laguerre polynomial of order  $n$ :  $L_n(x)$ .

The Laguerre polynomial is defined by:

$$L_n(x) = \frac{e^x}{n!} \frac{d^n}{dx^n} (x^n e^{-x})$$

## Parameters

<code>__n</code>	The order of the Laguerre polynomial.
<code>__x</code>	The argument of the Laguerre polynomial.

## Returns

The value of the Laguerre polynomial of order  $n$  and argument  $x$ .

Definition at line 312 of file `sf_laguerre.tcc`.

**8.3.2.154** `template<typename _Tp> _Tp std::__detail::__log_bincoef ( unsigned int __n, unsigned int __k )`

Return the logarithm of the binomial coefficient. The binomial coefficient is given by:

$$\binom{n}{k} = \frac{n!}{(n-k)!k!}$$

.

## Parameters

<code>__n</code>	The first argument of the binomial coefficient.
<code>__k</code>	The second argument of the binomial coefficient.

## Returns

The logarithm of the binomial coefficient.

Definition at line 1862 of file `sf_gamma.tcc`.

**8.3.2.155** `template<typename _Tp > _GLIBCXX14_CONSTEXPR _Tp std::__detail::__log_double_factorial ( _Tp __x )`

Definition at line 2450 of file `sf_gamma.tcc`.

References `__log_gamma()`.

Referenced by `__double_factorial()`, and `__log_double_factorial()`.

**8.3.2.156** `template<typename _Tp > _GLIBCXX14_CONSTEXPR _Tp std::__detail::__log_double_factorial ( int __n )`

Return the logarithm of the double factorial of the integer `n`.

The double factorial is defined for integral `n` by:

$$n!! = 135\dots(n-2)n, \text{ odd } n!! = 246\dots(n-2)n, \text{ even } n!! = 10!! = 1$$

The double factorial is defined for odd negative integers in the obvious way:

$$(-2m-1)!! = 1/(1(-1)(-3)\dots(-2m+1)(-2m-1)) = \frac{(-1)^m}{(2m-1)!!}$$

for  $n = -2m - 1$ .

Definition at line 2516 of file `sf_gamma.tcc`.

References `__log_double_factorial()`, `__log_factorial()`, `_S_double_factorial_table`, and `_S_neg_double_factorial_table`.

**8.3.2.157** `template<typename _Tp > _GLIBCXX14_CONSTEXPR _Tp std::__detail::__log_factorial ( unsigned int __n )`

Return the logarithm of the factorial of the integer `n`.

The factorial is:

$$n! = 12\dots(n-1)n, 0! = 1$$

Definition at line 2440 of file `sf_gamma.tcc`.

References `__log_gamma()`, and `_S_factorial_table`.

Referenced by `__log_double_factorial()`.

**8.3.2.158** `template<typename _Tp > _Tp std::__detail::__log_gamma ( _Tp __x )`

Return  $\log(|\Gamma(x)|)$ . This will return values even for  $x < 0$ . To recover the sign of  $\Gamma(x)$  for any argument use `__log_gamma_sign`.



## Parameters

<code>__x</code>	The argument of the log of the gamma function.
------------------	--

## Returns

The logarithm of the gamma function.

Definition at line 1800 of file `sf_gamma.tcc`.

References `__log_gamma_lanczos()`.

Referenced by `__beta_lgamma()`, `__cyl_bessel_ij_series()`, `__gamma()`, `__hyperg()`, `__hyperg_reflect()`, `__log_double_factorial()`, `__log_factorial()`, `__log_pochhammer_u()`, `__poly_laguerre_large_n()`, `__psi()`, `__riemann_zeta()`, `__riemann_zeta_glob()`, and `__sph_legendre()`.

**8.3.2.159** `template<typename _Tp > _GLIBCXX14_CONSTEXPR _Tp std::__detail::__log_gamma_bernoulli ( _Tp __x )`

Return  $\log(\Gamma(x))$  by asymptotic expansion with Bernoulli number coefficients. This is like Sterling's approximation.

## Parameters

<code>__x</code>	The argument of the log of the gamma function.
------------------	--

## Returns

The logarithm of the gamma function.

Definition at line 1699 of file `sf_gamma.tcc`.

**8.3.2.160** `template<typename _Tp > _GLIBCXX14_CONSTEXPR _Tp std::__detail::__log_gamma_lanczos ( _Tp __x )`

Return  $\log(\Gamma(x))$  by the Lanczos method. This method dominates all others on the positive axis I think.

## Parameters

<code>__x</code>	The argument of the log of the gamma function.
------------------	--

## Returns

The logarithm of the gamma function.

Definition at line 1755 of file `sf_gamma.tcc`.

Referenced by `__log_gamma()`.

**8.3.2.161** `template<typename _Tp > _Tp std::__detail::__log_gamma_sign ( _Tp __x )`

Return the sign of  $\Gamma(x)$ . At nonpositive integers zero is returned.

## Parameters

\_\_\_\_\_

<code>__x</code>	The argument of the gamma function.
------------------	-------------------------------------

**Returns**

The sign of the gamma function.

Definition at line 1831 of file `sf_gamma.tcc`.

Referenced by `__hyperg()`, `__hyperg_reflect()`, and `__pochhammer_l()`.

**8.3.2.162** `template<typename _Tp > _GLIBCXX14_CONSTEXPR _Tp std::__detail::__log_gamma_spouge ( _Tp __z )`

Return  $\Gamma(z)$  by the Spouge algorithm:

$$\Gamma(z+1) = (z+a)^{z+1/2} e^{-z-a} \left[ \sqrt{2\pi} \sum_{k=1}^{\lceil a \rceil + 1} \frac{c_k(a)}{z+k} \right]$$

where

$$c_k(a) = \frac{(-1)^{k-1}}{(k-1)!} (a-k)^{k-1/2} e^{a-k}$$

and the error is bounded by

$$\epsilon(a) < a^{-1/2} (2\pi)^{-a-1/2}$$

.

**See also**

Spouge, J.L., Computation of the gamma, digamma, and trigamma functions. SIAM Journal on Numerical Analysis 31, 3 (1994), pp. 931-944

**Parameters**

<code>__z</code>	The argument of the gamma function.
------------------	-------------------------------------

**Returns**

The the gamma function.

Definition at line 1739 of file `sf_gamma.tcc`.

**8.3.2.163** `template<typename _Tp > _Tp std::__detail::__log_pochhammer_l ( _Tp __a, _Tp __n )`

Return the logarithm of the lower Pochhammer symbol or the falling factorial function. The lower Pochhammer symbol is defined by

$$(a)_n = \prod_{k=0}^{n-1} (a-k), (a)_0 = 1 = \Gamma(a+1)/\Gamma(a-n+1)$$

In particular,  $\text{sf}[(a)_n] = n!$ . Thus this function returns

$$\ln[(a)_n] = \Gamma(a+1) - \Gamma(a-n+1), \ln[(a)_0] = 0$$

Many notations exist:

$$a^{\overline{n}}$$

,

$$\left\{ \begin{matrix} a \\ n \end{matrix} \right\}$$

, and others.

Definition at line 2209 of file sf\_gamma.tcc.

**8.3.2.164** `template<typename _Tp> _Tp std::__detail::__log_pochhammer_u( _Tp __a, _Tp __n )`

Return the logarithm of the (upper) Pochhammer symbol or the rising factorial function. The Pochhammer symbol is defined by

$$(a)_n = \prod_{k=0}^{n-1} (a+k), (a)_0 = 1 = \Gamma(a+n)/\Gamma(n)$$

Thus this function returns

$$\ln[(a)_n] = \Gamma(a+n) - \Gamma(n), \ln[(a)_0] = 0$$

Many notations exist:

$$a^{\overline{n}}$$

,

$$\left[ \begin{matrix} a \\ n \end{matrix} \right]$$

, and others.

Definition at line 2144 of file sf\_gamma.tcc.

References \_\_log\_gamma().

**8.3.2.165** `template<typename _Tp> _Tp std::__detail::__logint( const _Tp __x )`

Return the logarithmic integral  $li(x)$ .

The logarithmic integral is given by

$$li(x) = Ei(\log(x))$$

#### Parameters

<code>__x</code>	The argument of the logarithmic integral function.
------------------	--

#### Returns

The logarithmic integral.

Definition at line 535 of file sf\_expint.tcc.

References \_\_expint().

**8.3.2.166** `template<typename _Tp> _Tp std::__detail::__owens_t( _Tp __h, _Tp __a )`

Return the Owens T function:

$$T(h, a) = \frac{1}{2\pi} \int_0^a \frac{\exp[-\frac{1}{2}h^2(1+x^2)]}{1+x^2} dx$$

This implementation is a translation of the Fortran implementation in

## See also

Patefield, M. and Tandy, D. "Fast and accurate Calculation of Owen's T-Function", Journal of Statistical Software, 5 (5), 1 - 25 (2000)

## Parameters

in	<code>__h</code>	The scale parameter.
in	<code>__a</code>	The integration limit.

## Returns

The owens T function.

Definition at line 92 of file `sf_owens_t.tcc`.

References `__znorm1()`, and `__znorm2()`.

### 8.3.2.167 `template<typename _Tp> _Tp std::__detail::__pochhammer_l ( _Tp __a, _Tp __n )`

Return the logarithm of the lower Pochhammer symbol or the falling factorial function. The lower Pochhammer symbol is defined by

$$(a)_n = \prod_{k=0}^{n-1} (a - k), (a)_0 = 1 = \Gamma(a + 1) / \Gamma(a - n + 1)$$

In particular,  $(n)_n = n!$ .

Definition at line 2232 of file `sf_gamma.tcc`.

References `__log_gamma_sign()`.

### 8.3.2.168 `template<typename _Tp> _Tp std::__detail::__pochhammer_u ( _Tp __a, _Tp __n )`

Return the (upper) Pochhammer function or the rising factorial function. The Pochhammer symbol is defined by

$$(a)_n = \prod_{k=0}^{n-1} (a + k), (a)_0 = 1 = \Gamma(a + n) / \Gamma(a)$$

Many notations exist:

$$a^{\overline{n}}$$

,

$$\left[ \begin{matrix} a \\ n \end{matrix} \right]$$

, and others.

Definition at line 2170 of file `sf_gamma.tcc`.

### 8.3.2.169 `template<typename _Tp> _Tp std::__detail::__poly_hermite ( unsigned int __n, _Tp __x )`

This routine returns the Hermite polynomial of order n:  $H_n(x)$ .

The Hermite polynomial is defined by:

$$H_n(x) = (-1)^n e^{x^2} \frac{d^n}{dx^n} e^{-x^2}$$

The Hermite polynomial obeys a reflection formula:

$$H_n(-x) = (-1)^n H_n(x)$$

## Parameters

<code>__n</code>	The order of the Hermite polynomial.
<code>__x</code>	The argument of the Hermite polynomial.

## Returns

The value of the Hermite polynomial of order n and argument x.

Definition at line 179 of file sf\_hermite.tcc.

References `__poly_hermite_asymp()`, and `__poly_hermite_recursion()`.

**8.3.2.170** `template<typename _Tp> _Tp std::__detail::__poly_hermite_asymp ( unsigned int __n, _Tp __x )`

This routine returns the Hermite polynomial of large order n:  $H_n(x)$ . We assume here that  $x \geq 0$ .

The Hermite polynomial is defined by:

$$H_n(x) = (-1)^n e^{x^2} \frac{d^n}{dx^n} e^{-x^2}$$

see "Asymptotic analysis of the Hermite polynomials from their differential-difference equation", Diego Dominici, arXiv:math/0601078v1 [math.CA] 4 Jan 2006

## Parameters

<code>__n</code>	The order of the Hermite polynomial.
<code>__x</code>	The argument of the Hermite polynomial.

## Returns

The value of the Hermite polynomial of order n and argument x.

Definition at line 113 of file sf\_hermite.tcc.

References `__airy()`.

Referenced by `__poly_hermite()`.

**8.3.2.171** `template<typename _Tp> _Tp std::__detail::__poly_hermite_recursion ( unsigned int __n, _Tp __x )`

This routine returns the Hermite polynomial of order n:  $H_n(x)$  by recursion on n.

The Hermite polynomial is defined by:

$$H_n(x) = (-1)^n e^{x^2} \frac{d^n}{dx^n} e^{-x^2}$$

## Parameters

<code>__n</code>	The order of the Hermite polynomial.
<code>__x</code>	The argument of the Hermite polynomial.

## Returns

The value of the Hermite polynomial of order n and argument x.

Definition at line 69 of file sf\_hermite.tcc.

Referenced by `__poly_hermite()`.

**8.3.2.172** `template<typename _Tp> _Tp std::__detail::__poly_jacobi ( unsigned int __n, _Tp __alpha, _Tp __beta, _Tp __x )`

Compute the Jacobi polynomial by recursion on x:

$$2k(\alpha+\beta+k)(\alpha+\beta+2k-2)P_k^{(\alpha,\beta)}(x) = (\alpha+\beta+2k-1)((\alpha^2-\beta^2)+x(\alpha+\beta+2k-2)(\alpha+\beta+2k))P_{k-1}^{(\alpha,\beta)}(x) - 2(\alpha+k-1)(\beta+k-1)(\alpha+\beta+2k-2)P_{k-2}^{(\alpha,\beta)}(x)$$

Definition at line 57 of file sf\_jacobi.tcc.

References `__beta()`.

Referenced by `__poly_radial_jacobi()`.

**8.3.2.173** `template<typename _Tpa, typename _Tp> _Tp std::__detail::__poly_laguerre ( unsigned int __n, _Tpa __alpha1, _Tp __x )`

This routine returns the associated Laguerre polynomial of order n, degree  $\alpha$ :  $L_n^{\alpha}lpha(x)$ .

The associated Laguerre function is defined by

$$L_n^{\alpha}(x) = \frac{(\alpha+1)_n}{n!} {}_1F_1(-n; \alpha+1; x)$$

where  $(\alpha)_n$  is the Pochhammer symbol and  ${}_1F_1(a; c; x)$  is the confluent hypergeometric function.

The associated Laguerre polynomial is defined for integral  $\alpha = m$  by:

$$L_n^m(x) = (-1)^m \frac{d^m}{dx^m} L_{n+m}(x)$$

where the Laguerre polynomial is defined by:

$$L_n(x) = \frac{e^x}{n!} \frac{d^n}{dx^n} (x^n e^{-x})$$

#### Parameters

<code>__n</code>	The order of the Laguerre function.
<code>__alpha1</code>	The degree of the Laguerre function.
<code>__x</code>	The argument of the Laguerre function.

#### Returns

The value of the Laguerre function of order n, degree  $\alpha$ , and argument x.

Definition at line 240 of file sf\_laguerre.tcc.

References `__poly_laguerre_hyperrg()`, `__poly_laguerre_large_n()`, and `__poly_laguerre_recursion()`.

**8.3.2.174** `template<typename _Tpa, typename _Tp> _Tp std::__detail::__poly_laguerre_hyperrg ( unsigned int __n, _Tpa __alpha1, _Tp __x )`

Evaluate the polynomial based on the confluent hypergeometric function in a safe way, with no restriction on the arguments.

The associated Laguerre function is defined by

$$L_n^{\alpha}(x) = \frac{(\alpha+1)_n}{n!} {}_1F_1(-n; \alpha+1; x)$$

where  $(\alpha)_n$  is the Pochhammer symbol and  ${}_1F_1(a; c; x)$  is the confluent hypergeometric function.

This function assumes  $x \neq 0$ .

This is from the GNU Scientific Library.

## Parameters

<code>__n</code>	The order of the Laguerre function.
<code>__alpha1</code>	The degree of the Laguerre function.
<code>__x</code>	The argument of the Laguerre function.

## Returns

The value of the Laguerre function of order  $n$ , degree  $\alpha$ , and argument  $x$ .

Definition at line 125 of file `sf_laguerre.tcc`.

Referenced by `__poly_laguerre()`.

**8.3.2.175** `template<typename _Tpa, typename _Tp> _Tp std::__detail::__poly_laguerre_large_n ( unsigned __n, _Tpa __alpha1, _Tp __x )`

This routine returns the associated Laguerre polynomial of order  $n$ , degree  $\alpha$  for large  $n$ . Abramowitz & Stegun, 13.5.21.

## Parameters

<code>__n</code>	The order of the Laguerre function.
<code>__alpha1</code>	The degree of the Laguerre function.
<code>__x</code>	The argument of the Laguerre function.

## Returns

The value of the Laguerre function of order  $n$ , degree  $\alpha$ , and argument  $x$ .

This is from the GNU Scientific Library.

Definition at line 70 of file `sf_laguerre.tcc`.

References `__log_gamma()`.

Referenced by `__poly_laguerre()`.

**8.3.2.176** `template<typename _Tpa, typename _Tp> _Tp std::__detail::__poly_laguerre_recursion ( unsigned int __n, _Tpa __alpha1, _Tp __x )`

This routine returns the associated Laguerre polynomial of order  $n$ , degree  $\alpha$ :  $L_n^\alpha(x)$  by recursion.

The associated Laguerre function is defined by

$$L_n^\alpha(x) = \frac{(\alpha+1)_n}{n!} {}_1F_1(-n; \alpha+1; x)$$

where  $(\alpha)_n$  is the Pochhammer symbol and  ${}_1F_1(a; c; x)$  is the confluent hypergeometric function.

The associated Laguerre polynomial is defined for integral  $\alpha = m$  by:

$$L_n^m(x) = (-1)^m \frac{d^m}{dx^m} L_{n+m}(x)$$

where the Laguerre polynomial is defined by:

$$L_n(x) = \frac{e^x}{n!} \frac{d^n}{dx^n} (x^n e^{-x})$$



## Parameters

<code>__n</code>	The order of the Laguerre function.
<code>__alpha1</code>	The degree of the Laguerre function.
<code>__x</code>	The argument of the Laguerre function.

## Returns

The value of the Laguerre function of order  $n$ , degree  $\alpha$ , and argument  $x$ .

Definition at line 181 of file `sf_laguerre.tcc`.

Referenced by `__poly_laguerre()`.

**8.3.2.177** `template<typename _Tp> _Tp std::__detail::__poly_legendre_p ( unsigned int __l, _Tp __x )`

Return the Legendre polynomial by upward recursion on order  $l$ .

The Legendre function of order  $l$  and argument  $x$ ,  $P_l(x)$ , is defined by:

$$P_l(x) = \frac{1}{2^l l!} \frac{d^l}{dx^l} (x^2 - 1)^l$$

## Parameters

<code>__l</code>	The order of the Legendre polynomial. $l \geq 0$ .
<code>__x</code>	The argument of the Legendre polynomial. $ x  \leq 1$ .

Definition at line 73 of file `sf_legendre.tcc`.

Referenced by `__assoc_legendre_p()`, and `__sph_legendre()`.

**8.3.2.178** `template<typename _Tp> _Tp std::__detail::__poly_legendre_q ( unsigned int __l, _Tp __x )`

Return the Legendre function of the second kind by upward recursion on order  $l$ .

The Legendre function of order  $l$  and argument  $x$ ,  $Q_l(x)$ , is defined by:

$$Q_l(x) = \frac{1}{2^l l!} \frac{d^l}{dx^l} (x^2 - 1)^l$$

## Parameters

<code>__l</code>	The order of the Legendre polynomial. $l \geq 0$ .
<code>__x</code>	The argument of the Legendre polynomial. $ x  \leq 1$ .

Definition at line 123 of file `sf_legendre.tcc`.

**8.3.2.179** `template<typename _Tp> _Tp std::__detail::__poly_radial_jacobi ( unsigned int __n, unsigned int __m, _Tp __rho )`

Definition at line 111 of file `sf_jacobi.tcc`.

References `__poly_jacobi()`.

Referenced by `__zernike()`, `__gnu_cxx::radpolyf()`, and `__gnu_cxx::radpolyf()`.

8.3.2.180 `template<typename _Tp> _Tp std::__detail::__polylog ( _Tp __s, _Tp __x )`

Return the polylog  $\text{Li}_s(x)$  for two real arguments.

## Parameters

<code>__s</code>	The real index.
<code>__x</code>	The real argument.

## Returns

The complex value of the polylogarithm.

Definition at line 1072 of file sf\_polylog.tcc.

References `__fpequal()`, and `__polylog_exp()`.

Referenced by `__dirichlet_beta()`, `__dirichlet_eta()`, and `__polylog()`.

8.3.2.181 `template<typename _Tp> std::complex<_Tp> std::__detail::__polylog ( _Tp __s, std::complex<_Tp> __w )`

Return the polylog in those cases where we can calculate it.

## Parameters

<code>__s</code>	The real index.
<code>__w</code>	The complex argument.

## Returns

The complex value of the polylogarithm.

Definition at line 1102 of file sf\_polylog.tcc.

References `__fpequal()`, `__polylog()`, and `__polylog_exp()`.

8.3.2.182 `template<typename _Tp, typename ArgType> __gnu_cxx::__promote_num_t<std::complex<_Tp>, ArgType> std::__detail::__polylog_exp ( _Tp __s, ArgType __w )`

This is the frontend function which calculates  $Li_s(e^w)$ . First we branch into different parts depending on the properties of  $s$ . This function is the same irrespective of a real or complex  $w$ , hence the template parameter `ArgType`.

## Note

: I *really* wish we could return a `variant<Tp, std::complex<Tp>>`.

## Parameters

<code>__s</code>	The real order.
<code>__w</code>	The real or complex argument.

## Returns

The real or complex value of  $Li_s(e^w)$ .

Definition at line 1039 of file sf\_polylog.tcc.

References `__polylog_exp_int_neg()`, `__polylog_exp_int_pos()`, `__polylog_exp_negative_real_part()`, `__polylog_exp_real_neg()`, and `__polylog_exp_real_pos()`.

Referenced by `__bose_einstein()`, `__clausen()`, `__clausen_c()`, `__clausen_s()`, `__fermi_dirac()`, and `__polylog()`.

**8.3.2.183** `template<typename _Tp> std::complex<_Tp> std::__detail::__polylog_exp_asymp ( const _Tp __s, std::complex<_Tp> __w )`

This function implements the asymptotic series for the polylog. It is given by

$$2 \sum_{k=0}^{\infty} \zeta(2k) w^{s-2k} / \Gamma(s-2k+1) - i\pi w^{(s-1)} / \Gamma(s)$$

for  $\operatorname{Re}(w) \gg 1$

Don't check this against Mathematica 8. For real  $u$  the imaginary part of the polylog is given by  $\operatorname{Im}(Li_s(e^u)) = -\pi u^{s-1} / \Gamma(s)$  Check this relation for any benchmark that you use. The use of `evenzeta` leads to a speedup of about 1000.

#### Parameters

<code>__s</code>	the real index $s$ .
<code>__w</code>	the large complex argument $w$ .

#### Returns

the value of the polylogarithm.

Definition at line 686 of file `sf_polylog.tcc`.

References `__fpequal()`.

Referenced by `__polylog_exp_int_neg()`, `__polylog_exp_int_pos()`, `__polylog_exp_real_neg()`, and `__polylog_exp_real_pos()`.

**8.3.2.184** `template<typename _Tp> std::complex<_Tp> std::__detail::__polylog_exp_int_neg ( const int __s, std::complex<_Tp> __w )`

This treats the case where  $s$  is a negative integer.

#### Parameters

<code>__s</code>	a negative integer.
<code>__w</code>	an arbitrary complex number

#### Returns

the value of the polylogarithm,.

Definition at line 856 of file `sf_polylog.tcc`.

References `__clamp_0_m2pi()`, `__clamp_pi()`, `__fpequal()`, `__polylog_exp_asymp()`, `__polylog_exp_neg()`, and `__polylog_exp_negative_real_part()`.

Referenced by `__polylog_exp()`.

**8.3.2.185** `template<typename _Tp> std::complex<_Tp> std::__detail::__polylog_exp_int_neg ( const int __s, _Tp __w )`

This treats the case where  $s$  is a negative integer and  $w$  is a real.

## Parameters

<code>__s</code>	a negative integer.
<code>__w</code>	the argument.

## Returns

the value of the polylogarithm.

Definition at line 898 of file `sf_polylog.tcc`.

References `__fpequal()`, `__polylog_exp_asymp()`, `__polylog_exp_neg()`, and `__polylog_exp_negative_real_part()`.

**8.3.2.186** `template<typename _Tp> std::complex<_Tp> std::__detail::__polylog_exp_int_pos ( const unsigned int __s, std::complex<_Tp> __w )`

Here `s` is a positive integer and the function descends into the different kernels depending on `w`.

## Parameters

<code>__s</code>	a positive integer.
<code>__w</code>	an arbitrary complex number.

## Returns

The value of the polylogarithm.

Definition at line 767 of file `sf_polylog.tcc`.

References `__clamp_0_m2pi()`, `__clamp_pi()`, `__fpequal()`, `__fpreal()`, `__polylog_exp_asymp()`, `__polylog_exp_negative_real_part()`, `__polylog_exp_pos()`, and `__riemann_zeta()`.

Referenced by `__polylog_exp()`.

**8.3.2.187** `template<typename _Tp> std::complex<_Tp> std::__detail::__polylog_exp_int_pos ( const unsigned int __s, _Tp __w )`

Here `s` is a positive integer and the function descends into the different kernels depending on `w`.

## Parameters

<code>__s</code>	a positive integer
<code>__w</code>	an arbitrary real argument <code>w</code>

## Returns

the value of the polylogarithm.

Definition at line 815 of file `sf_polylog.tcc`.

References `__fpequal()`, `__polylog_exp_asymp()`, `__polylog_exp_negative_real_part()`, `__polylog_exp_pos()`, and `__riemann_zeta()`.

**8.3.2.188** `template<typename _Tp> std::complex<_Tp> std::__detail::__polylog_exp_neg ( _Tp __s, std::complex<_Tp> __w )`

This function treats the cases of negative real index  $s$ . Theoretical convergence is present for  $|w| < 2\pi$ . We use an optimized version of

$$Li_s(e^w) = \Gamma(1-s)(-w)^{(s-1)} + (2\pi)^{(s-1)}/\pi A_p(w)$$

$$A_p(w) = \sum_k \Gamma(1+k-s)/k! \sin(\pi/2 * (s-k))(w/2/\pi)^k \zeta(1+k-s)$$

#### Parameters

<code>__s</code>	The real index
<code>__w</code>	The complex argument

#### Returns

The value of the polylogarithm.

Definition at line 346 of file `sf_polylog.tcc`.

References `__fpequal()`, `__riemann_zeta()`, and `__riemann_zeta_m_1()`.

Referenced by `__polylog_exp_int_neg()`, and `__polylog_exp_real_neg()`.

**8.3.2.189** `template<typename _Tp> std::complex<_Tp> std::__detail::__polylog_exp_neg ( int __s, std::complex<_Tp> __w )`

This function treats the cases of negative integer index  $s$  and branches accordingly

#### Parameters

<code>__s</code>	the integer index $s$ .
<code>__w</code>	The Argument $w$

#### Returns

The value of the Polylogarithm evaluated by a suitable function.

Definition at line 564 of file `sf_polylog.tcc`.

References `__polylog_exp_neg_even()`, and `__polylog_exp_neg_odd()`.

**8.3.2.190** `template<typename _Tp, int __sigma> std::complex<_Tp> std::__detail::__polylog_exp_neg_even ( unsigned int __n, std::complex<_Tp> __w )`

This function treats the cases of negative integer index  $s$  which are multiples of two.

In that case the sine occuring in the expansion occasionally takes on the value zero. We use that to provide an optimized series for  $p = 2n$ :

In the template parameter  $\sigma$  we transport whether  $p = 4k$  ( $\sigma = 1$ ) or  $p = 4k + 2$  ( $\sigma = -1$ )

$$Li_p(e^w) = \Gamma(1-p)(-w)^{p-1} - A_p(w) - \sigma * B_p(w)$$

with

$$A_p(w) = 2(2\pi)^{(p-1)}(-p)!/(2\pi)^{(p-1)}(1 + w^2/(4\pi^2))^{-1/2+p/2} \cos((1-p)ArcTan(2\pi/w))$$

and

$$B_p(w) = -2(2\pi i)^{(p-1)} \sum_{k=0}^{\infty} \Gamma(2+2k-p)/(2k+1)! (-1)^k (w/2\pi)^{(2k+1)} (\zeta(2+2k-p) - \tau p1)$$

This is suitable for  $|w| < 2\pi$  The original series is (This might be worthwhile if we use the already present table of the Bernoullis)

$$Li_p(e^w) = \Gamma(1-p)(-w)^{p-1} - \sigma(2\pi)^p/p! \sum_{k=0}^{\infty} \Gamma(2+2k-p)/(2k+1)! (-1)^k (w/2\pi)^{(2k+1)} \zeta(2+2k-p)$$

#### Parameters

<code>__n</code>	the integral index $n = 4k$ .
<code>__w</code>	The complex argument w

#### Returns

the value of the Polylogarithm.

Definition at line 450 of file sf\_polylog.tcc.

References `__fpequal()`.

Referenced by `__polylog_exp_neg()`.

**8.3.2.191** `template<typename _Tp, int __sigma> std::complex<_Tp> std::__detail::__polylog_exp_neg_odd ( unsigned int __n, std::complex<_Tp> __w )`

This function treats the cases of negative integer index s which are odd.

In that case the sine occurring in the expansion occasionally vanishes. We use that to provide an optimized series for  $p = 1+2k$ : In the template parameter sigma we transport whether  $p = 1+4k$  ( $sigma = 1$ ) or  $p = 3+4k$  ( $sigma = -1$ )

$$Li_p(e^w) = \Gamma(1-p) * (-w)^{p-1} + \sigma * A_p(w) - \sigma * B_p(w)$$

with

$$A_p(w) = 2(2\pi)^{(p-1)} * \Gamma(1-p) (1 + w^2/(4\pi^2))^{-1/2+p/2} \cos((1-p)ArcTan(2\pi i/w))$$

and

$$B_p(w) = 2(2\pi i)^{(p-1)} * \sum_{k=0}^{\infty} \Gamma(1+2k-p)/(2k)! (-w^2/4/\pi^2)^k (\zeta(1+2k-p) - \tau p1)$$

This is suitable for  $|w| < 2\pi$ . The use of evenzeta gives a speedup of about 50 The original series is (This might be worthwhile if we use the already present table of the Bernoullis)

$$Li_p(e^w) = Gamma(1-p) * (-w)^{p-1} - \sigma * 2 * (2\pi i)^{(p-1)} * \sum_{k=0}^{\infty} \Gamma(1+2k-p)/(2k)! (-1)^k (w/2/\pi)^{(2k)} \zeta(1+2k-p)$$

#### Parameters

<code>__n</code>	the integral index $n = 4k$ .
<code>__w</code>	The complex argument $w$ .

**Returns**

The value of the Polylogarithm.

Definition at line 517 of file `sf_polylog.tcc`.

References `__fpequal()`.

Referenced by `__polylog_exp_neg()`.

**8.3.2.192** `template<typename _PowTp, typename _Tp> _Tp std::__detail::__polylog_exp_negative_real_part ( _PowTp __s, _Tp __w )`

Theoretical convergence for  $\text{Re}(w) < 0$ .

Seems to beat the other expansions for  $\text{Re}(w) < -\pi/2 - \pi/5$ . Note that this is an implementation of the basic series:

$$Li_s(e^z) = \sum_{k=1} e^{(k * z) * k^{(-s)}}$$

**Parameters**

<code>__s</code>	is an arbitrary type, integral or float.
<code>__w</code>	something with a negative real part.

**Returns**

the value of the polylogarithm.

Definition at line 737 of file `sf_polylog.tcc`.

References `__fpequal()`.

Referenced by `__polylog_exp()`, `__polylog_exp_int_neg()`, `__polylog_exp_int_pos()`, `__polylog_exp_real_neg()`, and `__polylog_exp_real_pos()`.

**8.3.2.193** `template<typename _Tp> std::complex<_Tp> std::__detail::__polylog_exp_pos ( unsigned int __s, std::complex<_Tp> __w )`

This function treats the cases of positive integer index  $s$ .

$$Li_s(e^w) = \sum_{k=0, k! \neq s-1} \zeta(s-k) w^k / k! + (H_{s-1} - \log(-w)) w^{(s-1)} / (s-1)!$$

The radius of convergence is  $|w| < 2\pi i$ . Note that this series involves a  $\log(-x)$ . gcc and Mathematica differ in their implementation of  $\log(e^{i\pi})$ : gcc:  $\log(e^{i\pi}) = + - i\pi$  whereas Mathematica doesn't preserve the sign in this case:  $\log(e^{i\pi}) = + i\pi$



## Parameters

<code>__s</code>	the index s.
<code>__w</code>	the argument w.

## Returns

the value of the polylogarithm.

Definition at line 206 of file sf\_polylog.tcc.

References `__fpequal()`, and `__riemann_zeta()`.

Referenced by `__polylog_exp_int_pos()`, and `__polylog_exp_real_pos()`.

**8.3.2.194** `template<typename _Tp> std::complex<_Tp> std::__detail::__polylog_exp_pos ( unsigned int __s, _Tp __w )`

This function treats the cases of positive integer index s for real w.

This specialization is worthwhile to catch the differing behaviour of log(x).

$$Li_s(e^w) = \sum_{k=0, k! \neq s-1} \zeta(s-k) w^k / k! + (H_{s-1} - \log(-w)) w^{s-1} / (s-1)!$$

The radius of convergence is  $|w| < 2\pi$ . Note that this series involves a  $\log(-x)$ . The use of `evenzeta` yields a speedup of about 2.5. gcc and Mathematica differ in their implementation of  $\log(e^{i\pi})$ : gcc:  $\log(e^{i\pi}) = + - i\pi$  whereas Mathematica doesn't preserve the sign in this case:  $\log(e^{i\pi}) = +i\pi$

## Parameters

<code>__s</code>	the index.
<code>__w</code>	the argument

## Returns

the value of the Polylogarithm

Definition at line 279 of file sf\_polylog.tcc.

References `__fpequal()`, and `__riemann_zeta()`.

**8.3.2.195** `template<typename _Tp> std::complex<_Tp> std::__detail::__polylog_exp_pos ( _Tp __s, std::complex<_Tp> __w )`

This function treats the cases of positive real index s.

The defining series is

$$Li_s(e^w) = A_s(w) + B_s(w) + \Gamma(1-s)(-w)^{s-1}$$

with

$$A_s(w) = \sum_{k=0}^m \zeta(s-k) w^k / k!$$

$$B_s(w) = \sum_{k=m+1}^{\infty} \sin(\pi/2(s-k)) \Gamma(1-s+k) \zeta(1-s+k) (w/2\pi)^k / k!$$

## Parameters

<code>__s</code>	the positive real index $s$ .
<code>__w</code>	The complex argument $w$ .

## Returns

the value of the polylogarithm.

Definition at line 603 of file `sf_polylog.tcc`.

References `__fpequal()`, and `__riemann_zeta()`.

**8.3.2.196** `template<typename _Tp> std::complex<_Tp> std::__detail::__polylog_exp_real_neg ( _Tp __s, std::complex<_Tp> __w )`

Return the polylog where  $s$  is a negative real value and for complex argument. Now we branch depending on the properties of  $w$  in the specific functions

## Parameters

<code>__s</code>	A negative real value that does not reduce to a negative integer.
<code>__w</code>	The complex argument.

## Returns

The value of the polylogarithm.

Definition at line 985 of file `sf_polylog.tcc`.

References `__clamp_0_m2pi()`, `__clamp_pi()`, `__polylog_exp_asymp()`, `__polylog_exp_neg()`, and `__polylog_exp_negative_real_part()`.

Referenced by `__polylog_exp()`.

**8.3.2.197** `template<typename _Tp> std::complex<_Tp> std::__detail::__polylog_exp_real_neg ( _Tp __s, _Tp __w )`

Return the polylog where  $s$  is a negative real value and for real argument. Now we branch depending on the properties of  $w$  in the specific functions.

## Parameters

<code>__s</code>	A negative real value.
<code>__w</code>	A real argument.

## Returns

The value of the polylogarithm.

Definition at line 1013 of file `sf_polylog.tcc`.

References `__polylog_exp_asymp()`, `__polylog_exp_neg()`, and `__polylog_exp_negative_real_part()`.

**8.3.2.198** `template<typename _Tp> std::complex<_Tp> std::__detail::__polylog_exp_real_pos ( _Tp __s, std::complex<_Tp> __w )`

Return the polylog where  $s$  is a positive real value and for complex argument.

## Parameters

<code>__s</code>	A positive real number.
<code>__w</code>	the complex argument.

## Returns

The value of the polylogarithm.

Definition at line 922 of file sf\_polylog.tcc.

References `__clamp_0_m2pi()`, `__clamp_pi()`, `__fpequal()`, `__fpreal()`, `__polylog_exp_asymp()`, `__polylog_exp_negative_real_part()`, `__polylog_exp_pos()`, and `__riemann_zeta()`.

Referenced by `__polylog_exp()`.

**8.3.2.199** `template<typename _Tp> std::complex<_Tp> std::__detail::__polylog_exp_real_pos ( _Tp __s, _Tp __w )`

Return the polylog where s is a positive real value and the argument is real.

## Parameters

<code>__s</code>	A positive real number tht does not reduce to an integer.
<code>__w</code>	The real argument w.

## Returns

The value of the polylogarithm.

Definition at line 956 of file sf\_polylog.tcc.

References `__fpequal()`, `__polylog_exp_asymp()`, `__polylog_exp_negative_real_part()`, `__polylog_exp_pos()`, and `__riemann_zeta()`.

**8.3.2.200** `template<typename _Tp> _Tp std::__detail::__psi ( _Tp __x )`

Return the digamma function. The digamma or  $\psi(x)$  function is defined by

$$\psi(x) = \frac{\Gamma'(x)}{\Gamma(x)}$$

For negative argument the reflection formula is used:

$$\psi(x) = \psi(1-x) - \pi \cot(\pi x)$$

.

Definition at line 2330 of file sf\_gamma.tcc.

References `__psi_asymp()`.

Referenced by `__expint_En_series()`, `__hydrogen()`, `__hyperg_reflect()`, and `__psi()`.

**8.3.2.201** `template<typename _Tp> _Tp std::__detail::__psi ( unsigned int __n, _Tp __x )`

Return the polygamma function  $\psi^{(n)}(x)$ .

The polygamma function is related to the Hurwitz zeta function:

$$\psi^{(n)}(x) = (-1)^{n+1} n! \zeta(n+1, x)$$

Definition at line 2395 of file sf\_gamma.tcc.

References `__hurwitz_zeta()`, `__log_gamma()`, and `__psi()`.

#### 8.3.2.202 `template<typename _Tp> _Tp std::__detail::__psi_asymp ( _Tp __x )`

Return the digamma function for large argument. The digamma or  $\psi(x)$  function is defined by

$$\psi(x) = \frac{\Gamma'(x)}{\Gamma(x)}$$

.

The asymptotic series is given by:

$$\psi(x) = \ln(x) - \frac{1}{2x} - \sum_{n=1}^{\infty} \frac{B_{2n}}{2nx^{2n}}$$

Definition at line 2299 of file sf\_gamma.tcc.

Referenced by `__psi()`.

#### 8.3.2.203 `template<typename _Tp> _Tp std::__detail::__psi_series ( _Tp __x )`

Return the digamma function by series expansion. The digamma or  $\psi(x)$  function is defined by

$$\psi(x) = \frac{\Gamma'(x)}{\Gamma(x)}$$

.

The series is given by:

$$\psi(x) = -\gamma_E - \frac{1}{x} \sum_{k=1}^{\infty} \frac{x-1}{(k+1)(x+k)}$$

Definition at line 2268 of file sf\_gamma.tcc.

#### 8.3.2.204 `template<typename _Tp> _Tp std::__detail::__riemann_zeta ( _Tp __s )`

Return the Riemann zeta function  $\zeta(s)$ .

The Riemann zeta function is defined by:

$$\zeta(s) = \sum_{k=1}^{\infty} k^{-s} \text{ for } s > 1 \quad \frac{(2\pi)^s}{\pi} \sin\left(\frac{\pi s}{2}\right) \Gamma(1-s) \zeta(1-s) \text{ for } s < 1$$

For  $s < 1$  use the reflection formula:

$$\zeta(s) = 2^s \pi^{s-1} \Gamma(1-s) \zeta(1-s)$$

## Parameters

<code>__s</code>	The argument
------------------	--------------

Definition at line 505 of file sf\_zeta.tcc.

References `__gamma()`, `__log_gamma()`, `__riemann_zeta_glob()`, `__riemann_zeta_product()`, and `__riemann_zeta_sum()`.

Referenced by `__polylog_exp_int_pos()`, `__polylog_exp_neg()`, `__polylog_exp_pos()`, `__polylog_exp_real_pos()`, and `evenzeta()`.

### 8.3.2.205 `template<typename _Tp> _Tp std::__detail::__riemann_zeta_alt ( _Tp __s )`

Evaluate the Riemann zeta function  $\zeta(s)$  by an alternate series for  $s > 0$ .

The Riemann zeta function is defined by:

$$\zeta(s) = \sum_{k=1}^{\infty} \frac{1}{k^s} \text{ for } s > 1$$

For  $s < 1$  use the reflection formula:

$$\zeta(s) = 2^s \pi^{s-1} \Gamma(1-s) \zeta(1-s)$$

Definition at line 329 of file sf\_zeta.tcc.

### 8.3.2.206 `template<typename _Tp> _Tp std::__detail::__riemann_zeta_euler_maclaurin ( _Tp __s )`

Evaluate the Riemann zeta function  $\zeta(s)$  by an alternate series for  $s > 0$ .

This is a specialization of the code for the Hurwitz zeta function.

Definition at line 282 of file sf\_zeta.tcc.

References `_S_Euler_Maclaurin_zeta`.

### 8.3.2.207 `template<typename _Tp> _Tp std::__detail::__riemann_zeta_glob ( _Tp __s )`

Evaluate the Riemann zeta function by series for all  $s \neq 1$ . Convergence is great until largish negative numbers. Then the convergence of the  $> 0$  sum gets better.

The series is:

$$\zeta(s) = \frac{1}{1-2^{1-s}} \sum_{n=0}^{\infty} \frac{1}{2^{n+1}} \sum_{k=0}^n (-1)^k \frac{n!}{(n-k)!k!} (k+1)^{-s}$$

Havil 2003, p. 206.

The Riemann zeta function is defined by:

$$\zeta(s) = \sum_{k=1}^{\infty} \frac{1}{k^s} \text{ for } s > 1$$

For  $s < 1$  use the reflection formula:

$$\zeta(s) = 2^s \pi^{s-1} \Gamma(1-s) \zeta(1-s)$$

Definition at line 374 of file sf\_zeta.tcc.

References `__log_gamma()`.

Referenced by `__riemann_zeta()`.

8.3.2.208 `template<typename _Tp> _Tp std::__detail::__riemann_zeta_m_1 ( _Tp __s )`

Return the Riemann zeta function  $\zeta(s) - 1$ .

## Parameters

<code>__s</code>	The argument $s! = 1$
------------------	-----------------------

Definition at line 672 of file sf\_zeta.tcc.

References `__riemann_zeta_m_1_sum()`, `_S_num_zetam1`, and `_S_zetam1`.

Referenced by `__polylog_exp_neg()`.

### 8.3.2.209 `template<typename _Tp> _Tp std::__detail::__riemann_zeta_m_1_sum ( _Tp __s )`

Return the Riemann zeta function  $\zeta(s) - 1$  by summation for  $s > 1$ . This is a small remainder for large  $s$ .

The Riemann zeta function is defined by:

$$\zeta(s) = \sum_{k=1}^{\infty} \frac{1}{k^s} \text{ for } s > 1$$

## Parameters

<code>__s</code>	The argument $s! = 1$
------------------	-----------------------

Definition at line 645 of file sf\_zeta.tcc.

Referenced by `__riemann_zeta_m_1()`.

### 8.3.2.210 `template<typename _Tp> _Tp std::__detail::__riemann_zeta_product ( _Tp __s )`

Compute the Riemann zeta function  $\zeta(s)$  using the product over prime factors.

$$\zeta(s) = \prod_{i=1}^{\infty} \frac{1}{1 - p_i^{-s}}$$

where  $p_i$  are the prime numbers.

The Riemann zeta function is defined by:

$$\zeta(s) = \sum_{k=1}^{\infty} \frac{1}{k^s} \text{ for } s > 1$$

For  $s < 1$  use the reflection formula:

$$\zeta(s) = 2^s \pi^{s-1} \Gamma(1-s) \zeta(1-s)$$

## Parameters

<code>__s</code>	The argument
------------------	--------------

Definition at line 463 of file sf\_zeta.tcc.

Referenced by `__riemann_zeta()`.

### 8.3.2.211 `template<typename _Tp> _Tp std::__detail::__riemann_zeta_sum ( _Tp __s )`

Compute the Riemann zeta function  $\zeta(s)$  by summation for  $s > 1$ .

The Riemann zeta function is defined by:

$$\zeta(s) = \sum_{k=1}^{\infty} \frac{1}{k^s} \text{ for } s > 1$$

For  $s < 1$  use the reflection formula:

$$\zeta(s) = 2^s \pi^{s-1} \Gamma(1-s) \zeta(1-s)$$

Definition at line 254 of file `sf_zeta.tcc`.

Referenced by `__riemann_zeta()`.

**8.3.2.212** `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> std::__detail::__sinc ( _Tp __a, _Tp __x )`

Return the generalized sinus cardinal function

$$\text{sinc}_a(x) = \frac{\sin(\pi x/a)}{(\pi x/a)}$$

.

Definition at line 51 of file `sf_cardinal.tcc`.

**8.3.2.213** `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> std::__detail::__sinc ( _Tp __x )`

Return the normalized sinus cardinal function

$$\text{sinc}(x) = \frac{\sin(\pi x)}{\pi x}$$

.

Definition at line 98 of file `sf_cardinal.tcc`.

**8.3.2.214** `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> std::__detail::__sinc_pi ( _Tp __x )`

Return the unnormalized sinus cardinal function

$$\text{sinc}_\pi(x) = \frac{\sin(x)}{x}$$

.

Definition at line 78 of file `sf_cardinal.tcc`.

**8.3.2.215** `template<typename _Tp> std::pair<_Tp, _Tp> std::__detail::__sincosint ( _Tp __x )`

This function returns the sine  $Si(x)$  and cosine  $Ci(x)$  integrals as a `pair`.

The sine integral is defined by:

$$Si(x) = \int_0^x dt \frac{\sin(t)}{t}$$

The cosine integral is defined by:

$$Ci(x) = \gamma_E + \log(x) + \int_0^x dt \frac{\cos(t) - 1}{t}$$

Definition at line 227 of file `sf_trigint.tcc`.

References `__sincosint_asymp()`, `__sincosint_cont_frac()`, and `__sincosint_series()`.



8.3.2.216 `template<typename _Tp> void std::__detail::__sincosint_asyp ( _Tp __t, _Tp & _Si, _Tp & _Ci )`

This function computes the sine  $Si(x)$  and cosine  $Ci(x)$  integrals by asymptotic series summation for positive argument. The asymptotic series is very good for  $x > 50$ .

Definition at line 163 of file sf\_trigint.tcc.

Referenced by `__sincosint()`.

8.3.2.217 `template<typename _Tp> void std::__detail::__sincosint_cont_frac ( _Tp __t, _Tp & _Si, _Tp & _Ci )`

This function computes the sine  $Si(x)$  and cosine  $Ci(x)$  integrals by continued fraction for positive argument.

Definition at line 55 of file sf\_trigint.tcc.

Referenced by `__sincosint()`.

8.3.2.218 `template<typename _Tp> void std::__detail::__sincosint_series ( _Tp __t, _Tp & _Si, _Tp & _Ci )`

This function computes the sine  $Si(x)$  and cosine  $Ci(x)$  integrals by series summation for positive argument.

Definition at line 98 of file sf\_trigint.tcc.

Referenced by `__sincosint()`.

8.3.2.219 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> std::__detail::__sinhc ( _Tp __a, _Tp __x )`

Return the generalized hyperbolic sinus cardinal function

$$\operatorname{sinhc}_a(x) = \frac{\sinh(\pi x/a)}{\pi x/a}$$

.

Definition at line 124 of file sf\_cardinal.tcc.

8.3.2.220 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> std::__detail::__sinhc ( _Tp __x )`

Return the normalized hyperbolic sinus cardinal function

$$\operatorname{sinhc}(x) = \frac{\sinh(\pi x)}{\pi x}$$

.

Definition at line 167 of file sf\_cardinal.tcc.

8.3.2.221 `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> std::__detail::__sinhc_pi ( _Tp __x )`

Return the unnormalized hyperbolic sinus cardinal function

$$\operatorname{sinhc}_\pi(x) = \frac{\sinh(x)}{x}$$

.

Definition at line 149 of file sf\_cardinal.tcc.

8.3.2.222 `template<typename _Tp> _Tp std::__detail::__sinhint ( const _Tp __x )`

Return the hyperbolic sine integral  $li(x)$ .

The hyperbolic sine integral is given by

$$Shi(x) = (Ei(x) - E_1(x))/2$$

#### Parameters

<code>__x</code>	The argument of the hyperbolic sine integral function.
------------------	--

#### Returns

The hyperbolic sine integral.

Definition at line 581 of file `sf_expint.tcc`.

References `__expint_E1()`, and `__expint_Ei()`.

8.3.2.223 `template<typename _Tp> _Tp std::__detail::__sph_bessel ( unsigned int __n, _Tp __x )`

Return the spherical Bessel function  $j_n(x)$  of order  $n$  and non-negative real argument  $x$ .

The spherical Bessel function is defined by:

$$j_n(x) = \left(\frac{\pi}{2x}\right)^{1/2} J_{n+1/2}(x)$$

#### Parameters

<code>__n</code>	The non-negative integral order
<code>__x</code>	The non-negative real argument

#### Returns

The output spherical Bessel function.

Definition at line 675 of file `sf_bessel.tcc`.

References `__sph_bessel_jn()`.

8.3.2.224 `template<typename _Tp> std::complex<_Tp> std::__detail::__sph_bessel ( unsigned int __n, std::complex<_Tp> __z )`

Return the complex spherical Bessel function.

#### Parameters

<code>in</code>	<code>__n</code>	The order for which the spherical Bessel function is evaluated.
<code>in</code>	<code>__z</code>	The argument at which the spherical Bessel function is evaluated.

#### Returns

The complex spherical Bessel function.

Definition at line 1314 of file `sf_hankel.tcc`.

References `__sph_hankel()`.

8.3.2.225 `template<typename _Tp> void std::__detail::__sph_bessel_ik( unsigned int __n, _Tp __x, _Tp & __i_n, _Tp & __k_n, _Tp & __ip_n, _Tp & __kp_n )`

Compute the spherical modified Bessel functions  $i_n(x)$  and  $k_n(x)$  and their first derivatives  $i'_n(x)$  and  $k'_n(x)$  respectively.

## Parameters

<code>__n</code>	The order of the modified spherical Bessel function.
<code>__x</code>	The argument of the modified spherical Bessel function.
<code>__i_n</code>	The output regular modified spherical Bessel function.
<code>__k_n</code>	The output irregular modified spherical Bessel function.
<code>__ip_n</code>	The output derivative of the regular modified spherical Bessel function.
<code>__kp_n</code>	The output derivative of the irregular modified spherical Bessel function.

Definition at line 445 of file `sf_mod_bessel.tcc`.

References `__cyl_bessel_ik()`.

```
8.3.2.226 template<typename _Tp> void std::__detail::__sph_bessel_jn ( unsigned int __n, _Tp __x, _Tp & __j_n, _Tp & __n_n,
    _Tp & __jp_n, _Tp & __np_n )
```

Compute the spherical Bessel  $j_n(x)$  and Neumann  $n_n(x)$  functions and their first derivatives  $j'_n(x)$  and  $n'_n(x)$  respectively.

## Parameters

	<code>__n</code>	The order of the spherical Bessel function.
	<code>__x</code>	The argument of the spherical Bessel function.
out	<code>__j_n</code>	The output spherical Bessel function.
out	<code>__n_n</code>	The output spherical Neumann function.
out	<code>__jp_n</code>	The output derivative of the spherical Bessel function.
out	<code>__np_n</code>	The output derivative of the spherical Neumann function.

Definition at line 640 of file `sf_bessel.tcc`.

References `__cyl_bessel_jn()`.

Referenced by `__sph_bessel()`, `__sph_hankel_1()`, `__sph_hankel_2()`, and `__sph_neumann()`.

```
8.3.2.227 template<typename _Tp> void std::__detail::__sph_hankel ( unsigned int __n, std::complex<_Tp> __z,
    std::complex<_Tp> & __H1, std::complex<_Tp> & __H1p, std::complex<_Tp> & __H2, std::complex<_Tp> & __H2p
    )
```

Helper to compute complex spherical Hankel functions and their derivatives.

## Parameters

in	<code>__n</code>	The order for which the spherical Hankel functions are evaluated.
in	<code>__z</code>	The argument at which the spherical Hankel functions are evaluated.
out	<code>__H1</code>	The spherical Hankel function of the first kind.
out	<code>__H1p</code>	The derivative of the spherical Hankel function of the first kind.
out	<code>__H2</code>	The spherical Hankel function of the second kind.
out	<code>__H2p</code>	The derivative of the spherical Hankel function of the second kind.

Definition at line 1258 of file `sf_hankel.tcc`.

References `__hankel()`.

Referenced by `__sph_bessel()`, `__sph_hankel_1()`, `__sph_hankel_2()`, and `__sph_neumann()`.

8.3.2.228 `template<typename _Tp> std::complex<_Tp> std::__detail::__sph_hankel_1 ( unsigned int __n, _Tp __x )`

Return the spherical Hankel function of the first kind  $h_n^{(1)}(x)$ .

The spherical Hankel function of the first kind is defined by:

$$h_n^{(1)}(x) = j_n(x) + in_n(x)$$

#### Parameters

<code>__n</code>	The order of the spherical Neumann function.
<code>__x</code>	The argument of the spherical Neumann function.

#### Returns

The output spherical Neumann function.

Definition at line 744 of file `sf_bessel.tcc`.

References `__sph_bessel_jn()`.

8.3.2.229 `template<typename _Tp> std::complex<_Tp> std::__detail::__sph_hankel_1 ( unsigned int __n, std::complex<_Tp> __z )`

Return the complex spherical Hankel function of the first kind.

#### Parameters

<code>in</code>	<code>__n</code>	The order for which the spherical Hankel function of the first kind is evaluated.
<code>in</code>	<code>__z</code>	The argument at which the spherical Hankel function of the first kind is evaluated.

#### Returns

The complex spherical Hankel function of the first kind.

Definition at line 1282 of file `sf_hankel.tcc`.

References `__sph_hankel()`.

8.3.2.230 `template<typename _Tp> std::complex<_Tp> std::__detail::__sph_hankel_2 ( unsigned int __n, _Tp __x )`

Return the spherical Hankel function of the second kind  $h_n^{(2)}(x)$ .

The spherical Hankel function of the second kind is defined by:

$$h_n^{(2)}(x) = j_n(x) - in_n(x)$$

#### Parameters

<code>__n</code>	The non-negative integral order
------------------	---------------------------------

<code>__x</code>	The non-negative real argument
------------------	--------------------------------

**Returns**

The output spherical Neumann function.

Definition at line 777 of file `sf_bessel.tcc`.

References `__sph_bessel_jn()`.

**8.3.2.231** `template<typename _Tp > std::complex<_Tp> std::__detail::__sph_hankel_2 ( unsigned int __n, std::complex<_Tp> > __z )`

Return the complex spherical Hankel function of the second kind.

**Parameters**

<code>in</code>	<code>__n</code>	The order for which the spherical Hankel function of the second kind is evaluated.
<code>in</code>	<code>__z</code>	The argument at which the spherical Hankel function of the second kind is evaluated.

**Returns**

The complex spherical Hankel function of the second kind.

Definition at line 1298 of file `sf_hankel.tcc`.

References `__sph_hankel()`.

**8.3.2.232** `template<typename _Tp > std::complex<_Tp> std::__detail::__sph_harmonic ( unsigned int __l, int __m, _Tp __theta, _Tp __phi )`

Return the spherical harmonic function.

The spherical harmonic function of  $l$ ,  $m$ , and  $\theta$ ,  $\phi$  is defined by:

$$Y_l^m(\theta, \phi) = (-1)^m \left[ \frac{(2l+1)}{4\pi} \frac{(l-m)!}{(l+m)!} \right] P_l^{|m|}(\cos \theta) \exp^{im\phi}$$

**Parameters**

<code>__l</code>	The order of the spherical harmonic function. $l \geq 0$ .
<code>__m</code>	The order of the spherical harmonic function. $m \leq l$ .
<code>__theta</code>	The radian polar angle argument of the spherical harmonic function.
<code>__phi</code>	The radian azimuthal angle argument of the spherical harmonic function.

Definition at line 350 of file `sf_legendre.tcc`.

References `__sph_legendre()`.

**8.3.2.233** `template<typename _Tp > _Tp std::__detail::__sph_legendre ( unsigned int __l, unsigned int __m, _Tp __theta )`

Return the spherical associated Legendre function.

The spherical associated Legendre function of  $l$ ,  $m$ , and  $\theta$  is defined as  $Y_l^m(\theta, 0)$  where

$$Y_l^m(\theta, \phi) = (-1)^m \left[ \frac{(2l+1)}{4\pi} \frac{(l-m)!}{(l+m)!} \right] P_l^m(\cos \theta) \exp^{im\phi}$$

is the spherical harmonic function and  $P_l^m(x)$  is the associated Legendre function.

This function differs from the associated Legendre function by argument ( $x = \cos(\theta)$ ) and by a normalization factor but this factor is rather large for large  $l$  and  $m$  and so this function is stable for larger differences of  $l$  and  $m$ .

#### Parameters

<code>__l</code>	The order of the spherical associated Legendre function. $l \geq 0$ .
<code>__m</code>	The order of the spherical associated Legendre function. $m \leq l$ .
<code>__theta</code>	The radian polar angle argument of the spherical associated Legendre function.

Definition at line 253 of file `sf_legendre.tcc`.

References `__log_gamma()`, and `__poly_legendre_p()`.

Referenced by `__hydrogen()`, and `__sph_harmonic()`.

#### 8.3.2.234 `template<typename _Tp> _Tp std::__detail::__sph_neumann ( unsigned int __n, _Tp __x )`

Return the spherical Neumann function  $n_n(x)$  of order  $n$  and non-negative real argument  $x$ .

The spherical Neumann function is defined by:

$$n_n(x) = \left( \frac{\pi}{2x} \right)^{1/2} N_{n+1/2}(x)$$

#### Parameters

<code>__n</code>	The order of the spherical Neumann function.
<code>__x</code>	The argument of the spherical Neumann function.

#### Returns

The output spherical Neumann function.

Definition at line 712 of file `sf_bessel.tcc`.

References `__sph_bessel_jn()`.

#### 8.3.2.235 `template<typename _Tp> std::complex<_Tp> std::__detail::__sph_neumann ( unsigned int __n, std::complex<_Tp> __z )`

Return the complex spherical Neumann function.

#### Parameters

<code>in</code>	<code>__n</code>	The order for which the spherical Neumann function is evaluated.
<code>in</code>	<code>__z</code>	The argument at which the spherical Neumann function is evaluated.

#### Returns

The complex spherical Neumann function.

Definition at line 1330 of file `sf_hankel.tcc`.

References `__sph_hankel()`.

8.3.2.236 `template<typename _Tp > _GLIBCXX14_CONSTEXPR _Tp std::__detail::__students_t_cdf ( _Tp __t, unsigned int __nu )`

Return the Students T probability function.

The students T propability function is related to the incomplete beta function:

$$A(t|\nu) = 1 - I_{\frac{\nu}{\nu+t^2}}\left(\frac{\nu}{2}, \frac{1}{2}\right)A(t|\nu) =$$

#### Parameters

<code>__t</code>	
<code>__nu</code>	

Definition at line 301 of file `sf_beta.tcc`.

References `__beta_inc()`.

8.3.2.237 `template<typename _Tp > _GLIBCXX14_CONSTEXPR _Tp std::__detail::__students_t_cdfc ( _Tp __t, unsigned int __nu )`

Return the complement of the Students T probability function.

The complement of the students T propability function is:

$$A_c(t|\nu) = I_{\frac{\nu}{\nu+t^2}}\left(\frac{\nu}{2}, \frac{1}{2}\right) = 1 - A(t|\nu)$$

#### Parameters

<code>__t</code>	
<code>__nu</code>	

Definition at line 324 of file `sf_beta.tcc`.

References `__beta_inc()`.

8.3.2.238 `template<typename _Tp > _Tp std::__detail::__theta_1 ( _Tp __nu, _Tp __x )`

Return the exponential theta-1 function of period `nu` and argument `x`.

The Neville theta-1 function is defined by

$$\theta_1(\nu, x) = \frac{1}{\sqrt{\pi x}} \sum_{j=-\infty}^{+\infty} (-1)^j \exp\left(\frac{-(\nu + j - 1/2)^2}{x}\right)$$

#### Parameters

<code>__nu</code>	The periodic (period = 2) argument
<code>__x</code>	The argument

Definition at line 190 of file `sf_theta.tcc`.

References `__theta_2()`.

Referenced by `__theta_s()`.



8.3.2.239 `template<typename _Tp> _Tp std::__detail::__theta_2 ( _Tp __nu, _Tp __x )`

Return the exponential theta-2 function of period `nu` and argument `x`.

The exponential theta-2 function is defined by

$$\theta_2(\nu, x) = \frac{1}{\sqrt{\pi x}} \sum_{j=-\infty}^{+\infty} (-1)^j \exp\left(\frac{-(\nu + j)^2}{x}\right)$$

#### Parameters

<code>__nu</code>	The periodic (period = 2) argument
<code>__x</code>	The argument

Definition at line 162 of file `sf_theta.tcc`.

References `__theta_2_asymp()`, and `__theta_2_sum()`.

Referenced by `__theta_1()`, and `__theta_c()`.

8.3.2.240 `template<typename _Tp> _Tp std::__detail::__theta_2_asymp ( _Tp __nu, _Tp __x )`

Compute and return the  $\theta_2$  function by series expansion.

Definition at line 103 of file `sf_theta.tcc`.

Referenced by `__theta_2()`.

8.3.2.241 `template<typename _Tp> _Tp std::__detail::__theta_2_sum ( _Tp __nu, _Tp __x )`

Compute and return the  $\theta_1$  function by series expansion.

Definition at line 49 of file `sf_theta.tcc`.

Referenced by `__theta_2()`.

8.3.2.242 `template<typename _Tp> _Tp std::__detail::__theta_3 ( _Tp __nu, _Tp __x )`

Return the exponential theta-3 function of period `nu` and argument `x`.

The exponential theta-3 function is defined by

$$\theta_3(\nu, x) = \frac{1}{\sqrt{\pi x}} \sum_{j=-\infty}^{+\infty} \exp\left(\frac{-(\nu + j)^2}{x}\right)$$

#### Parameters

<code>__nu</code>	The periodic (period = 1) argument
<code>__x</code>	The argument

Definition at line 216 of file `sf_theta.tcc`.

References `__theta_3_asymp()`, and `__theta_3_sum()`.

Referenced by `__theta_4()`, and `__theta_d()`.

**8.3.2.243** `template<typename _Tp> _Tp std::__detail::__theta_3_asyp ( _Tp __nu, _Tp __x )`

Compute and return the  $\theta_3$  function by asymptotic series expansion.

Definition at line 128 of file sf\_theta.tcc.

Referenced by `__theta_3()`.

**8.3.2.244** `template<typename _Tp> _Tp std::__detail::__theta_3_sum ( _Tp __nu, _Tp __x )`

Compute and return the  $\theta_3$  function by series expansion.

Definition at line 77 of file sf\_theta.tcc.

Referenced by `__theta_3()`.

**8.3.2.245** `template<typename _Tp> _Tp std::__detail::__theta_4 ( _Tp __nu, _Tp __x )`

Return the exponential theta-2 function of period `nu` and argument `x`.

The exponential theta-2 function is defined by

$$\theta_2(\nu, x) = \frac{1}{\sqrt{\pi x}} \sum_{j=-\infty}^{+\infty} (-1)^j \exp\left(\frac{-(\nu + j)^2}{x}\right)$$

#### Parameters

<code>__nu</code>	The periodic (period = 2) argument
<code>__x</code>	The argument

Definition at line 244 of file sf\_theta.tcc.

References `__theta_3()`.

Referenced by `__theta_n()`.

**8.3.2.246** `template<typename _Tp> _Tp std::__detail::__theta_c ( _Tp __k, _Tp __x )`

Return the Neville  $\theta_c$  function

Definition at line 337 of file sf\_theta.tcc.

References `__comp_ellint_1()`, `__ellnome()`, and `__theta_2()`.

**8.3.2.247** `template<typename _Tp> _Tp std::__detail::__theta_d ( _Tp __k, _Tp __x )`

Return the Neville  $\theta_d$  function

Definition at line 362 of file sf\_theta.tcc.

References `__comp_ellint_1()`, `__ellnome()`, and `__theta_3()`.

**8.3.2.248** `template<typename _Tp> _Tp std::__detail::__theta_n ( _Tp __k, _Tp __x )`

Return the Neville  $\theta_n$  function

Definition at line 387 of file sf\_theta.tcc.

References `__comp_ellint_1()`, `__ellnome()`, and `__theta_4()`.

**8.3.2.249** `template<typename _Tp> _Tp std::__detail::__theta_s ( _Tp __k, _Tp __x )`

Return the Neville  $\theta_s$  function

Definition at line 311 of file sf\_theta.tcc.

References `__comp_ellint_1()`, `__ellnome()`, and `__theta_1()`.

**8.3.2.250** `template<typename _Tp> __gnu_cxx::__promote_num_t<_Tp> std::__detail::__zernike ( unsigned int __n, int __m, _Tp __rho, _Tp __phi )`

Definition at line 133 of file sf\_jacobi.tcc.

References `__poly_radial_jacobi()`.

**8.3.2.251** `template<typename _Tp> _Tp std::__detail::__znorm1 ( _Tp __x )`

Definition at line 58 of file sf\_owens\_t.tcc.

Referenced by `__owens_t()`.

**8.3.2.252** `template<typename _Tp> _Tp std::__detail::__znorm2 ( _Tp __x )`

Definition at line 47 of file sf\_owens\_t.tcc.

Referenced by `__owens_t()`.

**8.3.2.253** `template<typename _Tp = double> _Tp std::__detail::__evenzeta ( unsigned int __k )`

A function to calculate the values of zeta at even positive integers. For values smaller than thirty a table is used.

Parameters

<code>__k</code>	an integer at which we evaluate the Riemann zeta function.
------------------	--

Returns

$zeta(k)$

Definition at line 156 of file sf\_polylog.tcc.

References `__riemann_zeta()`.

### 8.3.3 Variable Documentation

**8.3.3.1** `constexpr size_t std::__detail::__Num_Euler_Maclaurin_zeta = 100`

Coefficients for Euler-Maclaurin summation of zeta functions.

$$B_{2j}/(2j)!$$

where  $B_k$  are the Bernoulli numbers.

Definition at line 65 of file sf\_zeta.tcc.

**8.3.3.2** `constexpr _Factorial_table<long double> std::__detail::_S_double_factorial_table[301]`

Definition at line 274 of file sf\_gamma.tcc.

Referenced by `__double_factorial()`, and `__log_double_factorial()`.

**8.3.3.3** `constexpr long double std::__detail::_S_Euler_Maclaurin_zeta[_Num_Euler_Maclaurin_zeta]`

Definition at line 68 of file sf\_zeta.tcc.

Referenced by `__hurwitz_zeta_euler_maclaurin()`, and `__riemann_zeta_euler_maclaurin()`.

**8.3.3.4** `constexpr _Factorial_table<long double> std::__detail::_S_factorial_table[171]`

Definition at line 84 of file sf\_gamma.tcc.

Referenced by `__factorial()`, and `__log_factorial()`.

**8.3.3.5** `constexpr _Factorial_table<long double> std::__detail::_S_neg_double_factorial_table[999]`

Definition at line 595 of file sf\_gamma.tcc.

Referenced by `__double_factorial()`, and `__log_double_factorial()`.

**8.3.3.6** `template<typename _Tp> constexpr std::size_t std::__detail::_S_num_double_factorials = 0`

Definition at line 259 of file sf\_gamma.tcc.

**8.3.3.7** `template<> constexpr std::size_t std::__detail::_S_num_double_factorials< double > = 301`

Definition at line 264 of file sf\_gamma.tcc.

**8.3.3.8** `template<> constexpr std::size_t std::__detail::_S_num_double_factorials< float > = 57`

Definition at line 262 of file sf\_gamma.tcc.

**8.3.3.9** `template<> constexpr std::size_t std::__detail::_S_num_double_factorials< long double > = 301`

Definition at line 266 of file sf\_gamma.tcc.

**8.3.3.10** `template<typename _Tp> constexpr std::size_t std::__detail::_S_num_factorials = 0`

Definition at line 69 of file sf\_gamma.tcc.

8.3.3.11 `template<> constexpr std::size_t std::__detail::_S_num_factorials< double > = 171`

Definition at line 74 of file `sf_gamma.tcc`.

8.3.3.12 `template<> constexpr std::size_t std::__detail::_S_num_factorials< float > = 35`

Definition at line 72 of file `sf_gamma.tcc`.

8.3.3.13 `template<> constexpr std::size_t std::__detail::_S_num_factorials< long double > = 171`

Definition at line 76 of file `sf_gamma.tcc`.

8.3.3.14 `template<typename _Tp > constexpr std::size_t std::__detail::_S_num_neg_double_factorials = 0`

Definition at line 579 of file `sf_gamma.tcc`.

8.3.3.15 `template<> constexpr std::size_t std::__detail::_S_num_neg_double_factorials< double > = 150`

Definition at line 584 of file `sf_gamma.tcc`.

8.3.3.16 `template<> constexpr std::size_t std::__detail::_S_num_neg_double_factorials< float > = 27`

Definition at line 582 of file `sf_gamma.tcc`.

8.3.3.17 `template<> constexpr std::size_t std::__detail::_S_num_neg_double_factorials< long double > = 999`

Definition at line 586 of file `sf_gamma.tcc`.

8.3.3.18 `constexpr size_t std::__detail::_S_num_zetam1 = 33`

Table of  $\zeta(n) - 1$  from 2 - 32. MPFR - 128 bits.

Definition at line 592 of file `sf_zeta.tcc`.

Referenced by `__riemann_zeta_m_1()`.

8.3.3.19 `constexpr long double std::__detail::_S_zetam1[_S_num_zetam1]`

Definition at line 596 of file `sf_zeta.tcc`.

Referenced by `__riemann_zeta_m_1()`.



## Chapter 9

# Class Documentation

### 9.1 `std::__detail::_Factorial_table<_Tp>` Struct Template Reference

#### Public Attributes

- `_Tp __factorial`
- `_Tp __log_factorial`
- `unsigned int __n`

#### 9.1.1 Detailed Description

```
template<typename _Tp>struct std::__detail::_Factorial_table<_Tp>
```

Definition at line 61 of file `sf_gamma.tcc`.

#### 9.1.2 Member Data Documentation

9.1.2.1 `template<typename _Tp>_Tp std::__detail::_Factorial_table<_Tp>::__factorial`

Definition at line 64 of file `sf_gamma.tcc`.

9.1.2.2 `template<typename _Tp>_Tp std::__detail::_Factorial_table<_Tp>::__log_factorial`

Definition at line 65 of file `sf_gamma.tcc`.

9.1.2.3 `template<typename _Tp> unsigned int std::__detail::_Factorial_table<_Tp>::__n`

Definition at line 63 of file `sf_gamma.tcc`.

The documentation for this struct was generated from the following file:

- `bits/sf_gamma.tcc`






## Chapter 10

# File Documentation


### 10.1 bits/sf\_airy.tcc File Reference

```
#include <bits/complex_util.h>
```

Include dependency graph for sf\_airy.tcc:



This graph shows which files directly or indirectly include this file:



## Namespaces

- [std](#)
- [std::\\_\\_detail](#)

## Macros

- [#define \\_GLIBCXX\\_BITS\\_SF\\_AIRY\\_TCC 1](#)

## Functions

- `template<typename _Tp >`  
`void std::\_\_detail::\_\_airy (const std::complex< _Tp > &__z, _Tp __eps, std::complex< _Tp > &_Ai, std::complex< _Tp > &_Aip, std::complex< _Tp > &_Bi, std::complex< _Tp > &_Bip)`  
*This function computes the Airy function  $Ai(z)$  and its first derivative in the complex  $z$ -plane.*
- `template<typename _Tp >`  
`std::complex< _Tp > std::\_\_detail::\_\_airy\_ai (std::complex< _Tp > __z)`  
*Return the complex Airy  $Ai$  function.*
- `template<typename _Tp >`  
`void std::\_\_detail::\_\_airy\_asymp\_absarg\_ge\_pio3 (std::complex< _Tp > __z, std::complex< _Tp > &_Ai, std::complex< _Tp > &_Aip, int __sign=-1)`  
*This function evaluates  $Ai(z)$  and  $Ai'(z)$  from their asymptotic expansions for  $|arg(z)| < 2 * \pi/3$ . For speed, the number of terms needed to achieve about 16 decimals accuracy is tabled and determined from  $abs(z)$ .*
- `template<typename _Tp >`  
`void std::\_\_detail::\_\_airy\_asymp\_absarg\_lt\_pio3 (std::complex< _Tp > __z, std::complex< _Tp > &_Ai, std::complex< _Tp > &_Aip)`  
*This function evaluates  $Ai(z)$  and  $Ai'(z)$  from their asymptotic expansions for  $|arg(-z)| < \pi/3$ . For speed, the number of terms needed to achieve about 16 decimals accuracy is tabled and determined from  $|z|$ .*
- `template<typename _Tp >`  
`void std::\_\_detail::\_\_airy\_bessel\_i (const std::complex< _Tp > &__z, _Tp __eps, std::complex< _Tp > &_lp1d3, std::complex< _Tp > &_lm1d3, std::complex< _Tp > &_lp2d3, std::complex< _Tp > &_lm2d3)`
- `template<typename _Tp >`  
`void std::\_\_detail::\_\_airy\_bessel\_k (const std::complex< _Tp > &__z, _Tp __eps, std::complex< _Tp > &_Kp1d3, std::complex< _Tp > &_Kp2d3)`  
*Compute approximations to the modified Bessel functions of the second kind of orders 1/3 and 2/3 for moderate arguments.*
- `template<typename _Tp >`  
`std::complex< _Tp > std::\_\_detail::\_\_airy\_bi (std::complex< _Tp > __z)`  
*Return the complex Airy  $Bi$  function.*
- `template<typename _Tp >`  
`void std::\_\_detail::\_\_airy\_hyperg\_rational (const std::complex< _Tp > &__z, std::complex< _Tp > &_Ai, std::complex< _Tp > &_Aip, std::complex< _Tp > &_Bi, std::complex< _Tp > &_Bip)`  
*This function computes rational approximations to the hypergeometric functions related to the modified Bessel functions of orders  $\nu = + - 1/3$  and  $\nu = -2/3$ . That is,  $A(z)/B(z)$ , Where  $A(z)$  and  $B(z)$  are cubic polynomials with real coefficients, approximates*

$$\frac{\Gamma(\nu + 1)}{(z/2)^{\nu}} I_{\nu}(z) = {}_0F_1(; \nu + 1; z^2/4),$$

where the function on the right is a confluent hypergeometric limit function. For  $|z| \leq 1/4$  and  $|arg(z)| \leq \pi/2$ , the approximations are accurate to about 16 decimals.

### 10.1.1 Detailed Description

This is an internal header file, included by other library headers. You should not attempt to use it directly.


### 10.1.2 Macro Definition Documentation

#### 10.1.2.1 `#define _GLIBCXX_BITS_SF_AIRY_TCC 1`


Definition at line 31 of file `sf_airy.tcc`.

## 10.2 bits/sf\_bessel.tcc File Reference

```
#include <utility>
#include <ext/math_const.h>
Include dependency graph for sf_bessel.tcc:
```

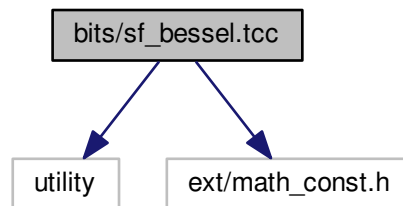

This graph shows which files directly or indirectly include this file:



## Namespaces

- [std](#)

- [std::\\_\\_detail](#)

## Macros

- [#define \\_GLIBCXX\\_BITS\\_SF\\_BESSEL\\_TCC 1](#)

## Functions

- `template<typename _Tp >`  
`_Tp std::__detail::__cyl_bessel_ij_series (_Tp __nu, _Tp __x, _Tp __sgn, unsigned int __max_iter)`  
*This routine returns the cylindrical Bessel functions of order  $\nu$ :  $J_\nu$  or  $I_\nu$  by series expansion.*
- `template<typename _Tp >`  
`_Tp std::__detail::__cyl_bessel_j (_Tp __nu, _Tp __x)`  
*Return the Bessel function of order  $\nu$ :  $J_\nu(x)$ .*
- `template<typename _Tp >`  
`void std::__detail::__cyl_bessel_jn (_Tp __nu, _Tp __x, _Tp &_Jnu, _Tp &_Nnu, _Tp &_Jpnu, _Tp &_Npnu)`  
*Return the cylindrical Bessel functions and their derivatives of order  $\nu$  by various means.*
- `template<typename _Tp >`  
`void std::__detail::__cyl_bessel_jn_asymp (_Tp __nu, _Tp __x, _Tp &_Jnu, _Tp &_Nnu, _Tp &_Jpnu, _Tp &_Npnu)`  
*This routine computes the asymptotic cylindrical Bessel and Neumann functions of order  $\nu$ :  $J_\nu(x)$ ,  $N_\nu(x)$ . Use this for  $x \gg \nu^2 + 1$ .*
- `template<typename _Tp >`  
`void std::__detail::__cyl_bessel_jn_steel (_Tp __nu, _Tp __x, _Tp &_Jnu, _Tp &_Nnu, _Tp &_Jpnu, _Tp &_Npnu)`  
*Compute the Bessel  $J_\nu(x)$  and Neumann  $N_\nu(x)$  functions and their first derivatives  $J'_\nu(x)$  and  $N'_\nu(x)$  respectively. These four functions are computed together for numerical stability.*
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__cyl_hankel_1 (_Tp __nu, _Tp __x)`  
*Return the cylindrical Hankel function of the first kind  $H_\nu^{(1)}(x)$ .*
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__cyl_hankel_2 (_Tp __nu, _Tp __x)`  
*Return the cylindrical Hankel function of the second kind  $H_n^{(2)}u(x)$ .*
- `template<typename _Tp >`  
`_Tp std::__detail::__cyl_neumann_n (_Tp __nu, _Tp __x)`  
*Return the Neumann function of order  $\nu$ :  $N_\nu(x)$ .*
- `template<typename _Tp >`  
`void std::__detail::__gamma_temme (_Tp __mu, _Tp &__gam1, _Tp &__gam2, _Tp &__gampl, _Tp &__gammi)`  
*Compute the gamma functions required by the Temme series expansions of  $N_\nu(x)$  and  $K_\nu(x)$ .*

$$\Gamma_1 = \frac{1}{2\mu} \left[ \frac{1}{\Gamma(1-\mu)} - \frac{1}{\Gamma(1+\mu)} \right]$$

and

$$\Gamma_2 = \frac{1}{2} \left[ \frac{1}{\Gamma(1-\mu)} + \frac{1}{\Gamma(1+\mu)} \right]$$

where  $-1/2 \leq \mu \leq 1/2$  is  $\mu = \nu - N$  and  $N$  is the nearest integer to  $\nu$ . The values of  $\Gamma(1+\mu)$  and  $\Gamma(1-\mu)$  are returned as well.
- `template<typename _Tp >`  
`_Tp std::__detail::__sph_bessel (unsigned int __n, _Tp __x)`  
*Return the spherical Bessel function  $j_n(x)$  of order  $n$  and non-negative real argument  $x$ .*

- `template<typename _Tp >`  
`void std::__detail::__sph_bessel_jn (unsigned int __n, _Tp __x, _Tp &__j_n, _Tp &__n_n, _Tp &__jp_n, _Tp &__np_n)`  
*Compute the spherical Bessel  $j_n(x)$  and Neumann  $n_n(x)$  functions and their first derivatives  $j'_n(x)$  and  $n'_n(x)$  respectively.*
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__sph_hankel_1 (unsigned int __n, _Tp __x)`  
*Return the spherical Hankel function of the first kind  $h_n^{(1)}(x)$ .*
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__sph_hankel_2 (unsigned int __n, _Tp __x)`  
*Return the spherical Hankel function of the second kind  $h_n^{(2)}(x)$ .*
- `template<typename _Tp >`  
`_Tp std::__detail::__sph_neumann (unsigned int __n, _Tp __x)`  
*Return the spherical Neumann function  $n_n(x)$  of order  $n$  and non-negative real argument  $x$ .*

### 10.2.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include `<cmath>`.

### 10.2.2 Macro Definition Documentation


#### 10.2.2.1 `#define _GLIBCXX_BITS_SF_BESSEL_TCC 1`

Definition at line 47 of file `sf_bessel.tcc`.


## 10.3 bits/sf\_beta.tcc File Reference

```
#include <ext/math_const.h>
```

Include dependency graph for `sf_beta.tcc`:



This graph shows which files directly or indirectly include this file:



## Namespaces

- [std](#)
- [std::\\_\\_detail](#)

## Macros

- [#define \\_GLIBCXX\\_BITS\\_SF\\_BETA\\_TCC 1](#)

## Functions

- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_beta \(\\_Tp \\_\\_a, \\_Tp \\_\\_b\)](#)  
*Return the beta function  $B(a, b)$ .*
- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_beta\\_gamma \(\\_Tp \\_\\_a, \\_Tp \\_\\_b\)](#)  
*Return the beta function:  $B(a, b)$ .*
- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_beta\\_inc \(\\_Tp \\_\\_a, \\_Tp \\_\\_b, \\_Tp \\_\\_x\)](#)
- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_beta\\_inc\\_cont\\_frac \(\\_Tp \\_\\_a, \\_Tp \\_\\_b, \\_Tp \\_\\_x\)](#)
- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_beta\\_lgamma \(\\_Tp \\_\\_a, \\_Tp \\_\\_b\)](#)  
*Return the beta function  $B(a, b)$  using the log gamma functions.*
- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_beta\\_product \(\\_Tp \\_\\_a, \\_Tp \\_\\_b\)](#)  
*Return the beta function  $B(x, y)$  using the product form.*
- [template<typename \\_Tp > \\_GLIBCXX14\\_CONSTEXPR \\_Tp std::\\_\\_detail::\\_\\_binomial\\_cdf \(\\_Tp \\_\\_p, unsigned int \\_\\_n, unsigned int \\_\\_k\)](#)  
*Return the binomial cumulative distribution function.*
- [template<typename \\_Tp > \\_GLIBCXX14\\_CONSTEXPR \\_Tp std::\\_\\_detail::\\_\\_binomial\\_cdfc \(\\_Tp \\_\\_p, unsigned int \\_\\_n, unsigned int \\_\\_k\)](#)  
*Return the complementary binomial cumulative distribution function.*

- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp std::__detail::__f_cdf (_Tp __F, unsigned int __nu1, unsigned int __nu2)`  
*Return the F-distribution propability function. This returns the probability that the observed chi-square for a correct model exceeds the value  $\chi^2$ .*
- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp std::__detail::__f_cdfc (_Tp __F, unsigned int __nu1, unsigned int __nu2)`  
*Return the F-distribution propability function. This returns the probability that the observed chi-square for a correct model exceeds the value  $\chi^2$ .*
- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp std::__detail::__students_t_cdf (_Tp __t, unsigned int __nu)`  
*Return the Students T probability function.*
- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp std::__detail::__students_t_cdfc (_Tp __t, unsigned int __nu)`  
*Return the complement of the Students T probability function.*

### 10.3.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include `<cmath>`.

### 10.3.2 Macro Definition Documentation


#### 10.3.2.1 `#define _GLIBCXX_BITS_SF_BETA_TCC 1`

Definition at line 49 of file `sf_beta.tcc`.


## 10.4 bits/sf\_cardinal.tcc File Reference

```
#include <bits/complex_util.h>
```

Include dependency graph for `sf_cardinal.tcc`:

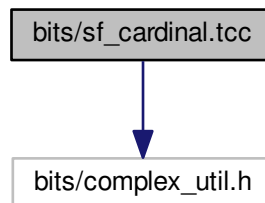

This graph shows which files directly or indirectly include this file:



## Namespaces

- [std](#)
- [std::\\_\\_detail](#)

## Macros

- [#define \\_GLIBCXX\\_BITS\\_SF\\_CARDINAL\\_TCC 1](#)

## Functions

- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t<_Tp > std::\_\_detail::\_\_sinc (_Tp __a, _Tp __x)`  
*Return the generalized sinus cardinal function*

$$\text{sinc}_a(x) = \frac{\sin(\pi x/a)}{(\pi x/a)}$$

- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t<_Tp > std::\_\_detail::\_\_sinc (_Tp __x)`  
*Return the normalized sinus cardinal function*

$$\text{sinc}(x) = \frac{\sin(\pi x)}{\pi x}$$

- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t<_Tp > std::\_\_detail::\_\_sinc\_pi (_Tp __x)`  
*Return the unnormalized sinus cardinal function*

$$\text{sinc}_\pi(x) = \frac{\sin(x)}{x}$$

- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t<_Tp > std::\_\_detail::\_\_sinhc (_Tp __a, _Tp __x)`



*Return the generalized hyperbolic sinus cardinal function*

$$\operatorname{sinhc}_a(x) = \frac{\sinh(\pi x/a)}{\pi x/a}$$

- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > std::__detail::__sinhc ( _Tp __x)`

*Return the normalized hyperbolic sinus cardinal function*

$$\operatorname{sinhc}(x) = \frac{\sinh(\pi x)}{\pi x}$$

- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > std::__detail::__sinhc_pi ( _Tp __x)`

*Return the unnormalized hyperbolic sinus cardinal function*

$$\operatorname{sinhc}_\pi(x) = \frac{\sinh(x)}{x}$$

## 10.4.1 Macro Definition Documentation


### 10.4.1.1 `#define _GLIBCXX_BITS_SF_CARDINAL_TCC 1`

Definition at line 30 of file `sf_cardinal.tcc`.


## 10.5 bits/sf\_chebyshev.tcc File Reference

`#include <ext/math_const.h>`

Include dependency graph for `sf_chebyshev.tcc`:

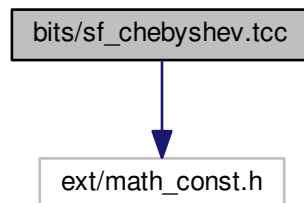

This graph shows which files directly or indirectly include this file:



## Namespaces

- [std](#)
- [std::\\_\\_detail](#)

## Macros

- [#define \\_GLIBCXX\\_SF\\_CHEBYSHEV\\_TCC 1](#)

## Functions

- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_chebyshev\\_recur \(unsigned int \\_\\_n, \\_Tp \\_\\_x, \\_Tp \\_C0, \\_Tp \\_C1\)](#)
- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_chebyshev\\_t \(unsigned int \\_\\_n, \\_Tp \\_\\_x\)](#)
- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_chebyshev\\_u \(unsigned int \\_\\_n, \\_Tp \\_\\_x\)](#)
- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_chebyshev\\_v \(unsigned int \\_\\_n, \\_Tp \\_\\_x\)](#)
- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_chebyshev\\_w \(unsigned int \\_\\_n, \\_Tp \\_\\_x\)](#)

### 10.5.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include `<cmath>`.

### 10.5.2 Macro Definition Documentation


#### 10.5.2.1 [#define \\_GLIBCXX\\_SF\\_CHEBYSHEV\\_TCC 1](#)

Definition at line 31 of file `sf_chebyshev.tcc`.


## 10.6 bits/sf\_dawson.tcc File Reference

```
#include <ext/math_const.h>
```

Include dependency graph for sf\_dawson.tcc:



This graph shows which files directly or indirectly include this file:



### Namespaces

- `std`
- `std::__detail`

### Macros

- `#define _GLIBCXX_SF_DAWSON_TCC 1`

### Functions

- `template<typename _Tp >  
_Tp std::__detail::__dawson (_Tp __x)`  
*Return the Dawson integral,  $F(x)$ , for real argument  $x$ .*

- `template<typename _Tp >`  
`_Tp std::__detail::__dawson_const_frac (_Tp __x)`

*Compute the Dawson integral using a sampling theorem representation.*

- `template<typename _Tp >`  
`_Tp std::__detail::__dawson_series (_Tp __x)`

*Compute the Dawson integral using the series expansion.*

### 10.6.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include `<cmath>`.

### 10.6.2 Macro Definition Documentation


#### 10.6.2.1 `#define _GLIBCXX_SF_DAWSON_TCC 1`

Definition at line 31 of file `sf_dawson.tcc`.


## 10.7 `bits/sf_ellint.tcc` File Reference

`#include <ext/math_const.h>`

Include dependency graph for `sf_ellint.tcc`:



This graph shows which files directly or indirectly include this file:



## Namespaces

- [std](#)
- [std::\\_\\_detail](#)

## Macros

- [#define \\_GLIBCXX\\_BITS\\_SF\\_ELLINT\\_TCC 1](#)

## Functions

- `template<typename _Tp >`  
`_Tp std::\_\_detail::\_\_comp\_ellint\_1 (_Tp __k)`  
*Return the complete elliptic integral of the first kind  $K(k)$  using the Carlson formulation.*
- `template<typename _Tp >`  
`_Tp std::\_\_detail::\_\_comp\_ellint\_2 (_Tp __k)`  
*Return the complete elliptic integral of the second kind  $E(k)$  using the Carlson formulation.*
- `template<typename _Tp >`  
`_Tp std::\_\_detail::\_\_comp\_ellint\_3 (_Tp __k, _Tp __nu)`  
*Return the complete elliptic integral of the third kind  $\Pi(k, \nu) = \Pi(k, \nu, \pi/2)$  using the Carlson formulation.*
- `template<typename _Tp >`  
`_Tp std::\_\_detail::\_\_comp\_ellint\_d (_Tp __k)`
- `template<typename _Tp >`  
`_Tp std::\_\_detail::\_\_comp\_ellint\_rf (_Tp __x, _Tp __y)`
- `template<typename _Tp >`  
`_Tp std::\_\_detail::\_\_comp\_ellint\_rg (_Tp __x, _Tp __y)`
- `template<typename _Tp >`  
`_Tp std::\_\_detail::\_\_ellint\_1 (_Tp __k, _Tp __phi)`  
*Return the incomplete elliptic integral of the first kind  $F(k, \phi)$  using the Carlson formulation.*
- `template<typename _Tp >`  
`_Tp std::\_\_detail::\_\_ellint\_2 (_Tp __k, _Tp __phi)`  
*Return the incomplete elliptic integral of the second kind  $E(k, \phi)$  using the Carlson formulation.*

- `template<typename _Tp >`  
`_Tp std::__detail::__ellint_3 (_Tp __k, _Tp __nu, _Tp __phi)`  
*Return the incomplete elliptic integral of the third kind  $\Pi(k, \nu, \phi)$  using the Carlson formulation.*
- `template<typename _Tp >`  
`_Tp std::__detail::__ellint_cel (_Tp __k_c, _Tp __p, _Tp __a, _Tp __b)`
- `template<typename _Tp >`  
`_Tp std::__detail::__ellint_d (_Tp __k, _Tp __phi)`
- `template<typename _Tp >`  
`_Tp std::__detail::__ellint_el1 (_Tp __x, _Tp __k_c)`
- `template<typename _Tp >`  
`_Tp std::__detail::__ellint_el2 (_Tp __x, _Tp __k_c, _Tp __a, _Tp __b)`
- `template<typename _Tp >`  
`_Tp std::__detail::__ellint_el3 (_Tp __x, _Tp __k_c, _Tp __p)`
- `template<typename _Tp >`  
`_Tp std::__detail::__ellint_rc (_Tp __x, _Tp __y)`  
*Return the Carlson elliptic function  $R_C(x, y) = R_F(x, y, y)$  where  $R_F(x, y, z)$  is the Carlson elliptic function of the first kind.*
- `template<typename _Tp >`  
`_Tp std::__detail::__ellint_rd (_Tp __x, _Tp __y, _Tp __z)`  
*Return the Carlson elliptic function of the second kind  $R_D(x, y, z) = R_J(x, y, z, z)$  where  $R_J(x, y, z, p)$  is the Carlson elliptic function of the third kind.*
- `template<typename _Tp >`  
`_Tp std::__detail::__ellint_rf (_Tp __x, _Tp __y, _Tp __z)`  
*Return the Carlson elliptic function  $R_F(x, y, z)$  of the first kind.*
- `template<typename _Tp >`  
`_Tp std::__detail::__ellint_rg (_Tp __x, _Tp __y, _Tp __z)`  
*Return the symmetric Carlson elliptic function of the second kind  $R_G(x, y, z)$ .*
- `template<typename _Tp >`  
`_Tp std::__detail::__ellint_rj (_Tp __x, _Tp __y, _Tp __z, _Tp __p)`  
*Return the Carlson elliptic function  $R_J(x, y, z, p)$  of the third kind.*
- `template<typename _Tp >`  
`_Tp std::__detail::__heuman_lambda (_Tp __k, _Tp __phi)`
- `template<typename _Tp >`  
`_Tp std::__detail::__jacobi_zeta (_Tp __k, _Tp __phi)`

### 10.7.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include `<cmath>`.

### 10.7.2 Macro Definition Documentation


#### 10.7.2.1 `#define _GLIBCXX_BITS_SF_ELLINT_TCC 1`

Definition at line 47 of file `sf_ellint.tcc`.


## 10.8 bits/sf\_expint.tcc File Reference

```
#include <ext/math_const.h>
```

Include dependency graph for sf\_expint.tcc:



This graph shows which files directly or indirectly include this file:



### Namespaces

- [std](#)
- [std::\\_\\_detail](#)

### Macros

- [#define \\_GLIBCXX\\_BITS\\_SF\\_EXPINT\\_TCC 1](#)

### Functions

- [template<typename \\_Tp >  
\\_Tp std::\\_\\_detail::\\_\\_coshint \(const \\_Tp \\_\\_x\)](#)  
*Return the hyperbolic cosine integral  $li(x)$ .*

- `template<typename _Tp >`  
`_Tp std::__detail::__expint (unsigned int __n, _Tp __x)`  
*Return the exponential integral  $E_n(x)$ .*
- `template<typename _Tp >`  
`_Tp std::__detail::__expint (_Tp __x)`  
*Return the exponential integral  $Ei(x)$ .*
- `template<typename _Tp >`  
`_Tp std::__detail::__expint_asymp (unsigned int __n, _Tp __x)`  
*Return the exponential integral  $E_n(x)$  for large argument.*
- `template<typename _Tp >`  
`_Tp std::__detail::__expint_E1 (_Tp __x)`  
*Return the exponential integral  $E_1(x)$ .*
- `template<typename _Tp >`  
`_Tp std::__detail::__expint_E1_asymp (_Tp __x)`  
*Return the exponential integral  $E_1(x)$  by asymptotic expansion.*
- `template<typename _Tp >`  
`_Tp std::__detail::__expint_E1_series (_Tp __x)`  
*Return the exponential integral  $E_1(x)$  by series summation. This should be good for  $x < 1$ .*
- `template<typename _Tp >`  
`_Tp std::__detail::__expint_Ei (_Tp __x)`  
*Return the exponential integral  $Ei(x)$ .*
- `template<typename _Tp >`  
`_Tp std::__detail::__expint_Ei_asymp (_Tp __x)`  
*Return the exponential integral  $Ei(x)$  by asymptotic expansion.*
- `template<typename _Tp >`  
`_Tp std::__detail::__expint_Ei_series (_Tp __x)`  
*Return the exponential integral  $Ei(x)$  by series summation.*
- `template<typename _Tp >`  
`_Tp std::__detail::__expint_En_cont_frac (unsigned int __n, _Tp __x)`  
*Return the exponential integral  $E_n(x)$  by continued fractions.*
- `template<typename _Tp >`  
`_Tp std::__detail::__expint_En_recursion (unsigned int __n, _Tp __x)`  
*Return the exponential integral  $E_n(x)$  by recursion. Use upward recursion for  $x < n$  and downward recursion (Miller's algorithm) otherwise.*
- `template<typename _Tp >`  
`_Tp std::__detail::__expint_En_series (unsigned int __n, _Tp __x)`  
*Return the exponential integral  $E_n(x)$  by series summation.*
- `template<typename _Tp >`  
`_Tp std::__detail::__expint_large_n (unsigned int __n, _Tp __x)`  
*Return the exponential integral  $E_n(x)$  for large order.*
- `template<typename _Tp >`  
`_Tp std::__detail::__logint (const _Tp __x)`  
*Return the logarithmic integral  $li(x)$ .*
- `template<typename _Tp >`  
`_Tp std::__detail::__sinhint (const _Tp __x)`  
*Return the hyperbolic sine integral  $li(x)$ .*



### 10.8.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include `<cmath>`.

### 10.8.2 Macro Definition Documentation


#### 10.8.2.1 `#define _GLIBCXX_BITS_SF_EXPINT_TCC 1`

Definition at line 47 of file `sf_expint.tcc`.


## 10.9 bits/sf\_fresnel.tcc File Reference

```
#include <ext/math_const.h>
```

Include dependency graph for `sf_fresnel.tcc`:



This graph shows which files directly or indirectly include this file:



### Namespaces

- [std](#)

- [std::\\_\\_detail](#)

## Macros

- [#define \\_GLIBCXX\\_SF\\_FRESNEL\\_TCC](#) 1

## Functions

- `template<typename _Tp >  
std::complex< _Tp > std::\_\_detail::\_\_fresnel (const _Tp __x)`  
*Return the Fresnel cosine and sine integrals as a complex number  $\text{ff}[C(x) + iS(x)]$ .*
- `template<typename _Tp >  
void std::\_\_detail::\_\_fresnel\_cont\_frac (const _Tp __ax, _Tp &_Cf, _Tp &_Sf)`  
*This function computes the Fresnel cosine and sine integrals by continued fractions for positive argument.*
- `template<typename _Tp >  
void std::\_\_detail::\_\_fresnel\_series (const _Tp __ax, _Tp &_Cf, _Tp &_Sf)`  
*This function returns the Fresnel cosine and sine integrals as a pair by series expansion for positive argument.*

### 10.9.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include `<cmath>`.

### 10.9.2 Macro Definition Documentation


#### 10.9.2.1 [#define \\_GLIBCXX\\_SF\\_FRESNEL\\_TCC](#) 1

Definition at line 31 of file `sf_fresnel.tcc`.


## 10.10 `bits/sf_gamma.tcc` File Reference

`#include <ext/math_const.h>`

Include dependency graph for `sf_gamma.tcc`:



This graph shows which files directly or indirectly include this file:



## Classes

- struct [std::\\_\\_detail::\\_Factorial\\_table< \\_Tp >](#)

## Namespaces

- [std](#)
- [std::\\_\\_detail](#)

## Macros

- [#define \\_GLIBCXX\\_BITS\\_SF\\_GAMMA\\_TCC 1](#)

## Functions

- [template<typename \\_Tp > \\_GLIBCXX14\\_CONSTEXPR \\_Tp std::\\_\\_detail::\\_\\_bernoulli \(int \\_\\_n\)](#)  
*This returns Bernoulli number  $B_n$ .*
- [template<typename \\_Tp > \\_GLIBCXX14\\_CONSTEXPR \\_Tp std::\\_\\_detail::\\_\\_bernoulli\\_2n \(int \\_\\_n\)](#)  
*This returns Bernoulli number  $B_n$ .*
- [template<typename \\_Tp > \\_GLIBCXX14\\_CONSTEXPR \\_Tp std::\\_\\_detail::\\_\\_bernoulli\\_series \(unsigned int \\_\\_n\)](#)  
*This returns Bernoulli numbers from a table or by summation for larger values.*
- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_bincoef \(unsigned int \\_\\_n, unsigned int \\_\\_k\)](#)  
*Return the binomial coefficient. The binomial coefficient is given by:*

$$\binom{n}{k} = \frac{n!}{(n-k)!k!}$$

- [template<typename \\_Tp > \\_GLIBCXX14\\_CONSTEXPR \\_Tp std::\\_\\_detail::\\_\\_chi\\_squared\\_pdf \(\\_Tp \\_\\_chi2, unsigned int \\_\\_nu\)](#)

Return the chi-squared propability function. This returns the probability that the observed chi-squared for a correct model is less than the value  $\chi^2$ .

- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp std::__detail::__chi_squared_pdfc (_Tp __chi2, unsigned int __nu)`

Return the complementary chi-squared propability function. This returns the probability that the observed chi-squared for a correct model is greater than the value  $\chi^2$ .

- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp std::__detail::__double_factorial (int __n)`

Return the double factorial of the integer  $n$ .

- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp std::__detail::__factorial (unsigned int __n)`

Return the factorial of the integer  $n$ .

- `template<typename _Tp >`  
`_Tp std::__detail::__gamma (_Tp __x)`

Return  $\Gamma(x)$ .

- `template<typename _Tp >`  
`std::pair< _Tp, _Tp > std::__detail::__gamma_cont_frac (_Tp __a, _Tp __x)`

- `template<typename _Tp >`  
`_Tp std::__detail::__gamma_l (_Tp __a, _Tp __x)`

Return the lower incomplete gamma function. The lower incomplete gamma function is defined by

$$\gamma(a, x) = \int_0^x e^{-t} t^{a-1} dt (a > 0)$$

- `template<typename _Tp >`  
`_Tp std::__detail::__gamma_p (_Tp __a, _Tp __x)`

Return the regularized lower incomplete gamma function. The regularized lower incomplete gamma function is defined by

$$P(a, x) = \frac{\gamma(a, x)}{\Gamma(a)}$$

where  $\Gamma(a)$  is the gamma function and

$$\gamma(a, x) = \int_0^x e^{-t} t^{a-1} dt (a > 0)$$

is the lower incomplete gamma function.

- `template<typename _Tp >`  
`_Tp std::__detail::__gamma_q (_Tp __a, _Tp __x)`

Return the regularized upper incomplete gamma function. The regularized upper incomplete gamma function is defined by

$$Q(a, x) = \frac{\Gamma(a, x)}{\Gamma(a)}$$

where  $\Gamma(a)$  is the gamma function and

$$\Gamma(a, x) = \int_x^\infty e^{-t} t^{a-1} dt (a > 0)$$

is the upper incomplete gamma function.

- `template<typename _Tp >`  
`std::pair< _Tp, _Tp > std::__detail::__gamma_series (_Tp __a, _Tp __x)`

- `template<typename _Tp >`  
`_Tp std::__detail::__gamma_u (_Tp __a, _Tp __x)`

Return the upper incomplete gamma function. The lower incomplete gamma function is defined by

$$\Gamma(a, x) = \int_x^\infty e^{-t} t^{a-1} dt (a > 0)$$

- `template<typename _Tp >`  
`_Tp std::__detail::__log_bincoef` (unsigned int \_\_n, unsigned int \_\_k)

Return the logarithm of the binomial coefficient. The binomial coefficient is given by:

$$\binom{n}{k} = \frac{n!}{(n-k)!k!}$$

- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp std::__detail::__log_double_factorial` (\_Tp \_\_x)
- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp std::__detail::__log_double_factorial` (int \_\_n)

Return the logarithm of the double factorial of the integer n.

- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp std::__detail::__log_factorial` (unsigned int \_\_n)

Return the logarithm of the factorial of the integer n.

- `template<typename _Tp >`  
`_Tp std::__detail::__log_gamma` (\_Tp \_\_x)

Return  $\log(|\Gamma(x)|)$ . This will return values even for  $x < 0$ . To recover the sign of  $\Gamma(x)$  for any argument use `__log_gamma_sign`.

- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp std::__detail::__log_gamma_bernoulli` (\_Tp \_\_x)

Return  $\log(\Gamma(x))$  by asymptotic expansion with Bernoulli number coefficients. This is like Sterling's approximation.

- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp std::__detail::__log_gamma_lanczos` (\_Tp \_\_x)

Return  $\log(\Gamma(x))$  by the Lanczos method. This method dominates all others on the positive axis I think.

- `template<typename _Tp >`  
`_Tp std::__detail::__log_gamma_sign` (\_Tp \_\_x)

Return the sign of  $\Gamma(x)$ . At nonpositive integers zero is returned.

- `template<typename _Tp >`  
`_GLIBCXX14_CONSTEXPR _Tp std::__detail::__log_gamma_spouge` (\_Tp \_\_z)

Return  $\Gamma(z)$  by the Spouge algorithm:

$$\Gamma(z+1) = (z+a)^{z+1/2} e^{-z-a} \left[ \sqrt{2\pi} \sum_{k=1}^{\lceil a \rceil + 1} \frac{c_k(a)}{z+k} \right]$$

where

$$c_k(a) = \frac{(-1)^{k-1}}{(k-1)!} (a-k)^{k-1/2} e^{a-k}$$

and the error is bounded by

$$\epsilon(a) < a^{-1/2} (2\pi)^{-a-1/2}$$

- `template<typename _Tp >`  
`_Tp std::__detail::__log_pochhammer_l` (\_Tp \_\_a, \_Tp \_\_n)

Return the logarithm of the lower Pochhammer symbol or the falling factorial function. The lower Pochhammer symbol is defined by

$$(a)_n = \prod_{k=0}^{n-1} (a-k), (a)_0 = 1 = \Gamma(a+1)/\Gamma(a-n+1)$$

In particular,  $(a)_n = n!$  if  $a = n$ . Thus this function returns

$$\ln[(a)_n] = \Gamma(a+1) - \Gamma(a-n+1), \ln[(a)_0] = 0$$

Many notations exist:

$$a^{\overline{n}}$$

,

$$\left\{ \begin{matrix} a \\ n \end{matrix} \right\}$$

, and others.

- `template<typename _Tp >`  
`_Tp std::__detail::__log_pochhammer_u (_Tp __a, _Tp __n)`

Return the logarithm of the (upper) Pochhammer symbol or the rising factorial function. The Pochhammer symbol is defined by

$$(a)_n = \prod_{k=0}^{n-1} (a+k), (a)_0 = 1 = \Gamma(a+n)/\Gamma(a)$$

Thus this function returns

$$\ln[(a)_n] = \Gamma(a+n) - \Gamma(a), \ln[(a)_0] = 0$$

Many notations exist:

$$a^{\overline{n}}$$

,

$$\left[ \begin{matrix} a \\ n \end{matrix} \right]$$

, and others.

- `template<typename _Tp >`  
`_Tp std::__detail::__pochhammer_l (_Tp __a, _Tp __n)`

Return the logarithm of the lower Pochhammer symbol or the falling factorial function. The lower Pochhammer symbol is defined by

$$(a)_n = \prod_{k=0}^{n-1} (a-k), (a)_0 = 1 = \Gamma(a+1)/\Gamma(a-n+1)$$

In particular,  $(n)_n = n!$ .

- `template<typename _Tp >`  
`_Tp std::__detail::__pochhammer_u (_Tp __a, _Tp __n)`

Return the (upper) Pochhammer function or the rising factorial function. The Pochhammer symbol is defined by

$$(a)_n = \prod_{k=0}^{n-1} (a+k), (a)_0 = 1 = \Gamma(a+n)/\Gamma(a)$$

Many notations exist:

$$a^{\overline{n}}$$

,

$$\left[ \begin{matrix} a \\ n \end{matrix} \right]$$

, and others.

- `template<typename _Tp >`  
`_Tp std::__detail::__psi (_Tp __x)`

Return the digamma function. The digamma or  $\psi(x)$  function is defined by

$$\psi(x) = \frac{\Gamma'(x)}{\Gamma(x)}$$

For negative argument the reflection formula is used:

$$\psi(x) = \psi(1-x) - \pi \cot(\pi x)$$

.

- `template<typename _Tp >`  
`_Tp std::__detail::__psi (unsigned int __n, _Tp __x)`

Return the polygamma function  $\psi^{(n)}(x)$ .

- `template<typename _Tp >`  
`_Tp std::__detail::__psi_asymp (_Tp __x)`

*Return the digamma function for large argument. The digamma or  $\psi(x)$  function is defined by*

$$\psi(x) = \frac{\Gamma'(x)}{\Gamma(x)}$$

- `template<typename _Tp >`  
`_Tp std::__detail::__psi_series (_Tp __x)`

*Return the digamma function by series expansion. The digamma or  $\psi(x)$  function is defined by*

$$\psi(x) = \frac{\Gamma'(x)}{\Gamma(x)}$$

## Variables

- `constexpr _Factorial_table< long double > std::__detail::__S_double_factorial_table [301]`
- `constexpr _Factorial_table< long double > std::__detail::__S_factorial_table [171]`
- `constexpr _Factorial_table< long double > std::__detail::__S_neg_double_factorial_table [999]`
- `template<typename _Tp >`  
`constexpr std::size_t std::__detail::__S_num_double_factorials = 0`
- `template<>`  
`constexpr std::size_t std::__detail::__S_num_double_factorials< double > = 301`
- `template<>`  
`constexpr std::size_t std::__detail::__S_num_double_factorials< float > = 57`
- `template<>`  
`constexpr std::size_t std::__detail::__S_num_double_factorials< long double > = 301`
- `template<typename _Tp >`  
`constexpr std::size_t std::__detail::__S_num_factorials = 0`
- `template<>`  
`constexpr std::size_t std::__detail::__S_num_factorials< double > = 171`
- `template<>`  
`constexpr std::size_t std::__detail::__S_num_factorials< float > = 35`
- `template<>`  
`constexpr std::size_t std::__detail::__S_num_factorials< long double > = 171`
- `template<typename _Tp >`  
`constexpr std::size_t std::__detail::__S_num_neg_double_factorials = 0`
- `template<>`  
`constexpr std::size_t std::__detail::__S_num_neg_double_factorials< double > = 150`
- `template<>`  
`constexpr std::size_t std::__detail::__S_num_neg_double_factorials< float > = 27`
- `template<>`  
`constexpr std::size_t std::__detail::__S_num_neg_double_factorials< long double > = 999`

### 10.10.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include `<cmath>`.

## 10.10.2 Macro Definition Documentation


### 10.10.2.1 `#define _GLIBCXX_BITS_SF_GAMMA_TCC 1`

Definition at line 49 of file `sf_gamma.tcc`.


## 10.11 `bits/sf_gegenbauer.tcc` File Reference

```
#include <ext/math_const.h>
```

Include dependency graph for `sf_gegenbauer.tcc`:



This graph shows which files directly or indirectly include this file:



## Namespaces

- [std](#)
- [std::\\_\\_detail](#)

## Macros

- [#define \\_GLIBCXX\\_SF\\_GEGENBAUER\\_TCC 1](#)



## Functions

- `template<typename _Tp >`  
`_Tp std::__detail::__gegenbauer_poly` (unsigned int \_\_n, \_Tp \_\_alpha, \_Tp \_\_x)

### 10.11.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include `<cmath>`.


### 10.11.2 Macro Definition Documentation

#### 10.11.2.1 `#define _GLIBCXX_SF_GEGENBAUER_TCC 1`


Definition at line 31 of file `sf_gegenbauer.tcc`.

## 10.12 bits/sf\_hankel.tcc File Reference

```
#include <complex>
#include <limits>
#include <vector>
#include <bits/complex_util.h>
Include dependency graph for sf_hankel.tcc:
```

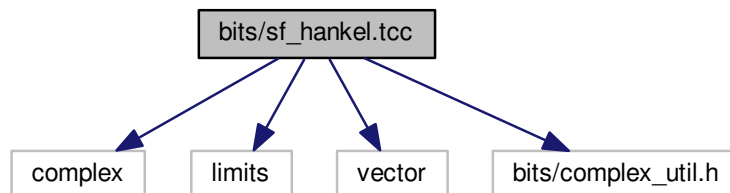

This graph shows which files directly or indirectly include this file:



## Namespaces

- [std](#)
- [std::\\_\\_detail](#)

## Macros

- [#define \\_GLIBCXX\\_BITS\\_SF\\_HANKEL\\_TCC 1](#)

## Functions

- `template<typename _Tp >`  
`void std::\_\_detail::\_\_airy\_arg (std::complex< _Tp > __num2d3, std::complex< _Tp > __zeta, std::complex< _Tp > &__argp, std::complex< _Tp > &__argm)`  
*Compute the arguments for the Airy function evaluations carefully to prevent premature overflow. Note that the major work here is in `safe_div`. A faster, but less safe implementation can be obtained without use of `safe_div`.*
- `template<typename _Tp >`  
`std::complex< _Tp > std::\_\_detail::\_\_cyl\_bessel (std::complex< _Tp > __nu, std::complex< _Tp > __z)`  
*Return the complex cylindrical Bessel function.*
- `template<typename _Tp >`  
`std::complex< _Tp > std::\_\_detail::\_\_cyl\_hankel\_1 (std::complex< _Tp > __nu, std::complex< _Tp > __z)`  
*Return the complex cylindrical Hankel function of the first kind.*
- `template<typename _Tp >`  
`std::complex< _Tp > std::\_\_detail::\_\_cyl\_hankel\_2 (std::complex< _Tp > __nu, std::complex< _Tp > __z)`  
*Return the complex cylindrical Hankel function of the second kind.*
- `template<typename _Tp >`  
`std::complex< _Tp > std::\_\_detail::\_\_cyl\_neumann (std::complex< _Tp > __nu, std::complex< _Tp > __z)`  
*Return the complex cylindrical Neumann function.*
- `template<typename _Tp >`  
`void std::\_\_detail::\_\_debye\_region (std::complex< _Tp > __alpha, int &__indexr, char &__aorb)`
- `template<typename _Tp >`  
`void std::\_\_detail::\_\_hankel (std::complex< _Tp > __nu, std::complex< _Tp > __z, std::complex< _Tp > &_H1, std::complex< _Tp > &_H2, std::complex< _Tp > &_H1p, std::complex< _Tp > &_H2p)`

- `template<typename _Tp >`  
`void std::__detail::__hankel_debye (std::complex< _Tp > __nu, std::complex< _Tp > __z, std::complex< _Tp > __alpha, int __indexr, char &__aorb, int &__morn, std::complex< _Tp > &_H1, std::complex< _Tp > &_H2, std::complex< _Tp > &_H1p, std::complex< _Tp > &_H2p)`
- `template<typename _Tp >`  
`void std::__detail::__hankel_params (std::complex< _Tp > __nu, std::complex< _Tp > __zhat, std::complex< _Tp > &_p, std::complex< _Tp > &_p2, std::complex< _Tp > &_nup2, std::complex< _Tp > &_num2, std::complex< _Tp > &_num1d3, std::complex< _Tp > &_num2d3, std::complex< _Tp > &_num4d3, std::complex< _Tp > &_zeta, std::complex< _Tp > &_zetaphf, std::complex< _Tp > &_zetamhf, std::complex< _Tp > &_zetam3hf, std::complex< _Tp > &_zetrat)`  
*Compute parameters depending on z and nu that appear in the uniform asymptotic expansions of the Hankel functions and their derivatives, except the arguments to the Airy functions.*
- `template<typename _Tp >`  
`void std::__detail::__hankel_uniform (std::complex< _Tp > __nu, std::complex< _Tp > __z, std::complex< _Tp > &_H1, std::complex< _Tp > &_H2, std::complex< _Tp > &_H1p, std::complex< _Tp > &_H2p)`  
*This routine computes the uniform asymptotic approximations of the Hankel functions and their derivatives including a patch for the case when the order equals or nearly equals the argument. At such points, Olver's expressions have zero denominators (and numerators) resulting in numerical problems. This routine averages results from four surrounding points in the complex plane to obtain the result in such cases.*
- `template<typename _Tp >`  
`void std::__detail::__hankel_uniform_olver (std::complex< _Tp > __nu, std::complex< _Tp > __z, std::complex< _Tp > &_H1, std::complex< _Tp > &_H2, std::complex< _Tp > &_H1p, std::complex< _Tp > &_H2p)`  
*Compute approximate values for the Hankel functions of the first and second kinds using Olver's uniform asymptotic expansion to of order nu along with their derivatives.*
- `template<typename _Tp >`  
`void std::__detail::__hankel_uniform_outer (std::complex< _Tp > __nu, std::complex< _Tp > __z, _Tp __eps, std::complex< _Tp > &_zhat, std::complex< _Tp > &_1dnsq, std::complex< _Tp > &_num1d3, std::complex< _Tp > &_num2d3, std::complex< _Tp > &_p, std::complex< _Tp > &_p2, std::complex< _Tp > &_etm3h, std::complex< _Tp > &_etrat, std::complex< _Tp > &_Aip, std::complex< _Tp > &_o4dp, std::complex< _Tp > &_Aim, std::complex< _Tp > &_o4dm, std::complex< _Tp > &_od2p, std::complex< _Tp > &_od0dp, std::complex< _Tp > &_od2m, std::complex< _Tp > &_od0dm)`  
*Compute outer factors and associated functions of z and nu appearing in Olver's uniform asymptotic expansions of the Hankel functions of the first and second kinds and their derivatives. The various functions of z and nu returned by `hankel_uniform_outer` are available for use in computing further terms in the expansions.*
- `template<typename _Tp >`  
`void std::__detail::__hankel_uniform_sum (std::complex< _Tp > __p, std::complex< _Tp > __p2, std::complex< _Tp > __num2, std::complex< _Tp > __zetam3hf, std::complex< _Tp > _Aip, std::complex< _Tp > _o4dp, std::complex< _Tp > _Aim, std::complex< _Tp > _o4dm, std::complex< _Tp > _od2p, std::complex< _Tp > _od0dp, std::complex< _Tp > _od2m, std::complex< _Tp > _od0dm, _Tp __eps, std::complex< _Tp > &_H1sum, std::complex< _Tp > &_H1psum, std::complex< _Tp > &_H2sum, std::complex< _Tp > &_H2psum)`  
*Compute the sums in appropriate linear combinations appearing in Olver's uniform asymptotic expansions for the Hankel functions of the first and second kinds and their derivatives, using up to nterms (less than 5) to achieve relative error eps.*
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__sph_bessel (unsigned int __n, std::complex< _Tp > __z)`  
*Return the complex spherical Bessel function.*
- `template<typename _Tp >`  
`void std::__detail::__sph_hankel (unsigned int __n, std::complex< _Tp > __z, std::complex< _Tp > &_H1, std::complex< _Tp > &_H1p, std::complex< _Tp > &_H2, std::complex< _Tp > &_H2p)`  
*Helper to compute complex spherical Hankel functions and their derivatives.*
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__sph_hankel_1 (unsigned int __n, std::complex< _Tp > __z)`

*Return the complex spherical Hankel function of the first kind.*

- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__sph_hankel_2 (unsigned int __n, std::complex< _Tp > __z)`

*Return the complex spherical Hankel function of the second kind.*

- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__sph_neumann (unsigned int __n, std::complex< _Tp > __z)`

*Return the complex spherical Neumann function.*

### 10.12.1 Detailed Description

This is an internal header file, included by other library headers. You should not attempt to use it directly.

### 10.12.2 Macro Definition Documentation


#### 10.12.2.1 `#define _GLIBCXX_BITS_SF_HANKEL_TCC 1`

Definition at line 31 of file `sf_hankel.tcc`.

## 10.13 `bits/sf_hankel_new.tcc` File Reference

```
#include <complex>
#include <limits>
#include <vector>
#include "specfun_util.h"
#include "complex_util.h"
```

Include dependency graph for `sf_hankel_new.tcc`:

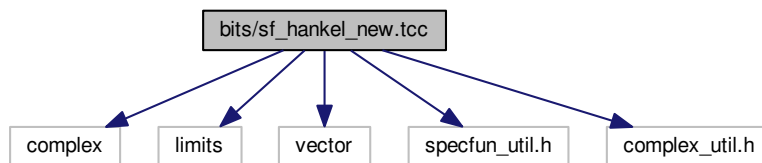

### Macros

- `#define _GLIBCXX_BITS_SF_HANKEL_NEW_TCC 1`

### 10.13.1 Macro Definition Documentation


#### 10.13.1.1 `#define _GLIBCXX_BITS_SF_HANKEL_NEW_TCC 1`

Definition at line 31 of file `sf_hankel_new.tcc`.


## 10.14 bits/sf\_hermite.tcc File Reference

```
#include <ext/math_const.h>
```

Include dependency graph for sf\_hermite.tcc:



This graph shows which files directly or indirectly include this file:



### Namespaces

- [std](#)
- [std::\\_\\_detail](#)

### Macros

- [#define \\_GLIBCXX\\_BITS\\_SF\\_HERMITE\\_TCC 1](#)

### Functions

- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_poly\\_hermite \(unsigned int \\_\\_n, \\_Tp \\_\\_x\)](#)  
*This routine returns the Hermite polynomial of order  $n$ :  $H_n(x)$ .*

- `template<typename _Tp >`  
`_Tp std::__detail::__poly_hermite_asymp` (unsigned int \_\_n, \_Tp \_\_x)  
*This routine returns the Hermite polynomial of large order  $n$ :  $H_n(x)$ . We assume here that  $x \geq 0$ .*
- `template<typename _Tp >`  
`_Tp std::__detail::__poly_hermite_recursion` (unsigned int \_\_n, \_Tp \_\_x)  
*This routine returns the Hermite polynomial of order  $n$ :  $H_n(x)$  by recursion on  $n$ .*

### 10.14.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include `<cmath>`.


### 10.14.2 Macro Definition Documentation

#### 10.14.2.1 `#define _GLIBCXX_BITS_SF_HERMITE_TCC 1`

Definition at line 42 of file `sf_hermite.tcc`.

## 10.15 `bits/sf_hydrogen.tcc` File Reference

This graph shows which files directly or indirectly include this file:



### Namespaces

- `std`
- `std::__detail`

### Macros

- `#define _GLIBCXX_BITS_SF_HYDROGEN_TCC 1`

## Functions

- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__hydrogen` (const unsigned int \_\_n, const unsigned int \_\_l, const unsigned int \_\_m, const \_Tp \_\_Z, const \_Tp \_\_r, const \_Tp \_\_theta, const \_Tp \_\_phi)

### 10.15.1 Detailed Description

This is an internal header file, included by other library headers. You should not attempt to use it directly.

### 10.15.2 Macro Definition Documentation


#### 10.15.2.1 `#define _GLIBCXX_BITS_SF_HYDROGEN_TCC 1`

Definition at line 31 of file sf\_hydrogen.tcc.


## 10.16 bits/sf\_hyperg.tcc File Reference

```
#include <ext/math_const.h>
```

Include dependency graph for sf\_hyperg.tcc:



This graph shows which files directly or indirectly include this file:



## Namespaces

- [std](#)
- [std::\\_\\_detail](#)

## Macros

- `#define \_GLIBCXX\_BITS\_SF\_HYPERG\_TCC 1`

## Functions

- `template<typename _Tp >`  
`\_Tp std::\_\_detail::\_\_conf\_hyperg (_Tp __a, _Tp __c, _Tp __x)`  
*Return the confluent hypergeometric function  ${}_1F_1(a; c; x)$ .*
- `template<typename _Tp >`  
`\_Tp std::\_\_detail::\_\_conf\_hyperg\_lim (_Tp __c, _Tp __x)`  
*Return the confluent hypergeometric limit function  ${}_0F_1(-; c; x)$ .*
- `template<typename _Tp >`  
`\_Tp std::\_\_detail::\_\_conf\_hyperg\_lim\_series (_Tp __c, _Tp __x)`  
*This routine returns the confluent hypergeometric limit function by series expansion.*
- `template<typename _Tp >`  
`\_Tp std::\_\_detail::\_\_conf\_hyperg\_luke (_Tp __a, _Tp __c, _Tp __xin)`  
*Return the hypergeometric function  ${}_1F_1(a; c; x)$  by an iterative procedure described in Luke, Algorithms for the Computation of Mathematical Functions.*
- `template<typename _Tp >`  
`\_Tp std::\_\_detail::\_\_conf\_hyperg\_series (_Tp __a, _Tp __c, _Tp __x)`  
*This routine returns the confluent hypergeometric function by series expansion.*
- `template<typename _Tp >`  
`\_Tp std::\_\_detail::\_\_hyperg (_Tp __a, _Tp __b, _Tp __c, _Tp __x)`  
*Return the hypergeometric function  ${}_2F_1(a, b; c; x)$ .*
- `template<typename _Tp >`  
`\_Tp std::\_\_detail::\_\_hyperg\_luke (_Tp __a, _Tp __b, _Tp __c, _Tp __xin)`



Return the hypergeometric function  ${}_2F_1(a, b; c; x)$  by an iterative procedure described in Luke, *Algorithms for the Computation of Mathematical Functions*.

- `template<typename _Tp >`  
`_Tp std::__detail::__hyperg_reflect (_Tp __a, _Tp __b, _Tp __c, _Tp __x)`

Return the hypergeometric function  ${}_2F_1(a, b; c; x)$  by the reflection formulae in Abramowitz & Stegun formula 15.3.6 for  $d = c - a - b$  not integral and formula 15.3.11 for  $d = c - a - b$  integral. This assumes  $a, b, c \neq$  negative integer.

- `template<typename _Tp >`  
`_Tp std::__detail::__hyperg_series (_Tp __a, _Tp __b, _Tp __c, _Tp __x)`

Return the hypergeometric function  ${}_2F_1(a, b; c; x)$  by series expansion.

### 10.16.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include `<cmath>`.

### 10.16.2 Macro Definition Documentation


#### 10.16.2.1 `#define _GLIBCXX_BITS_SF_HYPERG_TCC 1`

Definition at line 44 of file `sf_hyperg.tcc`.


## 10.17 bits/sf\_hypint.tcc File Reference

```
#include <ext/math_const.h>
```

Include dependency graph for `sf_hypint.tcc`:



This graph shows which files directly or indirectly include this file:



## Namespaces

- [std](#)
- [std::\\_\\_detail](#)

## Macros

- [#define \\_GLIBCXX\\_SF\\_HYPINT\\_TCC 1](#)

## Functions

- `template<typename _Tp >`  
`std::pair< _Tp, _Tp > std::\_\_detail::\_\_chshint (_Tp __x, _Tp &_Chi, _Tp &_Shi)`  
*This function returns the hyperbolic cosine  $Chi(x)$  and hyperbolic sine  $Shi(x)$  integrals as a pair.*
- `template<typename _Tp >`  
`void std::\_\_detail::\_\_chshint\_cont\_frac (_Tp __t, _Tp &_Chi, _Tp &_Shi)`  
*This function computes the hyperbolic cosine  $Chi(x)$  and hyperbolic sine  $Shi(x)$  integrals by continued fraction for positive argument.*
- `template<typename _Tp >`  
`void std::\_\_detail::\_\_chshint\_series (_Tp __t, _Tp &_Chi, _Tp &_Shi)`  
*This function computes the hyperbolic cosine  $Chi(x)$  and hyperbolic sine  $Shi(x)$  integrals by series summation for positive argument.*

### 10.17.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include `<cmath>`.

### 10.17.2 Macro Definition Documentation


#### 10.17.2.1 [#define \\_GLIBCXX\\_SF\\_HYPINT\\_TCC 1](#)

Definition at line 31 of file `sf_hypint.tcc`.


## 10.18 bits/sf\_jacobi.tcc File Reference

```
#include <ext/math_const.h>
```

Include dependency graph for sf\_jacobi.tcc:



This graph shows which files directly or indirectly include this file:



### Namespaces

- [std](#)
- [std::\\_\\_detail](#)

### Macros

- [#define \\_GLIBCXX\\_SF\\_JACOBI\\_TCC 1](#)

### Functions

- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_poly\\_jacobi](#) (unsigned int \_\_n, \_Tp \_\_alpha, \_Tp \_\_beta, \_Tp \_\_x)

- `template<typename _Tp >`  
`_Tp std::__detail::__poly_radial_jacobi` (unsigned int \_\_n, unsigned int \_\_m, \_Tp \_\_rho)
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > std::__detail::__zernike` (unsigned int \_\_n, int \_\_m, \_Tp \_\_rho, \_Tp \_\_phi)

### 10.18.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include `<cmath>`.

### 10.18.2 Macro Definition Documentation


#### 10.18.2.1 `#define _GLIBCXX_SF_JACOBI_TCC 1`

Definition at line 31 of file `sf_jacobi.tcc`.


## 10.19 bits/sf\_laguerre.tcc File Reference

```
#include <ext/math_const.h>
```

Include dependency graph for `sf_laguerre.tcc`:



This graph shows which files directly or indirectly include this file:



## Namespaces

- [std](#)
- [std::\\_\\_detail](#)

## Macros

- `#define _GLIBCXX_BITS_SF_LAGUERRE_TCC 1`

## Functions

- `template<typename _Tp >`  
`_Tp std::__detail::__assoc_laguerre` (unsigned int \_\_n, unsigned int \_\_m, \_Tp \_\_x)  
*This routine returns the associated Laguerre polynomial of order n, degree m:  $L_n^m(x)$ .*
- `template<typename _Tp >`  
`_Tp std::__detail::__laguerre` (unsigned int \_\_n, \_Tp \_\_x)  
*This routine returns the Laguerre polynomial of order n:  $L_n(x)$ .*
- `template<typename _Tpa, typename _Tp >`  
`_Tp std::__detail::__poly_laguerre` (unsigned int \_\_n, \_Tpa \_\_alpha1, \_Tp \_\_x)  
*This routine returns the associated Laguerre polynomial of order n, degree  $\alpha$ :  $L_n^\alpha(x)$ .*
- `template<typename _Tpa, typename _Tp >`  
`_Tp std::__detail::__poly_laguerre_hyperg` (unsigned int \_\_n, \_Tpa \_\_alpha1, \_Tp \_\_x)  
*Evaluate the polynomial based on the confluent hypergeometric function in a safe way, with no restriction on the arguments.*
- `template<typename _Tpa, typename _Tp >`  
`_Tp std::__detail::__poly_laguerre_large_n` (unsigned \_\_n, \_Tpa \_\_alpha1, \_Tp \_\_x)  
*This routine returns the associated Laguerre polynomial of order n, degree  $\alpha$  for large n. Abramowitz & Stegun, 13.5.21.*
- `template<typename _Tpa, typename _Tp >`  
`_Tp std::__detail::__poly_laguerre_recursion` (unsigned int \_\_n, \_Tpa \_\_alpha1, \_Tp \_\_x)  
*This routine returns the associated Laguerre polynomial of order n, degree  $\alpha$ :  $L_n^\alpha(x)$  by recursion.*

### 10.19.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include `<cmath>`.

### 10.19.2 Macro Definition Documentation


#### 10.19.2.1 `#define _GLIBCXX_BITS_SF_LAGUERRE_TCC 1`

Definition at line 44 of file `sf_laguerre.tcc`.


## 10.20 `bits/sf_legendre.tcc` File Reference

```
#include <ext/math_const.h>
```

Include dependency graph for `sf_legendre.tcc`:



This graph shows which files directly or indirectly include this file:



## Namespaces

- [std](#)

- [std::\\_\\_detail](#)

## Macros

- `#define _GLIBCXX_BITS_SF_LEGENDRE_TCC 1`

## Functions

- `template<typename _Tp >`  
`_Tp std::__detail::__assoc_legendre_p (unsigned int __l, unsigned int __m, _Tp __x)`  
*Return the associated Legendre function by recursion on  $l$  and downward recursion on  $m$ .*
- `template<typename _Tp >`  
`_Tp std::__detail::__poly_legendre_p (unsigned int __l, _Tp __x)`  
*Return the Legendre polynomial by upward recursion on order  $l$ .*
- `template<typename _Tp >`  
`_Tp std::__detail::__poly_legendre_q (unsigned int __l, _Tp __x)`  
*Return the Legendre function of the second kind by upward recursion on order  $l$ .*
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__sph_harmonic (unsigned int __l, int __m, _Tp __theta, _Tp __phi)`  
*Return the spherical harmonic function.*
- `template<typename _Tp >`  
`_Tp std::__detail::__sph_legendre (unsigned int __l, unsigned int __m, _Tp __theta)`  
*Return the spherical associated Legendre function.*

### 10.20.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include `<cmath>`.

### 10.20.2 Macro Definition Documentation


#### 10.20.2.1 `#define _GLIBCXX_BITS_SF_LEGENDRE_TCC 1`

Definition at line 47 of file `sf_legendre.tcc`.


## 10.21 bits/sf\_mod\_bessel.tcc File Reference

```
#include <utility>
#include <ext/math_const.h>
```

Include dependency graph for `sf_mod_bessel.tcc`:

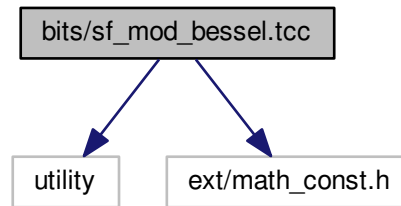

This graph shows which files directly or indirectly include this file:



## Namespaces

- `std`
- `std::__detail`

## Macros

- `#define _GLIBCXX_BITS_SF_MOD_BESSEL_TCC 1`

## Functions

- `template<typename _Tp >`  
`void std::__detail::__airy (_Tp __z, _Tp &_Ai, _Tp &_Bi, _Tp &_Aip, _Tp &_Bip)`  
*Compute the Airy functions  $Ai(x)$  and  $Bi(x)$  and their first derivatives  $Ai'(x)$  and  $Bi'(x)$  respectively.*
- `template<typename _Tp >`  
`_Tp std::__detail::__cyl_bessel_i (_Tp __nu, _Tp __x)`  
*Return the regular modified Bessel function of order  $\nu$ :  $I_\nu(x)$ .*



- `template<typename _Tp >`  
`void std::__detail::__cyl_bessel_ik (_Tp __nu, _Tp __x, _Tp &_Inu, _Tp &_Knu, _Tp &_Ipnu, _Tp &_Kpnu)`  
*Return the modified cylindrical Bessel functions and their derivatives of order  $\nu$  by various means.*
- `template<typename _Tp >`  
`void std::__detail::__cyl_bessel_ik_asymp (_Tp __nu, _Tp __x, _Tp &_Inu, _Tp &_Knu, _Tp &_Ipnu, _Tp &_Kpnu)`  
*This routine computes the asymptotic modified cylindrical Bessel and functions of order  $\nu$ :  $I_\nu(x)$ ,  $N_\nu(x)$ . Use this for  $x \gg \nu^2 + 1$ .*
- `template<typename _Tp >`  
`void std::__detail::__cyl_bessel_ik_steeds (_Tp __nu, _Tp __x, _Tp &_Inu, _Tp &_Knu, _Tp &_Ipnu, _Tp &_Kpnu)`  
*Compute the modified Bessel functions  $I_\nu(x)$  and  $K_\nu(x)$  and their first derivatives  $I'_\nu(x)$  and  $K'_\nu(x)$  respectively. These four functions are computed together for numerical stability.*
- `template<typename _Tp >`  
`_Tp std::__detail::__cyl_bessel_k (_Tp __nu, _Tp __x)`  
*Return the irregular modified Bessel function  $K_\nu(x)$  of order  $\nu$ .*
- `template<typename _Tp >`  
`void std::__detail::__fock_airy (_Tp __x, std::complex< _Tp > &__w1, std::complex< _Tp > &__w2, std::complex< _Tp > &__w1p, std::complex< _Tp > &__w2p)`  
*Compute the Fock-type Airy functions  $w_1(x)$  and  $w_2(x)$  and their first derivatives  $w'_1(x)$  and  $w'_2(x)$  respectively.*

$$w_1(x) = \sqrt{\pi}(Ai(x) + iBi(x))$$

$$w_2(x) = \sqrt{\pi}(Ai(x) - iBi(x))$$
- `template<typename _Tp >`  
`void std::__detail::__sph_bessel_ik (unsigned int __n, _Tp __x, _Tp &__i_n, _Tp &__k_n, _Tp &__ip_n, _Tp &__kp_n)`  
*Compute the spherical modified Bessel functions  $i_n(x)$  and  $k_n(x)$  and their first derivatives  $i'_n(x)$  and  $k'_n(x)$  respectively.*

### 10.21.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include `<cmath>`.


### 10.21.2 Macro Definition Documentation

#### 10.21.2.1 `#define _GLIBCXX_BITS_SF_MOD_BESSEL_TCC 1`

Definition at line 47 of file `sf_mod_bessel.tcc`.

## 10.22 bits/sf\_owens\_t.tcc File Reference

This graph shows which files directly or indirectly include this file:



### Namespaces

- [std](#)
- [std::\\_\\_detail](#)

### Macros

- [#define \\_GLIBCXX\\_BITS\\_SF\\_OWENS\\_T\\_TCC 1](#)

### Functions

- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_gauss \(\\_Tp \\_\\_x\)](#)
- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_owens\\_t \(\\_Tp \\_\\_h, \\_Tp \\_\\_a\)](#)
- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_znorm1 \(\\_Tp \\_\\_x\)](#)
- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_znorm2 \(\\_Tp \\_\\_x\)](#)

#### 10.22.1 Detailed Description

This is an internal header file, included by other library headers. You should not attempt to use it directly.

#### 10.22.2 Macro Definition Documentation


##### 10.22.2.1 [#define \\_GLIBCXX\\_BITS\\_SF\\_OWENS\\_T\\_TCC 1](#)

Definition at line 31 of file `sf_owens_t.tcc`.


## 10.23 bits/sf\_polylog.tcc File Reference

```
#include <ext/math_const.h>
```

Include dependency graph for sf\_polylog.tcc:



This graph shows which files directly or indirectly include this file:



### Namespaces

- [std](#)
- [std::\\_\\_detail](#)

### Macros

- [#define \\_GLIBCXX\\_BITS\\_SF\\_POLYLOG\\_TCC 1](#)

### Functions

- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_bose\\_einstein \(\\_Tp \\_\\_s, \\_Tp \\_\\_x\)](#)

- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__clamp_0_m2pi (std::complex< _Tp > __w)`
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__clamp_pi (std::complex< _Tp > __w)`
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__clausen (unsigned int __m, std::complex< _Tp > __w)`
- `template<typename _Tp >`  
`_Tp std::__detail::__clausen (unsigned int __m, _Tp __w)`
- `template<typename _Tp >`  
`_Tp std::__detail::__clausen_c (unsigned int __m, std::complex< _Tp > __w)`
- `template<typename _Tp >`  
`_Tp std::__detail::__clausen_c (unsigned int __m, _Tp __w)`
- `template<typename _Tp >`  
`_Tp std::__detail::__clausen_s (unsigned int __m, std::complex< _Tp > __w)`
- `template<typename _Tp >`  
`_Tp std::__detail::__clausen_s (unsigned int __m, _Tp __w)`
- `template<typename _Tp >`  
`_Tp std::__detail::__dirichlet_beta (std::complex< _Tp > __w)`
- `template<typename _Tp >`  
`_Tp std::__detail::__dirichlet_beta (_Tp __w)`
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__dirichlet_eta (std::complex< _Tp > __w)`
- `template<typename _Tp >`  
`_Tp std::__detail::__dirichlet_eta (_Tp __w)`
- `template<typename _Tp >`  
`_Tp std::__detail::__fermi_dirac (_Tp __s, _Tp __x)`
- `template<typename _Tp >`  
`bool std::__detail::__fpequal (const _Tp &__a, const _Tp &__b)`
- `template<typename _Tp >`  
`bool std::__detail::__fpimag (const std::complex< _Tp > &__w)`
- `template<typename _Tp >`  
`bool std::__detail::__fpimag (const _Tp)`
- `template<typename _Tp >`  
`bool std::__detail::__fpreal (const std::complex< _Tp > &__w)`
- `template<typename _Tp >`  
`bool std::__detail::__fpreal (const _Tp)`
- `template<typename _Tp >`  
`std::complex< FType > std::__detail::__hurwitz_zeta (const _Tp __s, std::complex< _Tp > __a)`
- `template<typename _Tp >`  
`_Tp std::__detail::__polylog (_Tp __s, _Tp __x)`
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__polylog (_Tp __s, std::complex< _Tp > __w)`
- `template<typename _Tp, typename ArgType >`  
`__gnu_cxx::__promote_num_t< std::complex< _Tp >, ArgType > std::__detail::__polylog_exp (_Tp __s, ArgType __w)`
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__polylog_exp_asymp (const _Tp __s, std::complex< _Tp > __w)`
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__polylog_exp_int_neg (const int __s, std::complex< _Tp > __w)`
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__polylog_exp_int_neg (const int __s, _Tp __w)`
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__polylog_exp_int_pos (const unsigned int __s, std::complex< _Tp > __w)`

- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__polylog_exp_int_pos` (const unsigned int \_\_s, \_Tp \_\_w)
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__polylog_exp_neg` (\_Tp \_\_s, std::complex< \_Tp > \_\_w)
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__polylog_exp_neg` (int \_\_s, std::complex< \_Tp > \_\_w)
- `template<typename _Tp, int __sigma>`  
`std::complex< _Tp > std::__detail::__polylog_exp_neg_even` (unsigned int \_\_n, std::complex< \_Tp > \_\_w)
- `template<typename _Tp, int __sigma>`  
`std::complex< _Tp > std::__detail::__polylog_exp_neg_odd` (unsigned int \_\_n, std::complex< \_Tp > \_\_w)
- `template<typename _PowTp, typename _Tp >`  
`_Tp std::__detail::__polylog_exp_negative_real_part` (\_PowTp \_\_s, \_Tp \_\_w)
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__polylog_exp_pos` (unsigned int \_\_s, std::complex< \_Tp > \_\_w)
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__polylog_exp_pos` (unsigned int \_\_s, \_Tp \_\_w)
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__polylog_exp_pos` (\_Tp \_\_s, std::complex< \_Tp > \_\_w)
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__polylog_exp_real_neg` (\_Tp \_\_s, std::complex< \_Tp > \_\_w)
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__polylog_exp_real_neg` (\_Tp \_\_s, \_Tp \_\_w)
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__polylog_exp_real_pos` (\_Tp \_\_s, std::complex< \_Tp > \_\_w)
- `template<typename _Tp >`  
`std::complex< _Tp > std::__detail::__polylog_exp_real_pos` (\_Tp \_\_s, \_Tp \_\_w)
- `template<typename _Tp = double>`  
`_Tp std::__detail::__evenzeta` (unsigned int \_\_k)

### 10.23.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include `<cmath>`.

### 10.23.2 Macro Definition Documentation


#### 10.23.2.1 `#define _GLIBCXX_BITS_SF_POLYLOG_TCC 1`

Definition at line 41 of file `sf_polylog.tcc`.


## 10.24 bits/sf\_theta.tcc File Reference

```
#include <vector>
#include <tuple>
#include <ext/math_const.h>
```

Include dependency graph for `sf_theta.tcc`:

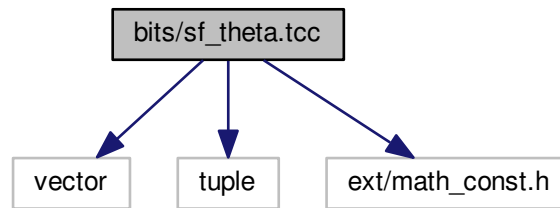

This graph shows which files directly or indirectly include this file:



## Namespaces

- [std](#)
- [std::\\_\\_detail](#)

## Macros

- [#define \\_GLIBCXX\\_SF\\_THETA\\_TCC 1](#)

## Functions

- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_ellnome \(\\_Tp \\_\\_k\)](#)
- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_ellnome\\_k \(\\_Tp \\_\\_k\)](#)
- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_ellnome\\_series \(\\_Tp \\_\\_k\)](#)

- `template<typename _Tp >`  
`std::tuple< _Tp, _Tp, _Tp > std::__detail::__jacobi_sncndn (_Tp __k, _Tp __u)`
- `template<typename _Tp >`  
`_Tp std::__detail::__theta_1 (_Tp __nu, _Tp __x)`
- `template<typename _Tp >`  
`_Tp std::__detail::__theta_2 (_Tp __nu, _Tp __x)`
- `template<typename _Tp >`  
`_Tp std::__detail::__theta_2_asymp (_Tp __nu, _Tp __x)`
- `template<typename _Tp >`  
`_Tp std::__detail::__theta_2_sum (_Tp __nu, _Tp __x)`
- `template<typename _Tp >`  
`_Tp std::__detail::__theta_3 (_Tp __nu, _Tp __x)`
- `template<typename _Tp >`  
`_Tp std::__detail::__theta_3_asymp (_Tp __nu, _Tp __x)`
- `template<typename _Tp >`  
`_Tp std::__detail::__theta_3_sum (_Tp __nu, _Tp __x)`
- `template<typename _Tp >`  
`_Tp std::__detail::__theta_4 (_Tp __nu, _Tp __x)`
- `template<typename _Tp >`  
`_Tp std::__detail::__theta_c (_Tp __k, _Tp __x)`
- `template<typename _Tp >`  
`_Tp std::__detail::__theta_d (_Tp __k, _Tp __x)`
- `template<typename _Tp >`  
`_Tp std::__detail::__theta_n (_Tp __k, _Tp __x)`
- `template<typename _Tp >`  
`_Tp std::__detail::__theta_s (_Tp __k, _Tp __x)`

### 10.24.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include `<cmath>`.


### 10.24.2 Macro Definition Documentation

#### 10.24.2.1 `#define _GLIBCXX_SF_THETA_TCC 1`


Definition at line 31 of file `sf_theta.tcc`.

## 10.25 bits/sf\_trigint.tcc File Reference

```
#include <ext/math_const.h>  
Include dependency graph for sf_trigint.tcc:
```



This graph shows which files directly or indirectly include this file:



### Namespaces

- [std](#)
- [std::\\_\\_detail](#)

### Macros

- [#define \\_GLIBCXX\\_SF\\_TRIGINT\\_TCC 1](#)

### Enumerations

- [enum { std::\\_\\_detail::SININT, std::\\_\\_detail::COSINT }](#)



## Functions

- `template<typename _Tp >`  
`std::pair< _Tp, _Tp > std::__detail::__sincosint ( _Tp __x)`  
*This function returns the sine  $Si(x)$  and cosine  $Ci(x)$  integrals as a pair.*
- `template<typename _Tp >`  
`void std::__detail::__sincosint_asymp ( _Tp __t, _Tp &_Si, _Tp &_Ci)`  
*This function computes the sine  $Si(x)$  and cosine  $Ci(x)$  integrals by asymptotic series summation for positive argument.*
- `template<typename _Tp >`  
`void std::__detail::__sincosint_cont_frac ( _Tp __t, _Tp &_Si, _Tp &_Ci)`  
*This function computes the sine  $Si(x)$  and cosine  $Ci(x)$  integrals by continued fraction for positive argument.*
- `template<typename _Tp >`  
`void std::__detail::__sincosint_series ( _Tp __t, _Tp &_Si, _Tp &_Ci)`  
*This function computes the sine  $Si(x)$  and cosine  $Ci(x)$  integrals by series summation for positive argument.*

### 10.25.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include `<cmath>`.

### 10.25.2 Macro Definition Documentation


#### 10.25.2.1 `#define _GLIBCXX_SF_TRIGINT_TCC 1`

Definition at line 31 of file `sf_trigint.tcc`.


## 10.26 bits/sf\_zeta.tcc File Reference

```
#include <ext/math_const.h>
```

Include dependency graph for `sf_zeta.tcc`:



This graph shows which files directly or indirectly include this file:



## Namespaces

- [std](#)
- [std::\\_\\_detail](#)

## Macros

- [#define \\_GLIBCXX\\_BITS\\_SF\\_ZETA\\_TCC 1](#)

## Functions

- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_dilog \(\\_Tp \\_\\_x\)](#)  
Compute the dilogarithm function  $Li_2(x)$  by summation for  $x \leq 1$ .
- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_hurwitz\\_zeta \(\\_Tp \\_\\_s, \\_Tp \\_\\_a\)](#)  
Return the Hurwitz zeta function  $\zeta(s, a)$  for all  $s \neq 1$  and  $a > -1$ .
- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_hurwitz\\_zeta\\_euler\\_maclaurin \(\\_Tp \\_\\_s, \\_Tp \\_\\_a\)](#)  
Return the Hurwitz zeta function  $\zeta(s, a)$  for all  $s \neq 1$  and  $a > -1$ .
- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_riemann\\_zeta \(\\_Tp \\_\\_s\)](#)  
Return the Riemann zeta function  $\zeta(s)$ .
- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_riemann\\_zeta\\_alt \(\\_Tp \\_\\_s\)](#)  
Evaluate the Riemann zeta function  $\zeta(s)$  by an alternate series for  $s > 0$ .
- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_riemann\\_zeta\\_euler\\_maclaurin \(\\_Tp \\_\\_s\)](#)  
Evaluate the Riemann zeta function  $\zeta(s)$  by an alternate series for  $s > 0$ .
- [template<typename \\_Tp > \\_Tp std::\\_\\_detail::\\_\\_riemann\\_zeta\\_glob \(\\_Tp \\_\\_s\)](#)  
Evaluate the Riemann zeta function by series for all  $s \neq 1$ . Convergence is great until largish negative numbers. Then the convergence of the  $> 0$  sum gets better.

- `template<typename _Tp >`  
`_Tp std::__detail::__riemann_zeta_m_1 (_Tp __s)`  
*Return the Riemann zeta function  $\zeta(s) - 1$ .*
- `template<typename _Tp >`  
`_Tp std::__detail::__riemann_zeta_m_1_sum (_Tp __s)`  
*Return the Riemann zeta function  $\zeta(s) - 1$  by summation for  $s > 1$ . This is a small remainder for large  $s$ .*
- `template<typename _Tp >`  
`_Tp std::__detail::__riemann_zeta_product (_Tp __s)`  
*Compute the Riemann zeta function  $\zeta(s)$  using the product over prime factors.*
- `template<typename _Tp >`  
`_Tp std::__detail::__riemann_zeta_sum (_Tp __s)`  
*Compute the Riemann zeta function  $\zeta(s)$  by summation for  $s > 1$ .*

## Variables

- `constexpr size_t std::__detail::__Num_Euler_Maclaurin_zeta = 100`
- `constexpr long double std::__detail::__S_Euler_Maclaurin_zeta [_Num_Euler_Maclaurin_zeta]`
- `constexpr size_t std::__detail::__S_num_zetam1 = 33`
- `constexpr long double std::__detail::__S_zetam1 [_S_num_zetam1]`

### 10.26.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include `<cmath>`.

### 10.26.2 Macro Definition Documentation

#### 10.26.2.1 `#define _GLIBCXX_BITS_SF_ZETA_TCC 1`

Definition at line 46 of file `sf_zeta.tcc`.

## 10.27 bits/specfun.h File Reference

```
#include <bits/c++config.h>
#include <limits>
#include <bits/stl_algobase.h>
#include <bits/specfun_util.h>
#include <type_traits>
#include <bits/numeric_limits.h>
#include <bits/complex_util.h>
#include <bits/sf_gamma.tcc>
#include <bits/sf_bessel.tcc>
#include <bits/sf_beta.tcc>
#include <bits/sf_cardinal.tcc>
#include <bits/sf_chebyshev.tcc>
#include <bits/sf_dawson.tcc>
#include <bits/sf_ellint.tcc>
#include <bits/sf_expint.tcc>
#include <bits/sf_fresnel.tcc>
#include <bits/sf_gegenbauer.tcc>
#include <bits/sf_hyperg.tcc>
#include <bits/sf_hypint.tcc>
#include <bits/sf_jacobi.tcc>
#include <bits/sf_laguerre.tcc>
#include <bits/sf_legendre.tcc>
#include <bits/sf_hydrogen.tcc>
#include <bits/sf_mod_bessel.tcc>
#include <bits/sf_hermite.tcc>
#include <bits/sf_theta.tcc>
#include <bits/sf_trigint.tcc>
#include <bits/sf_zeta.tcc>
#include <bits/sf_owens_t.tcc>
#include <bits/sf_polylog.tcc>
#include <bits/sf_airy.tcc>
#include <bits/sf_hankel.tcc>
```

Include dependency graph for specfun.h:



### Namespaces

- [\\_\\_gnu\\_cxx](#)
- [std](#)

### Macros

- [#define \\_\\_cpp\\_lib\\_math\\_special\\_functions 201603L](#)
- [#define \\_\\_STDCPP\\_MATH\\_SPEC\\_FUNCS\\_\\_ 201003L](#)

## Enumerations

- enum { [\\_\\_gnu\\_cxx::GLIBCXX\\_JACOBI\\_SN](#), [\\_\\_gnu\\_cxx::GLIBCXX\\_JACOBI\\_CN](#), [\\_\\_gnu\\_cxx::GLIBCXX\\_JACOBI\\_DN](#) }

## Functions

- template<typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp>](#) [\\_\\_gnu\\_cxx::airy\\_ai](#) (\_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::airy\\_aif](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::airy\\_ail](#) (long double \_\_x)
- template<typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp>](#) [\\_\\_gnu\\_cxx::airy\\_bi](#) (\_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::airy\\_bif](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::airy\\_bil](#) (long double \_\_x)
- template<typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote<\\_Tp>::\\_\\_type](#) [std::assoc\\_laguerre](#) (unsigned int \_\_n, unsigned int \_\_m, \_Tp \_\_x)
- float [std::assoc\\_laguerref](#) (unsigned int \_\_n, unsigned int \_\_m, float \_\_x)
- long double [std::assoc\\_laguerrel](#) (unsigned int \_\_n, unsigned int \_\_m, long double \_\_x)
- template<typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote<\\_Tp>::\\_\\_type](#) [std::assoc\\_legendre](#) (unsigned int \_\_l, unsigned int \_\_m, \_Tp \_\_x)
- float [std::assoc\\_legendref](#) (unsigned int \_\_l, unsigned int \_\_m, float \_\_x)
- long double [std::assoc\\_legendrel](#) (unsigned int \_\_l, unsigned int \_\_m, long double \_\_x)
- template<typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp>](#) [\\_\\_gnu\\_cxx::bernoulli](#) (unsigned int \_\_n)
- float [\\_\\_gnu\\_cxx::bernoullif](#) (unsigned int \_\_n)
- long double [\\_\\_gnu\\_cxx::bernoullil](#) (unsigned int \_\_n)
- template<typename \_Tpa, typename \_Tpb >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_2<\\_Tpa, \\_Tpb>::\\_\\_type](#) [std::beta](#) (\_Tpa \_\_a, \_Tpb \_\_b)
- float [std::betaf](#) (float \_\_a, float \_\_b)
- long double [std::betal](#) (long double \_\_a, long double \_\_b)
- template<typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp>](#) [\\_\\_gnu\\_cxx::bincoef](#) (unsigned int \_\_n, unsigned int \_\_k)
- float [\\_\\_gnu\\_cxx::bincoeff](#) (unsigned int \_\_n, unsigned int \_\_k)
- long double [\\_\\_gnu\\_cxx::bincoefl](#) (unsigned int \_\_n, unsigned int \_\_k)
- template<typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp>](#) [\\_\\_gnu\\_cxx::chebyshev\\_t](#) (unsigned int \_\_n, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::chebyshev\\_tf](#) (unsigned int \_\_n, float \_\_x)
- long double [\\_\\_gnu\\_cxx::chebyshev\\_tl](#) (unsigned int \_\_n, long double \_\_x)
- template<typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp>](#) [\\_\\_gnu\\_cxx::chebyshev\\_u](#) (unsigned int \_\_n, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::chebyshev\\_uf](#) (unsigned int \_\_n, float \_\_x)
- long double [\\_\\_gnu\\_cxx::chebyshev\\_ul](#) (unsigned int \_\_n, long double \_\_x)
- template<typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp>](#) [\\_\\_gnu\\_cxx::chebyshev\\_v](#) (unsigned int \_\_n, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::chebyshev\\_vf](#) (unsigned int \_\_n, float \_\_x)
- long double [\\_\\_gnu\\_cxx::chebyshev\\_vl](#) (unsigned int \_\_n, long double \_\_x)
- template<typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp>](#) [\\_\\_gnu\\_cxx::chebyshev\\_w](#) (unsigned int \_\_n, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::chebyshev\\_wf](#) (unsigned int \_\_n, float \_\_x)
- long double [\\_\\_gnu\\_cxx::chebyshev\\_wl](#) (unsigned int \_\_n, long double \_\_x)

- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::clausen` (unsigned int \_\_m, \_Tp \_\_w)
- `template<typename _Tp >`  
`std::complex< __gnu_cxx::__promote_num_t< _Tp > > __gnu_cxx::clausen` (unsigned int \_\_m, std::complex< \_Tp > \_\_w)
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::clausen_c` (unsigned int \_\_m, \_Tp \_\_w)
- `float __gnu_cxx::clausen_cf` (unsigned int \_\_m, float \_\_w)
- `long double __gnu_cxx::clausen_cl` (unsigned int \_\_m, long double \_\_w)
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::clausen_s` (unsigned int \_\_m, \_Tp \_\_w)
- `float __gnu_cxx::clausen_sf` (unsigned int \_\_m, float \_\_w)
- `long double __gnu_cxx::clausen_sl` (unsigned int \_\_m, long double \_\_w)
- `float __gnu_cxx::clausenf` (unsigned int \_\_m, float \_\_w)
- `std::complex< float > __gnu_cxx::clausenf` (unsigned int \_\_m, std::complex< float > \_\_w)
- `long double __gnu_cxx::clausenl` (unsigned int \_\_m, long double \_\_w)
- `std::complex< long double > __gnu_cxx::clausenl` (unsigned int \_\_m, std::complex< long double > \_\_w)
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type std::comp_ellint_1` (\_Tp \_\_k)
- `float std::comp_ellint_1f` (float \_\_k)
- `long double std::comp_ellint_1l` (long double \_\_k)
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type std::comp_ellint_2` (\_Tp \_\_k)
- `float std::comp_ellint_2f` (float \_\_k)
- `long double std::comp_ellint_2l` (long double \_\_k)
- `template<typename _Tp, typename _Tpn >`  
`__gnu_cxx::__promote_2< _Tp, _Tpn >::__type std::comp_ellint_3` (\_Tp \_\_k, \_Tpn \_\_nu)
- `float std::comp_ellint_3f` (float \_\_k, float \_\_nu)
- Return the complete elliptic integral of the third kind  $\Pi(k, \nu)$  for float modulus  $k$ .*
- `long double std::comp_ellint_3l` (long double \_\_k, long double \_\_nu)
- Return the complete elliptic integral of the third kind  $\Pi(k, \nu)$  for long double modulus  $k$ .*
- `template<typename _Tk >`  
`__gnu_cxx::__promote_num_t< _Tk > __gnu_cxx::comp_ellint_d` (\_Tk \_\_k)
- `float __gnu_cxx::comp_ellint_df` (float \_\_k)
- `long double __gnu_cxx::comp_ellint_dl` (long double \_\_k)
- `float __gnu_cxx::comp_ellint_rf` (float \_\_x, float \_\_y)
- `long double __gnu_cxx::comp_ellint_rf` (long double \_\_x, long double \_\_y)
- `template<typename _Tx, typename _Ty >`  
`__gnu_cxx::__promote_num_t< _Tx, _Ty > __gnu_cxx::comp_ellint_rf` (\_Tx \_\_x, \_Ty \_\_y)
- `float __gnu_cxx::comp_ellint_rg` (float \_\_x, float \_\_y)
- `long double __gnu_cxx::comp_ellint_rg` (long double \_\_x, long double \_\_y)
- `template<typename _Tx, typename _Ty >`  
`__gnu_cxx::__promote_num_t< _Tx, _Ty > __gnu_cxx::comp_ellint_rg` (\_Tx \_\_x, \_Ty \_\_y)
- `template<typename _Tpa, typename _Tpc, typename _Tp >`  
`__gnu_cxx::__promote_3< _Tpa, _Tpc, _Tp >::__type __gnu_cxx::conf_hyperg` (\_Tpa \_\_a, \_Tpc \_\_c, \_Tp \_\_x)
- `template<typename _Tpc, typename _Tp >`  
`__gnu_cxx::__promote_2< _Tpc, _Tp >::__type __gnu_cxx::conf_hyperg_lim` (\_Tpc \_\_c, \_Tp \_\_x)
- `float __gnu_cxx::conf_hyperg_limf` (float \_\_c, float \_\_x)
- `long double __gnu_cxx::conf_hyperg_liml` (long double \_\_c, long double \_\_x)
- `float __gnu_cxx::conf_hypergf` (float \_\_a, float \_\_c, float \_\_x)
- `long double __gnu_cxx::conf_hypergl` (long double \_\_a, long double \_\_c, long double \_\_x)

- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::coshint ( _Tp __x)`
- `float __gnu_cxx::coshintf (float __x)`
- `long double __gnu_cxx::coshintl (long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::cosint ( _Tp __x)`
- `float __gnu_cxx::cosintf (float __x)`
- `long double __gnu_cxx::cosintl (long double __x)`
- `template<typename _Tpnu, typename _Tp >`  
`__gnu_cxx::__promote_2< _Tpnu, _Tp >::type std::cyl_bessel_i ( _Tpnu __nu, _Tp __x)`
- `float std::cyl_bessel_if (float __nu, float __x)`
- `long double std::cyl_bessel_il (long double __nu, long double __x)`
- `template<typename _Tpnu, typename _Tp >`  
`__gnu_cxx::__promote_2< _Tpnu, _Tp >::type std::cyl_bessel_j ( _Tpnu __nu, _Tp __x)`
- `float std::cyl_bessel_jf (float __nu, float __x)`
- `long double std::cyl_bessel_jl (long double __nu, long double __x)`
- `template<typename _Tpnu, typename _Tp >`  
`__gnu_cxx::__promote_2< _Tpnu, _Tp >::type std::cyl_bessel_k ( _Tpnu __nu, _Tp __x)`
- `float std::cyl_bessel_kf (float __nu, float __x)`
- `long double std::cyl_bessel_kl (long double __nu, long double __x)`
- `template<typename _Tpnu, typename _Tp >`  
`std::complex< __gnu_cxx::__promote_num_t< _Tpnu, _Tp > > __gnu_cxx::cyl_hankel_1 ( _Tpnu __nu, _Tp __z)`
- `template<typename _Tpnu, typename _Tp >`  
`std::complex< __gnu_cxx::__promote_num_t< _Tpnu, _Tp > > __gnu_cxx::cyl_hankel_1 (std::complex< _Tpnu > __nu, std::complex< _Tp > __x)`
- `std::complex< float > __gnu_cxx::cyl_hankel_1f (float __nu, float __z)`
- `std::complex< float > __gnu_cxx::cyl_hankel_1f (std::complex< float > __nu, std::complex< float > __x)`
- `std::complex< long double > __gnu_cxx::cyl_hankel_1l (long double __nu, long double __z)`
- `std::complex< long double > __gnu_cxx::cyl_hankel_1l (std::complex< long double > __nu, std::complex< long double > __x)`
- `template<typename _Tpnu, typename _Tp >`  
`std::complex< __gnu_cxx::__promote_num_t< _Tpnu, _Tp > > __gnu_cxx::cyl_hankel_2 ( _Tpnu __nu, _Tp __z)`
- `template<typename _Tpnu, typename _Tp >`  
`std::complex< __gnu_cxx::__promote_num_t< _Tpnu, _Tp > > __gnu_cxx::cyl_hankel_2 (std::complex< _Tpnu > __nu, std::complex< _Tp > __x)`
- `std::complex< float > __gnu_cxx::cyl_hankel_2f (float __nu, float __z)`
- `std::complex< float > __gnu_cxx::cyl_hankel_2f (std::complex< float > __nu, std::complex< float > __x)`
- `std::complex< long double > __gnu_cxx::cyl_hankel_2l (long double __nu, long double __z)`
- `std::complex< long double > __gnu_cxx::cyl_hankel_2l (std::complex< long double > __nu, std::complex< long double > __x)`
- `template<typename _Tpnu, typename _Tp >`  
`__gnu_cxx::__promote_2< _Tpnu, _Tp >::type std::cyl_neumann ( _Tpnu __nu, _Tp __x)`
- `float std::cyl_neumannf (float __nu, float __x)`
- `long double std::cyl_neumannl (long double __nu, long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::dawson ( _Tp __x)`
- `float __gnu_cxx::dawsonf (float __x)`
- `long double __gnu_cxx::dawsonl (long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::digamma ( _Tp __z)`

- float `__gnu_cxx::digammaf` (float `__z`)
- long double `__gnu_cxx::digammal` (long double `__z`)
- template<typename `_Tp` >  
`__gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::dilog` (`_Tp` `__x`)
- float `__gnu_cxx::dilogf` (float `__x`)
- long double `__gnu_cxx::dilogl` (long double `__x`)
- template<typename `_Tp` >  
`_Tp __gnu_cxx::dirichlet_beta` (`_Tp` `__x`)
- float `__gnu_cxx::dirichlet_betaf` (float `__x`)
- long double `__gnu_cxx::dirichlet_betall` (long double `__x`)
- template<typename `_Tp` >  
`_Tp __gnu_cxx::dirichlet_eta` (`_Tp` `__x`)
- float `__gnu_cxx::dirichlet_etaf` (float `__x`)
- long double `__gnu_cxx::dirichlet_etaall` (long double `__x`)
- template<typename `_Tp` >  
`__gnu_cxx::__promote_num_t<_Tp> __gnu_cxx::double_factorial` (int `__n`)
- float `__gnu_cxx::double_factorialf` (int `__n`)
- long double `__gnu_cxx::double_factoriall` (int `__n`)
- template<typename `_Tp`, typename `_Tpp` >  
`__gnu_cxx::__promote_2<_Tp, _Tpp>::__type std::ellint_1` (`_Tp` `__k`, `_Tpp` `__phi`)
- float `std::ellint_1f` (float `__k`, float `__phi`)
- long double `std::ellint_1l` (long double `__k`, long double `__phi`)
- template<typename `_Tp`, typename `_Tpp` >  
`__gnu_cxx::__promote_2<_Tp, _Tpp>::__type std::ellint_2` (`_Tp` `__k`, `_Tpp` `__phi`)
- float `std::ellint_2f` (float `__k`, float `__phi`)
- Return the incomplete elliptic integral of the second kind  $E(k, \phi)$  for float argument.*
- long double `std::ellint_2l` (long double `__k`, long double `__phi`)
- Return the incomplete elliptic integral of the second kind  $E(k, \phi)$ .*
- template<typename `_Tp`, typename `_Tpn`, typename `_Tpp` >  
`__gnu_cxx::__promote_3<_Tp, _Tpn, _Tpp>::__type std::ellint_3` (`_Tp` `__k`, `_Tpn` `__nu`, `_Tpp` `__phi`)
- Return the incomplete elliptic integral of the third kind  $\Pi(k, \nu, \phi)$ .*
- float `std::ellint_3f` (float `__k`, float `__nu`, float `__phi`)
- Return the incomplete elliptic integral of the third kind  $\Pi(k, \nu, \phi)$  for float argument.*
- long double `std::ellint_3l` (long double `__k`, long double `__nu`, long double `__phi`)
- Return the incomplete elliptic integral of the third kind  $\Pi(k, \nu, \phi)$ .*
- template<typename `_Tk`, typename `_Tp`, typename `_Ta`, typename `_Tb` >  
`__gnu_cxx::__promote_num_t<_Tk, _Tp, _Ta, _Tb> __gnu_cxx::ellint_cel` (`_Tk` `__k_c`, `_Tp` `__p`, `_Ta` `__a`, `_Tb` `__b`)
- float `__gnu_cxx::ellint_celf` (float `__k_c`, float `__p`, float `__a`, float `__b`)
- long double `__gnu_cxx::ellint_cell` (long double `__k_c`, long double `__p`, long double `__a`, long double `__b`)
- template<typename `_Tk`, typename `_Tphi` >  
`__gnu_cxx::__promote_num_t<_Tk, _Tphi> __gnu_cxx::ellint_d` (`_Tk` `__k`, `_Tphi` `__phi`)
- float `__gnu_cxx::ellint_df` (float `__k`, float `__phi`)
- long double `__gnu_cxx::ellint_dl` (long double `__k`, long double `__phi`)
- template<typename `_Tp`, typename `_Tk` >  
`__gnu_cxx::__promote_num_t<_Tp, _Tk> __gnu_cxx::ellint_el1` (`_Tp` `__x`, `_Tk` `__k_c`)
- float `__gnu_cxx::ellint_el1f` (float `__x`, float `__k_c`)
- long double `__gnu_cxx::ellint_el1l` (long double `__x`, long double `__k_c`)
- template<typename `_Tp`, typename `_Tk`, typename `_Ta`, typename `_Tb` >  
`__gnu_cxx::__promote_num_t<_Tp, _Tk, _Ta, _Tb> __gnu_cxx::ellint_el2` (`_Tp` `__x`, `_Tk` `__k_c`, `_Ta` `__a`, `_Tb` `__b`)



- float [\\_\\_gnu\\_cxx::ellint\\_el2f](#) (float \_\_x, float \_\_k\_c, float \_\_a, float \_\_b)
- long double [\\_\\_gnu\\_cxx::ellint\\_el2l](#) (long double \_\_x, long double \_\_k\_c, long double \_\_a, long double \_\_b)
- template<typename \_Tx, typename \_Tk, typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tx, \\_Tk, \\_Tp>](#) [\\_\\_gnu\\_cxx::ellint\\_el3](#) (\_Tx \_\_x, \_Tk \_\_k\_c, \_Tp \_\_p)
- float [\\_\\_gnu\\_cxx::ellint\\_el3f](#) (float \_\_x, float \_\_k\_c, float \_\_p)
- long double [\\_\\_gnu\\_cxx::ellint\\_el3l](#) (long double \_\_x, long double \_\_k\_c, long double \_\_p)
- template<typename \_Tp, typename \_Up >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp, \\_Up>](#) [\\_\\_gnu\\_cxx::ellint\\_rc](#) (\_Tp \_\_x, \_Up \_\_y)
- float [\\_\\_gnu\\_cxx::ellint\\_rcf](#) (float \_\_x, float \_\_y)
- long double [\\_\\_gnu\\_cxx::ellint\\_rcl](#) (long double \_\_x, long double \_\_y)
- template<typename \_Tp, typename \_Up, typename \_Vp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp, \\_Up, \\_Vp>](#) [\\_\\_gnu\\_cxx::ellint\\_rd](#) (\_Tp \_\_x, \_Up \_\_y, \_Vp \_\_z)
- float [\\_\\_gnu\\_cxx::ellint\\_rdf](#) (float \_\_x, float \_\_y, float \_\_z)
- long double [\\_\\_gnu\\_cxx::ellint\\_rdl](#) (long double \_\_x, long double \_\_y, long double \_\_z)
- template<typename \_Tp, typename \_Up, typename \_Vp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp, \\_Up, \\_Vp>](#) [\\_\\_gnu\\_cxx::ellint\\_rf](#) (\_Tp \_\_x, \_Up \_\_y, \_Vp \_\_z)
- float [\\_\\_gnu\\_cxx::ellint\\_rff](#) (float \_\_x, float \_\_y, float \_\_z)
- long double [\\_\\_gnu\\_cxx::ellint\\_rfl](#) (long double \_\_x, long double \_\_y, long double \_\_z)
- template<typename \_Tp, typename \_Up, typename \_Vp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp, \\_Up, \\_Vp>](#) [\\_\\_gnu\\_cxx::ellint\\_rg](#) (\_Tp \_\_x, \_Up \_\_y, \_Vp \_\_z)
- float [\\_\\_gnu\\_cxx::ellint\\_rgf](#) (float \_\_x, float \_\_y, float \_\_z)
- long double [\\_\\_gnu\\_cxx::ellint\\_rgl](#) (long double \_\_x, long double \_\_y, long double \_\_z)
- template<typename \_Tp, typename \_Up, typename \_Vp, typename \_Wp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp, \\_Up, \\_Vp, \\_Wp>](#) [\\_\\_gnu\\_cxx::ellint\\_rj](#) (\_Tp \_\_x, \_Up \_\_y, \_Vp \_\_z, \_Wp \_\_p)
- float [\\_\\_gnu\\_cxx::ellint\\_rjf](#) (float \_\_x, float \_\_y, float \_\_z, float \_\_p)
- long double [\\_\\_gnu\\_cxx::ellint\\_rjl](#) (long double \_\_x, long double \_\_y, long double \_\_z, long double \_\_p)
- template<typename \_Tp >  
[\\_Tp](#) [\\_\\_gnu\\_cxx::ellnome](#) (\_Tp \_\_k)
- float [\\_\\_gnu\\_cxx::ellnomef](#) (float \_\_k)
- long double [\\_\\_gnu\\_cxx::ellnomel](#) (long double \_\_k)
- template<typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote<\\_Tp>::type](#) [std::expint](#) (\_Tp \_\_x)
- template<typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp>](#) [\\_\\_gnu\\_cxx::expint\\_e1](#) (\_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::expint\\_e1f](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::expint\\_e1l](#) (long double \_\_x)
- template<typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp>](#) [\\_\\_gnu\\_cxx::expint\\_en](#) (unsigned int \_\_n, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::expint\\_enf](#) (unsigned int \_\_n, float \_\_x)
- long double [\\_\\_gnu\\_cxx::expint\\_enl](#) (unsigned int \_\_n, long double \_\_x)
- float [std::expintf](#) (float \_\_x)
- long double [std::expintl](#) (long double \_\_x)
- template<typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp>](#) [\\_\\_gnu\\_cxx::factorial](#) (unsigned int \_\_n)
- float [\\_\\_gnu\\_cxx::factorialf](#) (unsigned int \_\_n)
- long double [\\_\\_gnu\\_cxx::factoriall](#) (unsigned int \_\_n)
- template<typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp>](#) [\\_\\_gnu\\_cxx::fresnel\\_c](#) (\_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::fresnel\\_cf](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::fresnel\\_cl](#) (long double \_\_x)

- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::fresnel_s (_Tp __x)`
- `float __gnu_cxx::fresnel_sf (float __x)`
- `long double __gnu_cxx::fresnel_sl (long double __x)`
- `template<typename _Tn , typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tn, _Tp > __gnu_cxx::gamma_l (_Tn __n, _Tp __x)`
- `float __gnu_cxx::gamma_lf (float __n, float __x)`
- `long double __gnu_cxx::gamma_ll (long double __n, long double __x)`
- `template<typename _Ta , typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Ta, _Tp > __gnu_cxx::gamma_p (_Ta __a, _Tp __x)`
- `float __gnu_cxx::gamma_pf (float __a, float __x)`
- `long double __gnu_cxx::gamma_pl (long double __a, long double __x)`
- `template<typename _Ta , typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Ta, _Tp > __gnu_cxx::gamma_q (_Ta __a, _Tp __x)`
- `float __gnu_cxx::gamma_qf (float __a, float __x)`
- `long double __gnu_cxx::gamma_ql (long double __a, long double __x)`
- `template<typename _Tn , typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tn, _Tp > __gnu_cxx::gamma_u (_Tn __n, _Tp __x)`
- `float __gnu_cxx::gamma_uf (float __n, float __x)`
- `long double __gnu_cxx::gamma_ul (long double __n, long double __x)`
- `template<typename _Talpha , typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Talpha, _Tp > __gnu_cxx::gegenbauer (unsigned int __n, _Talpha __alpha, _Tp __x)`
- `float __gnu_cxx::gegenbauerf (unsigned int __n, float __alpha, float __x)`
- `long double __gnu_cxx::gegenbauerl (unsigned int __n, long double __alpha, long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::__type std::hermite (unsigned int __n, _Tp __x)`
- `float std::hermitef (unsigned int __n, float __x)`
- `long double std::hermitel (unsigned int __n, long double __x)`
- `template<typename _Tk , typename _Tphi >`  
`__gnu_cxx::__promote_num_t< _Tk, _Tphi > __gnu_cxx::heuman_lambda (_Tk __k, _Tphi __phi)`
- `float __gnu_cxx::heuman_lambdaf (float __k, float __phi)`
- `long double __gnu_cxx::heuman_lambdal (long double __k, long double __phi)`
- `template<typename _Tp , typename _Up >`  
`__gnu_cxx::__promote_num_t< _Tp, _Up > __gnu_cxx::hurwitz_zeta (_Tp __s, _Up __a)`
- `float __gnu_cxx::hurwitz_zetaf (float __s, float __a)`
- `long double __gnu_cxx::hurwitz_zetal (long double __s, long double __a)`
- `template<typename _Tpa , typename _Tpb , typename _Tpc , typename _Tp >`  
`__gnu_cxx::__promote_4< _Tpa, _Tpb, _Tpc, _Tp >::__type __gnu_cxx::hyperg (_Tpa __a, _Tpb __b, _Tpc __c, _Tp __x)`
- `float __gnu_cxx::hypergf (float __a, float __b, float __c, float __x)`
- `long double __gnu_cxx::hypergl (long double __a, long double __b, long double __c, long double __x)`
- `template<typename _Ta , typename _Tb , typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Ta, _Tb, _Tp > __gnu_cxx::ibeta (_Ta __a, _Tb __b, _Tp __x)`
- `template<typename _Ta , typename _Tb , typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Ta, _Tb, _Tp > __gnu_cxx::ibetac (_Ta __a, _Tb __b, _Tp __x)`
- `float __gnu_cxx::ibetacf (float __a, float __b, float __x)`
- `long double __gnu_cxx::ibetac (long double __a, long double __b, long double __x)`
- `float __gnu_cxx::ibetaf (float __a, float __b, float __x)`
- `long double __gnu_cxx::ibetal (long double __a, long double __b, long double __x)`

- `template<typename _Talpha, typename _Tbeta, typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Talpha, _Tbeta, _Tp > __gnu_cxx::jacobi (unsigned __n, _Talpha __alpha,`  
`_Tbeta __beta, _Tp __x)`
- `template<typename _Kp, typename _Up >`  
`__gnu_cxx::__promote_num_t< _Kp, _Up > __gnu_cxx::jacobi_cn (_Kp __k, _Up __u)`
- `float __gnu_cxx::jacobi_cnf (float __k, float __u)`
- `long double __gnu_cxx::jacobi_cnl (long double __k, long double __u)`
- `template<typename _Kp, typename _Up >`  
`__gnu_cxx::__promote_num_t< _Kp, _Up > __gnu_cxx::jacobi_dn (_Kp __k, _Up __u)`
- `float __gnu_cxx::jacobi_dnf (float __k, float __u)`
- `long double __gnu_cxx::jacobi_dnl (long double __k, long double __u)`
- `template<typename _Kp, typename _Up >`  
`__gnu_cxx::__promote_num_t< _Kp, _Up > __gnu_cxx::jacobi_sn (_Kp __k, _Up __u)`
- `float __gnu_cxx::jacobi_snf (float __k, float __u)`
- `long double __gnu_cxx::jacobi_snl (long double __k, long double __u)`
- `template<typename _Tk, typename _Tphi >`  
`__gnu_cxx::__promote_num_t< _Tk, _Tphi > __gnu_cxx::jacobi_zeta (_Tk __k, _Tphi __phi)`
- `float __gnu_cxx::jacobi_zetaf (float __k, float __phi)`
- `long double __gnu_cxx::jacobi_zetal (long double __k, long double __phi)`
- `float __gnu_cxx::jacobif (unsigned __n, float __alpha, float __beta, float __x)`
- `long double __gnu_cxx::jacobil (unsigned __n, long double __alpha, long double __beta, long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::type std::laguerre (unsigned int __n, _Tp __x)`
- `float std::laguerref (unsigned int __n, float __x)`
- `long double std::laguerrel (unsigned int __n, long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::lbincoef (unsigned int __n, unsigned int __k)`
- `float __gnu_cxx::lbincoeff (unsigned int __n, unsigned int __k)`
- `long double __gnu_cxx::lbincoeffl (unsigned int __n, unsigned int __k)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::ldouble_factorial (int __n)`
- `float __gnu_cxx::ldouble_factorialf (int __n)`
- `long double __gnu_cxx::ldouble_factoriall (int __n)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote< _Tp >::type std::legendre (unsigned int __l, _Tp __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::legendre_q (unsigned int __n, _Tp __x)`
- `float __gnu_cxx::legendre_qf (unsigned int __n, float __x)`
- `long double __gnu_cxx::legendre_ql (unsigned int __n, long double __x)`
- `float std::legendref (unsigned int __l, float __x)`
- `long double std::legendrel (unsigned int __l, long double __x)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::lfactorial (unsigned int __n)`
- `float __gnu_cxx::lfactorialf (unsigned int __n)`
- `long double __gnu_cxx::lfactoriall (unsigned int __n)`
- `template<typename _Tp >`  
`__gnu_cxx::__promote_num_t< _Tp > __gnu_cxx::logint (_Tp __x)`
- `float __gnu_cxx::logintf (float __x)`
- `long double __gnu_cxx::logintl (long double __x)`
- `template<typename _Tp, typename _Tn >`  
`__gnu_cxx::__promote_num_t< _Tp, _Tn > __gnu_cxx::lpochhammer_l (_Tp __a, _Tn __n)`
- `float __gnu_cxx::lpochhammer_lf (float __a, float __n)`

- long double [\\_\\_gnu\\_cxx::lpochhammer\\_ll](#) (long double \_\_a, long double \_\_n)
- template<typename \_Tp, typename \_Tn >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp, \\_Tn > \\_\\_gnu\\_cxx::lpochhammer\\_u](#) (\_Tp \_\_a, \_Tn \_\_n)
- float [\\_\\_gnu\\_cxx::lpochhammer\\_uf](#) (float \_\_a, float \_\_n)
- long double [\\_\\_gnu\\_cxx::lpochhammer\\_ul](#) (long double \_\_a, long double \_\_n)
- template<typename \_Tph, typename \_Tpa >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tph, \\_Tpa > \\_\\_gnu\\_cxx::owens\\_t](#) (\_Tph \_\_h, \_Tpa \_\_a)
- float [\\_\\_gnu\\_cxx::owens\\_tf](#) (float \_\_h, float \_\_a)
- long double [\\_\\_gnu\\_cxx::owens\\_tl](#) (long double \_\_h, long double \_\_a)
- template<typename \_Tp, typename \_Tn >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp, \\_Tn > \\_\\_gnu\\_cxx::pochhammer\\_l](#) (\_Tp \_\_a, \_Tn \_\_n)
- float [\\_\\_gnu\\_cxx::pochhammer\\_lf](#) (float \_\_a, float \_\_n)
- long double [\\_\\_gnu\\_cxx::pochhammer\\_ll](#) (long double \_\_a, long double \_\_n)
- template<typename \_Tp, typename \_Tn >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp, \\_Tn > \\_\\_gnu\\_cxx::pochhammer\\_u](#) (\_Tp \_\_a, \_Tn \_\_n)
- float [\\_\\_gnu\\_cxx::pochhammer\\_uf](#) (float \_\_a, float \_\_n)
- long double [\\_\\_gnu\\_cxx::pochhammer\\_ul](#) (long double \_\_a, long double \_\_n)
- template<typename \_Tp >  
  std::complex< [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp > > \\_\\_gnu\\_cxx::polylog](#) (\_Tp \_\_s, std::complex< \_Tp > \_\_w)
- std::complex< float > [\\_\\_gnu\\_cxx::polylogf](#) (float \_\_s, std::complex< float > \_\_w)
- std::complex< long double > [\\_\\_gnu\\_cxx::polylogl](#) (long double \_\_s, std::complex< long double > \_\_w)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp > \\_\\_gnu\\_cxx::psi](#) (\_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::psif](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::psil](#) (long double \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp > \\_\\_gnu\\_cxx::radpoly](#) (unsigned int \_\_n, unsigned int \_\_m, \_Tp \_\_rho)
- float [\\_\\_gnu\\_cxx::radpolyf](#) (unsigned int \_\_n, unsigned int \_\_m, float \_\_rho)
- long double [\\_\\_gnu\\_cxx::radpolyl](#) (unsigned int \_\_n, unsigned int \_\_m, long double \_\_rho)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote<\\_Tp >::\\_\\_type std::riemann\\_zeta](#) (\_Tp \_\_s)
- float [std::riemann\\_zetaf](#) (float \_\_s)
- long double [std::riemann\\_zetal](#) (long double \_\_s)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp > \\_\\_gnu\\_cxx::sinc](#) (\_Tp \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp > \\_\\_gnu\\_cxx::sinc\\_pi](#) (\_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::sinc\\_pif](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::sinc\\_pil](#) (long double \_\_x)
- float [\\_\\_gnu\\_cxx::sincf](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::sincl](#) (long double \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp > \\_\\_gnu\\_cxx::sinhc](#) (\_Tp \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp > \\_\\_gnu\\_cxx::sinhc\\_pi](#) (\_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::sinhc\\_pif](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::sinhc\\_pil](#) (long double \_\_x)
- float [\\_\\_gnu\\_cxx::sinhcf](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::sinhcl](#) (long double \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp > \\_\\_gnu\\_cxx::sinhint](#) (\_Tp \_\_x)

- float [\\_\\_gnu\\_cxx::sinhintf](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::sinhintl](#) (long double \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp>](#) [\\_\\_gnu\\_cxx::sinint](#) (\_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::sinintf](#) (float \_\_x)
- long double [\\_\\_gnu\\_cxx::sinintl](#) (long double \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote<\\_Tp>::\\_\\_type](#) [std::sph\\_bessel](#) (unsigned int \_\_n, \_Tp \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp>](#) [\\_\\_gnu\\_cxx::sph\\_bessel\\_i](#) (unsigned int \_\_n, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::sph\\_bessel\\_if](#) (unsigned int \_\_n, float \_\_x)
- long double [\\_\\_gnu\\_cxx::sph\\_bessel\\_il](#) (unsigned int \_\_n, long double \_\_x)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp>](#) [\\_\\_gnu\\_cxx::sph\\_bessel\\_k](#) (unsigned int \_\_n, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::sph\\_bessel\\_kf](#) (unsigned int \_\_n, float \_\_x)
- long double [\\_\\_gnu\\_cxx::sph\\_bessel\\_kl](#) (unsigned int \_\_n, long double \_\_x)
- float [std::sph\\_besself](#) (unsigned int \_\_n, float \_\_x)
- long double [std::sph\\_bessell](#) (unsigned int \_\_n, long double \_\_x)
- template<typename \_Tp >  
  [std::complex<\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp>>](#) [\\_\\_gnu\\_cxx::sph\\_hankel\\_1](#) (unsigned int \_\_n, \_Tp \_\_z)
- template<typename \_Tp >  
  [std::complex<\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp>>](#) [\\_\\_gnu\\_cxx::sph\\_hankel\\_1](#) (unsigned int \_\_n, [std::complex<\\_Tp>](#) \_\_x)
- [std::complex<float>](#) [\\_\\_gnu\\_cxx::sph\\_hankel\\_1f](#) (unsigned int \_\_n, float \_\_z)
- [std::complex<float>](#) [\\_\\_gnu\\_cxx::sph\\_hankel\\_1f](#) (unsigned int \_\_n, [std::complex<float>](#) \_\_x)
- [std::complex<long double>](#) [\\_\\_gnu\\_cxx::sph\\_hankel\\_1l](#) (unsigned int \_\_n, long double \_\_z)
- [std::complex<long double>](#) [\\_\\_gnu\\_cxx::sph\\_hankel\\_1l](#) (unsigned int \_\_n, [std::complex<long double>](#) \_\_x)
- template<typename \_Tp >  
  [std::complex<\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp>>](#) [\\_\\_gnu\\_cxx::sph\\_hankel\\_2](#) (unsigned int \_\_n, \_Tp \_\_z)
- template<typename \_Tp >  
  [std::complex<\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp>>](#) [\\_\\_gnu\\_cxx::sph\\_hankel\\_2](#) (unsigned int \_\_n, [std::complex<\\_Tp>](#) \_\_x)
- [std::complex<float>](#) [\\_\\_gnu\\_cxx::sph\\_hankel\\_2f](#) (unsigned int \_\_n, float \_\_z)
- [std::complex<float>](#) [\\_\\_gnu\\_cxx::sph\\_hankel\\_2f](#) (unsigned int \_\_n, [std::complex<float>](#) \_\_x)
- [std::complex<long double>](#) [\\_\\_gnu\\_cxx::sph\\_hankel\\_2l](#) (unsigned int \_\_n, long double \_\_z)
- [std::complex<long double>](#) [\\_\\_gnu\\_cxx::sph\\_hankel\\_2l](#) (unsigned int \_\_n, [std::complex<long double>](#) \_\_x)
- template<typename \_Ttheta, typename \_Tphi >  
  [std::complex<\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Ttheta, \\_Tphi>>](#) [\\_\\_gnu\\_cxx::sph\\_harmonic](#) (unsigned int \_\_l, int \_\_m, \_Ttheta \_\_theta, \_Tphi \_\_phi)
- [std::complex<float>](#) [\\_\\_gnu\\_cxx::sph\\_harmonicf](#) (unsigned int \_\_l, int \_\_m, float \_\_theta, float \_\_phi)
- [std::complex<long double>](#) [\\_\\_gnu\\_cxx::sph\\_harmonicl](#) (unsigned int \_\_l, int \_\_m, long double \_\_theta, long double \_\_phi)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote<\\_Tp>::\\_\\_type](#) [std::sph\\_legendre](#) (unsigned int \_\_l, unsigned int \_\_m, \_Tp \_\_theta)
- float [std::sph\\_legendref](#) (unsigned int \_\_l, unsigned int \_\_m, float \_\_theta)
- long double [std::sph\\_legendrel](#) (unsigned int \_\_l, unsigned int \_\_m, long double \_\_theta)
- template<typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote<\\_Tp>::\\_\\_type](#) [std::sph\\_neumann](#) (unsigned int \_\_n, \_Tp \_\_x)
- float [std::sph\\_neumannf](#) (unsigned int \_\_n, float \_\_x)
- long double [std::sph\\_neumannl](#) (unsigned int \_\_n, long double \_\_x)
- template<typename \_Tpnu, typename \_Tp >  
  [\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tpnu, \\_Tp>](#) [\\_\\_gnu\\_cxx::theta\\_1](#) (\_Tpnu \_\_nu, \_Tp \_\_x)

- float [\\_\\_gnu\\_cxx::theta\\_1f](#) (float \_\_nu, float \_\_x)
- long double [\\_\\_gnu\\_cxx::theta\\_1l](#) (long double \_\_nu, long double \_\_x)
- template<typename \_Tpnu, typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tpnu, \\_Tp > \\_\\_gnu\\_cxx::theta\\_2](#) (\_Tpnu \_\_nu, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::theta\\_2f](#) (float \_\_nu, float \_\_x)
- long double [\\_\\_gnu\\_cxx::theta\\_2l](#) (long double \_\_nu, long double \_\_x)
- template<typename \_Tpnu, typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tpnu, \\_Tp > \\_\\_gnu\\_cxx::theta\\_3](#) (\_Tpnu \_\_nu, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::theta\\_3f](#) (float \_\_nu, float \_\_x)
- long double [\\_\\_gnu\\_cxx::theta\\_3l](#) (long double \_\_nu, long double \_\_x)
- template<typename \_Tpnu, typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tpnu, \\_Tp > \\_\\_gnu\\_cxx::theta\\_4](#) (\_Tpnu \_\_nu, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::theta\\_4f](#) (float \_\_nu, float \_\_x)
- long double [\\_\\_gnu\\_cxx::theta\\_4l](#) (long double \_\_nu, long double \_\_x)
- template<typename \_Tp\_k, typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp\\_k, \\_Tp > \\_\\_gnu\\_cxx::theta\\_c](#) (\_Tp\_k \_\_k, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::theta\\_cf](#) (float \_\_k, float \_\_x)
- long double [\\_\\_gnu\\_cxx::theta\\_cl](#) (long double \_\_k, long double \_\_x)
- template<typename \_Tp\_k, typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp\\_k, \\_Tp > \\_\\_gnu\\_cxx::theta\\_d](#) (\_Tp\_k \_\_k, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::theta\\_df](#) (float \_\_k, float \_\_x)
- long double [\\_\\_gnu\\_cxx::theta\\_dl](#) (long double \_\_k, long double \_\_x)
- template<typename \_Tp\_k, typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp\\_k, \\_Tp > \\_\\_gnu\\_cxx::theta\\_n](#) (\_Tp\_k \_\_k, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::theta\\_nf](#) (float \_\_k, float \_\_x)
- long double [\\_\\_gnu\\_cxx::theta\\_nl](#) (long double \_\_k, long double \_\_x)
- template<typename \_Tp\_k, typename \_Tp >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Tp\\_k, \\_Tp > \\_\\_gnu\\_cxx::theta\\_s](#) (\_Tp\_k \_\_k, \_Tp \_\_x)
- float [\\_\\_gnu\\_cxx::theta\\_sf](#) (float \_\_k, float \_\_x)
- long double [\\_\\_gnu\\_cxx::theta\\_sl](#) (long double \_\_k, long double \_\_x)
- template<typename \_Trho, typename \_Tphi >  
[\\_\\_gnu\\_cxx::\\_\\_promote\\_num\\_t<\\_Trho, \\_Tphi > \\_\\_gnu\\_cxx::zernike](#) (unsigned int \_\_n, int \_\_m, \_Trho \_\_rho, \_Tphi \_\_phi)
- float [\\_\\_gnu\\_cxx::zernikef](#) (unsigned int \_\_n, int \_\_m, float \_\_rho, float \_\_phi)
- long double [\\_\\_gnu\\_cxx::zernikel](#) (unsigned int \_\_n, int \_\_m, long double \_\_rho, long double \_\_phi)

### 10.27.1 Detailed Description

This is an internal header file, included by other library headers. You should not attempt to use it directly. Instead, include `<cmath>`.

### 10.27.2 Macro Definition Documentation

#### 10.27.2.1 `#define __cpp_lib_math_special_functions 201603L`

Definition at line 39 of file `specfun.h`.

#### 10.27.2.2 `#define __STDCPP_MATH_SPEC_FUNCS__ 201003L`

Definition at line 37 of file `specfun.h`.

# Index

`_GLIBCXX_BITS_SF_AIRY_TCC`  
    [sf\\_airy.tcc, 211](#)  
`_GLIBCXX_BITS_SF_BESSEL_TCC`  
    [sf\\_bessel.tcc, 213](#)  
`_GLIBCXX_BITS_SF_BETA_TCC`  
    [sf\\_beta.tcc, 215](#)  
`_GLIBCXX_BITS_SF_CARDINAL_TCC`  
    [sf\\_cardinal.tcc, 217](#)  
`_GLIBCXX_BITS_SF_ELLINT_TCC`  
    [sf\\_ellint.tcc, 222](#)  
`_GLIBCXX_BITS_SF_EXPINT_TCC`  
    [sf\\_expint.tcc, 225](#)  
`_GLIBCXX_BITS_SF_GAMMA_TCC`  
    [sf\\_gamma.tcc, 232](#)  
`_GLIBCXX_BITS_SF_HANKEL_NEW_TCC`  
    [sf\\_hankel\\_new.tcc, 236](#)  
`_GLIBCXX_BITS_SF_HANKEL_TCC`  
    [sf\\_hankel.tcc, 236](#)  
`_GLIBCXX_BITS_SF_HERMITE_TCC`  
    [sf\\_hermite.tcc, 238](#)  
`_GLIBCXX_BITS_SF_HYDROGEN_TCC`  
    [sf\\_hydrogen.tcc, 239](#)  
`_GLIBCXX_BITS_SF_HYPERG_TCC`  
    [sf\\_hyperg.tcc, 241](#)  
`_GLIBCXX_BITS_SF_LAGUERRE_TCC`  
    [sf\\_laguerre.tcc, 246](#)  
`_GLIBCXX_BITS_SF_LEGENDRE_TCC`  
    [sf\\_legendre.tcc, 247](#)  
`_GLIBCXX_BITS_SF_MOD_BESSEL_TCC`  
    [sf\\_mod\\_bessel.tcc, 249](#)  
`_GLIBCXX_BITS_SF_OWENS_T_TCC`  
    [sf\\_owens\\_t.tcc, 250](#)  
`_GLIBCXX_BITS_SF_POLYLOG_TCC`  
    [sf\\_polylog.tcc, 253](#)  
`_GLIBCXX_BITS_SF_ZETA_TCC`  
    [sf\\_zeta.tcc, 259](#)  
`_GLIBCXX_JACOBI_CN`  
    Extended Mathematical Special Functions, [21](#)  
`_GLIBCXX_JACOBI_DN`  
    Extended Mathematical Special Functions, [21](#)  
`_GLIBCXX_JACOBI_SN`  
    Extended Mathematical Special Functions, [21](#)  
`_GLIBCXX_SF_CHEBYSHEV_TCC`  
    [sf\\_chebyshev.tcc, 218](#)  
`_GLIBCXX_SF_DAWSON_TCC`  
    [sf\\_dawson.tcc, 220](#)  
`_GLIBCXX_SF_FRESNEL_TCC`  
    [sf\\_fresnel.tcc, 226](#)  
`_GLIBCXX_SF_GEGENBAUER_TCC`  
    [sf\\_gegenbauer.tcc, 233](#)  
`_GLIBCXX_SF_HYPINT_TCC`  
    [sf\\_hypint.tcc, 242](#)  
`_GLIBCXX_SF_JACOBI_TCC`  
    [sf\\_jacobi.tcc, 244](#)  
`_GLIBCXX_SF_THETA_TCC`  
    [sf\\_theta.tcc, 255](#)  
`_GLIBCXX_SF_TRIGINT_TCC`  
    [sf\\_trigint.tcc, 257](#)  
`_Num_Euler_Maclaurin_zeta`  
    std::\_\_detail, [203](#)  
`_S_Euler_Maclaurin_zeta`  
    std::\_\_detail, [204](#)  
`_S_double_factorial_table`  
    std::\_\_detail, [204](#)  
`_S_factorial_table`  
    std::\_\_detail, [204](#)  
`_S_neg_double_factorial_table`  
    std::\_\_detail, [204](#)  
`_S_num_double_factorials`  
    std::\_\_detail, [204](#)  
`_S_num_double_factorials< double >`  
    std::\_\_detail, [204](#)  
`_S_num_double_factorials< float >`  
    std::\_\_detail, [204](#)  
`_S_num_double_factorials< long double >`  
    std::\_\_detail, [204](#)  
`_S_num_factorials`  
    std::\_\_detail, [204](#)  
`_S_num_factorials< double >`  
    std::\_\_detail, [204](#)  
`_S_num_factorials< float >`  
    std::\_\_detail, [205](#)  
`_S_num_factorials< long double >`  
    std::\_\_detail, [205](#)  
`_S_num_neg_double_factorials`  
    std::\_\_detail, [205](#)  
`_S_num_neg_double_factorials< double >`  
    std::\_\_detail, [205](#)  
`_S_num_neg_double_factorials< float >`  
    std::\_\_detail, [205](#)

- `__S_num_neg_double_factorials< long double >`  
std::\_\_detail, 205
- `__S_num_zetam1`  
std::\_\_detail, 205
- `__S_zetam1`  
std::\_\_detail, 205
- `__STDCPP_MATH_SPEC_FUNCS__`  
specfun.h, 270
- `__airy`  
std::\_\_detail, 114, 115
- `__airy_ai`  
std::\_\_detail, 117
- `__airy_arg`  
std::\_\_detail, 117
- `__airy_asymp_absarg_ge_pio3`  
std::\_\_detail, 117
- `__airy_asymp_absarg_lt_pio3`  
std::\_\_detail, 118
- `__airy_bessel_i`  
std::\_\_detail, 118
- `__airy_bessel_k`  
std::\_\_detail, 119
- `__airy_bi`  
std::\_\_detail, 120
- `__airy_hyperg_rational`  
std::\_\_detail, 120
- `__assoc_laguerre`  
std::\_\_detail, 121
- `__assoc_legendre_p`  
std::\_\_detail, 121
- `__bernoulli`  
std::\_\_detail, 121
- `__bernoulli_2n`  
std::\_\_detail, 122
- `__bernoulli_series`  
std::\_\_detail, 122
- `__beta`  
std::\_\_detail, 122
- `__beta_gamma`  
std::\_\_detail, 123
- `__beta_inc`  
std::\_\_detail, 123
- `__beta_inc_cont_frac`  
std::\_\_detail, 124
- `__beta_lgamma`  
std::\_\_detail, 124
- `__beta_product`  
std::\_\_detail, 124
- `__bincoef`  
std::\_\_detail, 125
- `__binomial_cdf`  
std::\_\_detail, 125
- `__binomial_cdfc`  
std::\_\_detail, 125
- `__bose_einstein`  
std::\_\_detail, 126
- `__chebyshev_recur`  
std::\_\_detail, 126
- `__chebyshev_t`  
std::\_\_detail, 126
- `__chebyshev_u`  
std::\_\_detail, 126
- `__chebyshev_v`  
std::\_\_detail, 126
- `__chebyshev_w`  
std::\_\_detail, 126
- `__chi_squared_pdf`  
std::\_\_detail, 127
- `__chi_squared_pdfc`  
std::\_\_detail, 127
- `__chshint`  
std::\_\_detail, 127
- `__chshint_cont_frac`  
std::\_\_detail, 127
- `__chshint_series`  
std::\_\_detail, 128
- `__clamp_0_m2pi`  
std::\_\_detail, 128
- `__clamp_pi`  
std::\_\_detail, 128
- `__clausen`  
std::\_\_detail, 128
- `__clausen_c`  
std::\_\_detail, 129
- `__clausen_s`  
std::\_\_detail, 129, 130
- `__comp_ellint_1`  
std::\_\_detail, 130
- `__comp_ellint_2`  
std::\_\_detail, 131
- `__comp_ellint_3`  
std::\_\_detail, 131
- `__comp_ellint_d`  
std::\_\_detail, 131
- `__comp_ellint_rf`  
std::\_\_detail, 132
- `__comp_ellint_rg`  
std::\_\_detail, 132
- `__conf_hyperg`  
std::\_\_detail, 132
- `__conf_hyperg_lim`  
std::\_\_detail, 132
- `__conf_hyperg_lim_series`  
std::\_\_detail, 132
- `__conf_hyperg_luke`  
std::\_\_detail, 133
- `__conf_hyperg_series`  
std::\_\_detail, 133



- `__coshint`
  - `std::__detail`, [133](#)
- `__cpp_lib_math_special_functions`
  - `specfun.h`, [270](#)
- `__cyl_bessel`
  - `std::__detail`, [134](#)
- `__cyl_bessel_i`
  - `std::__detail`, [134](#)
- `__cyl_bessel_ij_series`
  - `std::__detail`, [135](#)
- `__cyl_bessel_ik`
  - `std::__detail`, [135](#)
- `__cyl_bessel_ik_asymp`
  - `std::__detail`, [136](#)
- `__cyl_bessel_ik_steel`
  - `std::__detail`, [136](#)
- `__cyl_bessel_j`
  - `std::__detail`, [136](#)
- `__cyl_bessel_jn`
  - `std::__detail`, [137](#)
- `__cyl_bessel_jn_asymp`
  - `std::__detail`, [137](#)
- `__cyl_bessel_jn_steel`
  - `std::__detail`, [137](#)
- `__cyl_bessel_k`
  - `std::__detail`, [138](#)
- `__cyl_hankel_1`
  - `std::__detail`, [138](#), [139](#)
- `__cyl_hankel_2`
  - `std::__detail`, [139](#)
- `__cyl_neumann`
  - `std::__detail`, [140](#)
- `__cyl_neumann_n`
  - `std::__detail`, [140](#)
- `__dawson`
  - `std::__detail`, [140](#)
- `__dawson_const_frac`
  - `std::__detail`, [141](#)
- `__dawson_series`
  - `std::__detail`, [141](#)
- `__debye_region`
  - `std::__detail`, [141](#)
- `__dilog`
  - `std::__detail`, [141](#)
- `__dirichlet_beta`
  - `std::__detail`, [142](#)
- `__dirichlet_eta`
  - `std::__detail`, [142](#), [143](#)
- `__double_factorial`
  - `std::__detail`, [143](#)
- `__ellint_1`
  - `std::__detail`, [143](#)
- `__ellint_2`
  - `std::__detail`, [144](#)
- `__ellint_3`
  - `std::__detail`, [144](#)
- `__ellint_cel`
  - `std::__detail`, [144](#)
- `__ellint_d`
  - `std::__detail`, [145](#)
- `__ellint_el1`
  - `std::__detail`, [145](#)
- `__ellint_el2`
  - `std::__detail`, [145](#)
- `__ellint_el3`
  - `std::__detail`, [145](#)
- `__ellint_rc`
  - `std::__detail`, [145](#)
- `__ellint_rd`
  - `std::__detail`, [146](#)
- `__ellint_rf`
  - `std::__detail`, [146](#)
- `__ellint_rg`
  - `std::__detail`, [147](#)
- `__ellint_rj`
  - `std::__detail`, [147](#)
- `__ellnome`
  - `std::__detail`, [148](#)
- `__ellnome_k`
  - `std::__detail`, [148](#)
- `__ellnome_series`
  - `std::__detail`, [148](#)
- `__expint`
  - `std::__detail`, [148](#), [149](#)
- `__expint_E1`
  - `std::__detail`, [149](#)
- `__expint_E1_asymp`
  - `std::__detail`, [150](#)
- `__expint_E1_series`
  - `std::__detail`, [150](#)
- `__expint_Ei`
  - `std::__detail`, [151](#)
- `__expint_Ei_asymp`
  - `std::__detail`, [151](#)
- `__expint_Ei_series`
  - `std::__detail`, [151](#)
- `__expint_En_cont_frac`
  - `std::__detail`, [152](#)
- `__expint_En_recursion`
  - `std::__detail`, [152](#)
- `__expint_En_series`
  - `std::__detail`, [153](#)
- `__expint_asymp`
  - `std::__detail`, [149](#)
- `__expint_large_n`
  - `std::__detail`, [153](#)
- `__f_cdf`
  - `std::__detail`, [153](#)

- \_\_f\_cdfc
  - std::\_\_detail, 154
- \_\_factorial
  - std::\_\_detail, 154
  - std::\_\_detail::Factorial\_table, 207
- \_\_fermi\_dirac
  - std::\_\_detail, 154
- \_\_fock\_airy
  - std::\_\_detail, 155
- \_\_fpequal
  - std::\_\_detail, 155
- \_\_fpimag
  - std::\_\_detail, 155, 157
- \_\_fpreal
  - std::\_\_detail, 157
- \_\_fresnel
  - std::\_\_detail, 157
- \_\_fresnel\_cont\_frac
  - std::\_\_detail, 158
- \_\_fresnel\_series
  - std::\_\_detail, 158
- \_\_gamma
  - std::\_\_detail, 158
- \_\_gamma\_cont\_frac
  - std::\_\_detail, 158
- \_\_gamma\_l
  - std::\_\_detail, 158
- \_\_gamma\_p
  - std::\_\_detail, 159
- \_\_gamma\_q
  - std::\_\_detail, 159
- \_\_gamma\_series
  - std::\_\_detail, 159
- \_\_gamma\_temme
  - std::\_\_detail, 159
- \_\_gamma\_u
  - std::\_\_detail, 160
- \_\_gauss
  - std::\_\_detail, 160
- \_\_gegenbauer\_poly
  - std::\_\_detail, 160
- \_\_gnu\_cxx, 87
- \_\_hankel
  - std::\_\_detail, 160
- \_\_hankel\_debye
  - std::\_\_detail, 161
- \_\_hankel\_params
  - std::\_\_detail, 161
- \_\_hankel\_uniform
  - std::\_\_detail, 161
- \_\_hankel\_uniform\_olver
  - std::\_\_detail, 162
- \_\_hankel\_uniform\_outer
  - std::\_\_detail, 162
- \_\_hankel\_uniform\_sum
  - std::\_\_detail, 162
- \_\_heuman\_lambda
  - std::\_\_detail, 163
- \_\_hurwitz\_zeta
  - std::\_\_detail, 163, 164
- \_\_hurwitz\_zeta\_euler\_maclaurin
  - std::\_\_detail, 164
- \_\_hydrogen
  - std::\_\_detail, 164
- \_\_hyperg
  - std::\_\_detail, 164
- \_\_hyperg\_luke
  - std::\_\_detail, 165
- \_\_hyperg\_reflect
  - std::\_\_detail, 165
- \_\_hyperg\_series
  - std::\_\_detail, 165
- \_\_jacobi\_sncndn
  - std::\_\_detail, 167
- \_\_jacobi\_zeta
  - std::\_\_detail, 167
- \_\_laguerre
  - std::\_\_detail, 167
- \_\_log\_bincoef
  - std::\_\_detail, 167
- \_\_log\_double\_factorial
  - std::\_\_detail, 168
- \_\_log\_factorial
  - std::\_\_detail, 168
  - std::\_\_detail::Factorial\_table, 207
- \_\_log\_gamma
  - std::\_\_detail, 168
- \_\_log\_gamma\_bernoulli
  - std::\_\_detail, 169
- \_\_log\_gamma\_lanczos
  - std::\_\_detail, 169
- \_\_log\_gamma\_sign
  - std::\_\_detail, 169
- \_\_log\_gamma\_spouge
  - std::\_\_detail, 170
- \_\_log\_pochhammer\_l
  - std::\_\_detail, 170
- \_\_log\_pochhammer\_u
  - std::\_\_detail, 171
- \_\_logint
  - std::\_\_detail, 171
- \_\_n
  - std::\_\_detail::Factorial\_table, 207
- \_\_owens\_t
  - std::\_\_detail, 171
- \_\_pochhammer\_l
  - std::\_\_detail, 172
- \_\_pochhammer\_u

std::\_\_detail, 172  
 \_\_poly\_hermite  
   std::\_\_detail, 172  
 \_\_poly\_hermite\_asyp  
   std::\_\_detail, 173  
 \_\_poly\_hermite\_recursion  
   std::\_\_detail, 173  
 \_\_poly\_jacobi  
   std::\_\_detail, 173  
 \_\_poly\_laguerre  
   std::\_\_detail, 174  
 \_\_poly\_laguerre\_hyperg  
   std::\_\_detail, 174  
 \_\_poly\_laguerre\_large\_n  
   std::\_\_detail, 176  
 \_\_poly\_laguerre\_recursion  
   std::\_\_detail, 176  
 \_\_poly\_legendre\_p  
   std::\_\_detail, 177  
 \_\_poly\_legendre\_q  
   std::\_\_detail, 177  
 \_\_poly\_radial\_jacobi  
   std::\_\_detail, 177  
 \_\_polylog  
   std::\_\_detail, 177, 179  
 \_\_polylog\_exp  
   std::\_\_detail, 179  
 \_\_polylog\_exp\_asyp  
   std::\_\_detail, 179  
 \_\_polylog\_exp\_int\_neg  
   std::\_\_detail, 180  
 \_\_polylog\_exp\_int\_pos  
   std::\_\_detail, 181  
 \_\_polylog\_exp\_neg  
   std::\_\_detail, 181, 182  
 \_\_polylog\_exp\_neg\_even  
   std::\_\_detail, 182  
 \_\_polylog\_exp\_neg\_odd  
   std::\_\_detail, 183  
 \_\_polylog\_exp\_negative\_real\_part  
   std::\_\_detail, 184  
 \_\_polylog\_exp\_pos  
   std::\_\_detail, 184, 185  
 \_\_polylog\_exp\_real\_neg  
   std::\_\_detail, 186  
 \_\_polylog\_exp\_real\_pos  
   std::\_\_detail, 186, 187  
 \_\_psi  
   std::\_\_detail, 187  
 \_\_psi\_asyp  
   std::\_\_detail, 188  
 \_\_psi\_series  
   std::\_\_detail, 188  
 \_\_riemann\_zeta  
   std::\_\_detail, 188  
 \_\_riemann\_zeta\_alt  
   std::\_\_detail, 189  
 \_\_riemann\_zeta\_euler\_maclaurin  
   std::\_\_detail, 189  
 \_\_riemann\_zeta\_glob  
   std::\_\_detail, 189  
 \_\_riemann\_zeta\_m\_1  
   std::\_\_detail, 189  
 \_\_riemann\_zeta\_m\_1\_sum  
   std::\_\_detail, 191  
 \_\_riemann\_zeta\_product  
   std::\_\_detail, 191  
 \_\_riemann\_zeta\_sum  
   std::\_\_detail, 191  
 \_\_sinc  
   std::\_\_detail, 192  
 \_\_sinc\_pi  
   std::\_\_detail, 192  
 \_\_sincosint  
   std::\_\_detail, 192  
 \_\_sincosint\_asyp  
   std::\_\_detail, 192  
 \_\_sincosint\_cont\_frac  
   std::\_\_detail, 193  
 \_\_sincosint\_series  
   std::\_\_detail, 193  
 \_\_sinhc  
   std::\_\_detail, 193  
 \_\_sinhc\_pi  
   std::\_\_detail, 193  
 \_\_sinhint  
   std::\_\_detail, 193  
 \_\_sph\_bessel  
   std::\_\_detail, 194  
 \_\_sph\_bessel\_ik  
   std::\_\_detail, 194  
 \_\_sph\_bessel\_jn  
   std::\_\_detail, 196  
 \_\_sph\_hankel  
   std::\_\_detail, 196  
 \_\_sph\_hankel\_1  
   std::\_\_detail, 196, 197  
 \_\_sph\_hankel\_2  
   std::\_\_detail, 197, 198  
 \_\_sph\_harmonic  
   std::\_\_detail, 198  
 \_\_sph\_legendre  
   std::\_\_detail, 198  
 \_\_sph\_neumann  
   std::\_\_detail, 199  
 \_\_students\_t\_cdf  
   std::\_\_detail, 199  
 \_\_students\_t\_cdfc

- std::\_\_detail, 200
- \_\_theta\_1
  - std::\_\_detail, 200
- \_\_theta\_2
  - std::\_\_detail, 200
- \_\_theta\_2\_asymp
  - std::\_\_detail, 201
- \_\_theta\_2\_sum
  - std::\_\_detail, 201
- \_\_theta\_3
  - std::\_\_detail, 201
- \_\_theta\_3\_asymp
  - std::\_\_detail, 201
- \_\_theta\_3\_sum
  - std::\_\_detail, 202
- \_\_theta\_4
  - std::\_\_detail, 202
- \_\_theta\_c
  - std::\_\_detail, 202
- \_\_theta\_d
  - std::\_\_detail, 202
- \_\_theta\_n
  - std::\_\_detail, 202
- \_\_theta\_s
  - std::\_\_detail, 203
- \_\_zernike
  - std::\_\_detail, 203
- \_\_znorm1
  - std::\_\_detail, 203
- \_\_znorm2
  - std::\_\_detail, 203
- airy\_ai
  - Extended Mathematical Special Functions, 21
- airy\_aif
  - Extended Mathematical Special Functions, 21
- airy\_ail
  - Extended Mathematical Special Functions, 21
- airy\_bi
  - Extended Mathematical Special Functions, 21
- airy\_bif
  - Extended Mathematical Special Functions, 21
- airy\_bil
  - Extended Mathematical Special Functions, 22
- assoc\_laguerre
  - Mathematical Special Functions, 71
- assoc\_laguerref
  - Mathematical Special Functions, 71
- assoc\_laguerrel
  - Mathematical Special Functions, 71
- assoc\_legendre
  - Mathematical Special Functions, 71
- assoc\_legendref
  - Mathematical Special Functions, 72
- assoc\_legendrel
  - Mathematical Special Functions, 72
- bernoulli
  - Extended Mathematical Special Functions, 22
- bernoullif
  - Extended Mathematical Special Functions, 22
- bernoullil
  - Extended Mathematical Special Functions, 22
- beta
  - Mathematical Special Functions, 72
- betaf
  - Mathematical Special Functions, 72
- betal
  - Mathematical Special Functions, 73
- bincoef
  - Extended Mathematical Special Functions, 22
- bincoeff
  - Extended Mathematical Special Functions, 22
- bincoefl
  - Extended Mathematical Special Functions, 22
- bits/sf\_airy.tcc, 209
- bits/sf\_bessel.tcc, 211
- bits/sf\_beta.tcc, 213
- bits/sf\_cardinal.tcc, 215
- bits/sf\_chebyshev.tcc, 217
- bits/sf\_dawson.tcc, 219
- bits/sf\_ellint.tcc, 220
- bits/sf\_expint.tcc, 223
- bits/sf\_fresnel.tcc, 225
- bits/sf\_gamma.tcc, 226
- bits/sf\_gegenbauer.tcc, 232
- bits/sf\_hankel.tcc, 233
- bits/sf\_hankel\_new.tcc, 236
- bits/sf\_hermite.tcc, 237
- bits/sf\_hydrogen.tcc, 238
- bits/sf\_hyperg.tcc, 239
- bits/sf\_hypint.tcc, 241
- bits/sf\_jacobi.tcc, 243
- bits/sf\_laguerre.tcc, 244
- bits/sf\_legendre.tcc, 246
- bits/sf\_mod\_bessel.tcc, 247
- bits/sf\_owens\_t.tcc, 250
- bits/sf\_polylog.tcc, 251
- bits/sf\_theta.tcc, 253
- bits/sf\_trigint.tcc, 256
- bits/sf\_zeta.tcc, 257
- bits/specfun.h, 260
- COSINT
  - std::\_\_detail, 114
- chebyshev\_t
  - Extended Mathematical Special Functions, 22
- chebyshev\_tf
  - Extended Mathematical Special Functions, 23

- chebyshev\_tl
  - Extended Mathematical Special Functions, [23](#)
- chebyshev\_u
  - Extended Mathematical Special Functions, [23](#)
- chebyshev\_uf
  - Extended Mathematical Special Functions, [23](#)
- chebyshev\_ul
  - Extended Mathematical Special Functions, [23](#)
- chebyshev\_v
  - Extended Mathematical Special Functions, [24](#)
- chebyshev\_vf
  - Extended Mathematical Special Functions, [24](#)
- chebyshev\_vl
  - Extended Mathematical Special Functions, [24](#)
- chebyshev\_w
  - Extended Mathematical Special Functions, [24](#)
- chebyshev\_wf
  - Extended Mathematical Special Functions, [25](#)
- chebyshev\_wl
  - Extended Mathematical Special Functions, [25](#)
- clausen
  - Extended Mathematical Special Functions, [25](#)
- clausen\_c
  - Extended Mathematical Special Functions, [25](#)
- clausen\_cf
  - Extended Mathematical Special Functions, [26](#)
- clausen\_cl
  - Extended Mathematical Special Functions, [26](#)
- clausen\_s
  - Extended Mathematical Special Functions, [26](#)
- clausen\_sf
  - Extended Mathematical Special Functions, [26](#)
- clausen\_sl
  - Extended Mathematical Special Functions, [26](#)
- clausenf
  - Extended Mathematical Special Functions, [27](#)
- clausenl
  - Extended Mathematical Special Functions, [27](#)
- comp\_ellint\_1
  - Mathematical Special Functions, [73](#)
- comp\_ellint\_1f
  - Mathematical Special Functions, [73](#)
- comp\_ellint\_1l
  - Mathematical Special Functions, [73](#)
- comp\_ellint\_2
  - Mathematical Special Functions, [73](#)
- comp\_ellint\_2f
  - Mathematical Special Functions, [74](#)
- comp\_ellint\_2l
  - Mathematical Special Functions, [74](#)
- comp\_ellint\_3
  - Mathematical Special Functions, [74](#)
- comp\_ellint\_3f
  - Mathematical Special Functions, [75](#)
- comp\_ellint\_3l
  - Mathematical Special Functions, [75](#)
- comp\_ellint\_d
  - Extended Mathematical Special Functions, [27](#)
- comp\_ellint\_df
  - Extended Mathematical Special Functions, [28](#)
- comp\_ellint\_dl
  - Extended Mathematical Special Functions, [28](#)
- comp\_ellint\_rf
  - Extended Mathematical Special Functions, [28](#)
- comp\_ellint\_rg
  - Extended Mathematical Special Functions, [28](#)
- conf\_hyperg
  - Extended Mathematical Special Functions, [29](#)
- conf\_hyperg\_lim
  - Extended Mathematical Special Functions, [29](#)
- conf\_hyperg\_limf
  - Extended Mathematical Special Functions, [29](#)
- conf\_hyperg\_liml
  - Extended Mathematical Special Functions, [29](#)
- conf\_hypergf
  - Extended Mathematical Special Functions, [30](#)
- conf\_hypergl
  - Extended Mathematical Special Functions, [30](#)
- coshint
  - Extended Mathematical Special Functions, [30](#)
- coshintf
  - Extended Mathematical Special Functions, [30](#)
- coshintl
  - Extended Mathematical Special Functions, [30](#)
- cosint
  - Extended Mathematical Special Functions, [31](#)
- cosintf
  - Extended Mathematical Special Functions, [31](#)
- cosintl
  - Extended Mathematical Special Functions, [31](#)
- cyl\_bessel\_i
  - Mathematical Special Functions, [75](#)
- cyl\_bessel\_if
  - Mathematical Special Functions, [75](#)
- cyl\_bessel\_il
  - Mathematical Special Functions, [75](#)
- cyl\_bessel\_j
  - Mathematical Special Functions, [76](#)
- cyl\_bessel\_jf
  - Mathematical Special Functions, [76](#)
- cyl\_bessel\_jl
  - Mathematical Special Functions, [76](#)
- cyl\_bessel\_k
  - Mathematical Special Functions, [76](#)
- cyl\_bessel\_kf
  - Mathematical Special Functions, [77](#)
- cyl\_bessel\_kl
  - Mathematical Special Functions, [77](#)

- cyl\_hankel\_1
  - Extended Mathematical Special Functions, [31](#)
- cyl\_hankel\_1f
  - Extended Mathematical Special Functions, [33](#)
- cyl\_hankel\_1l
  - Extended Mathematical Special Functions, [33](#)
- cyl\_hankel\_2
  - Extended Mathematical Special Functions, [33](#)
- cyl\_hankel\_2f
  - Extended Mathematical Special Functions, [34](#)
- cyl\_hankel\_2l
  - Extended Mathematical Special Functions, [34](#)
- cyl\_neumann
  - Mathematical Special Functions, [77](#)
- cyl\_neumannf
  - Mathematical Special Functions, [77](#)
- cyl\_neumannl
  - Mathematical Special Functions, [78](#)
- dawson
  - Extended Mathematical Special Functions, [34](#)
- dawsonf
  - Extended Mathematical Special Functions, [35](#)
- dawsonl
  - Extended Mathematical Special Functions, [35](#)
- digamma
  - Extended Mathematical Special Functions, [35](#)
- digammaf
  - Extended Mathematical Special Functions, [35](#)
- digammal
  - Extended Mathematical Special Functions, [35](#)
- dilog
  - Extended Mathematical Special Functions, [35](#)
- dilogf
  - Extended Mathematical Special Functions, [35](#)
- dilogl
  - Extended Mathematical Special Functions, [35](#)
- dirichlet\_beta
  - Extended Mathematical Special Functions, [35](#)
- dirichlet\_betaf
  - Extended Mathematical Special Functions, [36](#)
- dirichlet\_betal
  - Extended Mathematical Special Functions, [36](#)
- dirichlet\_eta
  - Extended Mathematical Special Functions, [36](#)
- dirichlet\_etaf
  - Extended Mathematical Special Functions, [36](#)
- dirichlet\_etalf
  - Extended Mathematical Special Functions, [36](#)
- dirichlet\_etall
  - Extended Mathematical Special Functions, [36](#)
- double\_factorial
  - Extended Mathematical Special Functions, [36](#)
- double\_factorialf
  - Extended Mathematical Special Functions, [37](#)
- double\_factoriall
  - Extended Mathematical Special Functions, [37](#)
- ellint\_1
  - Mathematical Special Functions, [78](#)
- ellint\_1f
  - Mathematical Special Functions, [78](#)
- ellint\_1l
  - Mathematical Special Functions, [78](#)
- ellint\_2
  - Mathematical Special Functions, [79](#)
- ellint\_2f
  - Mathematical Special Functions, [79](#)
- ellint\_2l
  - Mathematical Special Functions, [79](#)
- ellint\_3
  - Mathematical Special Functions, [79](#)
- ellint\_3f
  - Mathematical Special Functions, [80](#)
- ellint\_3l
  - Mathematical Special Functions, [80](#)
- ellint\_cel
  - Extended Mathematical Special Functions, [37](#)
- ellint\_celf
  - Extended Mathematical Special Functions, [37](#)
- ellint\_cell
  - Extended Mathematical Special Functions, [37](#)
- ellint\_d
  - Extended Mathematical Special Functions, [37](#)
- ellint\_df
  - Extended Mathematical Special Functions, [38](#)
- ellint\_dl
  - Extended Mathematical Special Functions, [38](#)
- ellint\_el1
  - Extended Mathematical Special Functions, [38](#)
- ellint\_el1f
  - Extended Mathematical Special Functions, [38](#)
- ellint\_el1l
  - Extended Mathematical Special Functions, [38](#)
- ellint\_el2
  - Extended Mathematical Special Functions, [38](#)
- ellint\_el2f
  - Extended Mathematical Special Functions, [39](#)
- ellint\_el2l
  - Extended Mathematical Special Functions, [39](#)
- ellint\_el3
  - Extended Mathematical Special Functions, [39](#)
- ellint\_el3f
  - Extended Mathematical Special Functions, [39](#)
- ellint\_el3l
  - Extended Mathematical Special Functions, [39](#)
- ellint\_rc
  - Extended Mathematical Special Functions, [39](#)
- ellint\_rcf
  - Extended Mathematical Special Functions, [40](#)

- ellint\_rcl
  - Extended Mathematical Special Functions, [40](#)
- ellint\_rd
  - Extended Mathematical Special Functions, [40](#)
- ellint\_rdf
  - Extended Mathematical Special Functions, [41](#)
- ellint\_rdl
  - Extended Mathematical Special Functions, [41](#)
- ellint\_rf
  - Extended Mathematical Special Functions, [41](#)
- ellint\_rff
  - Extended Mathematical Special Functions, [41](#)
- ellint\_rfl
  - Extended Mathematical Special Functions, [41](#)
- ellint\_rg
  - Extended Mathematical Special Functions, [42](#)
- ellint\_rgf
  - Extended Mathematical Special Functions, [42](#)
- ellint\_rgl
  - Extended Mathematical Special Functions, [42](#)
- ellint\_rj
  - Extended Mathematical Special Functions, [42](#)
- ellint\_rjf
  - Extended Mathematical Special Functions, [43](#)
- ellint\_rjl
  - Extended Mathematical Special Functions, [43](#)
- ellnome
  - Extended Mathematical Special Functions, [43](#)
- ellnomef
  - Extended Mathematical Special Functions, [44](#)
- ellnomel
  - Extended Mathematical Special Functions, [44](#)
- evenzeta
  - std::\_\_detail, [203](#)
- expint
  - Mathematical Special Functions, [80](#)
- expint\_e1
  - Extended Mathematical Special Functions, [44](#)
- expint\_e1f
  - Extended Mathematical Special Functions, [44](#)
- expint\_e1l
  - Extended Mathematical Special Functions, [44](#)
- expint\_en
  - Extended Mathematical Special Functions, [44](#)
- expint\_enf
  - Extended Mathematical Special Functions, [44](#)
- expint\_enl
  - Extended Mathematical Special Functions, [44](#)
- expintf
  - Mathematical Special Functions, [81](#)
- expintl
  - Mathematical Special Functions, [81](#)
- Extended Mathematical Special Functions, [13](#)
  - \_GLIBCXX\_JACOBI\_CN, [21](#)
  - \_GLIBCXX\_JACOBI\_DN, [21](#)
  - \_GLIBCXX\_JACOBI\_SN, [21](#)
  - airy\_ai, [21](#)
  - airy\_aif, [21](#)
  - airy\_ail, [21](#)
  - airy\_bi, [21](#)
  - airy\_bif, [21](#)
  - airy\_bil, [22](#)
  - bernoulli, [22](#)
  - bernoullif, [22](#)
  - bernoullil, [22](#)
  - bincoef, [22](#)
  - bincoeff, [22](#)
  - bincoefl, [22](#)
  - chebyshev\_t, [22](#)
  - chebyshev\_tf, [23](#)
  - chebyshev\_tl, [23](#)
  - chebyshev\_u, [23](#)
  - chebyshev\_uf, [23](#)
  - chebyshev\_ul, [23](#)
  - chebyshev\_v, [24](#)
  - chebyshev\_vf, [24](#)
  - chebyshev\_vl, [24](#)
  - chebyshev\_w, [24](#)
  - chebyshev\_wf, [25](#)
  - chebyshev\_wl, [25](#)
  - clausen, [25](#)
  - clausen\_c, [25](#)
  - clausen\_cf, [26](#)
  - clausen\_cl, [26](#)
  - clausen\_s, [26](#)
  - clausen\_sf, [26](#)
  - clausen\_sl, [26](#)
  - clausenf, [27](#)
  - clausenl, [27](#)
  - comp\_ellint\_d, [27](#)
  - comp\_ellint\_df, [28](#)
  - comp\_ellint\_dl, [28](#)
  - comp\_ellint\_rf, [28](#)
  - comp\_ellint\_rg, [28](#)
  - conf\_hyperg, [29](#)
  - conf\_hyperg\_lim, [29](#)
  - conf\_hyperg\_limf, [29](#)
  - conf\_hyperg\_liml, [29](#)
  - conf\_hypergf, [30](#)
  - conf\_hypergl, [30](#)
  - coshint, [30](#)
  - coshintf, [30](#)
  - coshintl, [30](#)
  - cosint, [31](#)
  - cosintf, [31](#)
  - cosintl, [31](#)
  - cyl\_hankel\_1, [31](#)
  - cyl\_hankel\_1f, [33](#)

cyl\_hankel\_1l, 33  
 cyl\_hankel\_2, 33  
 cyl\_hankel\_2f, 34  
 cyl\_hankel\_2l, 34  
 dawson, 34  
 dawsonf, 35  
 dawsonl, 35  
 digamma, 35  
 digammaf, 35  
 digammal, 35  
 dilog, 35  
 dilogf, 35  
 dilogl, 35  
 dirichlet\_beta, 35  
 dirichlet\_betaf, 36  
 dirichlet\_betal, 36  
 dirichlet\_eta, 36  
 dirichlet\_etaf, 36  
 dirichlet\_etall, 36  
 double\_factorial, 36  
 double\_factorialf, 37  
 double\_factoriall, 37  
 ellint\_cel, 37  
 ellint\_celf, 37  
 ellint\_cell, 37  
 ellint\_d, 37  
 ellint\_df, 38  
 ellint\_dl, 38  
 ellint\_el1, 38  
 ellint\_el1f, 38  
 ellint\_el1l, 38  
 ellint\_el2, 38  
 ellint\_el2f, 39  
 ellint\_el2l, 39  
 ellint\_el3, 39  
 ellint\_el3f, 39  
 ellint\_el3l, 39  
 ellint\_rc, 39  
 ellint\_rcf, 40  
 ellint\_rcl, 40  
 ellint\_rd, 40  
 ellint\_rdf, 41  
 ellint\_rdl, 41  
 ellint\_rf, 41  
 ellint\_rff, 41  
 ellint\_rfl, 41  
 ellint\_rg, 42  
 ellint\_rgf, 42  
 ellint\_rgl, 42  
 ellint\_rj, 42  
 ellint\_rjf, 43  
 ellint\_rjl, 43  
 ellnome, 43  
 ellnomef, 44  
 ellnomel, 44  
 expint\_e1, 44  
 expint\_e1f, 44  
 expint\_e1l, 44  
 expint\_en, 44  
 expint\_enf, 44  
 expint\_enl, 44  
 factorial, 44  
 factorialf, 44  
 factoriall, 44  
 fresnel\_c, 45  
 fresnel\_cf, 45  
 fresnel\_cl, 45  
 fresnel\_s, 45  
 fresnel\_sf, 45  
 fresnel\_sl, 45  
 gamma\_l, 45  
 gamma\_lf, 45  
 gamma\_ll, 46  
 gamma\_p, 46  
 gamma\_pf, 46  
 gamma\_pl, 46  
 gamma\_q, 46  
 gamma\_qf, 46  
 gamma\_ql, 46  
 gamma\_u, 46  
 gamma\_uf, 46  
 gamma\_ul, 46  
 gegenbauer, 46  
 gegenbauerf, 47  
 gegenbauerl, 47  
 heuman\_lambda, 47  
 heuman\_lambdaf, 47  
 heuman\_lambdal, 47  
 hurwitz\_zeta, 47  
 hurwitz\_zetaf, 48  
 hurwitz\_zetal, 48  
 hyperg, 48  
 hypergf, 48  
 hypergl, 48  
 ibeta, 48  
 ibetac, 49  
 ibetacf, 49  
 ibetacl, 49  
 ibetaf, 49  
 ibetal, 50  
 jacobi, 50  
 jacobi\_cn, 50  
 jacobi\_cnf, 50  
 jacobi\_cnl, 50  
 jacobi\_dn, 50  
 jacobi\_dnf, 51  
 jacobi\_dnl, 51  
 jacobi\_sn, 51



jacobi\_snf, 51  
 jacobi\_snl, 52  
 jacobi\_zeta, 52  
 jacobi\_zetaf, 52  
 jacobi\_zetal, 52  
 jacobif, 52  
 jacobil, 52  
 lbincoef, 52  
 lbincoeff, 53  
 lbincoefl, 53  
 ldouble\_factorial, 53  
 ldouble\_factorialf, 53  
 ldouble\_factoriall, 53  
 legendre\_q, 53  
 legendre\_qf, 53  
 legendre\_ql, 53  
 lfactorial, 53  
 lfactorialf, 53  
 lfactoriall, 53  
 logint, 54  
 logintf, 54  
 logintl, 54  
 lpochhammer\_l, 54  
 lpochhammer\_lf, 54  
 lpochhammer\_ll, 54  
 lpochhammer\_u, 54  
 lpochhammer\_uf, 55  
 lpochhammer\_ul, 55  
 owens\_t, 55  
 owens\_tf, 55  
 owens\_tl, 55  
 pochhammer\_l, 55  
 pochhammer\_lf, 56  
 pochhammer\_ll, 56  
 pochhammer\_u, 56  
 pochhammer\_uf, 56  
 pochhammer\_ul, 56  
 polylog, 56  
 polylogf, 56  
 polylogl, 56  
 psi, 57  
 psif, 57  
 psil, 57  
 radpoly, 57  
 radpolyf, 57  
 radpolyl, 57  
 sinc, 57  
 sinc\_pi, 57  
 sinc\_pif, 58  
 sinc\_pil, 58  
 sincf, 58  
 sincl, 58  
 sinhc, 58  
 sinhc\_pi, 58  
 sinhc\_pif, 58  
 sinhc\_pil, 58  
 sinhcf, 58  
 sinhcl, 58  
 sinhint, 58  
 sinhintf, 59  
 sinhintl, 59  
 sinint, 59  
 sinintf, 59  
 sinintl, 59  
 sph\_bessel\_i, 60  
 sph\_bessel\_if, 60  
 sph\_bessel\_il, 60  
 sph\_bessel\_k, 60  
 sph\_bessel\_kf, 60  
 sph\_bessel\_kl, 60  
 sph\_hankel\_1, 60  
 sph\_hankel\_1f, 61  
 sph\_hankel\_1l, 61  
 sph\_hankel\_2, 61  
 sph\_hankel\_2f, 61  
 sph\_hankel\_2l, 62  
 sph\_harmonic, 62  
 sph\_harmonicf, 62  
 sph\_harmonicl, 62  
 theta\_1, 63  
 theta\_1f, 63  
 theta\_1l, 63  
 theta\_2, 63  
 theta\_2f, 64  
 theta\_2l, 64  
 theta\_3, 64  
 theta\_3f, 64  
 theta\_3l, 64  
 theta\_4, 65  
 theta\_4f, 65  
 theta\_4l, 65  
 theta\_c, 65  
 theta\_cf, 66  
 theta\_cl, 66  
 theta\_d, 66  
 theta\_df, 66  
 theta\_dl, 66  
 theta\_n, 67  
 theta\_nf, 67  
 theta\_nl, 67  
 theta\_s, 67  
 theta\_sf, 68  
 theta\_sl, 68  
 zernike, 68  
 zernikef, 68  
 zernikel, 68  
 factorial

- Extended Mathematical Special Functions, [44](#)
- factorialf
  - Extended Mathematical Special Functions, [44](#)
- factoriall
  - Extended Mathematical Special Functions, [44](#)
- fresnel\_c
  - Extended Mathematical Special Functions, [45](#)
- fresnel\_cf
  - Extended Mathematical Special Functions, [45](#)
- fresnel\_cl
  - Extended Mathematical Special Functions, [45](#)
- fresnel\_s
  - Extended Mathematical Special Functions, [45](#)
- fresnel\_sf
  - Extended Mathematical Special Functions, [45](#)
- fresnel\_sl
  - Extended Mathematical Special Functions, [45](#)
- gamma\_l
  - Extended Mathematical Special Functions, [45](#)
- gamma\_lf
  - Extended Mathematical Special Functions, [45](#)
- gamma\_ll
  - Extended Mathematical Special Functions, [46](#)
- gamma\_p
  - Extended Mathematical Special Functions, [46](#)
- gamma\_pf
  - Extended Mathematical Special Functions, [46](#)
- gamma\_pl
  - Extended Mathematical Special Functions, [46](#)
- gamma\_q
  - Extended Mathematical Special Functions, [46](#)
- gamma\_qf
  - Extended Mathematical Special Functions, [46](#)
- gamma\_ql
  - Extended Mathematical Special Functions, [46](#)
- gamma\_u
  - Extended Mathematical Special Functions, [46](#)
- gamma\_uf
  - Extended Mathematical Special Functions, [46](#)
- gamma\_ul
  - Extended Mathematical Special Functions, [46](#)
- gegenbauer
  - Extended Mathematical Special Functions, [46](#)
- gegenbauerf
  - Extended Mathematical Special Functions, [47](#)
- gegenbauerl
  - Extended Mathematical Special Functions, [47](#)
- hermite
  - Mathematical Special Functions, [81](#)
- hermitef
  - Mathematical Special Functions, [81](#)
- hermitel
  - Mathematical Special Functions, [81](#)
- heuman\_lambda
  - Extended Mathematical Special Functions, [47](#)
- heuman\_lambdaf
  - Extended Mathematical Special Functions, [47](#)
- heuman\_lambdal
  - Extended Mathematical Special Functions, [47](#)
- hurwitz\_zeta
  - Extended Mathematical Special Functions, [47](#)
- hurwitz\_zetaf
  - Extended Mathematical Special Functions, [48](#)
- hurwitz\_zetal
  - Extended Mathematical Special Functions, [48](#)
- hyperg
  - Extended Mathematical Special Functions, [48](#)
- hypergf
  - Extended Mathematical Special Functions, [48](#)
- hypergl
  - Extended Mathematical Special Functions, [48](#)
- ibeta
  - Extended Mathematical Special Functions, [48](#)
- ibetac
  - Extended Mathematical Special Functions, [49](#)
- ibetacf
  - Extended Mathematical Special Functions, [49](#)
- ibetac1
  - Extended Mathematical Special Functions, [49](#)
- ibetaf
  - Extended Mathematical Special Functions, [49](#)
- ibetal
  - Extended Mathematical Special Functions, [50](#)
- jacobi
  - Extended Mathematical Special Functions, [50](#)
- jacobi\_cn
  - Extended Mathematical Special Functions, [50](#)
- jacobi\_cnf
  - Extended Mathematical Special Functions, [50](#)
- jacobi\_cnl
  - Extended Mathematical Special Functions, [50](#)
- jacobi\_dn
  - Extended Mathematical Special Functions, [50](#)
- jacobi\_dnf
  - Extended Mathematical Special Functions, [51](#)
- jacobi\_dnl
  - Extended Mathematical Special Functions, [51](#)
- jacobi\_sn
  - Extended Mathematical Special Functions, [51](#)
- jacobi\_snf
  - Extended Mathematical Special Functions, [51](#)
- jacobi\_snl
  - Extended Mathematical Special Functions, [52](#)
- jacobi\_zeta
  - Extended Mathematical Special Functions, [52](#)
- jacobi\_zetaf
  - Extended Mathematical Special Functions, [52](#)

- Extended Mathematical Special Functions, [52](#)
- jacobi\_zetal
  - Extended Mathematical Special Functions, [52](#)
- jacobiif
  - Extended Mathematical Special Functions, [52](#)
- jacobil
  - Extended Mathematical Special Functions, [52](#)
- laguerre
  - Mathematical Special Functions, [82](#)
- laguerref
  - Mathematical Special Functions, [82](#)
- laguerrel
  - Mathematical Special Functions, [82](#)
- lbincoef
  - Extended Mathematical Special Functions, [52](#)
- lbincoeff
  - Extended Mathematical Special Functions, [53](#)
- lbincoefl
  - Extended Mathematical Special Functions, [53](#)
- ldouble\_factorial
  - Extended Mathematical Special Functions, [53](#)
- ldouble\_factorialf
  - Extended Mathematical Special Functions, [53](#)
- ldouble\_factoriall
  - Extended Mathematical Special Functions, [53](#)
- legendre
  - Mathematical Special Functions, [82](#)
- legendre\_q
  - Extended Mathematical Special Functions, [53](#)
- legendre\_qf
  - Extended Mathematical Special Functions, [53](#)
- legendre\_ql
  - Extended Mathematical Special Functions, [53](#)
- legendref
  - Mathematical Special Functions, [83](#)
- legendrel
  - Mathematical Special Functions, [83](#)
- lfactorial
  - Extended Mathematical Special Functions, [53](#)
- lfactorialf
  - Extended Mathematical Special Functions, [53](#)
- lfactoriall
  - Extended Mathematical Special Functions, [53](#)
- logint
  - Extended Mathematical Special Functions, [54](#)
- logintf
  - Extended Mathematical Special Functions, [54](#)
- logintl
  - Extended Mathematical Special Functions, [54](#)
- lpochhammer\_l
  - Extended Mathematical Special Functions, [54](#)
- lpochhammer\_lf
  - Extended Mathematical Special Functions, [54](#)
- lpochhammer\_ll
  - Extended Mathematical Special Functions, [54](#)
- lpochhammer\_u
  - Extended Mathematical Special Functions, [54](#)
- lpochhammer\_uf
  - Extended Mathematical Special Functions, [55](#)
- lpochhammer\_ul
  - Extended Mathematical Special Functions, [55](#)
- Mathematical Special Functions, [69](#)
  - assoc\_laguerre, [71](#)
  - assoc\_laguerref, [71](#)
  - assoc\_laguerrel, [71](#)
  - assoc\_legendre, [71](#)
  - assoc\_legendref, [72](#)
  - assoc\_legendrel, [72](#)
  - beta, [72](#)
  - betaf, [72](#)
  - betal, [73](#)
  - comp\_ellint\_1, [73](#)
  - comp\_ellint\_1f, [73](#)
  - comp\_ellint\_1l, [73](#)
  - comp\_ellint\_2, [73](#)
  - comp\_ellint\_2f, [74](#)
  - comp\_ellint\_2l, [74](#)
  - comp\_ellint\_3, [74](#)
  - comp\_ellint\_3f, [75](#)
  - comp\_ellint\_3l, [75](#)
  - cyl\_bessel\_i, [75](#)
  - cyl\_bessel\_if, [75](#)
  - cyl\_bessel\_il, [75](#)
  - cyl\_bessel\_j, [76](#)
  - cyl\_bessel\_jf, [76](#)
  - cyl\_bessel\_jl, [76](#)
  - cyl\_bessel\_k, [76](#)
  - cyl\_bessel\_kf, [77](#)
  - cyl\_bessel\_kl, [77](#)
  - cyl\_neumann, [77](#)
  - cyl\_neumannf, [77](#)
  - cyl\_neumannl, [78](#)
  - ellint\_1, [78](#)
  - ellint\_1f, [78](#)
  - ellint\_1l, [78](#)
  - ellint\_2, [79](#)
  - ellint\_2f, [79](#)
  - ellint\_2l, [79](#)
  - ellint\_3, [79](#)
  - ellint\_3f, [80](#)
  - ellint\_3l, [80](#)
  - expint, [80](#)
  - expintf, [81](#)
  - expintl, [81](#)
  - hermite, [81](#)
  - hermitef, [81](#)

- hermitel, [81](#)
- laguerre, [82](#)
- laguerref, [82](#)
- laguerrel, [82](#)
- legendre, [82](#)
- legendref, [83](#)
- legendrel, [83](#)
- riemann\_zeta, [83](#)
- riemann\_zetaf, [83](#)
- riemann\_zetal, [83](#)
- sph\_bessel, [84](#)
- sph\_besself, [84](#)
- sph\_bessell, [84](#)
- sph\_legendre, [84](#)
- sph\_legendref, [85](#)
- sph\_legendrel, [85](#)
- sph\_neumann, [85](#)
- sph\_neumannf, [85](#)
- sph\_neumannl, [85](#)
- owens\_t
  - Extended Mathematical Special Functions, [55](#)
- owens\_tf
  - Extended Mathematical Special Functions, [55](#)
- owens\_tl
  - Extended Mathematical Special Functions, [55](#)
- pochhammer\_l
  - Extended Mathematical Special Functions, [55](#)
- pochhammer\_lf
  - Extended Mathematical Special Functions, [56](#)
- pochhammer\_ll
  - Extended Mathematical Special Functions, [56](#)
- pochhammer\_u
  - Extended Mathematical Special Functions, [56](#)
- pochhammer\_uf
  - Extended Mathematical Special Functions, [56](#)
- pochhammer\_ul
  - Extended Mathematical Special Functions, [56](#)
- polylog
  - Extended Mathematical Special Functions, [56](#)
- polylogf
  - Extended Mathematical Special Functions, [56](#)
- polylogl
  - Extended Mathematical Special Functions, [56](#)
- psi
  - Extended Mathematical Special Functions, [57](#)
- psif
  - Extended Mathematical Special Functions, [57](#)
- psil
  - Extended Mathematical Special Functions, [57](#)
- radpoly
  - Extended Mathematical Special Functions, [57](#)
- radpolyf
  - Extended Mathematical Special Functions, [57](#)
- riemann\_zeta
  - Mathematical Special Functions, [83](#)
- riemann\_zetaf
  - Mathematical Special Functions, [83](#)
- riemann\_zetal
  - Mathematical Special Functions, [83](#)
- SININT
  - std::\_\_detail, [114](#)
- sf\_airy.tcc
  - \_GLIBCXX\_BITS\_SF\_AIRY\_TCC, [211](#)
- sf\_bessel.tcc
  - \_GLIBCXX\_BITS\_SF\_BESSEL\_TCC, [213](#)
- sf\_beta.tcc
  - \_GLIBCXX\_BITS\_SF\_BETA\_TCC, [215](#)
- sf\_cardinal.tcc
  - \_GLIBCXX\_BITS\_SF\_CARDINAL\_TCC, [217](#)
- sf\_chebyshev.tcc
  - \_GLIBCXX\_SF\_CHEBYSHEV\_TCC, [218](#)
- sf\_dawson.tcc
  - \_GLIBCXX\_SF\_DAWSON\_TCC, [220](#)
- sf\_ellint.tcc
  - \_GLIBCXX\_BITS\_SF\_ELLINT\_TCC, [222](#)
- sf\_expint.tcc
  - \_GLIBCXX\_BITS\_SF\_EXPINT\_TCC, [225](#)
- sf\_fresnel.tcc
  - \_GLIBCXX\_SF\_FRESNEL\_TCC, [226](#)
- sf\_gamma.tcc
  - \_GLIBCXX\_BITS\_SF\_GAMMA\_TCC, [232](#)
- sf\_gegenbauer.tcc
  - \_GLIBCXX\_SF\_GEGENBAUER\_TCC, [233](#)
- sf\_hankel.tcc
  - \_GLIBCXX\_BITS\_SF\_HANKEL\_TCC, [236](#)
- sf\_hankel\_new.tcc
  - \_GLIBCXX\_BITS\_SF\_HANKEL\_NEW\_TCC, [236](#)
- sf\_hermite.tcc
  - \_GLIBCXX\_BITS\_SF\_HERMITE\_TCC, [238](#)
- sf\_hydrogen.tcc
  - \_GLIBCXX\_BITS\_SF\_HYDROGEN\_TCC, [239](#)
- sf\_hyperg.tcc
  - \_GLIBCXX\_BITS\_SF\_HYPERG\_TCC, [241](#)
- sf\_hypint.tcc
  - \_GLIBCXX\_SF\_HYPINT\_TCC, [242](#)
- sf\_jacobi.tcc
  - \_GLIBCXX\_SF\_JACOBI\_TCC, [244](#)
- sf\_laguerre.tcc
  - \_GLIBCXX\_BITS\_SF\_LAGUERRE\_TCC, [246](#)
- sf\_legendre.tcc
  - \_GLIBCXX\_BITS\_SF\_LEGENDRE\_TCC, [247](#)
- sf\_mod\_bessel.tcc
  - \_GLIBCXX\_BITS\_SF\_MOD\_BESSEL\_TCC, [249](#)

- sf\_owens.tcc
  - \_GLIBCXX\_BITS\_SF\_OWENS\_T\_TCC, 250
- sf\_polylog.tcc
  - \_GLIBCXX\_BITS\_SF\_POLYLOG\_TCC, 253
- sf\_theta.tcc
  - \_GLIBCXX\_SF\_THETA\_TCC, 255
- sf\_trigint.tcc
  - \_GLIBCXX\_SF\_TRIGINT\_TCC, 257
- sf\_zeta.tcc
  - \_GLIBCXX\_BITS\_SF\_ZETA\_TCC, 259
- sinc
  - Extended Mathematical Special Functions, 57
- sinc\_pi
  - Extended Mathematical Special Functions, 57
- sinc\_pif
  - Extended Mathematical Special Functions, 58
- sinc\_pil
  - Extended Mathematical Special Functions, 58
- sincf
  - Extended Mathematical Special Functions, 58
- sincl
  - Extended Mathematical Special Functions, 58
- sinhc
  - Extended Mathematical Special Functions, 58
- sinhc\_pi
  - Extended Mathematical Special Functions, 58
- sinhc\_pif
  - Extended Mathematical Special Functions, 58
- sinhc\_pil
  - Extended Mathematical Special Functions, 58
- sinhcf
  - Extended Mathematical Special Functions, 58
- sinhcl
  - Extended Mathematical Special Functions, 58
- sinhint
  - Extended Mathematical Special Functions, 58
- sinhintf
  - Extended Mathematical Special Functions, 59
- sinhintl
  - Extended Mathematical Special Functions, 59
- sinint
  - Extended Mathematical Special Functions, 59
- sinintf
  - Extended Mathematical Special Functions, 59
- sinintl
  - Extended Mathematical Special Functions, 59
- specfun.h
  - \_STDCPP\_MATH\_SPEC\_FUNCS\_, 270
  - \_cpp\_lib\_math\_special\_functions, 270
- sph\_bessel
  - Mathematical Special Functions, 84
- sph\_bessel\_i
  - Extended Mathematical Special Functions, 60
- sph\_bessel\_if
  - Extended Mathematical Special Functions, 60
- sph\_bessel\_il
  - Extended Mathematical Special Functions, 60
- sph\_bessel\_k
  - Extended Mathematical Special Functions, 60
- sph\_bessel\_kf
  - Extended Mathematical Special Functions, 60
- sph\_bessel\_kl
  - Extended Mathematical Special Functions, 60
- sph\_besself
  - Mathematical Special Functions, 84
- sph\_bessell
  - Mathematical Special Functions, 84
- sph\_hankel\_1
  - Extended Mathematical Special Functions, 60
- sph\_hankel\_1f
  - Extended Mathematical Special Functions, 61
- sph\_hankel\_1l
  - Extended Mathematical Special Functions, 61
- sph\_hankel\_2
  - Extended Mathematical Special Functions, 61
- sph\_hankel\_2f
  - Extended Mathematical Special Functions, 61
- sph\_hankel\_2l
  - Extended Mathematical Special Functions, 62
- sph\_harmonic
  - Extended Mathematical Special Functions, 62
- sph\_harmonicf
  - Extended Mathematical Special Functions, 62
- sph\_harmonicl
  - Extended Mathematical Special Functions, 62
- sph\_legendre
  - Mathematical Special Functions, 84
- sph\_legendref
  - Mathematical Special Functions, 85
- sph\_legendrel
  - Mathematical Special Functions, 85
- sph\_neumann
  - Mathematical Special Functions, 85
- sph\_neumannf
  - Mathematical Special Functions, 85
- sph\_neumannl
  - Mathematical Special Functions, 85
- std, 95
- std::\_\_detail, 97
  - \_Num\_Euler\_Maclaurin\_zeta, 203
  - \_S\_Euler\_Maclaurin\_zeta, 204
  - \_S\_double\_factorial\_table, 204
  - \_S\_factorial\_table, 204
  - \_S\_neg\_double\_factorial\_table, 204
  - \_S\_num\_double\_factorials, 204
  - \_S\_num\_double\_factorials< double >, 204
  - \_S\_num\_double\_factorials< float >, 204
  - \_S\_num\_double\_factorials< long double >, 204

- [\\_\\_S\\_num\\_factorials](#), 204
- [\\_\\_S\\_num\\_factorials< double >](#), 204
- [\\_\\_S\\_num\\_factorials< float >](#), 205
- [\\_\\_S\\_num\\_factorials< long double >](#), 205
- [\\_\\_S\\_num\\_neg\\_double\\_factorials](#), 205
- [\\_\\_S\\_num\\_neg\\_double\\_factorials< double >](#), 205
- [\\_\\_S\\_num\\_neg\\_double\\_factorials< float >](#), 205
- [\\_\\_S\\_num\\_neg\\_double\\_factorials< long double >](#), 205
- [\\_\\_S\\_num\\_zetam1](#), 205
- [\\_\\_S\\_zetam1](#), 205
- [\\_\\_airy](#), 114, 115
- [\\_\\_airy\\_ai](#), 117
- [\\_\\_airy\\_arg](#), 117
- [\\_\\_airy\\_asymp\\_absarg\\_ge\\_pio3](#), 117
- [\\_\\_airy\\_asymp\\_absarg\\_lt\\_pio3](#), 118
- [\\_\\_airy\\_bessel\\_i](#), 118
- [\\_\\_airy\\_bessel\\_k](#), 119
- [\\_\\_airy\\_bi](#), 120
- [\\_\\_airy\\_hyperg\\_rational](#), 120
- [\\_\\_assoc\\_laguerre](#), 121
- [\\_\\_assoc\\_legendre\\_p](#), 121
- [\\_\\_bernoulli](#), 121
- [\\_\\_bernoulli\\_2n](#), 122
- [\\_\\_bernoulli\\_series](#), 122
- [\\_\\_beta](#), 122
- [\\_\\_beta\\_gamma](#), 123
- [\\_\\_beta\\_inc](#), 123
- [\\_\\_beta\\_inc\\_cont\\_frac](#), 124
- [\\_\\_beta\\_lgamma](#), 124
- [\\_\\_beta\\_product](#), 124
- [\\_\\_bincoef](#), 125
- [\\_\\_binomial\\_cdf](#), 125
- [\\_\\_binomial\\_cdfc](#), 125
- [\\_\\_bose\\_einstein](#), 126
- [\\_\\_chebyshev\\_recur](#), 126
- [\\_\\_chebyshev\\_t](#), 126
- [\\_\\_chebyshev\\_u](#), 126
- [\\_\\_chebyshev\\_v](#), 126
- [\\_\\_chebyshev\\_w](#), 126
- [\\_\\_chi\\_squared\\_pdf](#), 127
- [\\_\\_chi\\_squared\\_pdfc](#), 127
- [\\_\\_chshint](#), 127
- [\\_\\_chshint\\_cont\\_frac](#), 127
- [\\_\\_chshint\\_series](#), 128
- [\\_\\_clamp\\_0\\_m2pi](#), 128
- [\\_\\_clamp\\_pi](#), 128
- [\\_\\_clausen](#), 128
- [\\_\\_clausen\\_c](#), 129
- [\\_\\_clausen\\_s](#), 129, 130
- [\\_\\_comp\\_ellint\\_1](#), 130
- [\\_\\_comp\\_ellint\\_2](#), 131
- [\\_\\_comp\\_ellint\\_3](#), 131
- [\\_\\_comp\\_ellint\\_d](#), 131
- [\\_\\_comp\\_ellint\\_rf](#), 132
- [\\_\\_comp\\_ellint\\_rg](#), 132
- [\\_\\_conf\\_hyperg](#), 132
- [\\_\\_conf\\_hyperg\\_lim](#), 132
- [\\_\\_conf\\_hyperg\\_lim\\_series](#), 132
- [\\_\\_conf\\_hyperg\\_luke](#), 133
- [\\_\\_conf\\_hyperg\\_series](#), 133
- [\\_\\_coshint](#), 133
- [\\_\\_cyl\\_bessel](#), 134
- [\\_\\_cyl\\_bessel\\_i](#), 134
- [\\_\\_cyl\\_bessel\\_ij\\_series](#), 135
- [\\_\\_cyl\\_bessel\\_ik](#), 135
- [\\_\\_cyl\\_bessel\\_ik\\_asymp](#), 136
- [\\_\\_cyl\\_bessel\\_ik\\_steel](#), 136
- [\\_\\_cyl\\_bessel\\_j](#), 136
- [\\_\\_cyl\\_bessel\\_jn](#), 137
- [\\_\\_cyl\\_bessel\\_jn\\_asymp](#), 137
- [\\_\\_cyl\\_bessel\\_jn\\_steel](#), 137
- [\\_\\_cyl\\_bessel\\_k](#), 138
- [\\_\\_cyl\\_hankel\\_1](#), 138, 139
- [\\_\\_cyl\\_hankel\\_2](#), 139
- [\\_\\_cyl\\_neumann](#), 140
- [\\_\\_cyl\\_neumann\\_n](#), 140
- [\\_\\_dawson](#), 140
- [\\_\\_dawson\\_const\\_frac](#), 141
- [\\_\\_dawson\\_series](#), 141
- [\\_\\_debye\\_region](#), 141
- [\\_\\_dilog](#), 141
- [\\_\\_dirichlet\\_beta](#), 142
- [\\_\\_dirichlet\\_eta](#), 142, 143
- [\\_\\_double\\_factorial](#), 143
- [\\_\\_ellint\\_1](#), 143
- [\\_\\_ellint\\_2](#), 144
- [\\_\\_ellint\\_3](#), 144
- [\\_\\_ellint\\_cel](#), 144
- [\\_\\_ellint\\_d](#), 145
- [\\_\\_ellint\\_el1](#), 145
- [\\_\\_ellint\\_el2](#), 145
- [\\_\\_ellint\\_el3](#), 145
- [\\_\\_ellint\\_rc](#), 145
- [\\_\\_ellint\\_rd](#), 146
- [\\_\\_ellint\\_rf](#), 146
- [\\_\\_ellint\\_rg](#), 147
- [\\_\\_ellint\\_rj](#), 147
- [\\_\\_ellnome](#), 148
- [\\_\\_ellnome\\_k](#), 148
- [\\_\\_ellnome\\_series](#), 148
- [\\_\\_expint](#), 148, 149
- [\\_\\_expint\\_E1](#), 149
- [\\_\\_expint\\_E1\\_asymp](#), 150
- [\\_\\_expint\\_E1\\_series](#), 150
- [\\_\\_expint\\_Ei](#), 151
- [\\_\\_expint\\_Ei\\_asymp](#), 151
- [\\_\\_expint\\_Ei\\_series](#), 151
- [\\_\\_expint\\_En\\_cont\\_frac](#), 152

- \_\_expint\_En\_recursion, 152
- \_\_expint\_En\_series, 153
- \_\_expint\_asymp, 149
- \_\_expint\_large\_n, 153
- \_\_f\_cdf, 153
- \_\_f\_cdfc, 154
- \_\_factorial, 154
- \_\_fermi\_dirac, 154
- \_\_fock\_airy, 155
- \_\_fpequal, 155
- \_\_fpimag, 155, 157
- \_\_fpreal, 157
- \_\_fresnel, 157
- \_\_fresnel\_cont\_frac, 158
- \_\_fresnel\_series, 158
- \_\_gamma, 158
- \_\_gamma\_cont\_frac, 158
- \_\_gamma\_l, 158
- \_\_gamma\_p, 159
- \_\_gamma\_q, 159
- \_\_gamma\_series, 159
- \_\_gamma\_temme, 159
- \_\_gamma\_u, 160
- \_\_gauss, 160
- \_\_gegenbauer\_poly, 160
- \_\_hankel, 160
- \_\_hankel\_debye, 161
- \_\_hankel\_params, 161
- \_\_hankel\_uniform, 161
- \_\_hankel\_uniform\_olver, 162
- \_\_hankel\_uniform\_outer, 162
- \_\_hankel\_uniform\_sum, 162
- \_\_heuman\_lambda, 163
- \_\_hurwitz\_zeta, 163, 164
- \_\_hurwitz\_zeta\_euler\_maclaurin, 164
- \_\_hydrogen, 164
- \_\_hyperg, 164
- \_\_hyperg\_luke, 165
- \_\_hyperg\_reflect, 165
- \_\_hyperg\_series, 165
- \_\_jacobi\_sncndn, 167
- \_\_jacobi\_zeta, 167
- \_\_laguerre, 167
- \_\_log\_bincoef, 167
- \_\_log\_double\_factorial, 168
- \_\_log\_factorial, 168
- \_\_log\_gamma, 168
- \_\_log\_gamma\_bernoulli, 169
- \_\_log\_gamma\_lanczos, 169
- \_\_log\_gamma\_sign, 169
- \_\_log\_gamma\_spouge, 170
- \_\_log\_pochhammer\_l, 170
- \_\_log\_pochhammer\_u, 171
- \_\_logint, 171
- \_\_owens\_t, 171
- \_\_pochhammer\_l, 172
- \_\_pochhammer\_u, 172
- \_\_poly\_hermite, 172
- \_\_poly\_hermite\_asymp, 173
- \_\_poly\_hermite\_recursion, 173
- \_\_poly\_jacobi, 173
- \_\_poly\_laguerre, 174
- \_\_poly\_laguerre\_hyperg, 174
- \_\_poly\_laguerre\_large\_n, 176
- \_\_poly\_laguerre\_recursion, 176
- \_\_poly\_legendre\_p, 177
- \_\_poly\_legendre\_q, 177
- \_\_poly\_radial\_jacobi, 177
- \_\_polylog, 177, 179
- \_\_polylog\_exp, 179
- \_\_polylog\_exp\_asymp, 179
- \_\_polylog\_exp\_int\_neg, 180
- \_\_polylog\_exp\_int\_pos, 181
- \_\_polylog\_exp\_neg, 181, 182
- \_\_polylog\_exp\_neg\_even, 182
- \_\_polylog\_exp\_neg\_odd, 183
- \_\_polylog\_exp\_negative\_real\_part, 184
- \_\_polylog\_exp\_pos, 184, 185
- \_\_polylog\_exp\_real\_neg, 186
- \_\_polylog\_exp\_real\_pos, 186, 187
- \_\_psi, 187
- \_\_psi\_asymp, 188
- \_\_psi\_series, 188
- \_\_riemann\_zeta, 188
- \_\_riemann\_zeta\_alt, 189
- \_\_riemann\_zeta\_euler\_maclaurin, 189
- \_\_riemann\_zeta\_glob, 189
- \_\_riemann\_zeta\_m\_1, 189
- \_\_riemann\_zeta\_m\_1\_sum, 191
- \_\_riemann\_zeta\_product, 191
- \_\_riemann\_zeta\_sum, 191
- \_\_sinc, 192
- \_\_sinc\_pi, 192
- \_\_sincosint, 192
- \_\_sincosint\_asymp, 192
- \_\_sincosint\_cont\_frac, 193
- \_\_sincosint\_series, 193
- \_\_sinhc, 193
- \_\_sinhc\_pi, 193
- \_\_sinhint, 193
- \_\_sph\_bessel, 194
- \_\_sph\_bessel\_ik, 194
- \_\_sph\_bessel\_jn, 196
- \_\_sph\_hankel, 196
- \_\_sph\_hankel\_1, 196, 197
- \_\_sph\_hankel\_2, 197, 198
- \_\_sph\_harmonic, 198
- \_\_sph\_legendre, 198

- \_\_sph\_neumann, [199](#)
- \_\_students\_t\_cdf, [199](#)
- \_\_students\_t\_cdfc, [200](#)
- \_\_theta\_1, [200](#)
- \_\_theta\_2, [200](#)
- \_\_theta\_2\_asyp, [201](#)
- \_\_theta\_2\_sum, [201](#)
- \_\_theta\_3, [201](#)
- \_\_theta\_3\_asyp, [201](#)
- \_\_theta\_3\_sum, [202](#)
- \_\_theta\_4, [202](#)
- \_\_theta\_c, [202](#)
- \_\_theta\_d, [202](#)
- \_\_theta\_n, [202](#)
- \_\_theta\_s, [203](#)
- \_\_zernike, [203](#)
- \_\_znorm1, [203](#)
- \_\_znorm2, [203](#)
- COSINT, [114](#)
- evenzeta, [203](#)
- SININT, [114](#)
- std::\_\_detail::\_Factorial\_table
  - \_\_factorial, [207](#)
  - \_\_log\_factorial, [207](#)
  - \_\_n, [207](#)
- std::\_\_detail::\_Factorial\_table< \_Tp >, [207](#)
- theta\_1
  - Extended Mathematical Special Functions, [63](#)
- theta\_1f
  - Extended Mathematical Special Functions, [63](#)
- theta\_1l
  - Extended Mathematical Special Functions, [63](#)
- theta\_2
  - Extended Mathematical Special Functions, [63](#)
- theta\_2f
  - Extended Mathematical Special Functions, [64](#)
- theta\_2l
  - Extended Mathematical Special Functions, [64](#)
- theta\_3
  - Extended Mathematical Special Functions, [64](#)
- theta\_3f
  - Extended Mathematical Special Functions, [64](#)
- theta\_3l
  - Extended Mathematical Special Functions, [64](#)
- theta\_4
  - Extended Mathematical Special Functions, [65](#)
- theta\_4f
  - Extended Mathematical Special Functions, [65](#)
- theta\_4l
  - Extended Mathematical Special Functions, [65](#)
- theta\_c
  - Extended Mathematical Special Functions, [65](#)
- theta\_cf
  - Extended Mathematical Special Functions, [66](#)
- theta\_cl
  - Extended Mathematical Special Functions, [66](#)
- theta\_d
  - Extended Mathematical Special Functions, [66](#)
- theta\_df
  - Extended Mathematical Special Functions, [66](#)
- theta\_dl
  - Extended Mathematical Special Functions, [66](#)
- theta\_n
  - Extended Mathematical Special Functions, [67](#)
- theta\_nf
  - Extended Mathematical Special Functions, [67](#)
- theta\_nl
  - Extended Mathematical Special Functions, [67](#)
- theta\_s
  - Extended Mathematical Special Functions, [67](#)
- theta\_sf
  - Extended Mathematical Special Functions, [68](#)
- theta\_sl
  - Extended Mathematical Special Functions, [68](#)
- zernike
  - Extended Mathematical Special Functions, [68](#)
- zernikef
  - Extended Mathematical Special Functions, [68](#)
- zernikel
  - Extended Mathematical Special Functions, [68](#)