


cxx_special_functions
/include/emsr/sf_cardinal.h

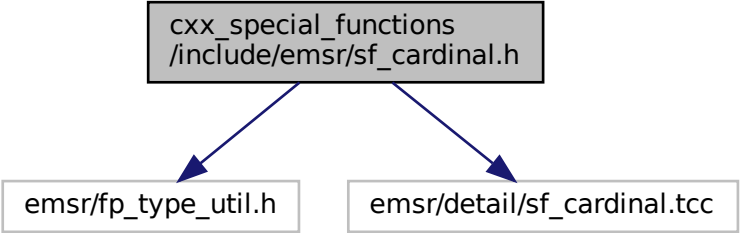

```
graph TD; A["cxx_special_functions  
/include/emsr/sf_cardinal.h"] --> B["emsr/fp_type_util.h"]; A --> C["emsr/detail/sf_cardinal.tcc"];
```

The diagram illustrates the include relationships for the `cxx_special_functions` header. A central box at the top, with a dark border and light gray background, contains the text `cxx_special_functions` and `/include/emsr/sf_cardinal.h`. Two blue arrows originate from the bottom of this box. The left arrow points to a box containing `emsr/fp_type_util.h`. The right arrow points to a box containing `emsr/detail/sf_cardinal.tcc`. All boxes have a thin gray border.

emsr/fp_type_util.h

emsr/detail/sf_cardinal.tcc