


How to use Import Glue

Turn game-rip meshes into Roblox-ready meshes and PBR texture maps, inside Blender.



YOU START WITH



A ripped mesh with its original materials and textures



Import Glue

crops or bakes each part on a duplicate



YOU GET, PER PART



_ALB
Albedo



_MET
Metalness



_RGH
Roughness



_NOR
Normal

1 Install it once, about a minute · needs Blender 4.3 or newer



1

Download the zip

From the latest release on GitHub. Keep it zipped.



2

Install from Disk

Edit > **Preferences** > **Add-ons**, then pick the zip.



3

Enable it

Tick **Import Glue PBR Baker** in the add-on list.



4

Open the panel

In the 3D Viewport press **N**, then the **Roblox** tab.

2 Bake your meshes the numbers match the panel on the right

1

Save your .blend

Outputs are written next to the saved file, so save before you start.

2

Choose what to bake

Select meshes in the viewport, or switch **Scope** to **All Scene Meshes** or **Collection**. The panel shows how many meshes it found.

3

Set the size

Bake Resolution and **Crop Ceiling** both default to 1024. Raise them only if the asset and your memory can take it.

4

Keep the texture check on

Leave **Run Texture Precheck** ticked. **Check Textures** runs the check by itself if you want to look first.

5

Press Run Import Glue

Blender looks busy until the bake finishes. Then use **Open Output Folder** under **Last Run**.



Your originals are safe. Source objects, meshes, UVs and materials are never edited. Results land in a new output collection, and existing files are never silently overwritten.


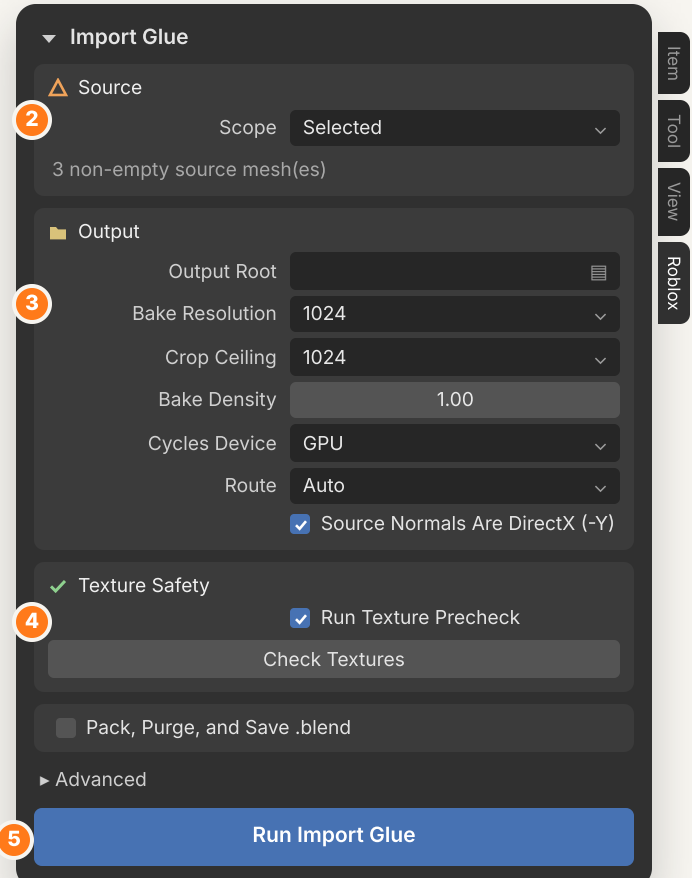


Illustration of the panel at its defaults; some options omitted.

Routes, settings and fixes

Import Glue PBR Baker 1.3.0 · engine 3.7

3 How each part gets its maps with Route set to Auto, the first “yes” wins

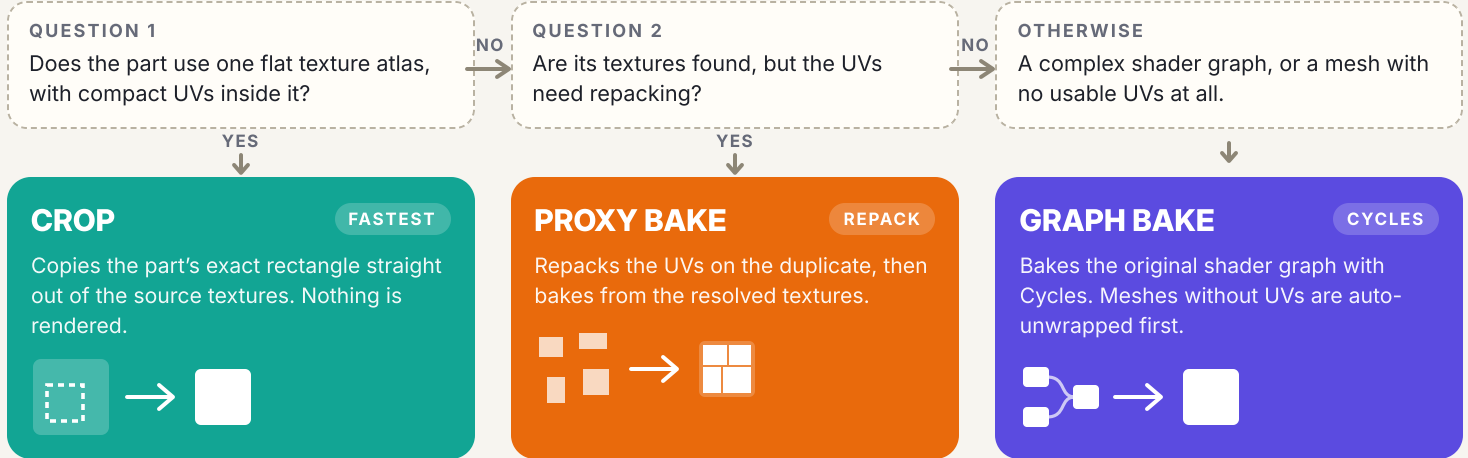

4 Settings worth knowing the orange tag is the default

Bake Resolution 1024 **Crop Ceiling** 1024

Upper limits for baked and cropped maps. They are ceilings, not targets.

Bake Density 1.00

Multiplier (0.05 to 8) for the size bakes ask for. Raise it when bakes look soft but are not at the ceiling.

Cycles Device GPU

With no GPU, the run stops instead of quietly using the CPU.

Route Auto

Force one route with Crop Only, Proxy Only, Graph Only or Bake Only.

Source Normals Are DirectX On

Flips the green channel so normals come out in OpenGL form for Roblox.

5 Where your files go

```
my_scene.blend
my_scene_exports/
├─ _v32_done.json    resume list
├─ rbx_pbr_smart/    one run
│   ├─ Helmet_ALB.png
│   ├─ Helmet_MET.png
│   ├─ Helmet_RGH.png
│   ├─ Helmet_NOR.png
│   ├─ manifest.json  what ran
│   └─ run_log.txt    progress
```

Each run gets a fresh folder (rbx_pbr_smart2 , 3 ...).
Unchanged parts are carried over from the last run. Set **Output Root** to write elsewhere.

6 If something stops the run

“Batch exceeds safety limit”

More than 16 meshes. Bake fewer at a time, or tick **Allow Oversized Batch** in Advanced.

Missing textures

Point **Shared Texture Pool** (Advanced) at the folder that holds them, then **Check Textures**.

No GPU available

Set **Cycles Device** to CPU, or tick **Allow CPU Fallback**. CPU bakes can take hours.

Over the triangle limit

The limit is 20,000. Graph bakes are decimated to fit; other routes are rejected, so simplify the mesh.

Blender looks frozen

It is baking. Watch progress in the system console or in **run_log.txt**.

Updated the add-on?

Restart Blender after installing a new version so the new code loads.

BATCH RUNS WITHOUT THE INTERFACE

Unzip the add-on folder first. Always pass `--res` and `--max-res`; without them, headless runs default to 4096 bake and 8192 crop.

```
blender -b "scene.blend" -P "import_glue_pbr_baker/run_headless.py"
-- --collection "Body" --res 1024 --max-res 1024
```